



ROICH
STRUCTURAL INC.

P.O. Box 38809 | Seattle, WA 98118
roichstructural.com | 206.745.2967

Official
Stamps:

Eng Family Homestead Renovation
611 8th Ave South, Seattle, WA 98104

FOR CONSTRUCTION

PERMIT SET

9/22/2023

LOWER ROOF / FLOOR FRAMING PLAN

S2.01

Scale

2019


9/22/2023

RC

RC

RC

INTS

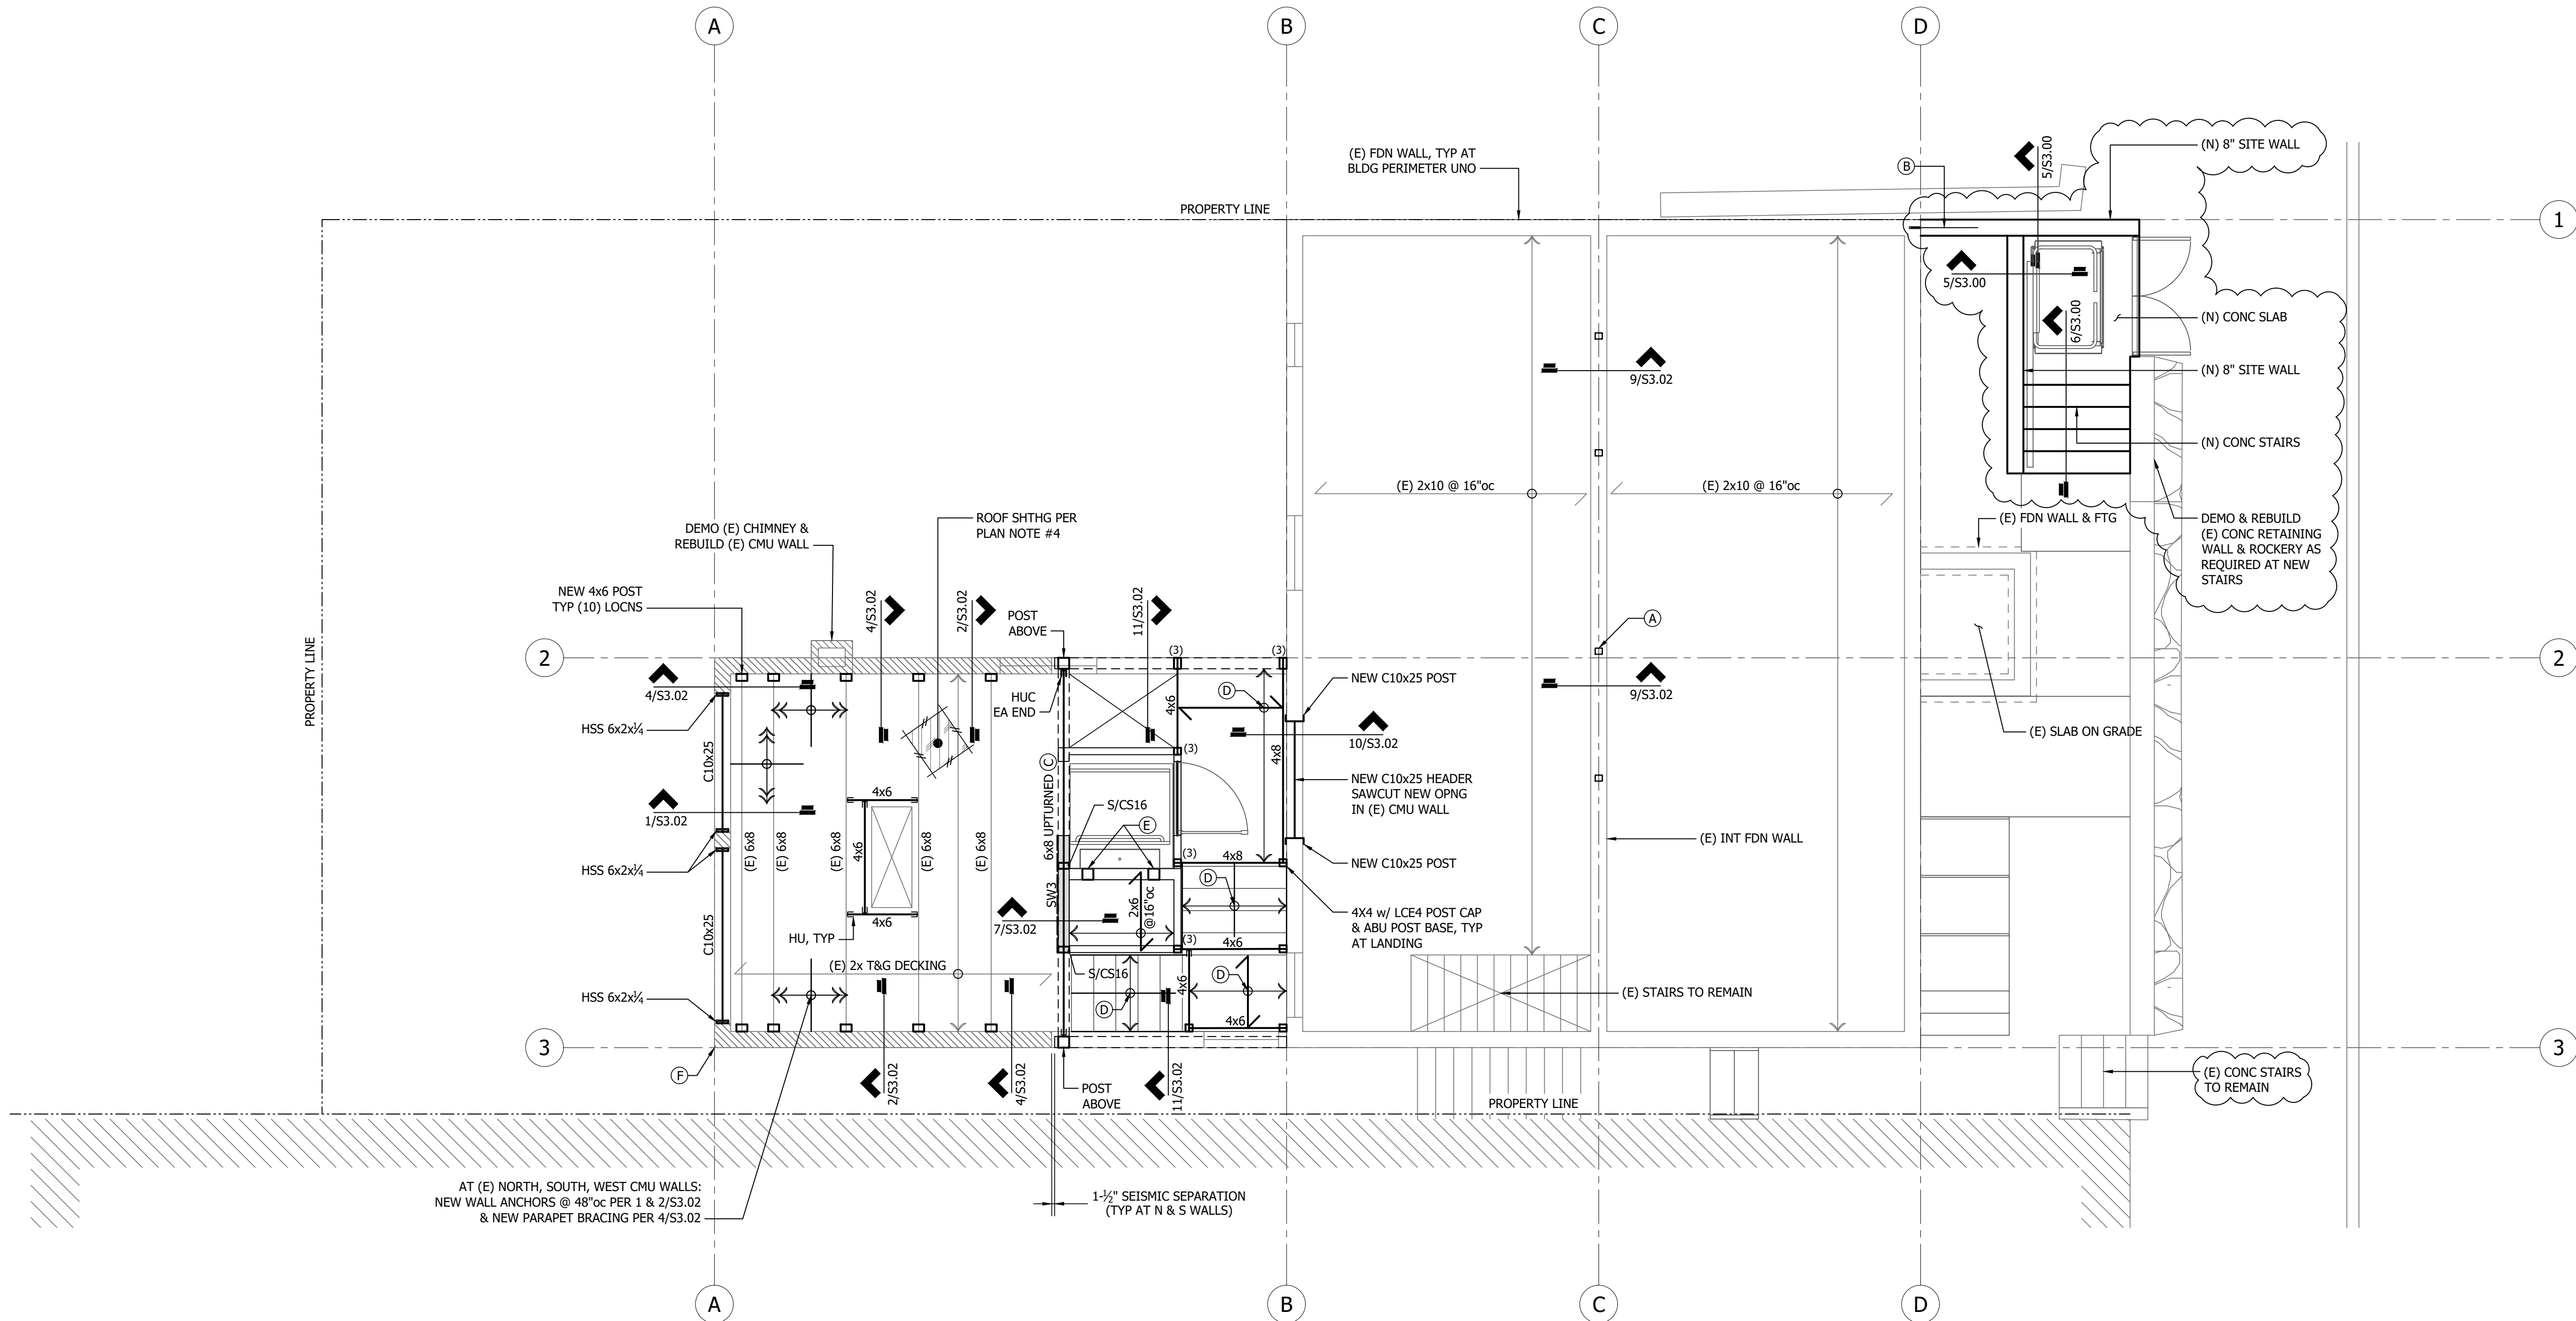

LOWER ROOF / FLOOR FRAMING PLAN


SCALE: 1/4" = 1'-0"

LOWER ROOF / FLOOR FRAMING PLAN NOTES

- REFER TO ARCHITECTURAL DRAWINGS FOR ALL DIMENSIONS, ROOF SLOPES & ANGLES.
- PLAN INDICATES FRAMING AT ROOF/FLOOR LEVEL AND WALLS/POSTS BELOW.
- EXISTING CONDITIONS ARE ASSUMED AND SHOULD BE VERIFIED BY THE CONTRACTOR. WHERE DISCOVERED CONDITIONS VARY FROM THOSE SHOWN ON PLANS, CONTRACTOR SHALL CONTACT THE ENGINEER BEFORE PROCEEDING WITH CONSTRUCTION.
- PROVIDE 19/32" APA RATED SHEATHING (32/16) OVER EXISTING ROOF DECKING. ATTACH SHEATHING WITH **8d x 1-3/4" NAILS @ 6"OC** TO ALL FRAMED PANEL EDGES AND OVER SHEARWALLS, AND @ 12"OC TO ALL INTERMEDIATE/FIELD FRAMING. PLACE LONG DIRECTION OF PLYWOOD PERPENDICULAR TO EXISTING ROOF DECKING DIRECTION, STAGGER PANEL JOINTS.
- ALL BEAMS SHALL BE FLUSH FRAMED AND ALL HEADERS DROPPED, UNO. REFER TO GENERAL STRUCTURAL NOTES FOR ADDITIONAL CONNECTION MEMBER INFORMATION NOT SHOWN PER PLAN.
- PROVIDE SOLID BEARING UNDER ALL POINT LOADS ABOVE.
- S___ INDICATES HOLD-DOWN STRAP AT END OF SHEAR WALL ABOVE.
- REFER TO GENERAL STRUCTURAL NOTES AND TYPICAL DETAILS FOR ADDITIONAL REQUIREMENTS.

LEGEND

- SWX SHEARWALL w/ DESIGNATION PER SHEARWALL SCHEDULE
- NEW WOOD WALL FRAMING ABOVE
- NEW WOOD WALL FRAMING BELOW
- EXISTING CMU WALL BELOW
- EXISTING CONCRETE WALL/SLAB BELOW
- NEW CONCRETE WALL/SLAB BELOW
- (X) NUMBER OF BUILT-UP STUDS
- C HANGER PER GEN STRUCT NOTES, UNO PER PLAN

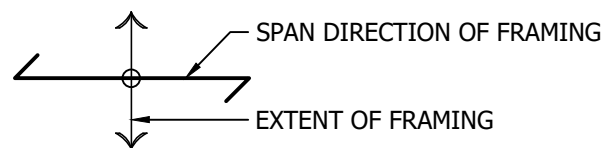

FOOTNOTES

- (A) BLOCKING TO ALIGN w/ POST ABOVE PER 9/S3.02.
- (B) PROVIDE NEW #4 x 2'-2" EPOXY DOWELS TO (E) CONC WALL TO MATCH NEW WALL & FOOTING REINFORCING PER 7/S3.00.
- (C) DRAG STRUT - ATTACH EXISTING DECKING TO BEAM ABOVE WITH SDS 1/2 x 8 SCREWS @ 24"OC OVER FULL LENGTH OF MEMBER.
- (D) PROVIDE STAIR AND LANDING FRAMING PER GENERAL STRUCTURAL NOTE #44 (REFER TO SHEET S1.00)
- (E) (2) 6x6 FULL HEIGHT POST w/ (2) A35 TOP & BOTTOM. LOCATE PER LIFT MANUFACTURE SPECS.
- (F) REPAIR EXISTING MASONRY AS REQUIRED PER GENERAL STRUCTURAL NOTE #19.