

Anax̂ Yaa Andagan Yé Daakahídi Cultural Center: "Where the Sun Rays Touch First"

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT

35% COORDINATION SET

OWNER	ARCHITECT	MECHANICAL	ELECTRICAL	STRUCTURAL	CIVIL	LANDSCAPE	LAND SURVEY
 Douglas Indian Association 1021 Glacier Ave. Juneau, AK, 99801	 NorthWind Architects, LLC. 126 Seward St. Juneau, Alaska 99801 Sean Boily, AIA	Modern Mechanical 11001 Black Bear Road Juneau, AK 99801 (907) 789-9320	Benenyi Engineering 217 2nd St. Juneau, AK 99801 Barry Begenyi (907) 586-5900	 Timberline Engineering 11460 Jo Anne Way Juneau, AK 99801 Jake Graves (907) 635-1433	 ProHNS LLC 1945 Alex Holden Way #101 Juneau, AK 99801 Lucas M. Chambers, PE (907) 780-4004	 Corvus Design 119 Seward St. Unit 15 Juneau, AK 99801 (907) 523-9100	 North 57 Land Surveying 8800 Glacier Hwy Suite 224 1/2 Juneau, AK 99801 (907) 738-5120

PROJECT DESCRIPTION

SCOPE OF WORK DESCRIBED BELOW IS INCLUSIVE OF ALL ASSOCIATED ARCHITECTURAL, MECHANICAL AND ELECTRICAL WORK WITHIN, OR REQUIRED TO SUPPORT THE AREAS DELINEATED.

THE WORK OF PROJECT IS DEFINED BY THE CONTRACT DOCUMENT DRAWINGS AND SPECIFICATIONS. IS FOR THE CONSTRUCTION OF A NEW BUILDING. BASE BID AND DESIGN ALTERNATES AND CONSISTS OF THE FOLLOWING:

PHASE ONE SITE DEVELOPMENT. REMOVE OVERBURDEN MATERIAL DESCRIBED IN STRUCTURAL DRAWINGS AND PROVIDE ENGINEERED FILL TO DEPTH OF LOWER-LEVEL FOUNDATION. EXTEND UTILITIES AS REQUIRED TO COMPLETE THE PHASE 2 WORK. ANTICIPATE MATERIAL REMOVAL 4,800 CUBIC YARDS. ANTICIPATED PHASE 1 ENGINEERED FILL 3,500 CUBIC YARDS. INCLUSIVE WITH PHASE 1 WORK IS PROVISION OF THE LOWER "HANNA BLOCK" SITE RETAINING STRUCTURE AS WELL AS THE ELECTRICAL UTILITY POWER LINE EXTENSION. ANTICIPATING CONSTRUCTION LATE SUMMER 2023

PHASE 2 BUILDING AND SITE CONSTRUCTION: WORK WILL INCLUDE CONSTRUCTION OF ~~26,000~~ **3800gsf** SF, TWO STORY BUILDING AND ALL OTHER FEATURES DEFINED IN THESE DOCUMENTS, INCLUDING CONSTRUCTION OF THE UPPER SITE RETAINAGE, RAMPS, RAILINGS EXTERIOR ACCESS STAIRS, AND INSTALLATION OF HARDSCAPES AND LANDSCAPE FINISHING. ANTICIPATING CONSTRUCTION STARTING FALL 2023, EXTENDING THOUGH 2024 THE FF&E AND MOVE-IN EARLY IN 2025.

GENERAL NOTES

SHEET INDEX

A10.0	3D VIEWS
GENERAL	
G0.0	COVER SHEET
G0.1	ABBREVIATIONS & LEGEND
G1.0	SITE PLAN
CIVIL	
C1.0	CIVIL SITE PLAN
C2.0	SECTION VIEWS
ARCHITECTURAL	
A0.0	EXTERIOR BUILDING ASSEMBLIES
A0.1	INTERIOR BUILDING ASSEMBLIES
A0.2	SPECIFICATIONS
A2.0	FLOOR PLAN - LEVEL 0
A2.1	FLOOR PLAN - LEVEL 1
A2.4	ROOF PLAN
A2.5	REFLECTED CEILING PLAN - LEVEL 0
A2.6	REFLECTED CEILING PLAN - LEVEL 1
A3.0	EXTERIOR ELEVATIONS
A3.1	EXTERIOR ELEVATIONS
A4.0	BUILDING SECTIONS
A4.1	BUILDING SECTIONS
A5.0	ENLARGED SECTIONS
A6.0	ENLARGED PLANS & INTERIOR ELEVATIONS
A6.1	ENLARGED PLANS & INTERIOR ELEVATIONS
STRUCTURAL	
S1	GENERAL NOTES & ABBREVIATIONS
S2	FOUNDATION PLAN
S3	FIRST FLOOR FRAMING PLAN
S4	ROOF FRAMING PLAN
S5	SECTION
S6	SECTION
S7	SECTION
MECHANICAL	
M0.2	SCHEDULES

COVER SHEET

SHEET #

G0.0

PLOT DATE: 06/05/2023
ISSUE DATE: 06/05/2023

ABBREVIATIONS

#	pound or number
&	and
(E)	existing
(R)	relocated
+	plus
-	minus
<	Angle
=	equal
@	at
A/C	air conditioning
AB	anchor bolt, air barrier
ABV	above
ACOUS	acoustical
ACT	acoustical ceiling tile
AD	area drain
ADJ	adjacent
ADJUST	adjustable
AESS	architecturally exposed structural steel
AFF	above finished floor
AG	acoustical glass
ALT	alternate
ALUM	aluminum
ANC	anchorage
APPROX	approximate
ARCH	architectural
ARG	abuse resistant gypsum wall board
ASPH	asphalt
AVG	average
AWP	acoustical wood panel
B.O.	bottom of
BD	board
BLDG	building
BLK	block
BLKG	blocking
BLW	below
BM	beam
BOD	bottom of deck
BOF	bottom of footing
BOT	bottom
BSBD	baseboard
BSMT	basement
BTWN	between
C.I.P.	cast in place
CAB	cabinet
CB	cove base
CBU	cement backer unit
CEM	cement
CF	cubic foot
CFCI	contractor furnish/ contractor install
CFMF	cold formed metal framing
CG	corner guard
CIP	cast in place concrete
CJ	control joint
CL	center line
CLG	ceiling
CLO	closet
CNR	corner
CNTR	counter
CO	clear clean out
COL	column
CONC	concrete
CONN	connection
CONST	construction
CONT	continuous
CONTR	contractor
CORR	corridor
CPT	carpet
CR	closet rod
CT	ceramic tile
CTR	center
CTSK	countersink
CUH	cabinet unit heater



CUR	cubical curtain
CW	curtain wall
CWB	cement board
D	deep, depth
DBL	double
DEB	dry erase board
DEMO	demolish, demolition
DEPT	department
DET	detail
DF	drinking fountain
DIA.	diameter
DIM	dimension
DIV	division
DN	down
DP	dampproof(ing)
DR	door
DS	downspout
DW	dishwasher
DWG	drawing
DWR	drawer
E	east
EA	each
EF	exhaust fan
EJ	expansion joint
EL	elevation
ELEC	electrical
ELEV	elevator
EM	entry mat
EMER	emergency
ENCL	enclosure
EP	electrical panelboard
EPX	epoxy
EQ	equal
EQUIP	equipment
EXH	exhaust
EXIST	existing
EXP	exposed
EXPAN	expansion
EXT	exterior/extend
F	factory finish
FA	fire alarm
FAB	fabricate
FAF	fluid applied flooring
FBCT	folding baby changing table
FD	floor drain, file drawer
FDC	fire department connection
FDN	foundation
FE	fire extinguisher
FEC	fire extinguisher cabinet
FFL	finished floor line
FG	fiberglass
FH	fire hydrant
FHD	feminine hygiene disposal
FIN	finish
FLASH	flashing
FLR	floor
FO	face of
FOC	face of concrete
FOF	face of finish
FOS	face of studs
FP	fireproof
FRMG	framing
FRP	fiberglass reinforced panels
FRT	fire retardant treated
FS	full size
FSS	folding shower seat
FT	foot, feet
FTG	footing
FURR	furring
FUT	future
FWS	freestanding wire shelving
GA	gauge
GALV	galvanized

GB	grab bar
GEN	general
GFCI	government furnish/contract install
GI	galvanized iron
GL	glass
GND	ground
GRD	grade
GT	glass tile
GWB	gypsum wall board
GYP	gypsum
H2O	water cooler
HB	hose bibb
HC	hollow core
HDG	hot dipped galvanized
HDR	header
HDWD	hardwood
HDWE	hardware
HM	hollow metal
HMT	hollow metal thermal break
HORIZ	horizontal
HR	hour
HT	height
HTG	heating
HTR	heater
HVC	heating/ventilating/cooling
HWH	hot water heater
ID	inside diameter
IG	insulated glass
IHM	insulated hollow metal
INCL	include
INSUL	insulation
INT	interior
IPS	interior paint system
JAN	janitor
JST	joist
JT	joint
KD	knock down
KIT	kitchen
KO	knock out
L	length, long
LAB	laboratory
LAM	laminate
LB	lock box (telephone)
LH	left hand
LIN	linoleum flooring
LKR	locker
LM	laminated glass
LT	light
LWC	linear wood ceiling
M&E	mechanical and electrical
MACH	machine
MATL	material
MAX	maximum
MBD	marker board
MC	medicine cabinet
MCP	metal ceiling panel
MCS	metal ceiling system
MECH	mechanical
MEMB	membrane
MET	metal
MFR	manufacturer
MGO	magnesium oxide
MH	manhole
MIL	millimeter
MIN	minimum
MIR	mirror
MPI	Master Painter's Institute
MR	moisture resistant
MRGB	moisture resistant gypsum board
MSB	mop service basin
MTD	mounted
MTL	metal
MTLB	metal base

MUL	mullion
MWP	metal wall panel
N	north
N/A	not applicable
NIC	not in contract
NO	number
NOM	nominal
NSMF	non-structural metal framing
NTS	not to scale
OC	on center
OD	outside diameter
OFCI	owner furnish/contractor install
OFOI	owner furnish/owner install
OH	overhead
OPNG	opening
OPP	opposite
OPQ	opaque
ORD	overflow roof drain
PC	pre-cast
PCR	proximity card reader
PCT	porcelain tile
PERF	perforated
PKG	parking
PL	property line
PLAM	plastic laminate
PLUM	plumb, plumbing
PLYWD	plywood
PNL	panel
PR	pair
PREFAB	prefabricated
PREFIN	prefinish(ed)
PSF	pounds per square foot
PSI	pounds per square inch
PT	paint
PTD	paper towel dispenser
PTDR	paper towel dispenser and receptacle
PTN	partition
PTR	paper towel receptacle
PVMT	pavement
QT	quarry tile
RB	resilient/rubber base
RCP	reflected ceiling plan
RD	roof drain
RE:	regarding (see)
REBAR	reinforcing bar
REF	reference
REFL	reflected
REFR	refrigerator
REINF	reinforc(ed)(ing)
REQD	required
RESIL	resilient
RFEC	recessed fire extinguisher cabinet
RH	robe hook, right hand
RM	room
RO	rough opening
RP	resin panel
RRS	resilient rubber sheet
RSB	rubber self cove base
RTD	rated
RWL	rain water leader
SA	self-adhered
SASW	self-adhered sheet waterproofing
SB	shower bench
SCHED	schedule
SCO	seat cover
SD	soap dispenser
SDT	static dissipative tile
SECT	section
SH	shelf
SHTG	sheeting
SHV	sheet vinyl
SHWR	shower
SIM	similar

SLR	sealer
SPEC	specification
SQ	square
SR	slip resistant
SS	stainless steel
SSK	service sink
SSM	solid surface material
ST	stain
STA	station
STD	standard
STL	steel
STN	stone
STRUCT	structural
SUSP	suspended
SYM	symmetrical
SYS	system
T	perpendicular
T&G	tongue and groove
T.O.	top of
TB	thermal break
TBD	to be determined
TBM	tack board (modular)
TEL	telephone
TEMP	temporary
TFF	troweled floor finish
TG	tempered glass
THK	thick
TKBD	tackboard
TOB	top of beam
TOC	top of concrete, top of curb
TOP	top of pavement
TOS	top of steel
TOW	top of wall
TPN	toilet partition TS tube steel
TSCD	toilet seat cover dispenser
TSPN	transparent
TTD	toilet tissue dispenser
TV	television
TWF	troweled wall finish
TYP	typical
UL	Underwriters Laboratories, Inc.
UNFIN	unfinished
UNO	unless noted otherwise
UR	urinal
VB	vapor barrier
VCT	vinyl composition tile
VERT	vertical
VEST	vestibule
VIF	verify in field
VR	vapor retarder
W	west, wide, width
W/	with
W/O	without
WB	window blind
WC	water closet
WCS	wood ceiling system
WCV	wall covering
WD	wood
WDG	wood grille
WDP	wood panel
WDW	window
WDWT	window treatment
WH	wall hung
WOC	walkoff carpet
WOM	walkoff mat
WP	waterproof
WR	water resistant/waste receptical
WS	window shade
WSCT	wainscot
WT	window treatment
WWF	woven wire fence
Σ	summation
≈	approximately

SYMBOLS

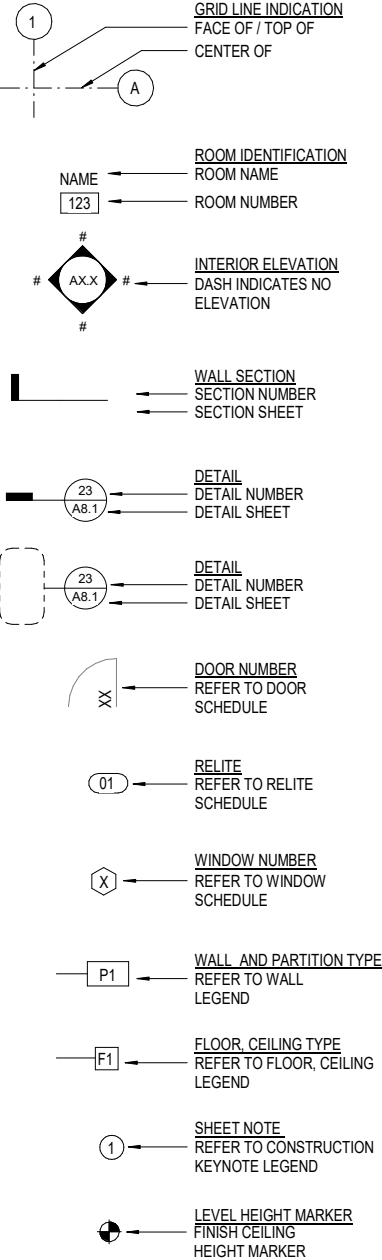

126 Seward St
Juneau, AK 99801
Ph #907.586.6150
www.northwindarch.com

IF THE ABOVE DIMENSION DOES NOT MEASURE ONE INCH (1") EXACTLY, THIS DRAWING WILL HAVE BEEN ENLARGED OR REDUCED, AFFECTING ALL LABEL SCALES.

AYAYD Cultural Center
DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT
ST. ANNS AVENUE
DOUGLAS, ALASKA


SHEET TITLE:
ABBREVIATIONS & LEGEND

CHECKED	Approver
DRAWN	Author

issue	date	description
-------	------	-------------

SHEET #
G0.1

ISSUE DATE
06/05/2023

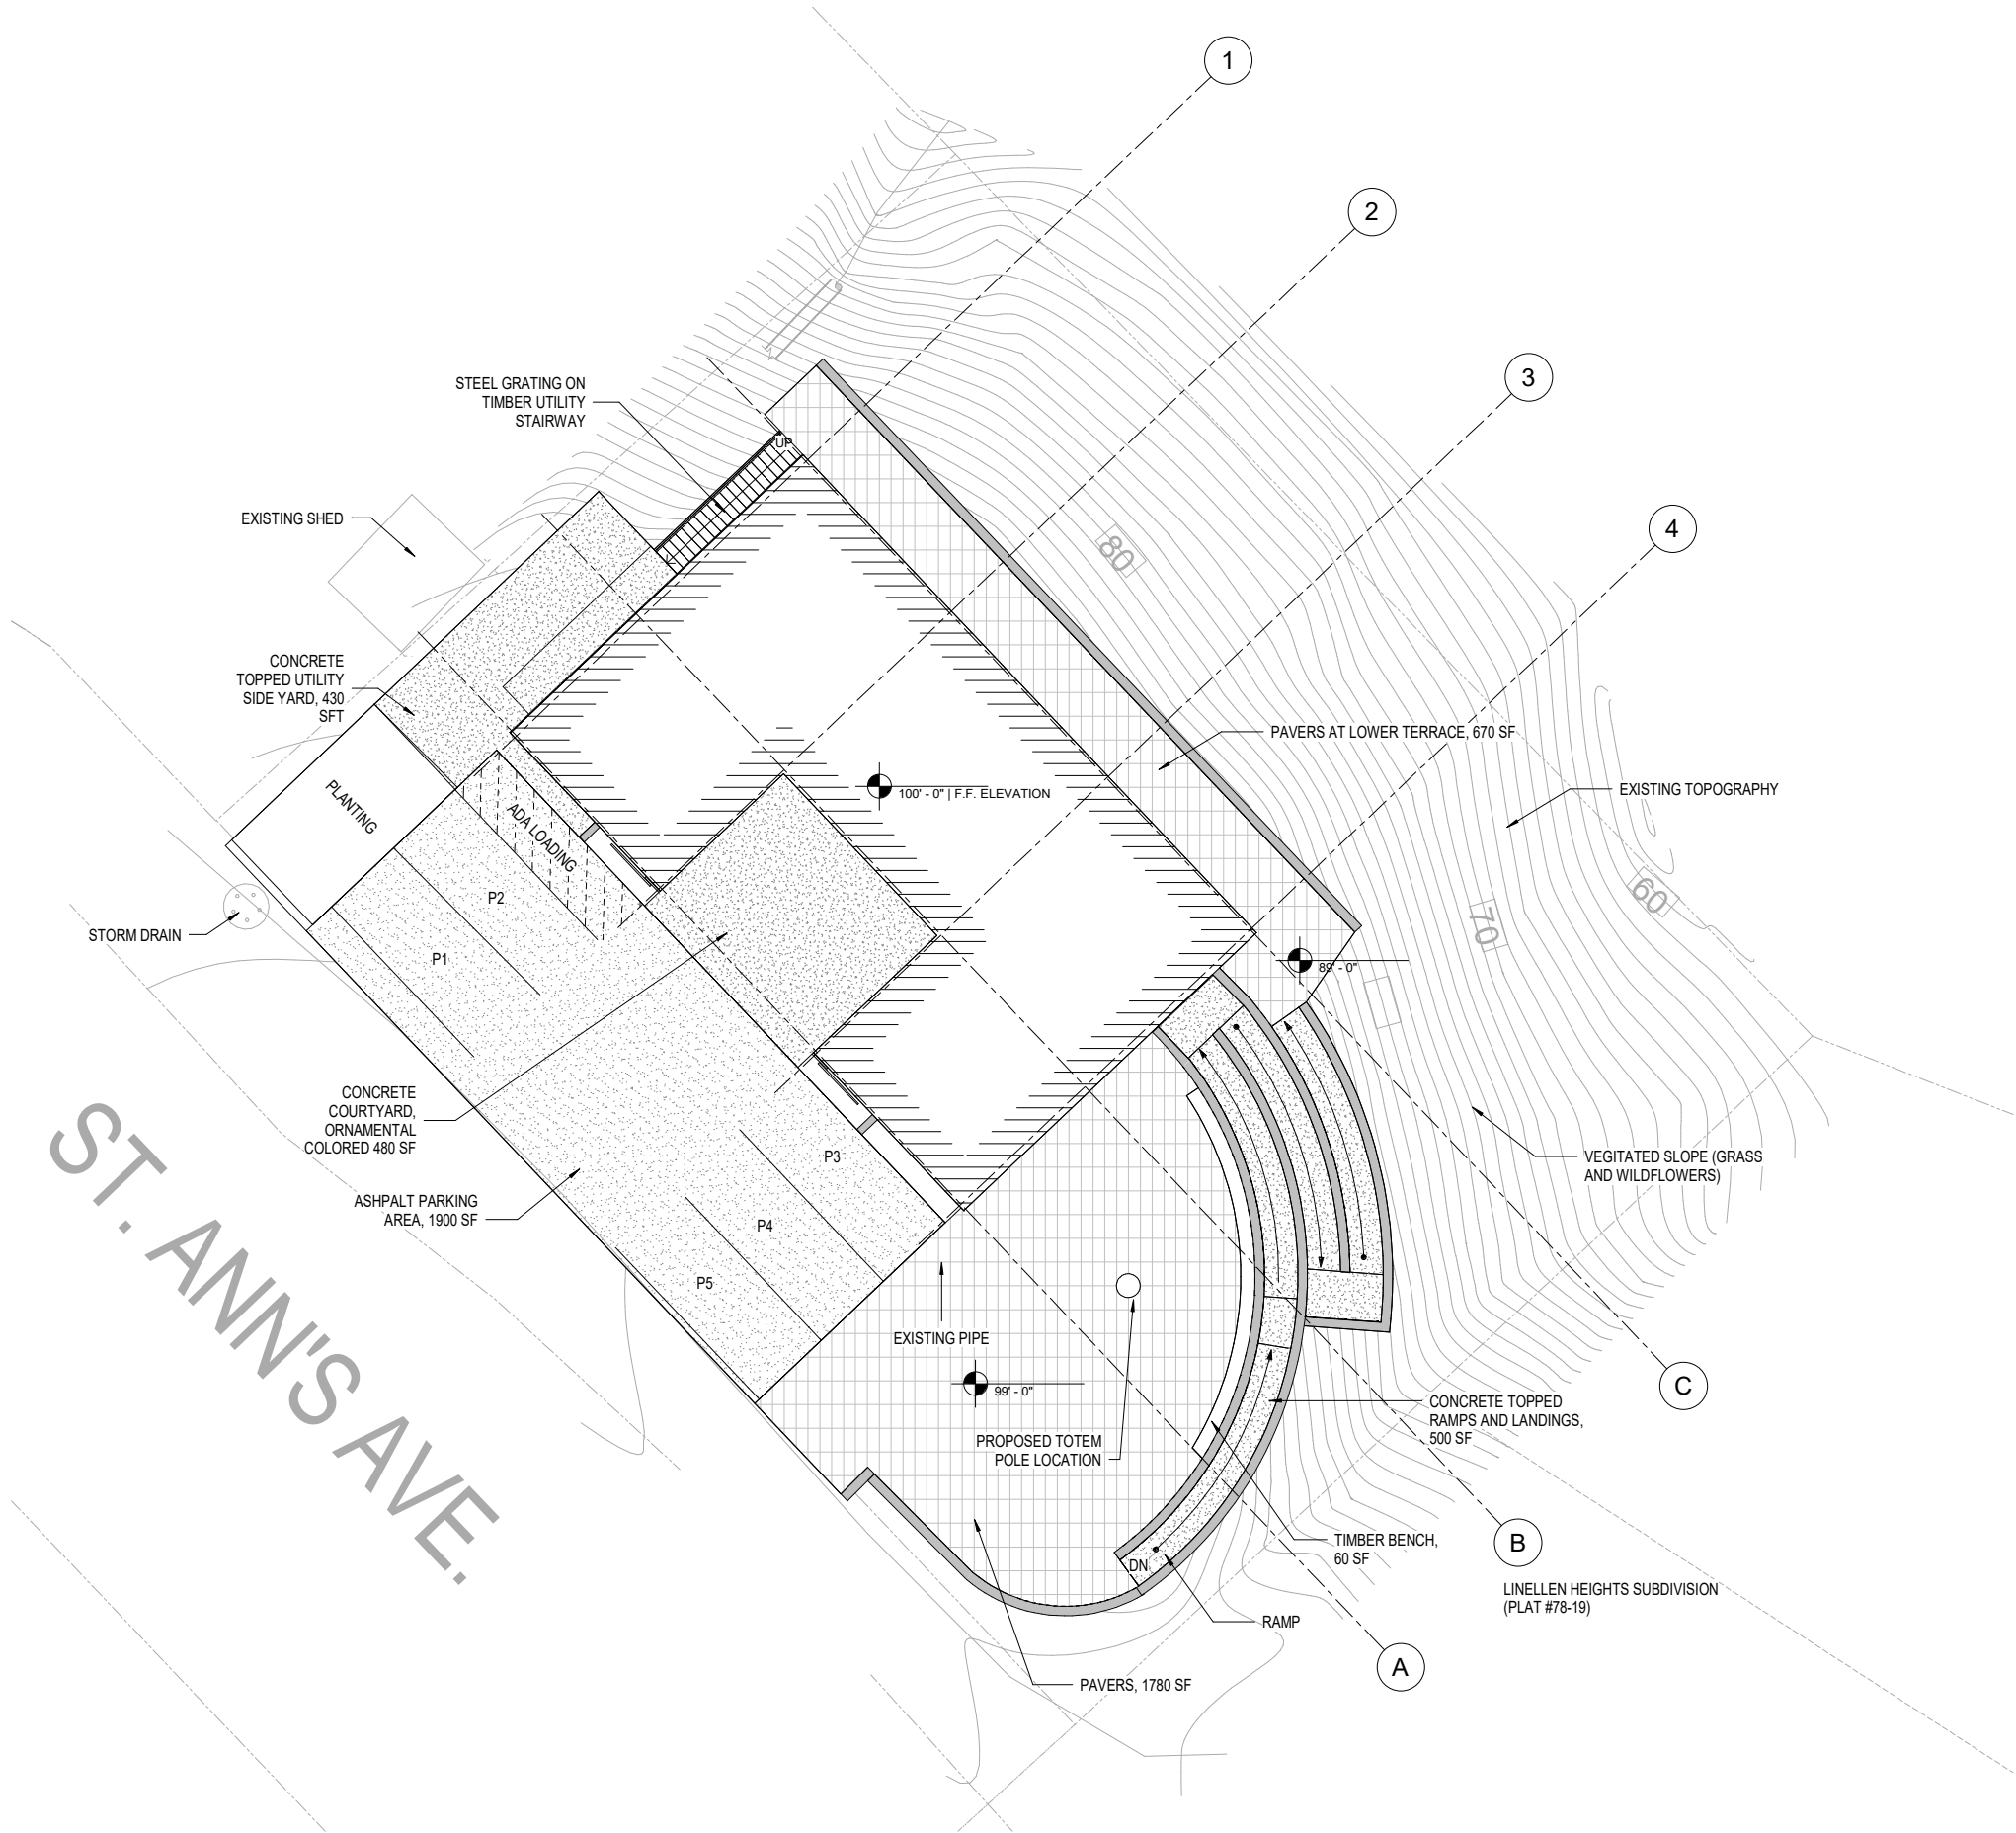

GENERAL NOTES:

1.

PARKING NOTES:

1.

SHEET NOTES:

1.



06/05/2023



126 Seward St
Juneau, AK 99801
Ph #907.586.6150
www.northwindarch.com

1" ACTUAL
IF THE ABOVE DIMENSION DOES NOT MEASURE ONE INCH (1") EXACTLY, THIS DRAWING WILL HAVE BEEN ENLARGED OR REDUCED, AFFECTING ALL LABEL SCALES.

AYAYD Cultural Center

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT

ST. ANNS AVENUE
DOUGLAS, ALASKA

SHEET TITLE:
SITE PLAN

CHECKED

DRAWN

N/A

issue date description

SHEET #


G1.0

ISSUE DATE

06/05/2023

SHEET NOTES:

- 1. CONNECT TO EXISTING 4" PVC SEWER STUB OUT WITH 35 LF OF NEW 4" PVC SEWER SERVICE.
- 2. CONNECT TO EXISTING 1" WATER CURB STOP WITH 35 LF OF NEW 1" POLY WATER SERVICE.

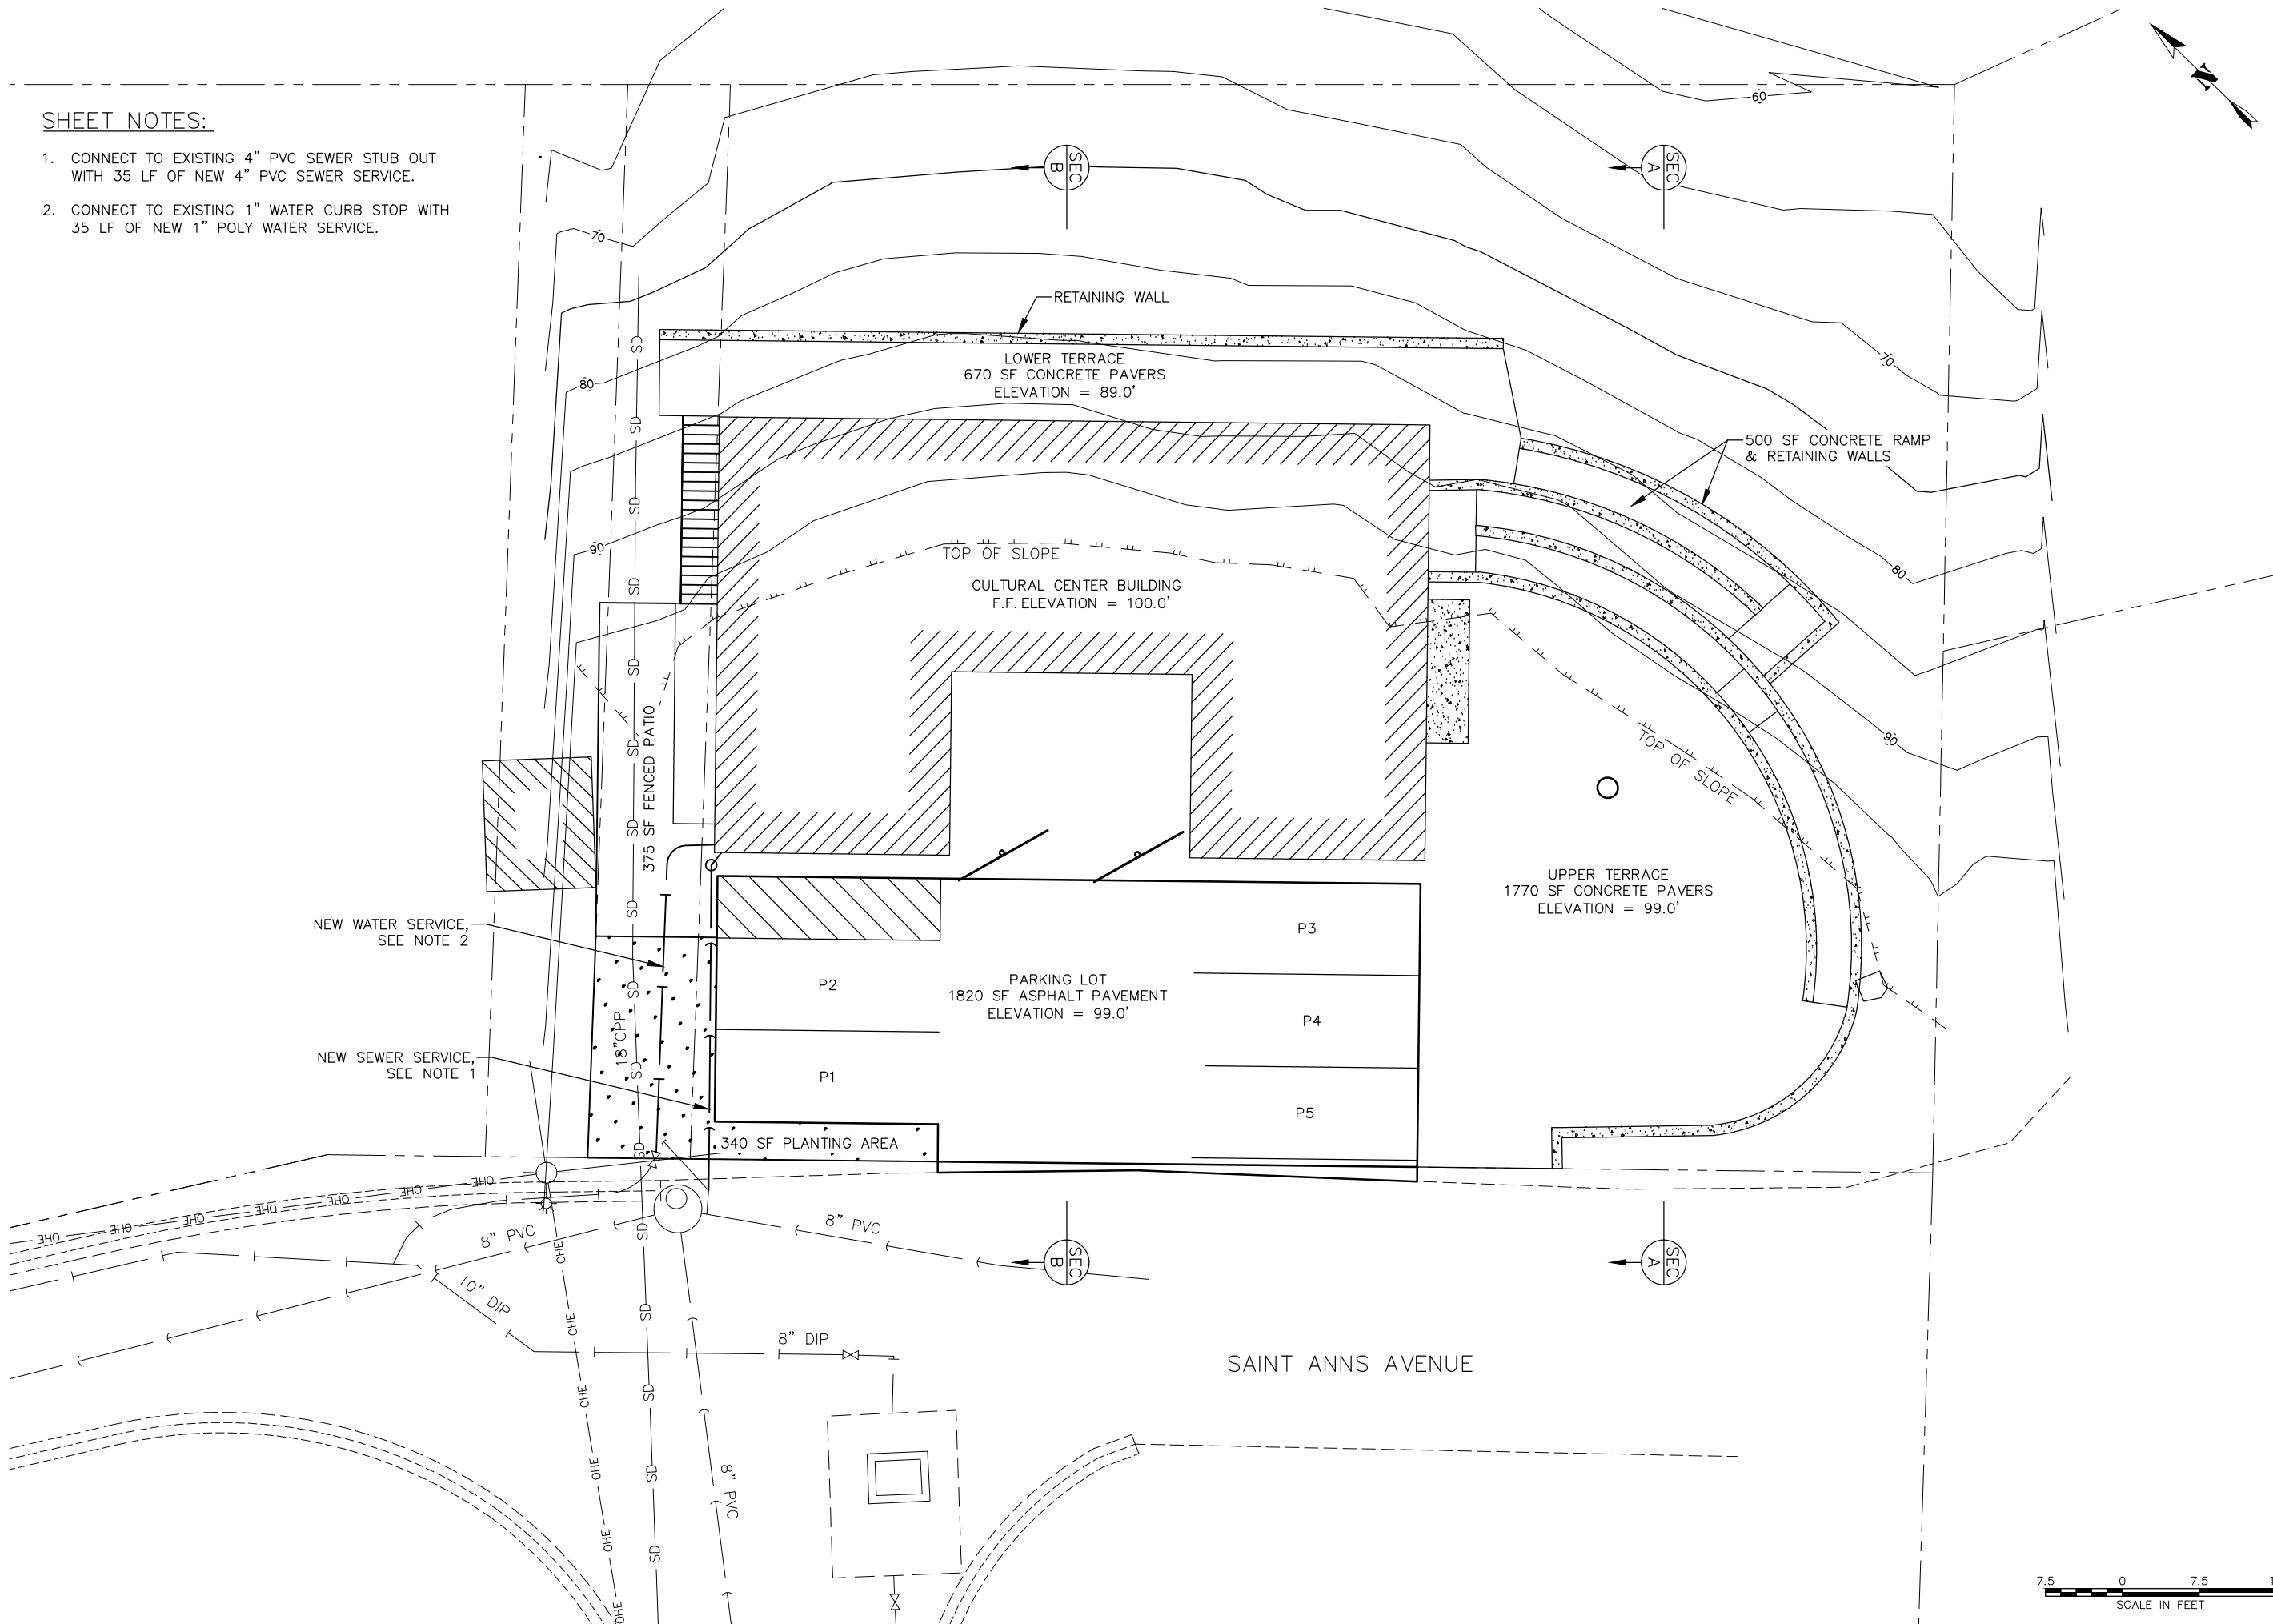

35%
DRAFT
SUBMITTAL



 **proHNS LLC**
1945 ALEX HOLDEN WAY #101
JUNEAU, AK 99801
(907)-780-4004

AYAYD Cultural Center
DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT

SAINT ANNS AVENUE
DOUGLAS, ALASKA

SHEET TITLE: CIVIL SITE PLAN		
CHECKED	L. CHAMBERS	
DRAWN	E. ROEMELING	
issue	date	description

SHEET # **C1.0**

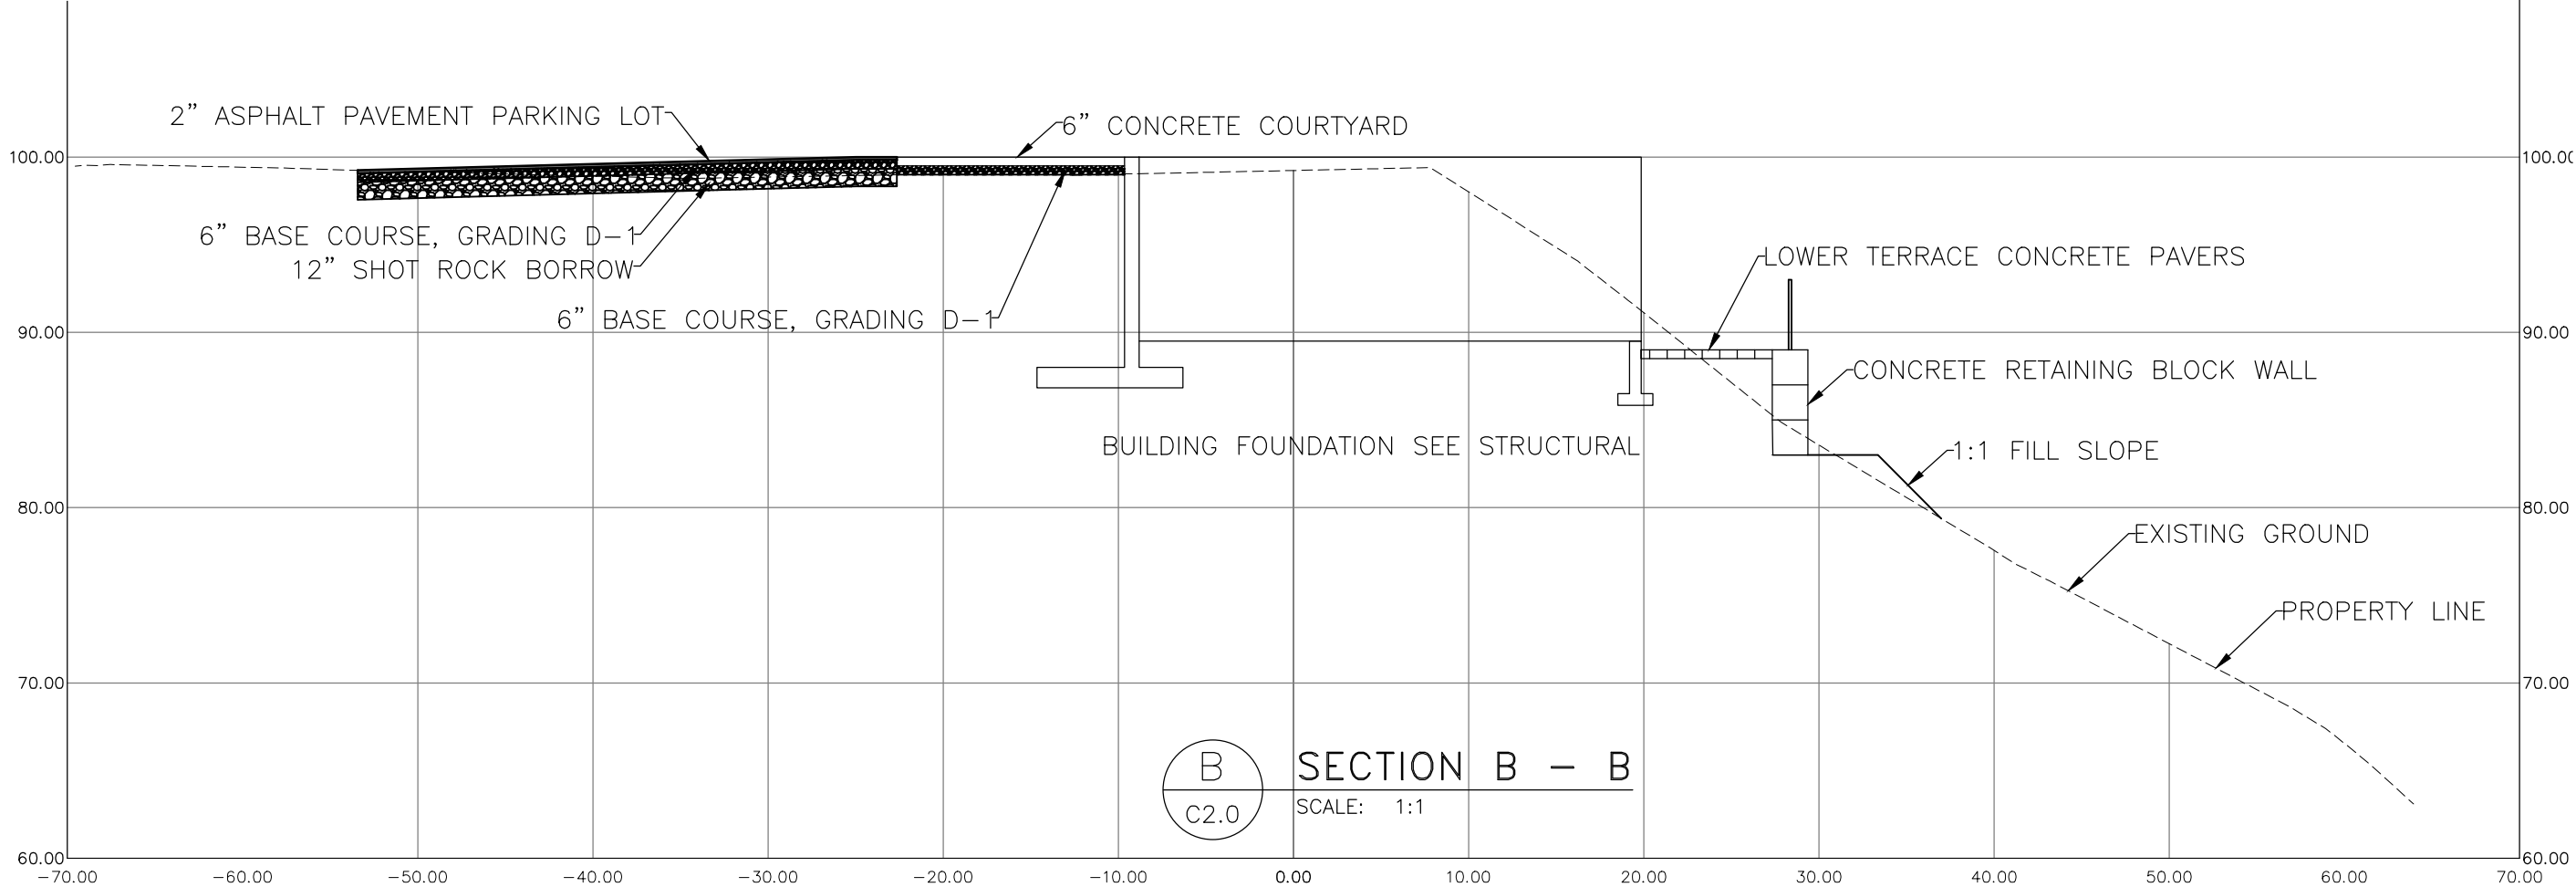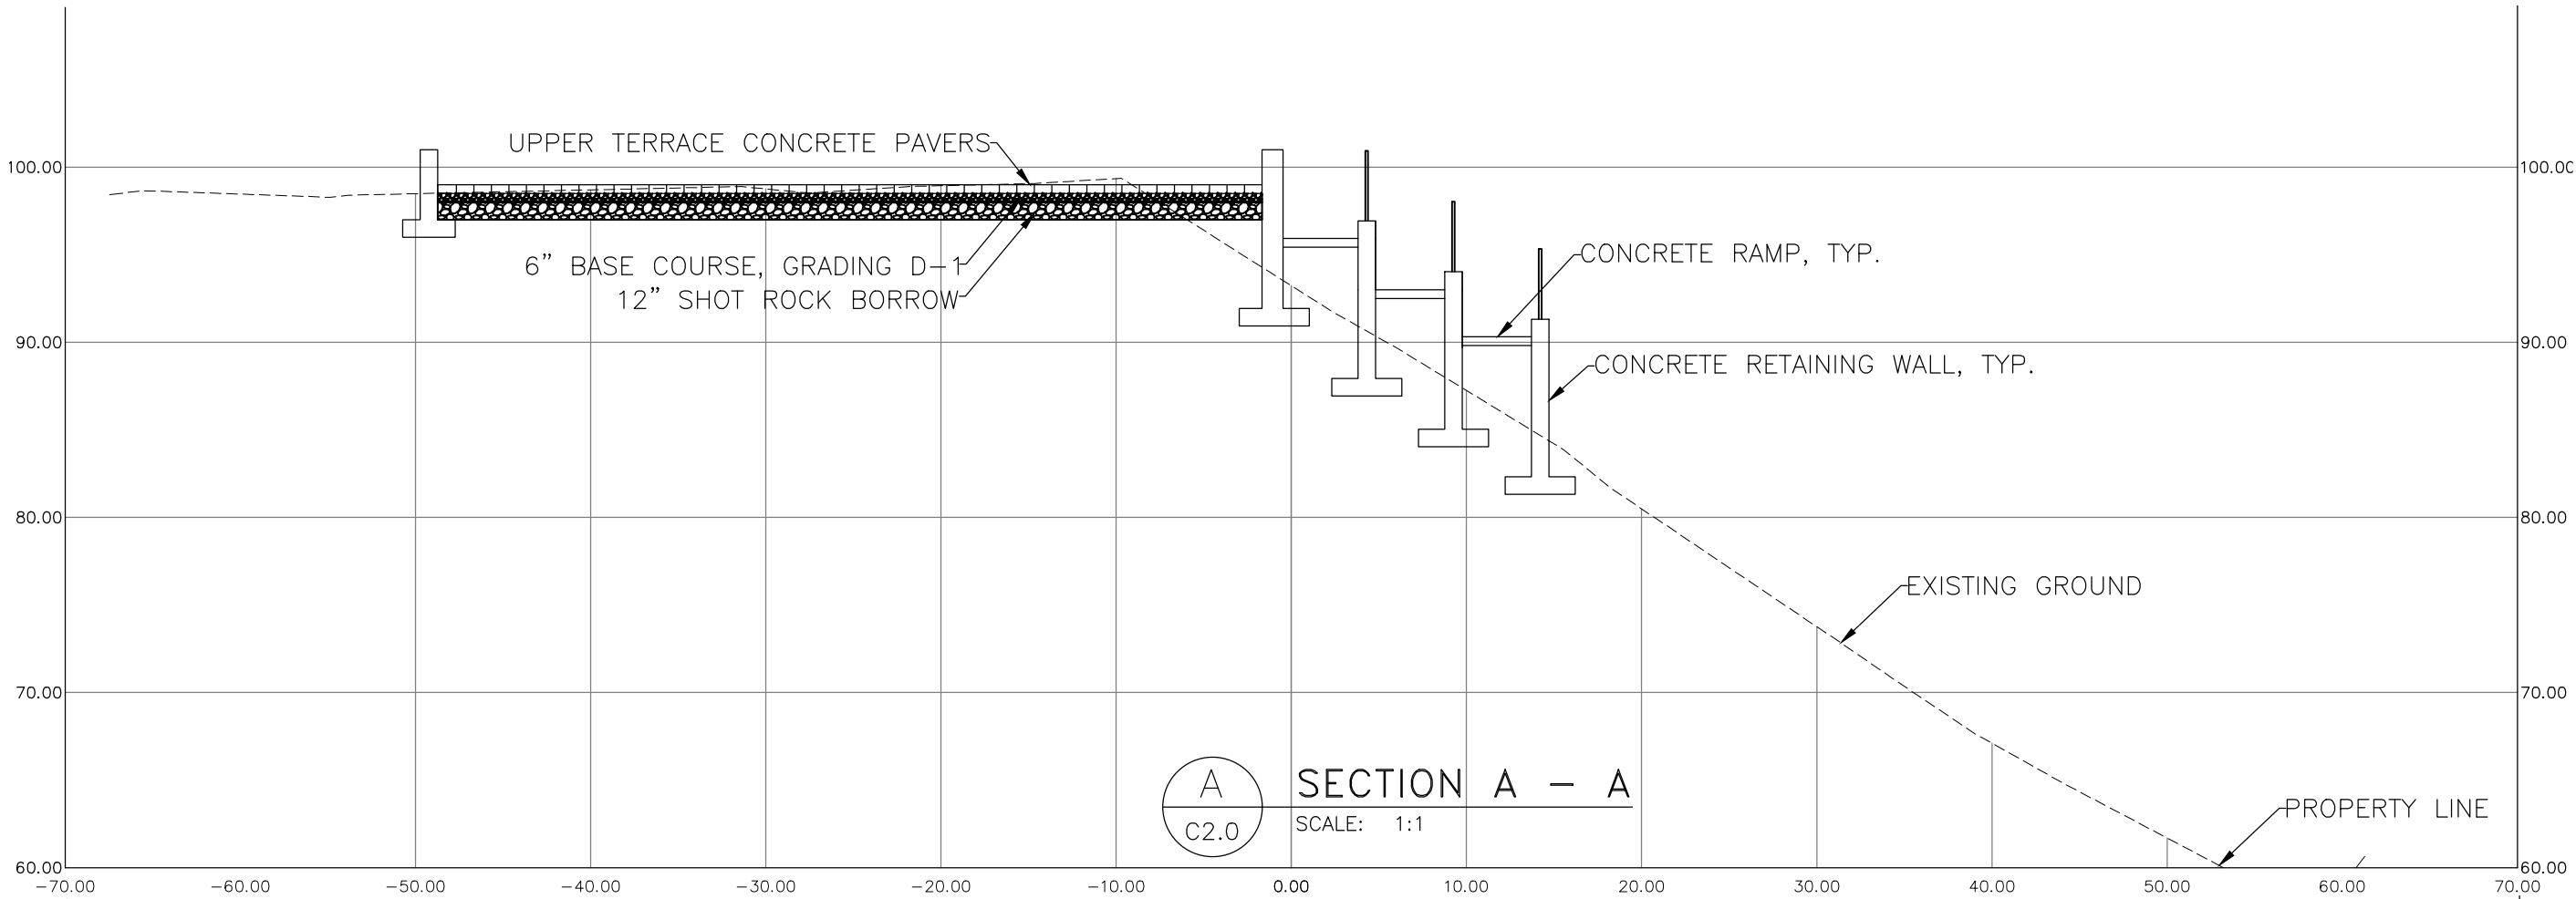

35%
DRAFT
SUBMITTAL



pro**HNS** LLC

1945 ALEX HOLDEN WAY #101
JUNEAU, AK 99801
(907)-780-4004

AYAYD Cultural Center

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT


SAINT ANNS AVENUE
DOUGLAS, ALASKA

SHEET TITLE:
SECTION VIEWS


CHECKED	L. CHAMBERS	
DRAWN	E. ROEMELING	
issue	date	description

SHEET #
C2.0


ISSUE DATE
06/02/23

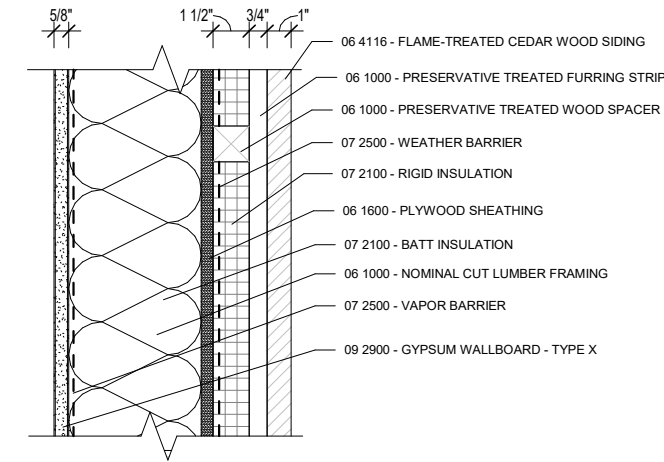


1 WS_WD1 - EXTERIOR WOOD CLAD WALL SYSTEM
3" = 1'-0"

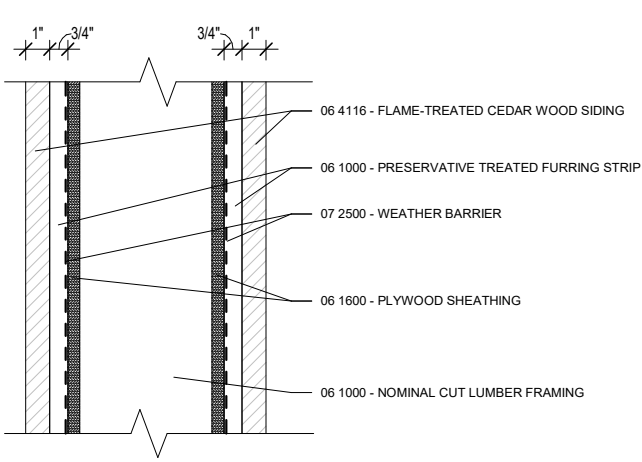


5 WS_WD2 - EXTERIOR WOOD CLAD FIN WALL SYSTEM
3" = 1'-0"

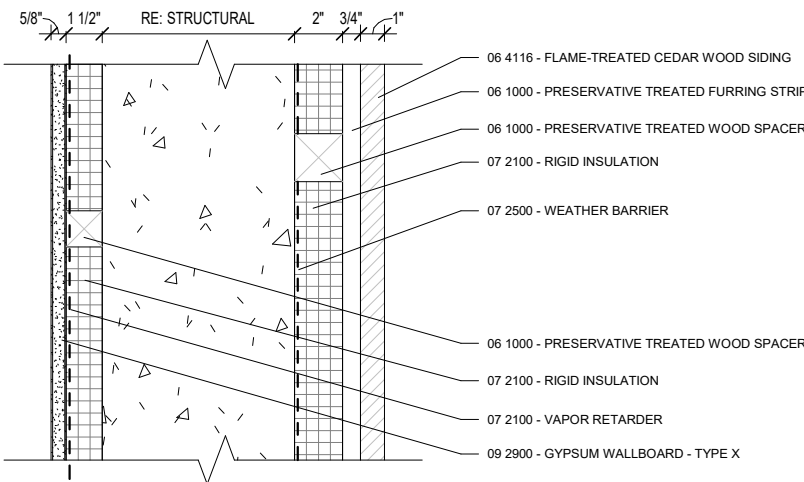


7 WS_CONC1 - CONCRETE FOUNDATION WALL
3" = 1'-0"

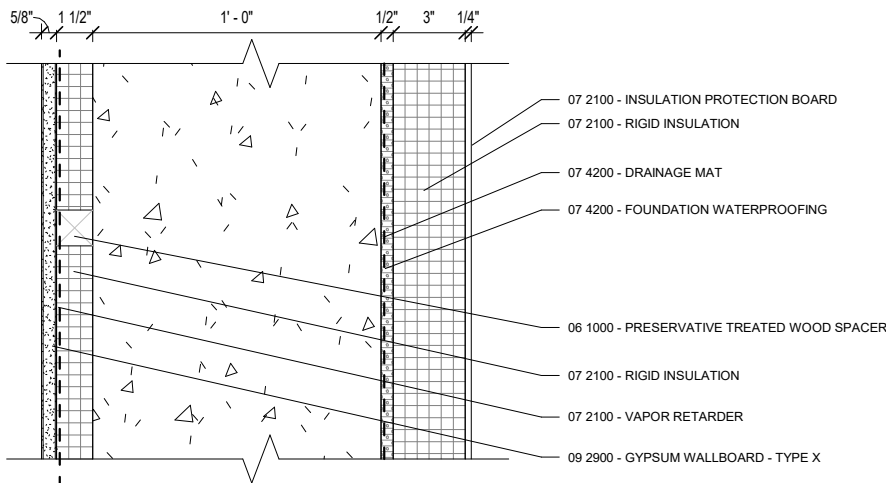


3 FWS_CONC1 - CONCRETE FOUNDATION WALL
3" = 1'-0"

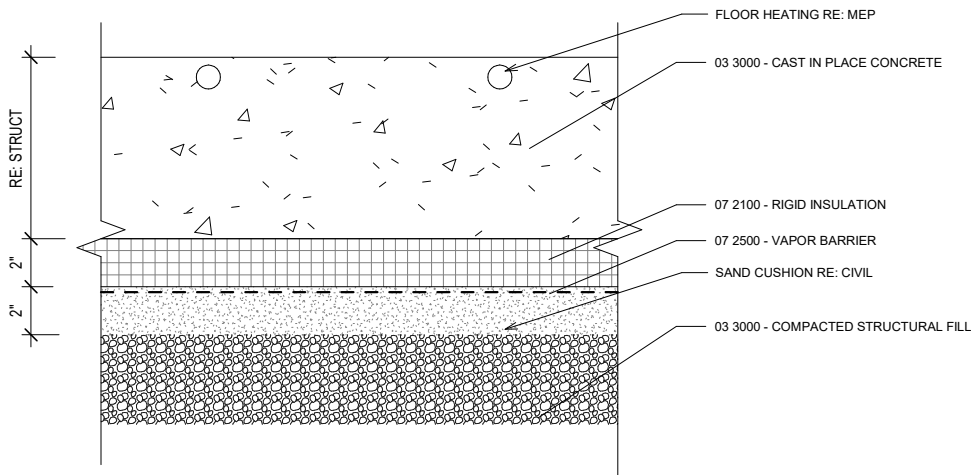

6 FS_CONC2 - SLAB ON GRADE CONCRETE FLOOR SYSTEM
3" = 1'-0"

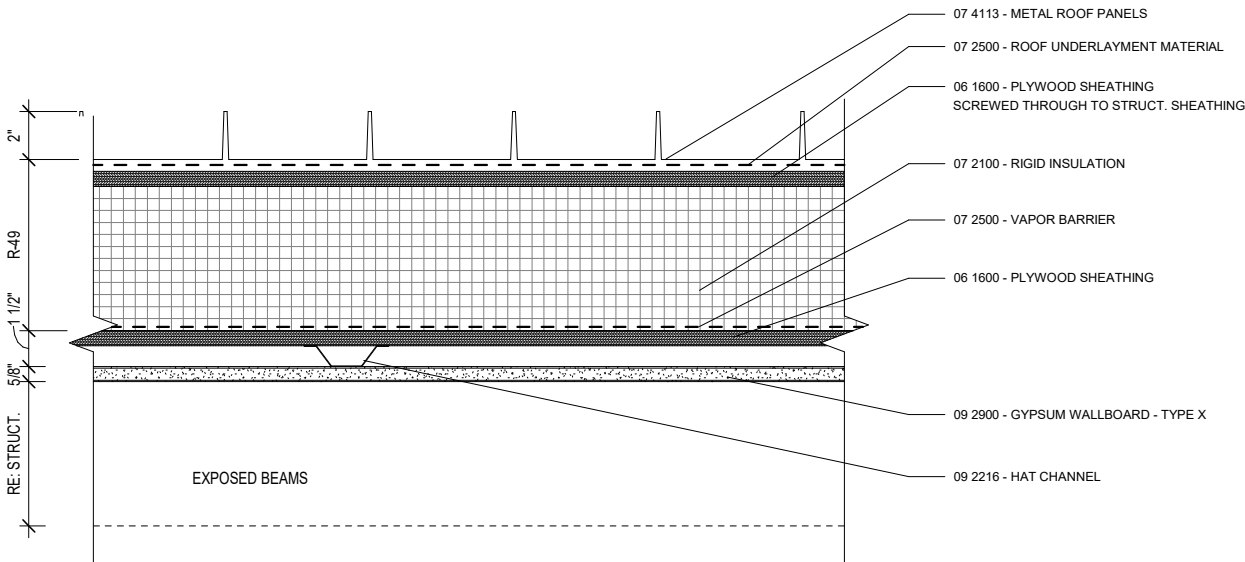

2 RS_MET1 - METAL PANEL ROOF SYSTEM
3" = 1'-0"

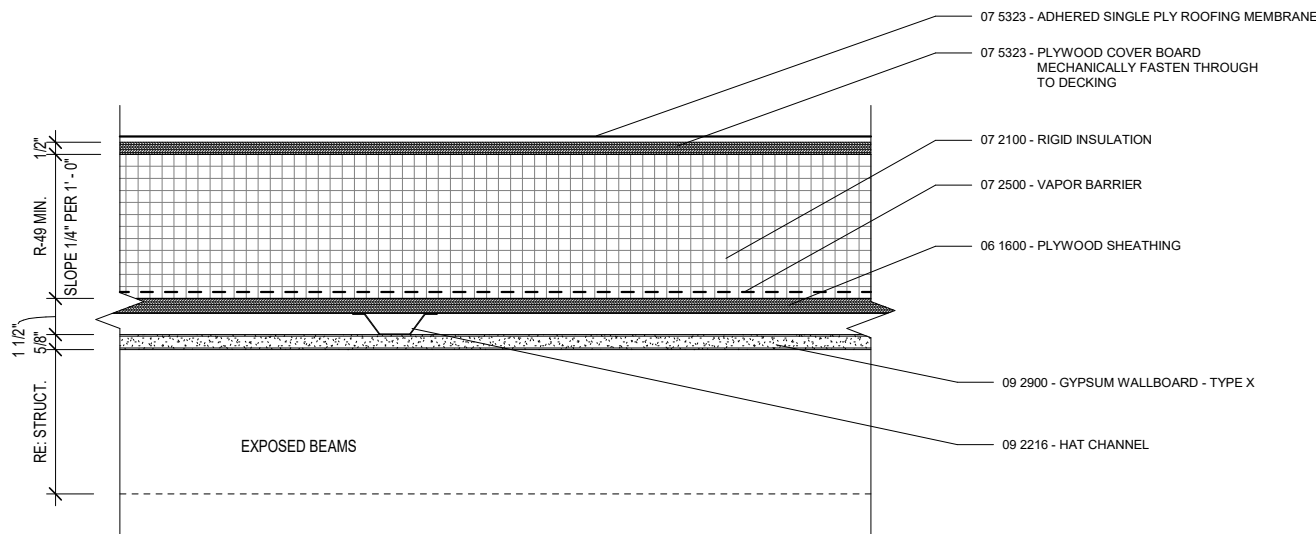

4 RS_EPDM1 - EPDM ROOF SYSTEM
3" = 1'-0"

GENERAL NOTES:

- IT IS THE INTENT OF THESE DOCUMENTS TO DESCRIBE A FULLY AIR/WATER TIGHT ENVELOPE SYSTEM COMPRISED PRIMARILY OF THE 074200 EXTERIOR WALL ASSEMBLY AND 075323 ROOF ASSEMBLY SYSTEMS. THE AIR/WATER TIGHTNESS OF THE SYSTEM SHALL BE FIELD TESTED BY THE CONTRACTOR DURING CONSTRUCTION USING IN-PLACE MOCK-UPS, AND BY THE OWNER AS A PART OF COMMISSIONING. IDENTIFIED DEFICIENCIES SHALL BE CORRECTED AT THE CONTRACTOR'S EXPENSE.
- IT IS THE INTENT OF THESE DOCUMENTS TO DESCRIBE 1HR AND 2HR RATED ASSEMBLIES DESIGNED TO FULLY PROTECT THE 051200 STRUCTURAL STEEL FRAME AND 053000 STEEL DECK SYSTEMS, AND AT REQUIRED LOCATIONS TO PREVENT THE SPREAD OF FIRE AND SMOKE BETWEEN SPACES. ALL RATED ASSEMBLIES SHALL BE INSPECTED BY THE OWNER'S AGENT PRIOR TO COVER. IDENTIFIED DEFICIENCIES SHALL BE CORRECTED AT THE CONTRACTOR'S EXPENSE.
- ALL JOINTS AND PENETRATIONS THROUGH FIRE RATED ASSEMBLIES TO BE FIRE STOPPED UTILIZING DELEGATED DESIGN FIRESTOPPING DETAILS IN ACCORDANCE WITH 078443 "PENETRATION AND JOINT FIRESTOPPING".
- ALL WALL ASSEMBLIES IN EXCESS OF 10' IN HEIGHT SHALL BE FIRE BLOCKED.
- SEE PLANS, SECTIONS AND ELEVATIONS FOR FLOOR/CEILING AND WALL TYPE LOCATIONS.
- SEE DETAILS FOR LOCATION-SPECIFIC INFORMATION.

LEGEND:

— STRUCTURAL FRAMING -
SEE STRUCT



06/05/2023

NorthWind
Architects, LLC

126 Seward St
Juneau, AK 99801
Ph #907.586.6150
www.northwindarch.com

IF THE ABOVE DIMENSION DOES NOT MEASURE ONE INCH (1") EXACTLY, THIS DRAWING WILL HAVE BEEN ENLARGED OR REDUCED, AFFECTING ALL LABEL SCALES.

AYAYD Cultural Center

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT

ST. ANNS AVENUE
DOUGLAS, ALASKA

SHEET TITLE:

EXTERIOR
BUILDING
ASSEMBLIES

CHECKED Approver
DRAWN Author


issue date description

SHEET #


A0.0

ISSUE DATE


06/05/2023

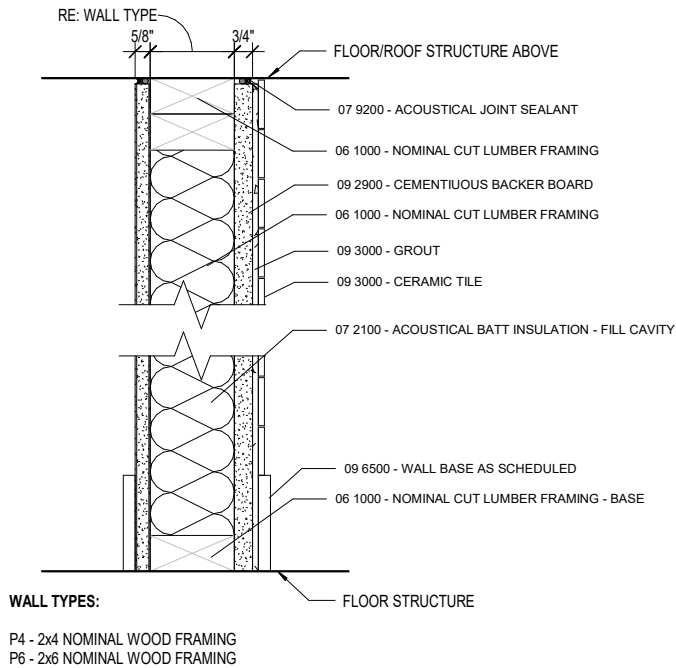

4 P()-CT - INTERIOR WOOD FRAMED PARTITION WITH CERAMIC TILE
3" = 1'-0"

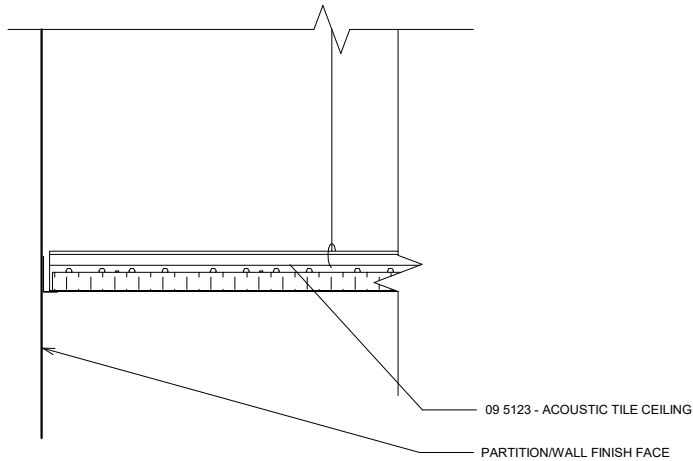

5 CLG-ACT1 - ACOUSTIC TILE CEILING
3" = 1'-0"

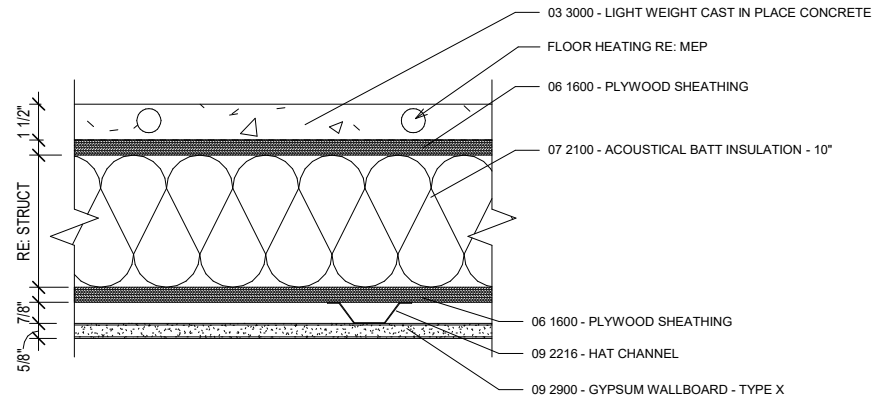


NOTE: FLOOR TYPE FS_CONC1a EXCLUDES BATT INSULATION, FLOOR HEATING, AND GYPSUM WALL BOARD. BOTTOM FACE IS CLAD WITH CEDAR SOFFIT PANELS
6 FS_CONC1 - CONCRETE FLOOR & CEILING SYSTEM
3" = 1'-0"

GENERAL NOTES:


- IT IS THE INTENT OF THESE DOCUMENTS TO DESCRIBE A FULLY AIR/WATER TIGHT ENVELOPE SYSTEM COMPRISED PRIMARILY OF THE 074200 EXTERIOR WALL ASSEMBLY AND 075323 ROOF ASSEMBLY SYSTEMS. THE AIR/WATER TIGHTNESS OF THE SYSTEM SHALL BE FIELD TESTED BY THE CONTRACTOR DURING CONSTRUCTION USING IN-PLACE MOCK-UPS, AND BY THE OWNER AS A PART OF COMMISSIONING. IDENTIFIED DEFICIENCIES SHALL BE CORRECTED AT THE CONTRACTOR'S EXPENSE.
- IT IS THE INTENT OF THESE DOCUMENTS TO DESCRIBE 1HR AND 2HR RATED ASSEMBLIES DESIGNED TO FULLY PROTECT THE 051200 STRUCTURAL STEEL FRAME AND 053000 STEEL DECK SYSTEMS, AND AT REQUIRED LOCATIONS TO PREVENT THE SPREAD OF FIRE AND SMOKE BETWEEN SPACES. ALL RATED ASSEMBLIES SHALL BE INSPECTED BY THE OWNER'S AGENT PRIOR TO COVER. IDENTIFIED DEFICIENCIES SHALL BE CORRECTED AT THE CONTRACTOR'S EXPENSE.
- ALL JOINTS AND PENETRATIONS THROUGH FIRE RATED ASSEMBLIES TO BE FIRE STOPPED UTILIZING DELEGATED DESIGN FIRESTOPPING DETAILS IN ACCORDANCE WITH 078443 "PENETRATION AND JOINT FIRESTOPPING".
- ALL WALL ASSEMBLIES IN EXCESS OF 10' IN HEIGHT SHALL BE FIRE BLOCKED.
- SEE PLANS, SECTIONS AND ELEVATIONS FOR FLOOR/CEILING AND WALL TYPE LOCATIONS.
- SEE DETAILS FOR LOCATION-SPECIFIC INFORMATION.

LEGEND:


— STRUCTURAL FRAMING -
SEE STRUCT

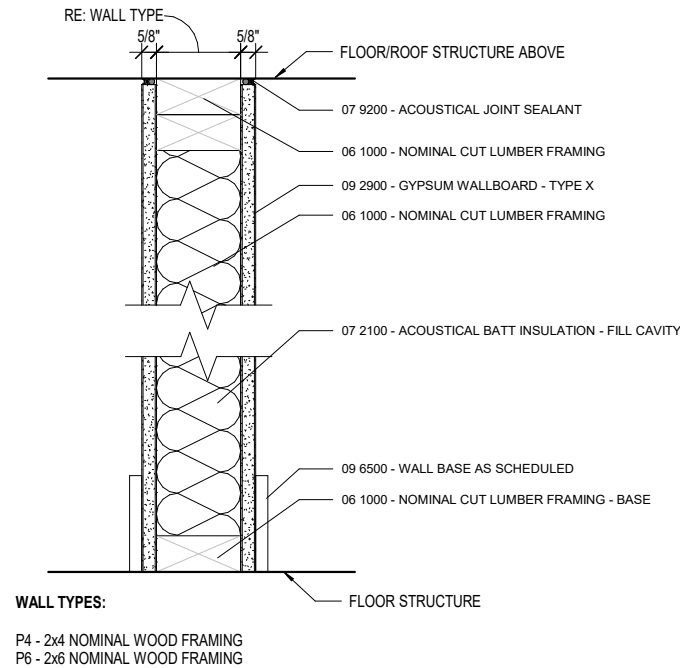


1 P() - INTERIOR WOOD FRAMED PARTITION
3" = 1'-0"

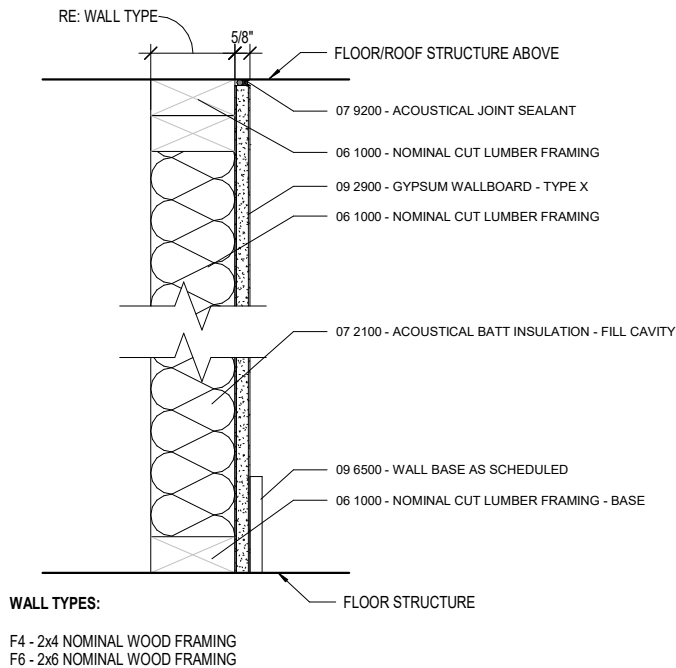

2 F() - INTERIOR WOOD FRAMED FURRING WALL
3" = 1'-0"

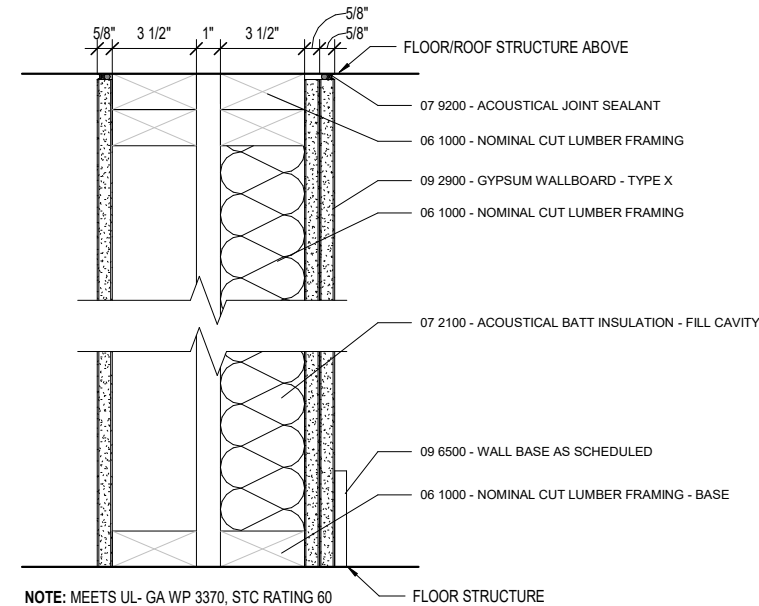

3 SW1 - INTERIOR WOOD FRAMED ELEVATOR SHAFT WALL PARTITION
3" = 1'-0"

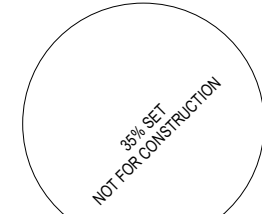

06/05/2023

NorthWind
Architects, LLC

126 Seward St
Juneau, AK 99801
Ph #907.586.6150
www.northwindarch.com

IF THE ABOVE DIMENSION DOES NOT MEASURE ONE INCH (1") EXACTLY, THIS DRAWING WILL HAVE BEEN ENLARGED OR REDUCED, AFFECTING ALL LABEL SCALES.

AYAYD Cultural Center

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT

ST. ANNS AVENUE
DOUGLAS, ALASKA

SHEET TITLE:
INTERIOR BUILDING
ASSEMBLIES

CHECKED	Approver	
DRAWN	Author	
issue	date	description

SHEET #

A0.1

ISSUE DATE 06/05/2023

ARCHITECTURAL SPECIFICATIONS:

DIVISION 01 - GENERAL REQUIREMENTS

- 1. SUBMITTALS: PROVIDE SUBMITTALS, INCLUDING SHOP DRAWINGS, PRODUCT LITERATURE, COLOR/PATTERN SELECTIONS, AND PROPOSED SUBSTITUTION FOR CONSULTANT AND CLIENT REVIEW AND APPROVE PRIOR TO PROCUREMENT. DIGITAL SUBMITTALS FORMATTED TO STREAMLINE REVIEW PREFERRED. ANTICIPATE 10 DAY SUBMITTAL TURNAROUND BY A/E TEAM.
- 2. CONTRACTOR IS RESPONSIBLE FOR COORDINATION AND ASSEMBLY OF ALL COMPONENTS OF THE WORK.

DIVISION 03 - CONCRETE
SEE STRUCTURAL AND CIVIL SPECIFICATION

DIVISION 05 - METALS:
SEE ALSO STRUCTURAL SPECIFICATION

SECTION 05 50 00 - METAL FABRICATIONS

- 1. OPEN FRAMING OF INTERIOR STAIRWAY (PAINTED)
- 2. GUARDRAIL ASSEMBLIES AT INTERIOR STAIRWAY.
- 3. STAINLESS STEEL PIPE HANDRAILS AT INTERIOR STAIRWAYS
- 4. HOT DIPPE GALVANIZED GUARDRAIL ASSEBLY AT LANDSCAPE RAMP.
- 5. HOT DIPPED GALVANIZED GUARDRAIL ASSEMBLY AT LANDSCAPE RAMP AND STAIR
- 6. GLVANIZED STEEL GRAING STIR TREADS AT LANDSCAPE STAIRWAY.
- 7. 316 ALLOY STAINLESS STEEL CABLE NET INFILL PANELS AT LANDSCPAE RAMP RAILING
- 8. STEEL PIVOT POISTS FOR WOOD PANELS IN COURTYARD (PAINTED)
- 9. HOT DIPPED GALVANIZED STEEL TOTEMPOLE BASE ARMATURE IN COURTYARD

DIVISION 06 - WOOD, PLASTICS, & COMPOSITES:

SECTION 06 10 00 - ROUGH CARPENTRY
SEE ALSO STRUCTURAL SPECIFICATION

- 1. DIMENSION FRAMING LUMBER, WOOD BLOCKING AND NAILERS – FOR MISC FRAMING
- 2. PLYWOOD:
 - A. INTERIOR MISCELLANEOUS BACKING USE: LOCATIONS AND THICKNESS PER DRAWINGS, GRADE ACX

SECTION 06 20 23 - INTERIOR FINISH CARPENTRY

- 1. INTERIOR WOOD TRIM:
 - A. INTERIOR TRIM FOR TRANSPARENT FINISH
 - a. SOLID SAWN WOOD, PREMIUM, HEMLOCK, ¾" MINIMUM.
 - B. INTERIOR FRAMES AND JAMBS FOR TRANSPARENT FINISH
 - a. SOLID SAWN WOOD, PREMIUM CVG, HEMLOCK, ¾" MINIMUM.

SECTION 06 20 30 - EXTERIOR FINISH CARPENTRY

- 1. EXTERIOR WOOD PANLS:
 - A. 2" THICK CEDAR SLABS GANGED TO GETHER IN TWO 10' X 10' CARVABLE PANELS - ICYS STRAIGHT LUMBER SUPPLIED (HOONAH)
 - B. SOLID 3" CEDAR IMBERS FOR CONFIGURATION AS CURVED SITE BENCH ALONG RETAINING WALL (SEE SITE PLAN). APPROXIMATELY 30 LF X 16" DEEP MOUNTED TO CAST CONCRETE SITE WALL.

SECTION 06 41 14 - PLASTIC LAMINATE FACED ARCHITECTURAL CABINETS

- 1. ARCHITECTURAL CABINETS:
 - A. GRADE: PREMIUM
 - B. TYPE OF CONSTRUCTION: FRAMELESS
 - C. DOOR AND DRAWER-FRONT STYLE: 1/2" REVEAL OVERLAY
 - D. ADA KNWE SPACE AT VEGTABLE SINK IN TEACHING KITCHEN, AND AT WASH SINK IN STAFF KITCHENETTE.
 - E. LAMINATE CLADDING: HIGH-PRESSURE DECORATIVE LAMINATE: NEMA LD 3
 - a. BASIS OF DESIGN MANUFACTURER: FORMICA
 - b. COLOR: BLOND CEDAR 8576
- 2. SOLID SURFACE COUNTERTOPS:
 - A. SSM-1, FORMICA - BIANCO MINERAL 758
- 3. STAINLESS STEEL COUNTERTOP AT KITCHEN: CUSTOM-FORMED 16GA 316 ALLOY WITH SQUARE EDGE AND WELDED CORNERS.
 - A. ISLAND TOP INTEGRATES STAINLESS STEEL VEGTABLE WASH SINK, FINISHED ON 4 SIDES.
 - B. TOPS FLANKING RANGE FINISHED ON 2 SIDES, WITH INTEGRAL 6" TALL STAINLESS STEEL BACKSPASH.

07 - THERMAL AND MOISTURE PROTECTION

SECTION 07 21 00 - INSULATION

- A. ACOUSTIC INSULATION:
 - A. PARTITION AND FLOOR ASSEMBLIES: GLASS FIBER BLANKET INSULATION:
 - a. UNFACED, TYPE I, ASTM C665, WITH MAXIMUM FLAME-SPREAD AND SMOKE-DEVELOPED INDEXES OF 25 AND 50, RESPECTIVELY, PER ASTM E84; PASSING ASTM E136 FOR COMBUSTION CHARACTERISTICS. THICKNESS AS INDICATED ON DRAWINGS
 - B. RIGID INSULATION #1: ROXUL 1.5" MINERAL WOOL BOARD, MEDIUM DENSITY. FOR USE UNDER WOOD SIDING.
 - C. RIGID INSULATION #2: TYPE XXX EPS FOR USE IN ROOF ASSEMBLY AND ON WARM SIDE OF CONCRETE STURCTURE.
 - D. RIGID INSULATION TYPE #3: TYPE XXX XPS FOR SUBGRADE USE, UNDER CONCRETE SLABS AND EXTIONR SIDE OF FOUNDATION WALLS .
 - E. FIBERGLASS BATT WALL INSULATION
 - F. MINERAL WOOL BOARD INSULATION
 - G. ACCESSORY INSULATION FOR MISCELLANEOUS VOIDS: MINERAL FIBER AND SPRAY FOAM INSULATION AS REQUIRED

072500 WEATHER BARRIERS:

- AT EXTERIOR WALLS:
 - 1. WRB-1: SELF ADHERING, VAPOR PERMEABLE, WATER RESISTIVE AIR BARRIER
 - A. VAPROSHIELD - WALLSHIELD SA (GREEN).
- FLEXIBLE FLASHING AND PRE-FORMED FLEXIBLE FLASHING INSIDE AND OUTSIDE CORNERS AND END DAMS:
 - 1. BUTYL RUBBER FLASHING: COMPOSITE, SELF-ADHESIVE, FLASHING PRODUCT CONSISTING OF A PLIABLE, BUTYL RUBBER COMPOUND, BONDED TO A HIGH-DENSITY POLYETHYLENE FILM, ALUMINUM FOIL, OR SPUNBONDED POLYOLEFIN
 - 2. WEATHER BARRIER TAPE: USE WRB-1 WEATHER BARRIER TAPE AS FLEXIBLE FLASHING FOR ALL INSTANCES WHERE FLEXIBLE FLASHING IS INDICATED TO SEAL WRB-1 AND WRB-2 TO ITSELF OR TO ANY OTHER SUBSTRATE.

072600 VAPOR BARRIERS:

- AT INSIDE FACE OF STUDS, UNDER FLOOR SLAB, OVER GRADE AT EXISTING CRAWLSPACE:
 - 1. VB-1: HIGH DENSITY POLYETHYLENE SHEET VAPOR BARRIER:
 - A. 10 MIL MINIMUM, CLEAR
 - B. SEAL ALL LAPS AND PERIMETERS.
 - AT UNDERSIDE OF ROOF INSULATION, SLOPED AND FLAT ROOFS.
 - 1. VB-2: LAMINATE WOVEN POLYETHYLENE, NONSLIP, UV-PROTECTED BACKING LAYER ON 100% BUTYL RUBBER, SELF-ADHERING BASE LAYER SUITABLE FOR APPLICATION IN FULLY ADHERED ROOFING SYSTEM.
 - A. 30 MIL MINIMUM, 250 PSI, .05 PERMS

075419 SINGLE-PLY MEMBRANE ROOFING:

- 1. AT ROOF: 60 MILS HEAT WELDED PVC, FULLY ADHERED; LIGHT GREY.
 - A. COVERBOARD PLYWOOD W/ FULL ADHESION TO UPLIFT, DESIGN BY ROOFING MANUFACTURER.
 - B. MECHANICALLY FASTENED POLYSTYRENE INSULATION + TAPERED EPS INSULATION KIT FOR ½" = 1" SLOPE TO DRAIN.
 - C. VAPOR RETARDER: ICE AND WATERSHIELD APPLIED TO FLAT STRUCTURAL DECK TO SERVE AS TEMPORARY WEATHER PROTECTION PRIOR TO INSTALLATION OF TAPER KIT AND ROOFING ASSEMBLY.
 - D. ROOF DRAINS:COMMERCIAL ROOF AND OVERFLOW DRAIN WITH DIBRIS SCREENS. SIZE FOR ROOF AREA, INSUALTE ALL ROOF DRAIN LINES.
- 2. AT DECK/BALCONY: HEAT WELDED PVC TEXTURED TRAFFIC MEMBRANE, FULLY ADHERED; DURADECK ULTRA SURCOSEAL GREY. CONTACT: DURADECK NORTHWEST 1-800-442-9215
 - A. CEMENTITIOUS COVERBOARD PLYWOOD W/ FASTENERS TO UPLIFT, DESIGN BY ROOFING MANUFACTURER. TRIM FRAMING TO SLOPE 1/4:1' AWAY FROM BUILDING TO RAILING.

074200 EXTERIOR WALL AND ROOF ASSEMBLIES:

- WOOD CLADDING AND SOFFITS:
 - 1. SIDING BOARDS: VERTICALLY ORIENTED FLAME-CHAR TREATED CVG CEDAR
 - A. ALTERNATING 5/4" X 8" AND X6, FLUSH T&G.
 - a. PENETRATING SEALER ON ALL FACES AND CUT ENDS.
 - b. NO SPLICING OR SCARFING IN AN INSTALLED COURSE. ALIGN COURSING. MITER OUTSIDE CORNERS.
 - B. FASTENERS: INSTALL VERTICAL PLANK SIDING WITH STAINLESS STEEL 8D RING SHANK NAILS, EVENLY SPACED OVER HORIXONTAL 3x4" X 3-1/2" PRESERVATIVE TREATED OR CEDAR FURRING STRIPS, SPACES 16" O.C.

• METAL ROOFING:

- 1. STANDING SEAM, CONCEALED FASTENER 24 GA PVDF COATED METAL ROOF PANELS.
 - A. BASIS OF DESIGN: MBICI BATTENLOK HS 12" PAN FORMED METAL ROOF. CHARCOAL GREY.
- 2. PROVIDE CLAMP RAILING TYPE SNOW STOPS AT ALL EAVES

076200 SHEET METAL FLASHING, COPING, GUTTERS:

- ACCESSORY SHEETMETAL TO MATCH: SLOPED ROOF FASCIA WRAP, ROOFING PERIMETER FLASHINGS, GUTTERS AND DOWNSPOUTS, FLASHINGS AT FENESTRATION.
 - 1. COPINGS AND FLASHINGS: 24GA PVDF COATED STEEL SHEETMETAL. COLOR:
 - A. AT RENOVATE BUILDING THE EAVE AND RAKE WRAPS AND GUTTERS TO BE WHITE. IFLASHINGS AT FENESTRATIONS TO BE SELECTED BY ARCHITECT.

DIVISION 08 - OPENINGS:

085200 FIBERGLASS WINDOWS, DOORS, STOREFRONTS:

- 1. WINDOWS: BASIS OF DESIGN MANUFACTURER: CASCADIA
- 2. BASIS OF DESIGN PRODUCTS:
 - A. FIXED AND AWNING WINDOWS: UNIVERSAL SERIES
 - B. STOREFRONT : UNIVERSAL SERIES STOREFRONT
 - C. ENTRY/EXIT DOORS, SWINGING AND SLIDING: UNIVERSAL SERIES PATIO DOORS WITH FRAMES INTEGRATED INTO STOREFRONT.
 - D. GLAZING, FINISHES AND HARDWARE
 - a. GLAZING: LOW-E COATED, INSULATED GLAZING UNITS (DOUBLE GLAZED)
 - b. EXT & INTERIOR FRAME FINISH: CHARCOAL GREY
 - c. HARDWARE: CORROSION RESISTANT FINISH ON HINGE COMPONENTS AND STAINLESS STEEL MULTI-POINT LOCK BACK, STAINLESS STEEL LOCKING KEEPERS, AND STAINLESS STEEL ROTARY CRANK OPERATOR WITH FOLDING HANDLE.

087100 INTERIOR DOORS AND FRAMES:

- 1. DOORS: FACTORY CLEAR-FINISHED FIVE OR SEVEN PLY LUMBER CORE WOOD DOORS;
 - A. THICKNESS: 1-3/4"
 - B. FACING SELECTION: PLAIN SLICED, BOOK MATCH
 - C. FACE SPECIES TBD BY ARCHITECT.
 - D. STILE AND RAILS ARE BONDED TO CORE, THEN ENTIRE UNIT IS ABRASIVE PLANED BEFORE VENEERING.
- 2. FRAMES AND TRIM:
 - A. SOLID SAWN LUMBER, CLEAR FINISH TO MATCH DOOR FACES.
- 3. LITE OPENINGS:
 - A. FRAME:SOLID SAWN LUMBER
 - B. GLAZING: FACTORY INSTALLED GLAZING IN DOORS INDICATED TO BE FACTORY FINISHED. COMPLY WITH REQUIREMENTS IN SECTION 088000 "GLAZING"
- 4. SPECIAL DOOR - BETWEEN TEACHING KITCHEN AND EDUCATION SPACE. WE WILL HAVE A 12" WIDE X 9' TALL NANAWALL, 4 PANELS WITH ONE PANEL CONFIGURED AS A SWING DOOR FOR DAILY USE WHEN THE OTHERS ARE CLOSED. THIS SYSTEM WILL BE COPPED TO THE TEACHING KITCHEN ISLAND COUNTERTOP AND WILL BE WEATHER SEALED TO SEPARATE SOUND AND KITCHEN SMELLS AND SOUNDS FROM THE EDCUATION SPACE. FINISHES TO MATCH OTHER DOOR AND FINISHES IN FACILITY.
- 5. DOOR HARDWARE:
 - A. STANLEY-BEST OR ASSA ABLOY COMMERCIAL HARDWARE
 - a. 5-KNUCKLE BALL-BEARING HINGES, NNO LESS THAN THREE HINGES, ALL DOORS
 - b. CYLINDRICAL LOCKSETS WITH ADA COMPLIANT LEVERS, ALL DOORS
 - c. WALL OR FLOOR STOPS. HOLDERS AT ALL DOORS.
 - d. ADA CLOSERS WITH CONSEALED OVERHEAD STOPS ON EXTERIOR DOORS. PROVIDE PARALLEL ARMS FOR ALL OVERHEAD CLOSERS, UON.
 - e. PROTECTION PLATES: ROCKWOOD
 - SIZES: FABRICATE PROTECTION PLATES (ARMOR, KICK OR MOP) NOT MORE THAN 2" LESS THAN DOOR WIDTH ON STOP SIDE AND NOT MORE THAN 1" LESS THAN DOOR WIDTH ON PULL SIDE, X THE HEIGHT INDICATED.
 - METAL PLATES: STAINLESS STEEL, 18 GAUGE (0.050) THICK. SATIN FINISH (J532D, 630), BEVELED FOUR EDGES (B4E)
 - f. GASKETS AND SWEEPS: PEMKO
 - g. PROVIDE CONTINUOUS WEATHERSTRIPPING AT EACH EDGE OF EVERY EXTERIOR DOOR LEAF
 - h. SILENCERS AT INTERIOR DOORS: TIMELY
 - i. BRUSHED CHROME HARDWARE FINISH.

SECTION 088000 - GLAZING

- 1. PRODUCTS:
 - A. EXTERIOR: COORDINATE WITH EXTERIOR FENESTRATION SUPPLIER; TRANSPARENT INSULATING GLASS. TEMPERED WHERE REQUIRED.
 - B. INTERIOR TRANSPARENT GLAZING
 - a. CLEAR SAFETY GLASS
 - b. OVERALL THICKNESS: 3/8" NOMINAL

DIVISION 09 - FINISHES:

092900 GYPSUM BOARD:

- 1. 5/8" TYPE X ASTM C1396/C1396M AT WALLS, CEILINGS
 - A. PROVIDE METAL CORNER TRIMS AND J-MOLDINGS, AND VINYL EXPANSION JOINTS
- 2. PROVIDE 3" MARBLE THRESHOLDS AT OPENINGS, CENTERED UNDER DOORS.
- 3. PROVIDE 4" CERAMIC TILE BASE.
 - 1. BASIS OF DESIGN: MSI SURFACES GRAPHITE PORCELAIN TILE, 12x24
- 4. BATHROOM WALLS: WET WALLS: CERAMIC TILE WAISCOT TO 50" AFF. ALL OTHERS: SCRUBBABLE WALL PAINT.

093000 TILE:

- 1. BATHROOM FLOORS: LARGE FORMAT SLIP RESISTANT CERAMIC TILE, THIN SET OVER UNDERLAYMENT.
- 2. PROVIDE 3" MARBLE THRESHOLDS AT OPENINGS, CENTERED UNDER DOORS.
- 3. PROVIDE 4" CERAMIC TILE BASE.
 - 1. BASIS OF DESIGN: MSI SURFACES GRAPHITE PORCELAIN TILE, 12x24
- 4. BATHROOM WALLS: WET WALLS: CERAMIC TILE WAISCOT TO 50" AFF. ALL OTHERS: SCRUBBABLE WALL PAINT.

095100 ACOUSTIC CEILING TILE AND GRID:

- 1. ACT 1 -BASIS OF DESIGN: ARMSTRONG ULTIMA 24X24 15/16" BEVELED REGULAR, GRID "SILHOUETTE 1/4" REVEAL, WHITE
- 2. SPECIAL SUBMITTAL: SEISMIC BRACING BY MANUFCTURER.

096005 FLOORING SPECIALTIES - RUBBER BASE, STAIR NOSING AND TRANSITIONS:

- BASIS OF DESIGN: THERMOSET RUBBER BY ROPE OR JOHNSONITE. 4" COVE BASE AND WALKING SURFACE TRANSITIONS COLOR TO BE COORDINTED WITH FLOORNG SELECTION. RUBBER BASE INSTALL LOCATIONS AS SCHEDULED.

096500 LUXURY VINYL TILE (LVT) FLOORING:

- 1. LVT: UPSTAIRS EDUCATION SPACE, DOWNSTIAR CIRCULATION SPACE, AND UPSTAIRS LOBBY
 - A. GLUE-DOWN TYPE, 30 -YEAR BY ARMSTRONG

096516 - RESILIENT SHEET FLOORING

- 1. RESILIENT FLOORING, KITCHEN AND UTILITIY SPACES
 - A. MANUFACTURER: TARKETT
 - B. STYLE: OPTIMA
 - C. COLOR: SILVER BELLS 0872

096800 COMMERCIAL CARPET:

- 1. WALK OFF CARPET TILE : 6'X8' IN FRONT OF EACH UPSTAIRS LOBBY AND DOWNSTAIRS LOUNGE DOORS.
 - A. BASIS OF DESIGN: STEP IN STYLE II BY MOHAWK GROUP
- 2. BROADLOOM CARPET IN OFFICES SMALL MEETING ROOM
 - A. BASIS OF DESIGN: GOOD WILL - BC528 BY MOHAWK GROUP

099123 INTERIOR PAINTING:

- 1. INTERIOR: DESIGN-BUILD COORDINATION WITH OWNER:
 - A. AT INTERIOR GYPSUM WALLBOARD SURFACES PREP AND PAINT WITH ONE COAT PA PRIMER AND COATS REQUIRED TO COVER OF EGGSHELL LATEX PAINT.
 - B. PAINT OR CLEAR FINISH ALL INTERIOR WOOD DOORS, FRAM AND AND TRIM THAT IS A PART OF THE WORK.

SECTION 09 77 13 - ACOUSTICAL FABRIC WRAPPED PANELS

- 1. PRODUCTS:
 - A. SUSPENDED FABRIC WRAPPED PANELS, DOWNSTAIRS HALLWAY, LOUNG E AND KITCHEN, UPSTAIRS BETWEEN BEAMS IN CLASSROOM.
 - a. MANUFACTURER: FABRITRACK
 - b. STYLE: GEO TRAK SYSTEM
 - c. SYSTEM: TERRACORE POLY
 - d. THICKNESS: 1"
 - e. FABRIC: TO BE SELECTED BY ARCHITECT

DIVISION 10 - SPECIALITIES

SECTION 10 28 00 - TOILET, BATH, AND LAUNDRY ACCESSORIES

- 1. PRODUCTS: BASIS OF DESIGN
 - GARMENT HOOK (GH): BOBRICK B-682, STAINLESS STEEL SATIN FINISH
 - TOILET PAPER DISPENSER (TPD): BOBRICK B-540, STAINLESS STEEL SATIN FINISH
 - GRAB BAR (GB): BOBRICK B-5806, STAINLESS STEEL SATIN FINISH, DIMENSIONS PER DRAWINGS
 - DIAPER-CHANGING STATION (BCS): BOBRICK KB310-SSRE, STAINLESS STEEL
 - PAPER TOWEL DISPENSER (PTD): OFOI
 - PAPER TOWEL DISPENSER/ WASTE RECEPTACLE (PTDR): BOBRICK B-36903, STAINLESS STEEL SATIN FINISH
 - LIQUID-SOP DISPENSER (SD): OFOI
 - HAND SANITIZER DISPENSER (HSD): OFOI
 - MIRROR UNIT (MIR): BOBRICK B-165 2430, STAINLESS STEEL SATIN FINISH

SECTION 101423 - ROOM - IDENTIFICATION PANEL SIGNAGE

SECTION 104400 - FIRE PROTECTION SPECIALTIES

- A. FIRE PROTECTION EXTINGUISHERS & CABINETS
 - a. BASIS OF DESIGN: J.L INDUSTRIES 2033F100
 - SURFACE MOUNTED
 - UP TO 20 LB FIRE EXTINGUISHERS
 - #4 STAINLESS STEEL
 - FULL GLASS DOOR - CLEAR ACRYLIC GLAZING W/ "FIRE EXTINGUISHER" DECAL
 - DIE CAST "FIRE" HANDLE

DIVISION 11 - EQUIPMENT

SECTION 113100 - RESIDENTIAL APPLIANCES

- A. DISHWASHER
 - a. BASIS OF DESIGN:
 - ADA COMPLIANT
 - FINGERPRINT - RESISTANT STAINLESS STEEL
 - 35 3/4" X 70" H X 25 3/8"D
- B. MICROWAVE
 - a. BASIS OF DESIGN:
 - .90 CU FT, 1500W
 - STAINLESS STEEL FACE
- C. REFRIGERATOR WITH FREEZE AND ICE MAKER
 - a. BASIS OF DESIGN: GE CXXX
 - CLEANSTEEL/STAINLESS STEEL
 - 33 7/8" H X 19 3/4" W X 21 1/4" D

SECTION 11400 - COMMERCIAL KICHEN EQUIPMENT AND APPLIANCES

- EQUIPMENT, WILL BE COORDINATED WITH MECHANICAL:
 - A. 48" WIDE 6-BURNER COMMERCIAL ELECTRIC RANGE WITH INTEGRATED OVEN.
 - B. TYPE 1 RANGE HOOD AND SUPPORTING EQUIPMENT
 - C. HIGH TEMPERATURE UNDERCOUNTER DISHWASHER
 - D. UPRIGHT SIDE BY SIDE COMMERCIAL REFRIGERATOR AND FREEZER, TOP MOUNTED COMPRESSORS
 - E. 6" STAINLESS STEEL WORK COUNTER ON STAINLESS STEEL LEGS, UNDERSHELF.
 - F. 6" HANGING PAN RACK OVE WORK COUNTER
 - G. 3-WELL COMMERCIAL SINK ON STAINLESS STEEL LEGS W/ WASHER HOSE AND DRAINING SIDE APRONS, FLOOR MOUNTED GREASE INTECEPTOR.

DIVISION 12 - FURNISHINGS

SECTION 122413 - ROLLER WINDOW SHADES

- 1. SUBMITTALS: PRODUCT DATA
- 2. PRODUCTS:
 - A. ROLLER WINDOW SHADE, RS-1:
 - a. MANUFACTURER: DRAPER
 - b. STYLE: SHEERWEAVE
 - c. COLOR: WHITE PLATINUM
 - d. VALANCE: CLEAR ANODIZED ALUMINUM FASCIA
 - B. ROLLER WINDOW SHADE, RS-2:
 - a. MANUFACTURER: MECO SHADE
 - b. STYLE: CHELSEA BLACKOUT
 - c. COLOR: TO BE SELECTED BY ARCHITECT FROM MANUFACTURES FULL RANGE OF COLORS
 - d. VALANCE: CLEAR ANODIZED ALUMINUM FASCIA

DIVISION 21-25 - MECHANICAL/HVAC/PLUMBING

REFER TO MECHANICAL AND PLUMBING DRAWINGS AND SHEET SPECIFICATIONS.

DIVISION 26-28 - ELECTRICAL

REFER TO ELECTRICAL DRAWINGS AND SHEET SPECIFICATIONS.

DIVISION 31 - EARTHWORK

- 1. COORDINATE WITH CIVIL AND LANDSCAPE DRAWINGS. AS REQUIRED TO COMPLETE THE WORK. REPAIR SOILS AND PLANTING IN AREAS OF SITE DISTURBANCE. ALL FINISH GRADE SURFACES TO DRAIN AWAY FROM BUILDING.
- 2. COORDINATE WITH ARCHITECTURAL SITE PLANS AND LANDSCAPE DRAWINGS AND SPECIFICATIONS.

DIVISION 32 - HARDSCAPE - COORDINATE WITH CIVIL DRAWINGS

321216 ASPHALT PAVING

3" ASPHALT PAVING OVER COMPACTED D1 BASE AND COMPACTED NSF SUB-BASE. PROVIDE PAINTED PARKING AND ACCESSIBILITY STRIPING

321313 CONCRETE PAVING

4" REINFORCED CONCRETE SIDEWALKS OVER COMPACTED D1 BASE. PROVIDE CONTROL JOINTS AT NO MORE THAN 6' CENTERS. WASHED AGGREGATE SURFACE FINISH.

321400 UNIT PAVERS

LINEAR PRECAST CONCRETE UNIT PAVERS, 4"x4"x24" TYP. BASKET WEAVE PATTERN OVER COMPACTED D1 BASE. 8000 PSI MINMUM CONCRETE, SANDBLASTED FINISH. WWW.MODERNPAVERS.NET

PROVIDE METAL POST MOUNTED ACCESSIBLE VAN PARKING SIGNAGE PER LOCAL REQUIREMENTS..

PROVIDE BUILDING ADRESS NUMBERS 6" TALL CAST ALUMINUM "1021".

PROVIDE OWNER ORGANIZATION SIGNAGE PRINTED ON 2' TALL X 5' WIDE 1/8" THICK ALUMINUM SHEET ON TWO 3"x3" ALUMINUM TUBES SET INTO LANDSCAPE WHERE INDICATED. COORDINATE SIGNAGE LED SITE LIGHTING AS NOTED ON ELECTRICAL DRAWINGS. BACK OF SIGN AND SUPPORT TUBES TO BE PAINTED DARK BROWN. COORDINATE SIGNAGE DESIGN WITH ARCHITECT AND OWNER.



06/05/2023



126 Seward St
Juneau, AK 99801
Ph #907.586.6150
www.northwindarch.com

← 1" ACTUAL →
IF THE ABOVE DIMENSION DOES NOT MEASURE ONE INCH (1") EXACTLY, THIS DRAWING WILL HAVE BEEN ENLARGED OR REDUCED, AFFECTING ALL LABEL SCALES.

AYAYD Cultural Center

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT

ST. ANNS AVENUE
DOUGLAS, ALASKA

SHEET TITLE:

SPECIFICATIONS

CHECKED	Approver
DRAWN	Author


issue	date	description
-------	------	-------------

SHEET #

A0.2

ISSUE DATE

06/05/2023

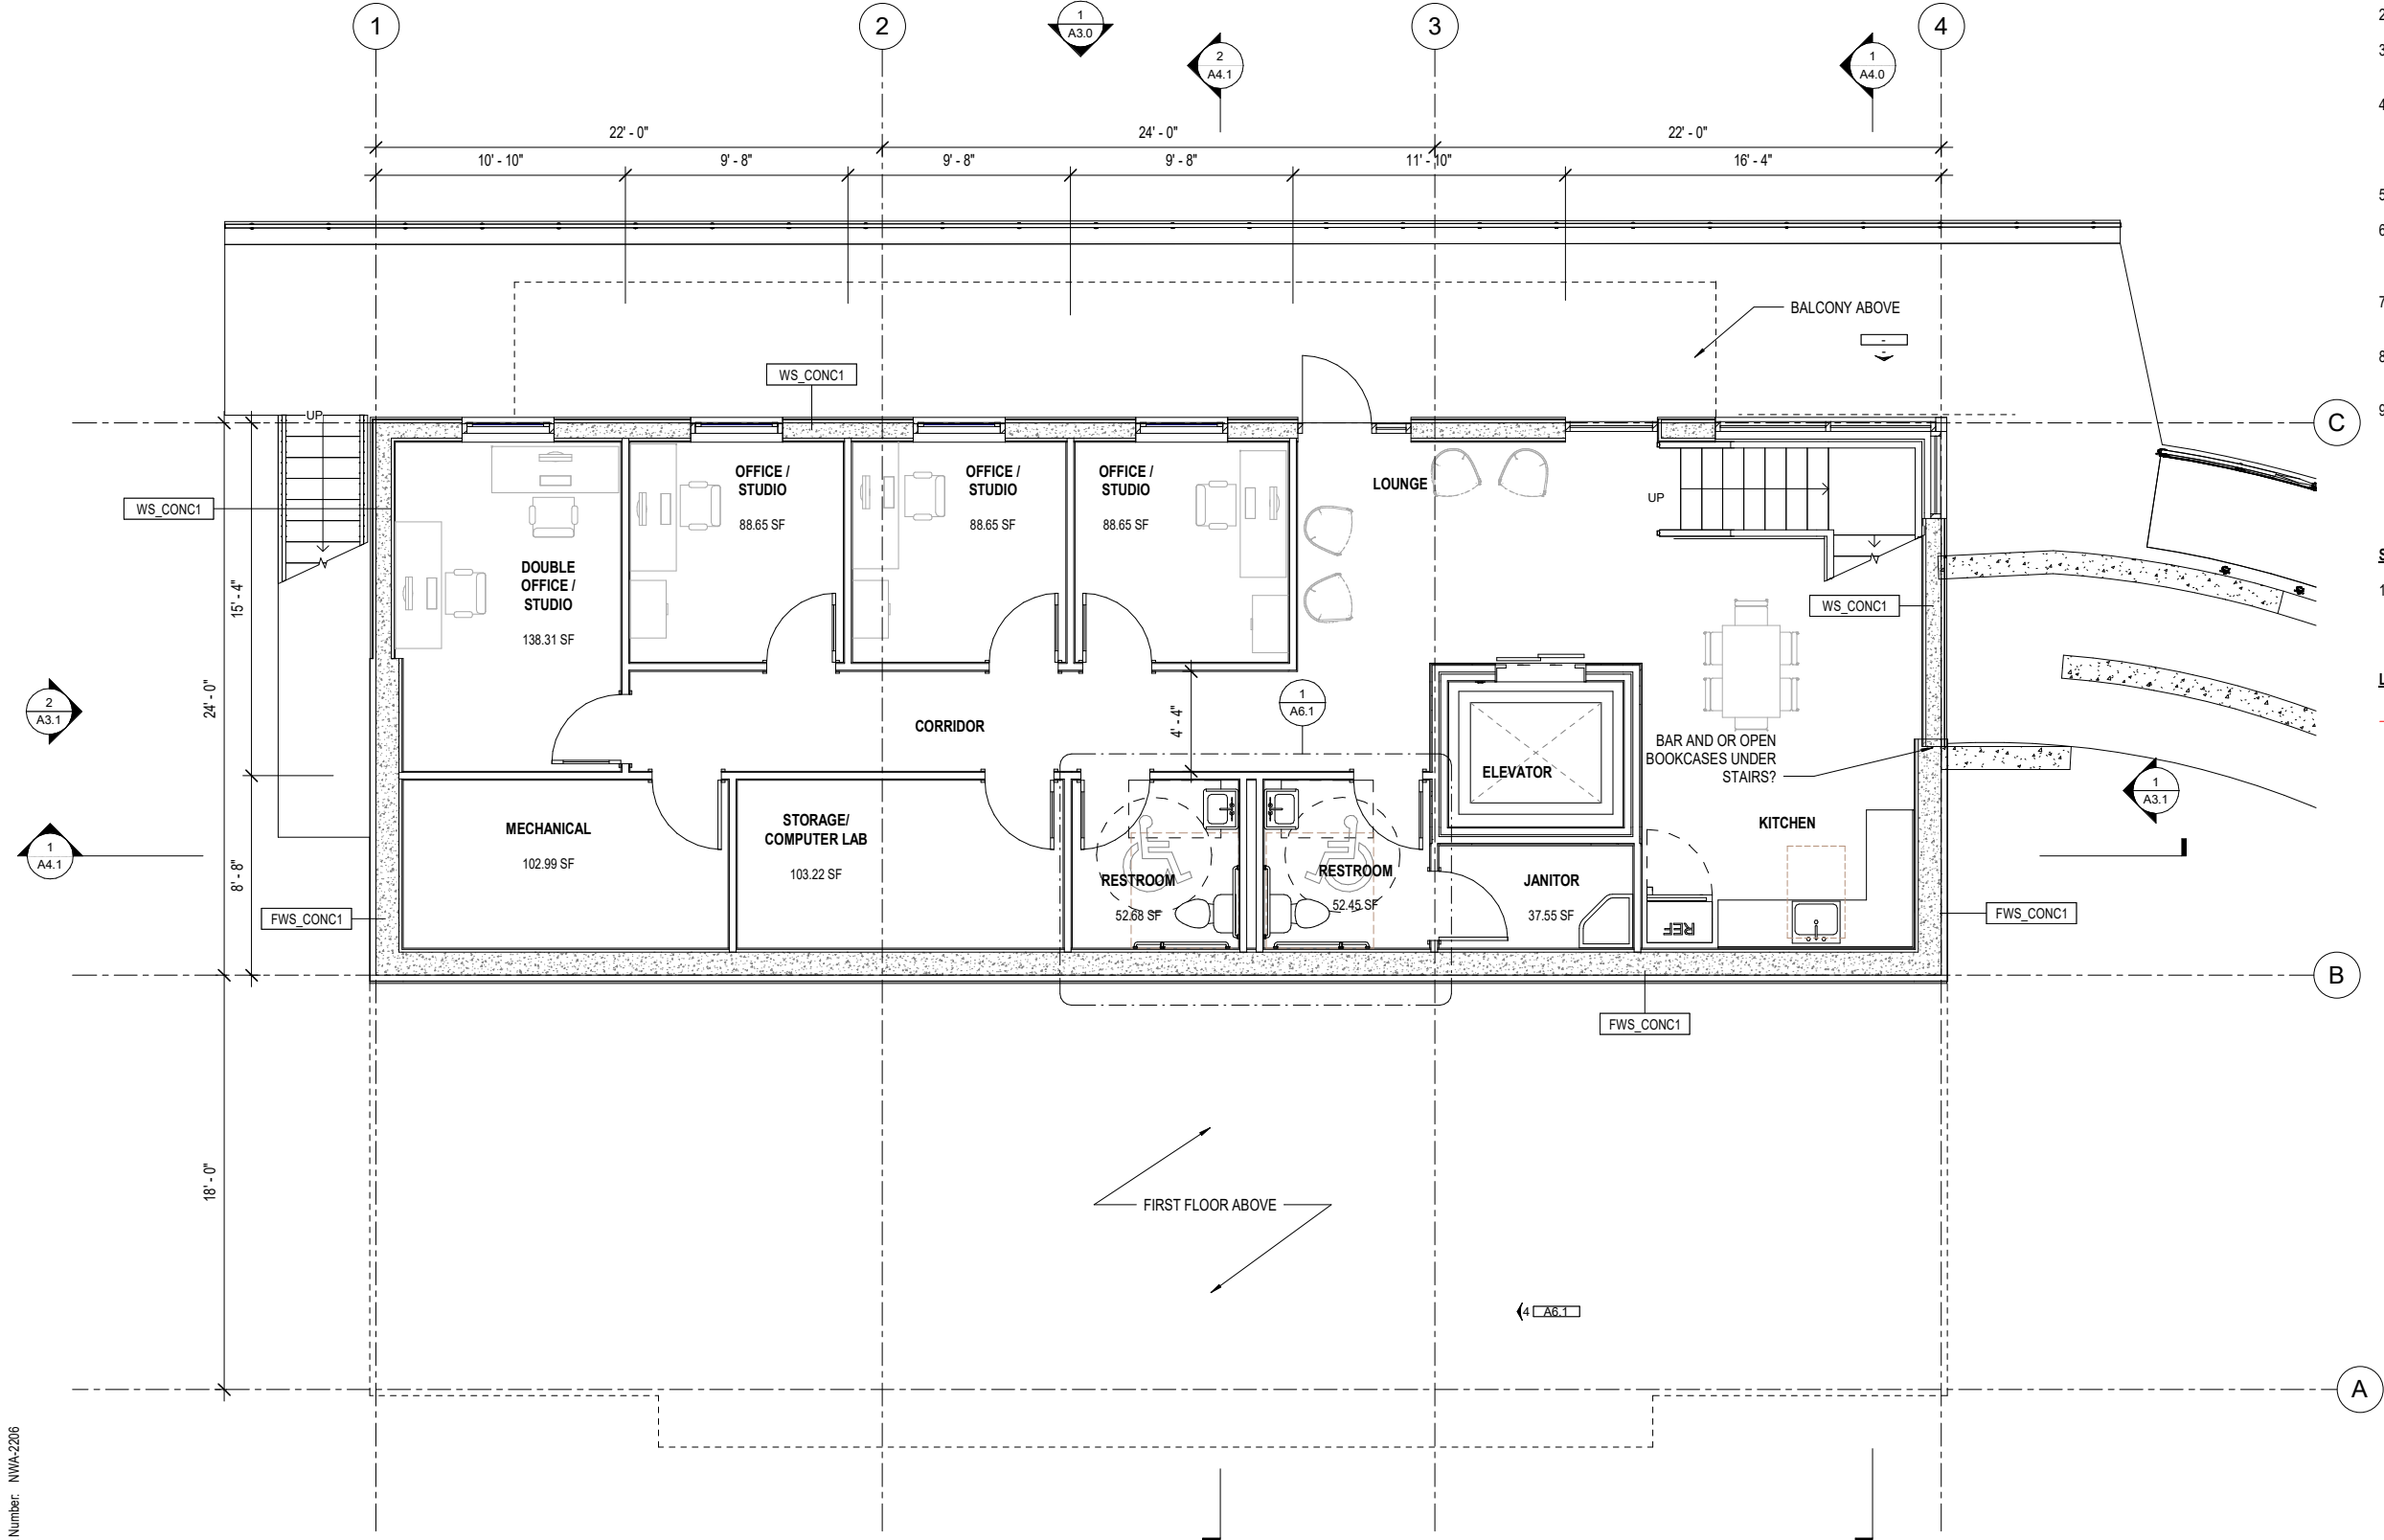

- GENERAL NOTES:**
1. CONTRACTOR SHALL FIELD VERIFY ACTUAL BUILDING CONDITIONS AND DIMENSIONS. WHERE DISCREPANCIES OR CONFLICTS ARE FOUND, NOTIFY ARCHITECT PRIOR TO COMMENCING WORK.
 2. DO NOT SCALE OFF OF DRAWINGS.
 3. DIMENSIONS ARE TO GRIDLINE, FACE OR CENTER OF FRAMING UNO.
 4. STRUCTURAL ELEMENTS SHOWN IN ARCHITECTURAL DRAWINGS FOR REFERENCE ONLY. SEE STRUCTURAL DRAWINGS FOR ALL STRUCTURAL INFORMATION.
 5. ALL PARTITIONS ARE TYPE P1-4, UNO.
 6. WHERE DOOR OPENINGS ARE NOT DIMENSIONED, LOCATE DOOR OPENINGS TO ENSURE 3" MIN JAMB FRAMING.
 7. DIMENSIONS LOCATING OPENINGS ARE TO CENTERLINE OF OPENING, UNO.
 8. SEE ENLARGED PLANS FOR INFORMATION NOT SHOWN HERE.
 9. THE MAJORITY OF ALL FFE ITEMS ARE OFOI AND ARE NOT IN CONTRACT, HOWEVER LIMITED ITEMS ARE SHOWN IN DRAWINGS FOR COORDINATION PURPOSES. SEE FFE SHEETS FOR GENERAL FFE INFORMATION AND FFE SHEETS AND PROJECT MANUAL FOR CFCI FFE INFORMATION.

- SHEET NOTES:**
1. #SPEC DESCRIPTION

- LEGEND:**
- STRUCTURAL FRAMING - SEE STRUCT



06/05/2023

NorthWind Architects, LLC

126 Seward St
Juneau, AK 99801
Ph #907.586.6150
www.northwindarch.com

1" ACTUAL
IF THE ABOVE DIMENSION DOES NOT MEASURE ONE INCH (1") EXACTLY, THIS DRAWING WILL HAVE BEEN ENLARGED OR REDUCED, AFFECTING ALL LABEL SCALES.

AYAYD Cultural Center
DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT


ST. ANNS AVENUE
DOUGLAS, ALASKA

SHEET TITLE:
FLOOR PLAN - LEVEL 0

CHECKED	Approver	
DRAWN	Author	
issue	date	description

SHEET # **A2.0**

ISSUE DATE 06/05/2023

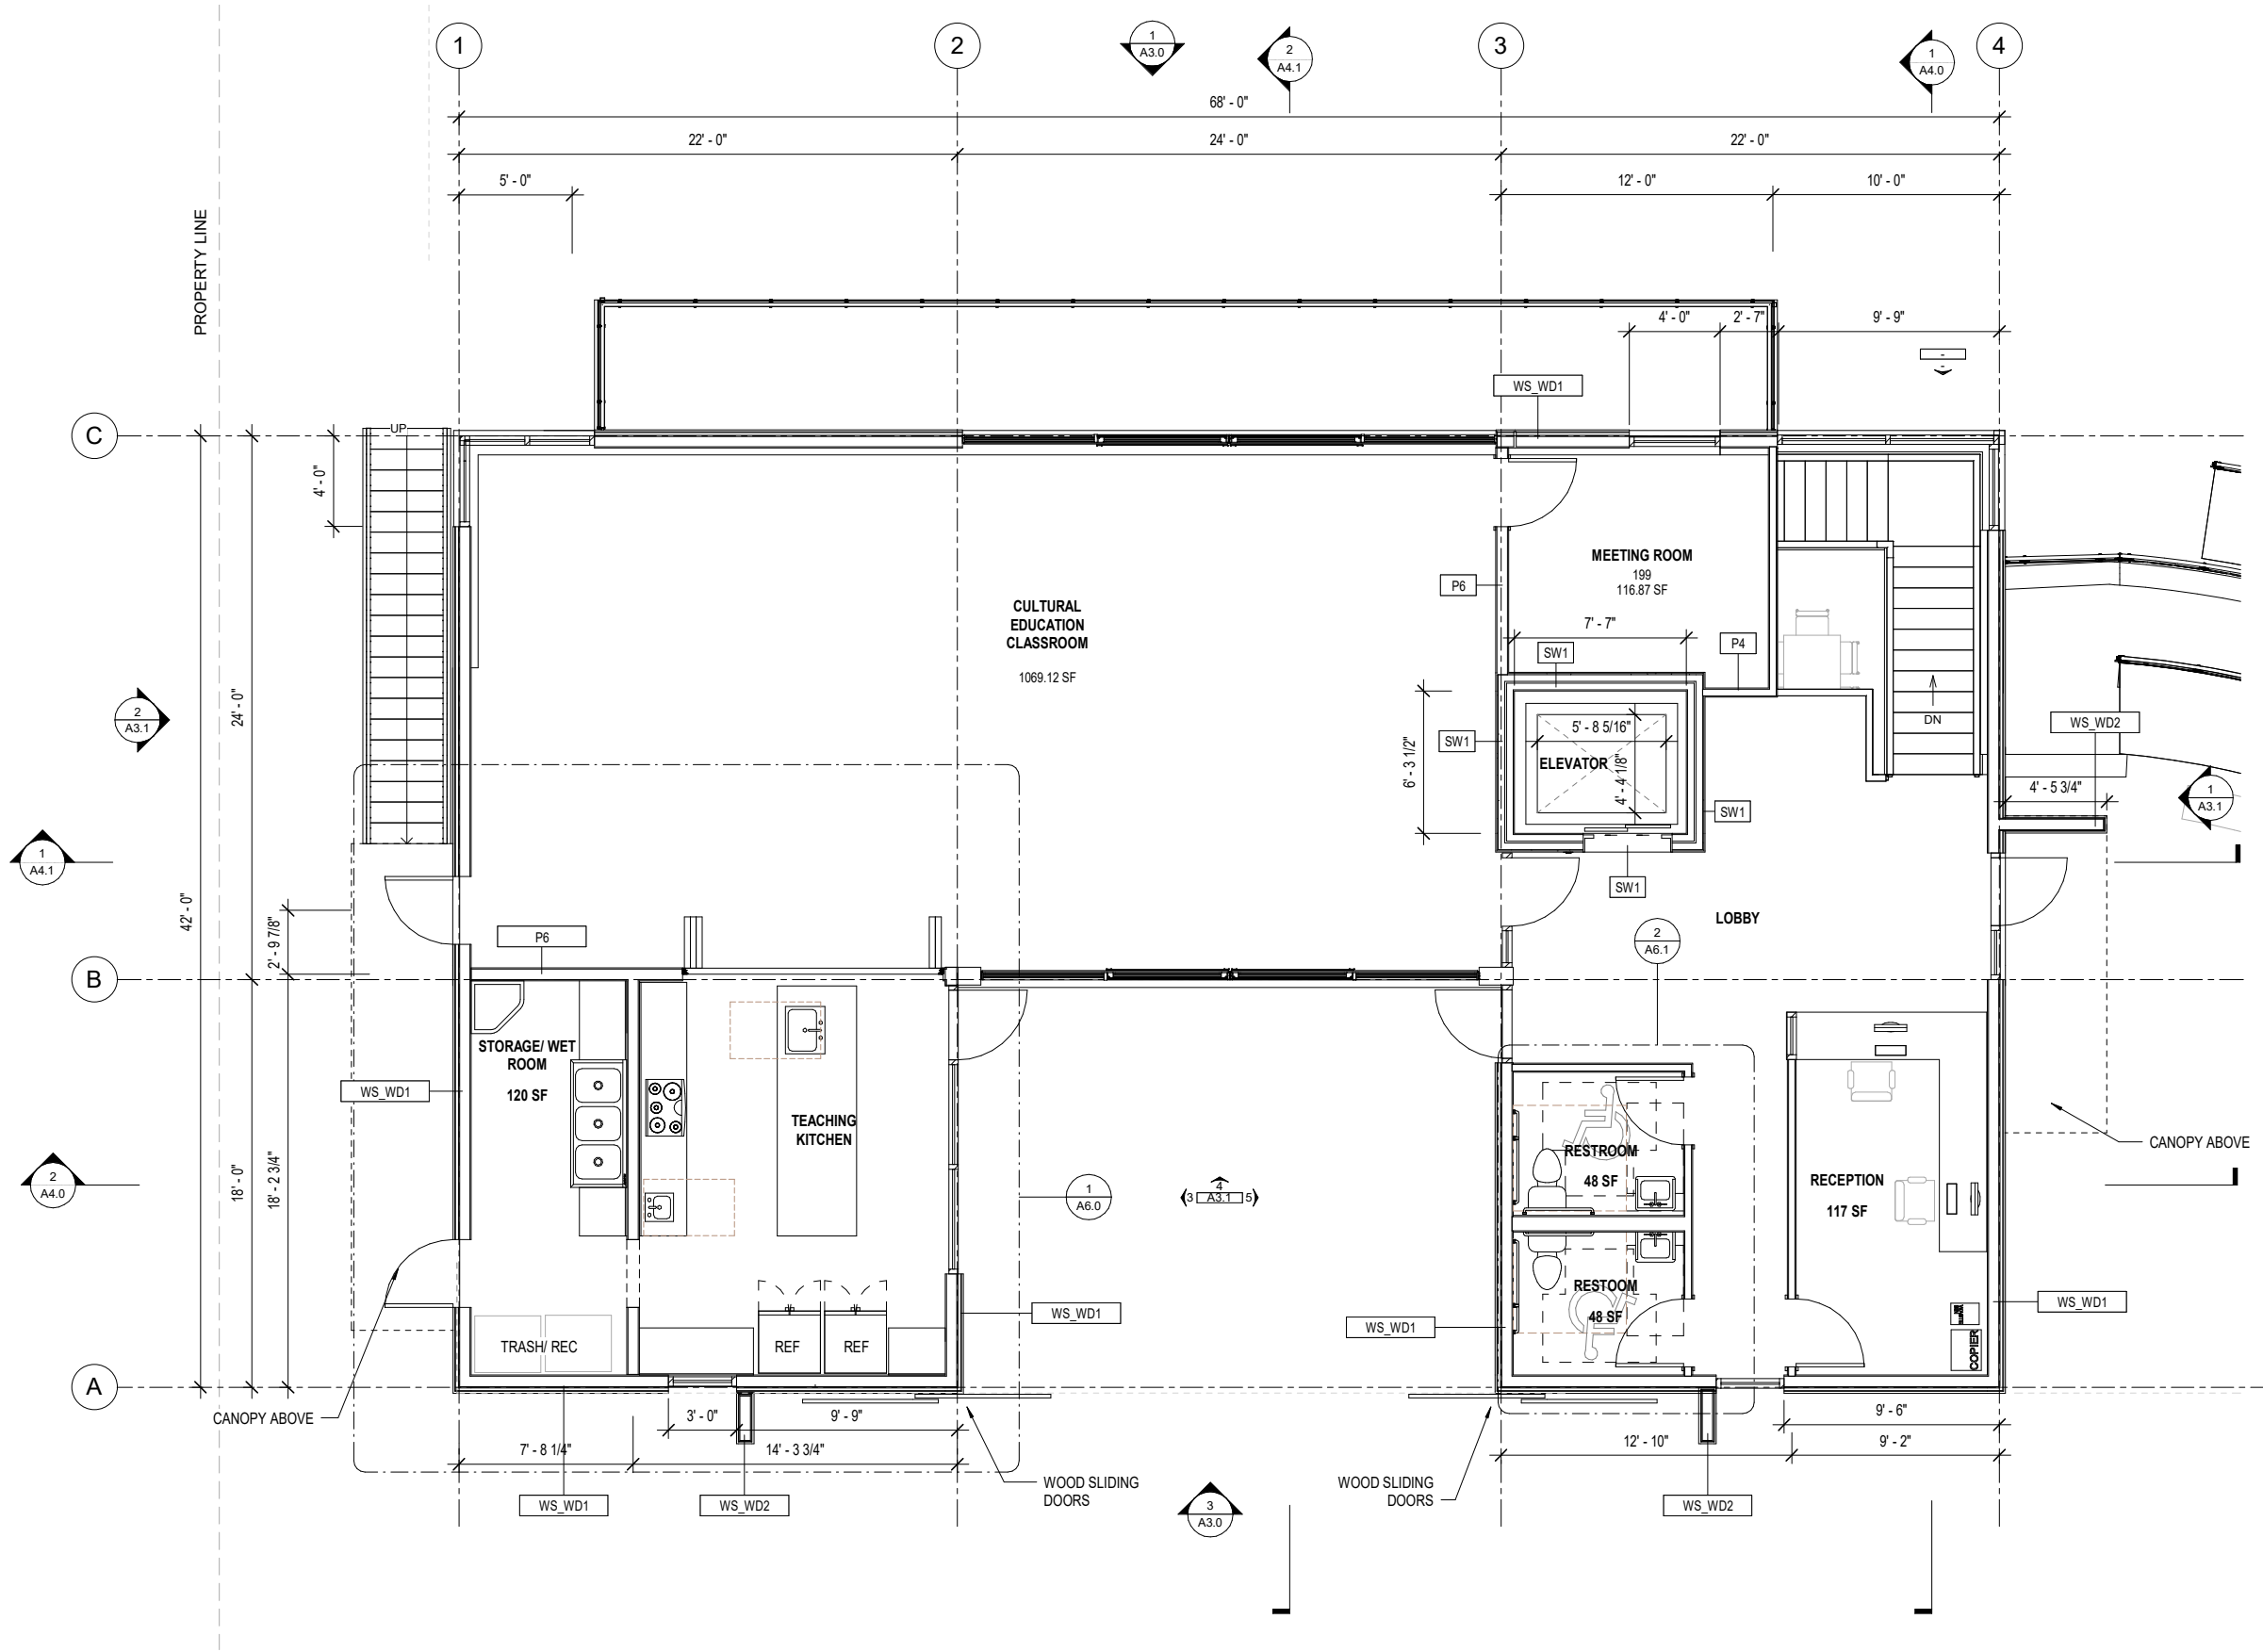

GENERAL NOTES:


1. CONTRACTOR SHALL FIELD VERIFY ACTUAL BUILDING CONDITIONS AND DIMENSIONS. WHERE DISCREPANCIES OR CONFLICTS ARE FOUND, NOTIFY ARCHITECT PRIOR TO COMMENCING WORK.
2. DO NOT SCALE OFF OF DRAWINGS.
3. DIMENSIONS ARE TO GRIDLINE, FACE OR CENTER OF FRAMING UNO.
4. STRUCTURAL ELEMENTS SHOWN IN ARCHITECTURAL DRAWINGS FOR REFERENCE ONLY. SEE STRUCTURAL DRAWINGS FOR ALL STRUCTURAL INFORMATION.
5. ALL PARTITIONS ARE TYPE P1-4, UNO.
6. WHERE DOOR OPENINGS ARE NOT DIMENSIONED, LOCATE DOOR OPENINGS TO ENSURE 3" MIN JAMB FRAMING.
7. DIMENSIONS LOCATING OPENINGS ARE TO CENTERLINE OF OPENING, UNO.
8. SEE ENLARGED PLANS FOR INFORMATION NOT SHOWN HERE.
9. THE MAJORITY OF ALL FFE ITEMS ARE OFOI AND ARE NOT IN CONTRACT, HOWEVER LIMITED ITEMS ARE SHOWN IN DRAWINGS FOR COORDINATION PURPOSES. SEE FFE SHEETS FOR GENERAL FFE INFORMATION AND FFE SHEETS AND PROJECT MANUAL FOR CFCl FFE INFORMATION.

SHEET NOTES:

1. #SPEC DESCRIPTION

LEGEND:

- STRUCTURAL FRAMING -
- SEE STRUCT



06/05/2023

NorthWind Architects, LLC

126 Seward St
Juneau, AK 99801
Ph #907.586.6150
www.northwindarch.com

1" ACTUAL
IF THE ABOVE DIMENSION DOES NOT MEASURE ONE INCH (1") EXACTLY, THIS DRAWING WILL HAVE BEEN ENLARGED OR REDUCED, AFFECTING ALL LABEL SCALES.

AYAYD Cultural Center
DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT


ST. ANNS AVENUE
DOUGLAS, ALASKA

SHEET TITLE:
**FLOOR PLAN -
LEVEL 1**

CHECKED	Approver
DRAWN	Author
issue	date description

SHEET # **A2.1**

ISSUE DATE 06/05/2023

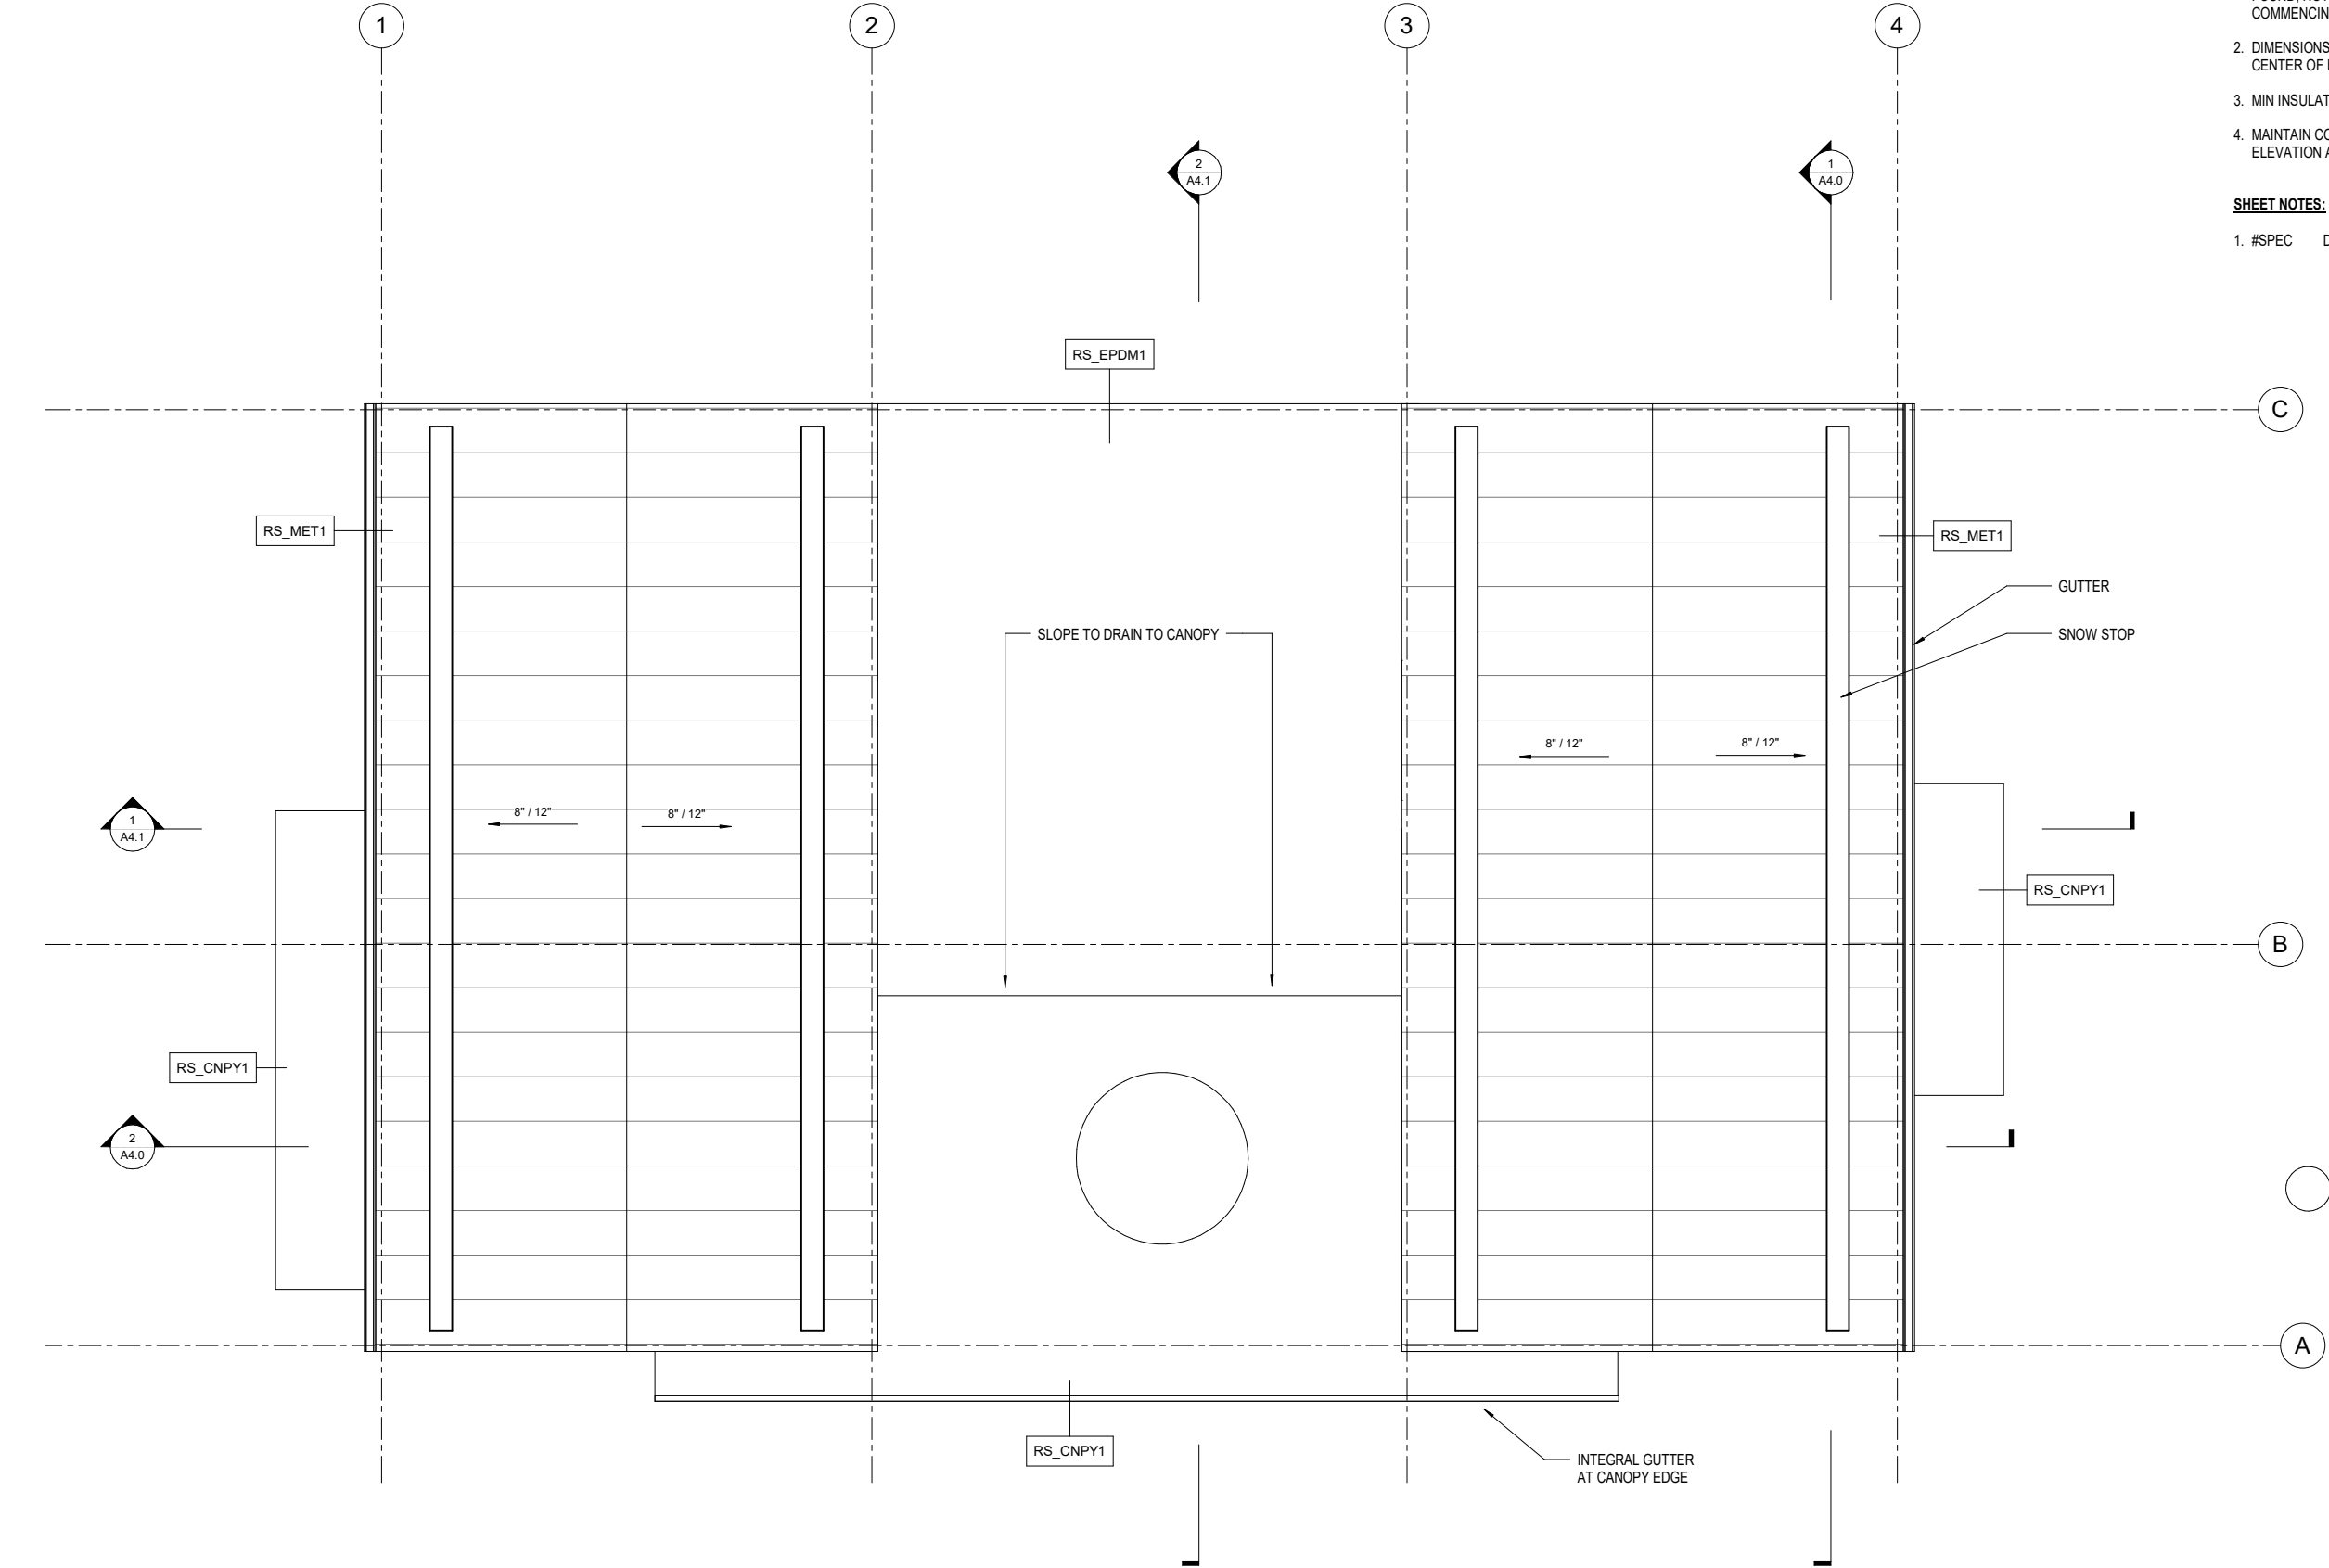

1 ROOF PLAN
1/4" = 1'-0"

GENERAL NOTES:

1. CONTRACTOR SHALL FIELD VERIFY ACTUAL BUILDING CONDITIONS AND DIMENSIONS. WHERE DISCREPANCIES OR CONFLICTS ARE FOUND, NOTIFY ARCHITECT PRIOR TO COMMENCING WORK.
2. DIMENSIONS ARE TO GRIDLINE, FACE OR CENTER OF FRAMING UNO.
3. MIN INSULATION THICKNESS AT ROOF DRAINS 8"
4. MAINTAIN CONSTANT TOP OF INSULATION ELEVATION AT ROOF PERIMETER

SHEET NOTES:

1. #SPEC DESCRIPTION



06/05/2023



126 Seward St
Juneau, AK 99801
Ph #907.586.6150
www.northwindarch.com

IF THE ABOVE DIMENSION DOES NOT MEASURE ONE INCH (1") EXACTLY, THIS DRAWING WILL HAVE BEEN ENLARGED OR REDUCED, AFFECTING ALL LABEL SCALES.

AYAYD Cultural Center

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT

ST. ANNS AVENUE
DOUGLAS, ALASKA

SHEET TITLE:
ROOF PLAN

CHECKED	Approver
DRAWN	Author


issue	date	description
-------	------	-------------

SHEET #

A2.4

ISSUE DATE

06/05/2023

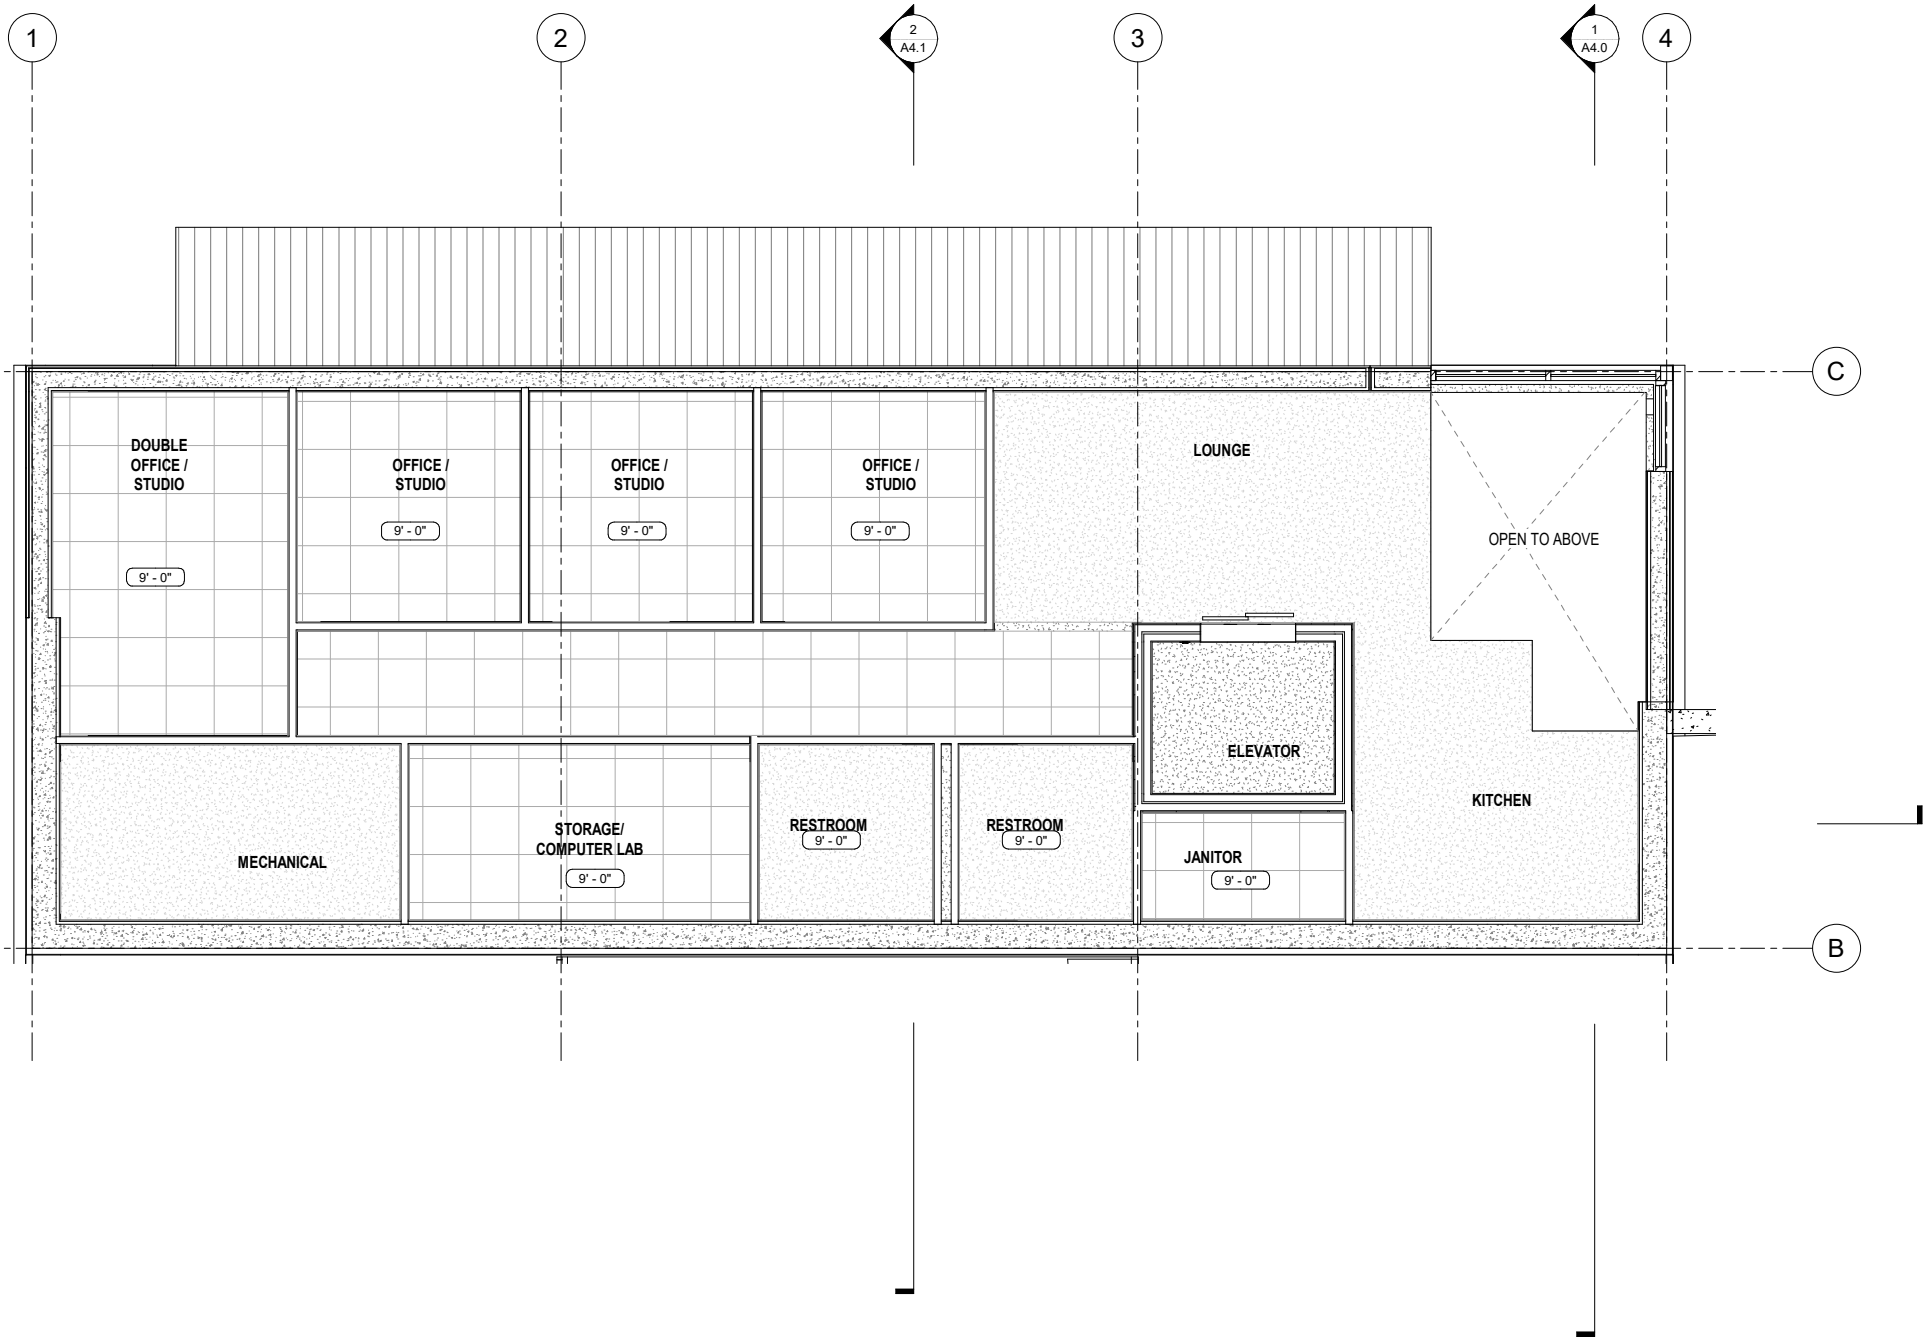

1 REFLECTED CEILING PLAN - LEVEL 0
1/4" = 1'-0"


GENERAL NOTES:

1. CONTRACTOR SHALL FIELD VERIFY ACTUAL BUILDING CONDITIONS AND DIMENSIONS. WHERE DISCREPANCIES OR CONFLICTS ARE FOUND, NOTIFY ARCHITECT PRIOR TO COMMENCING WORK.
2. DO NOT SCALE OFF OF DRAWINGS
3. ALL CEILING HEIGHTS ARE 9' - 0" AFF, UNO.
4. COORDINATE LOCATION OF ALL MEP ITEMS WITH MEP.
5. CENTER MEP ITEMS INCLUDING SPRINKLER HEADS IN CEILING TILES.
6. LINEWORK DEPICTING CEILING TILES IS TO SHOW EXTENT ONLY. POSITION GRID SUCH THAT NO EDGE TILES IS LESS THAN 6" IN WIDTH. CENTER GRID IN SPACES WHEREVER POSSIBLE.
7. LINEWORK DEPICTING CEILING PENETRATIONS ARE SHOWN FOR REFERENCE ONLY. SEE MEP.

SHEET NOTES:

1. #SPEC DESCRIPTION

LEGEND:



06/05/2023



126 Seward St
Juneau, AK 99801
Ph #907.586.6150
www.northwindarch.com

IF THE ABOVE DIMENSION DOES NOT MEASURE ONE INCH (1") EXACTLY, THIS DRAWING WILL HAVE BEEN ENLARGED OR REDUCED, AFFECTING ALL LABEL SCALES.

AYAYD Cultural Center

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT

ST. ANNS AVENUE
DOUGLAS, ALASKA

SHEET TITLE:

REFLECTED
CEILING PLAN -
LEVEL 0

CHECKED	Approver
DRAWN	Author


issue	date	description
-------	------	-------------

SHEET #

A2.5

ISSUE DATE

06/05/2023

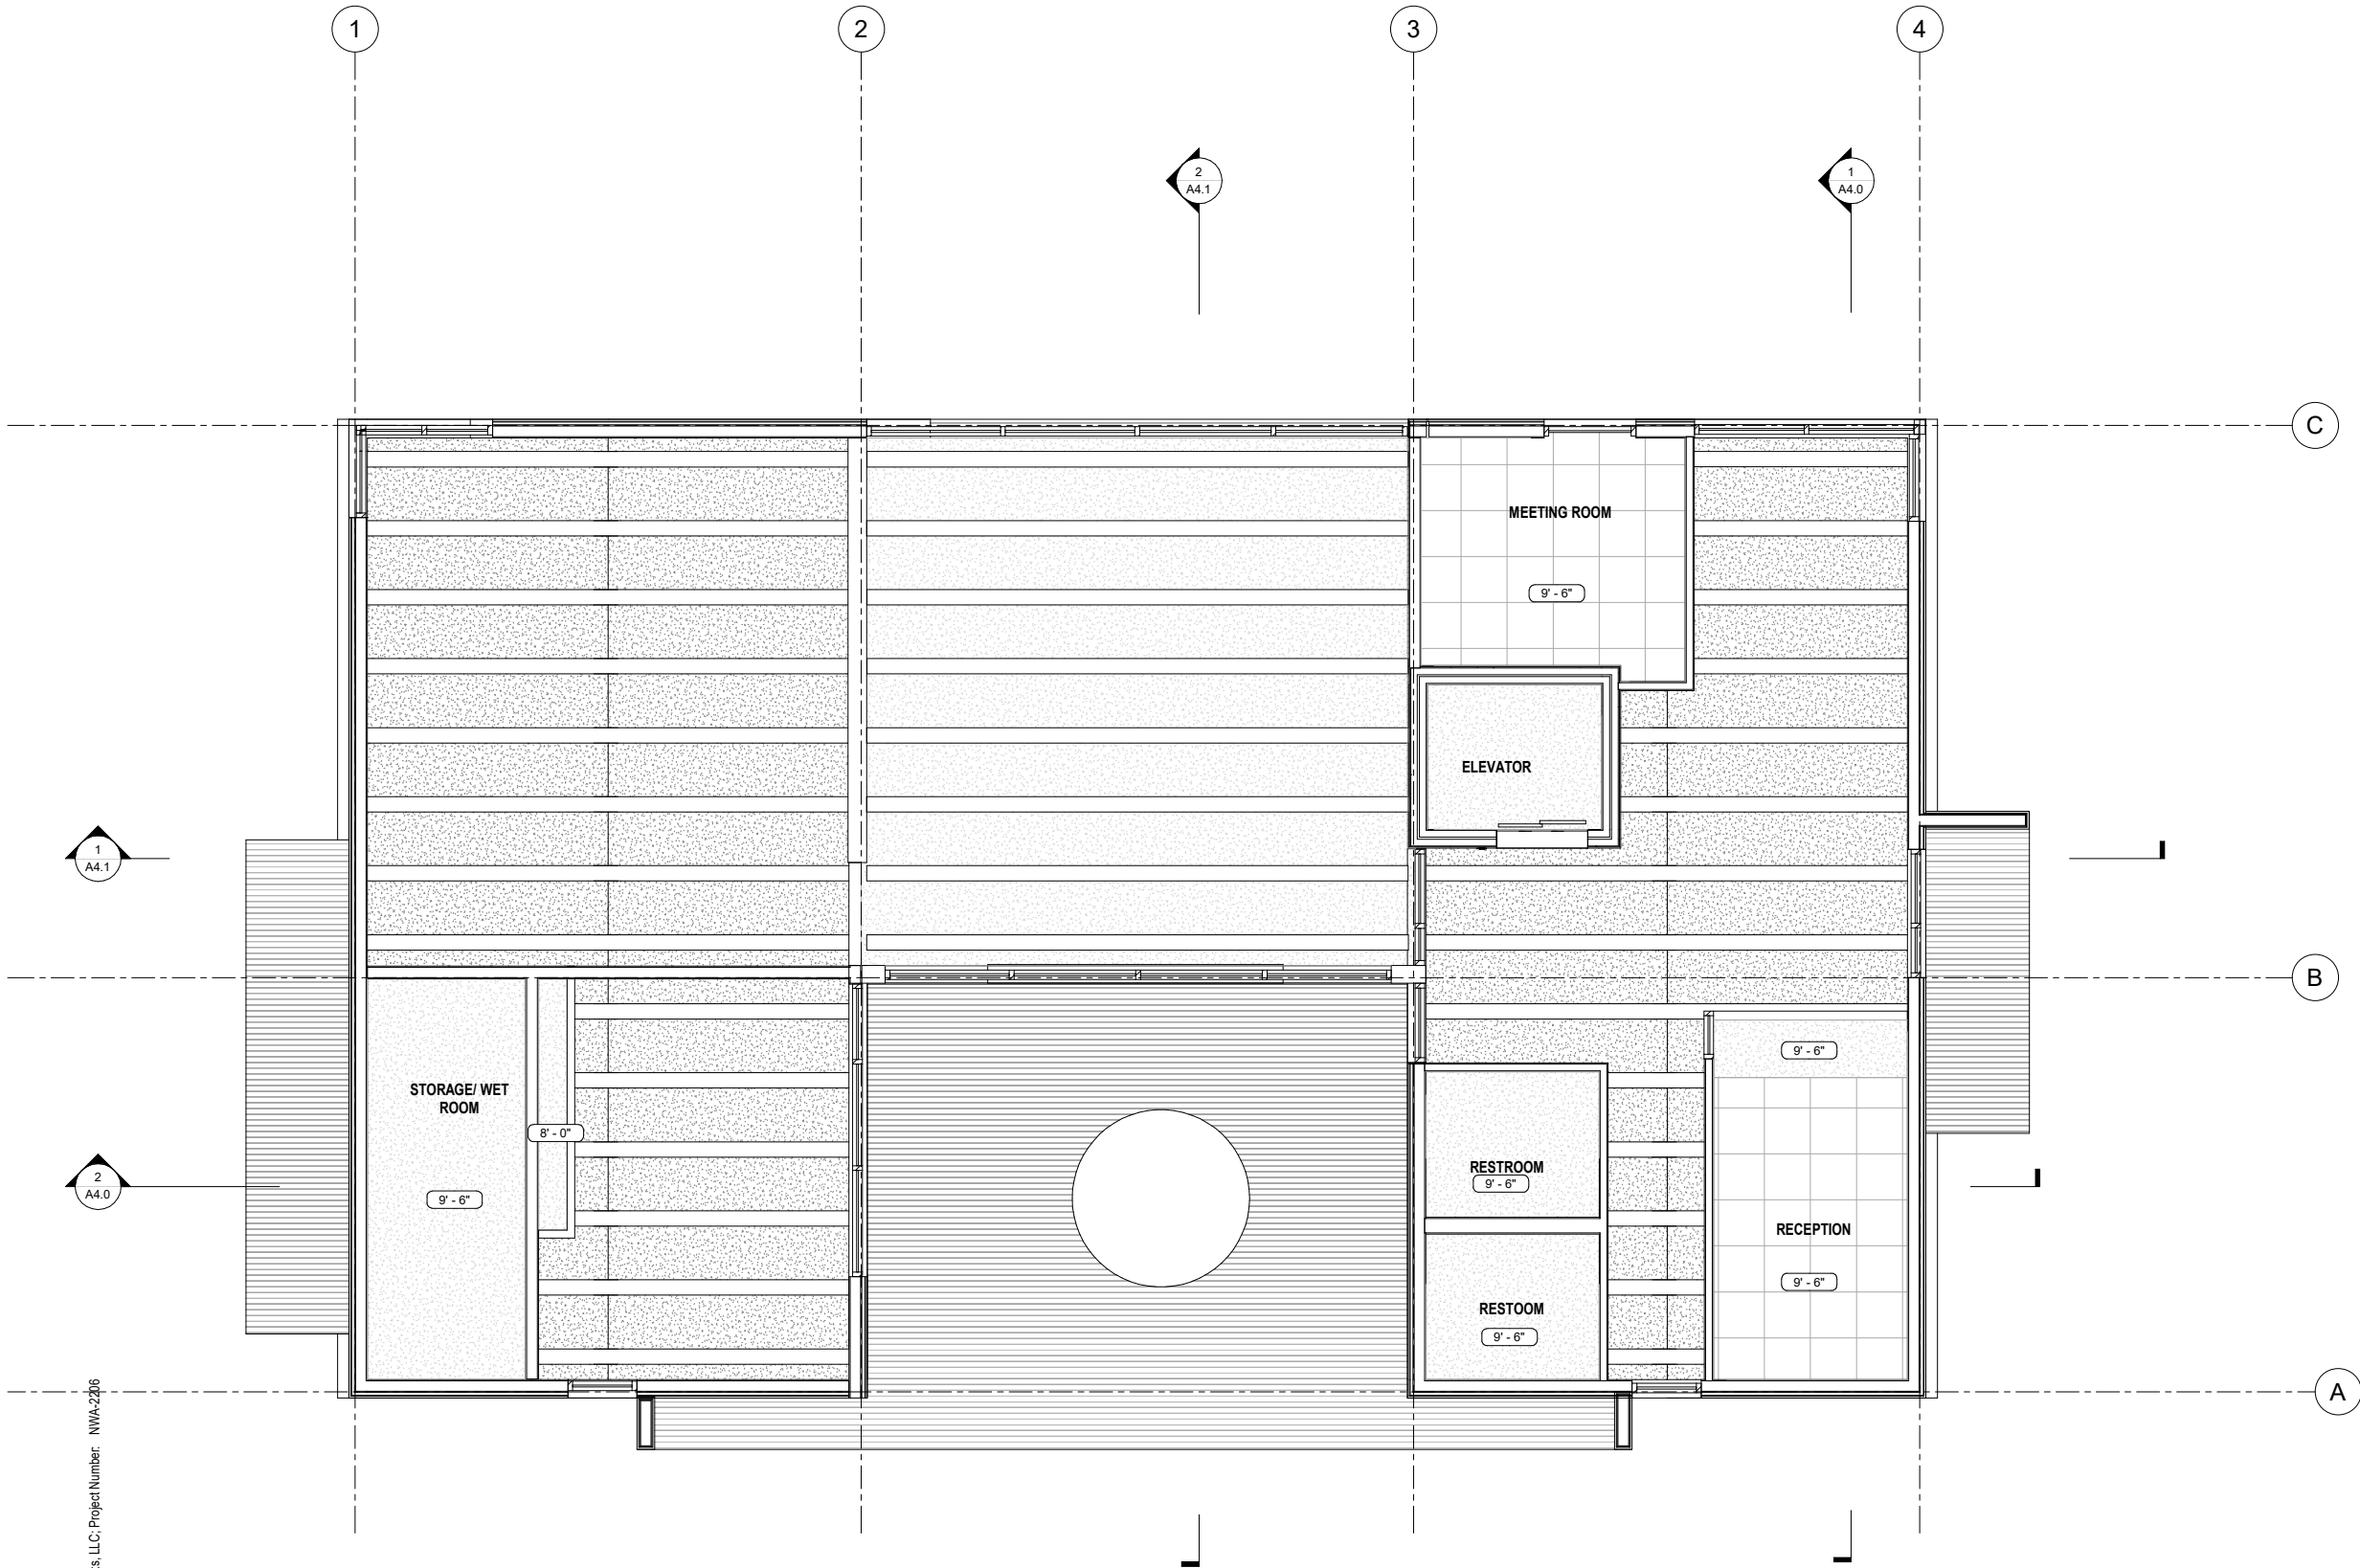

1 REFLECTED CEILING PLAN - LEVEL 01
1/4" = 1'-0"

@ NorthWind Architects, LLC; Project Number: NWA-2206

- GENERAL NOTES:**
1. CONTRACTOR SHALL FIELD VERIFY ACTUAL BUILDING CONDITIONS AND DIMENSIONS. WHERE DISCREPANCIES OR CONFLICTS ARE FOUND, NOTIFY ARCHITECT PRIOR TO COMMENCING WORK.
 2. DO NOT SCALE OFF OF DRAWINGS
 3. ALL CEILING HEIGHTS ARE 9' - 0" AFF, UNO.
 4. COORDINATE LOCATION OF ALL MEP ITEMS WITH MEP.
 5. CENTER MEP ITEMS INCLUDING SPRINKLER HEADS IN CEILING TILES.
 6. LINEWORK DEPICTING CEILING TILES IS TO SHOW EXTENT ONLY. POSITION GRID SUCH THAT NO EDGE TILES IS LESS THAN 6" IN WIDTH. CENTER GRID IN SPACES WHEREVER POSSIBLE.
 7. LINEWORK DEPICTING CEILING PENETRATIONS ARE SHOWN FOR REFERENCE ONLY. SEE MEP.

- SHEET NOTES:**
1. #SPEC DESCRIPTION

LEGEND:

← 1" ACTUAL →

IF THE ABOVE DIMENSION DOES NOT MEASURE ONE INCH (1") EXACTLY, THIS DRAWING WILL HAVE BEEN ENLARGED OR REDUCED, AFFECTING ALL LABEL SCALES.

35% SET
NOT FOR CONSTRUCTION

06/05/2023

W

N

NorthWind
Architects, LLC

126 Seward St
Juneau, AK 99801
Ph #907.586.6150
www.northwindarch.com

AYAYD Cultural Center

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT

ST. ANNS AVENUE
DOUGLAS, ALASKA

SHEET TITLE:		
REFLECTED CEILING PLAN - LEVEL 1		
CHECKED	Approver	
DRAWN	Author	
issue	date	description

@ NorthWind Architects, LLC, Project Number: NWA-2206



1 ELEVATION NORTH
3/16" = 1'-0"



3 ELEVATION SOUTH
3/16" = 1'-0"

GENERAL NOTES:

1. CONTRACTOR SHALL FIELD VERIFY ACTUAL BUILDING CONDITIONS AND DIMENSIONS. WHERE DISCREPANCIES OR CONFLICTS ARE FOUND, NOTIFY ARCHITECT PRIOR TO COMMENCING WORK.
2. DO NOT SCALE OFF OF DRAWINGS.
3. DIMENSIONS ARE TO GRIDLINE, FACE OR CENTER OF FRAMING UNO.
4. STRUCTURAL ELEMENTS SHOWN IN ARCHITECTURAL DRAWINGS FOR REFERENCE ONLY. SEE STRUCTURAL DRAWINGS FOR ALL STRUCTURAL INFORMATION.
5. SECTION DRAWINGS FOR REFERENCE ONLY IDENTIFY DATUM AND DETAILS. NOT FOR CONSTRUCTION.
6. TAPERED INSULATION SLOPES NOT SHOWN FOR CLARITY.

SHEET NOTES:

1. #SPEC DESCRIPTION



06/05/2023

126 Seward St
Juneau, AK 99801
Ph #907.586.6150
www.northwindarch.com

IF THE ABOVE DIMENSION DOES NOT MEASURE ONE INCH (1") EXACTLY, THIS DRAWING WILL HAVE BEEN ENLARGED OR REDUCED, AFFECTING ALL LABEL SCALES.

AYAYD Cultural Center

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT

ST. ANNS AVENUE
DOUGLAS, ALASKA

SHEET TITLE:
EXTERIOR
ELEVATIONS

CHECKED	Approver
DRAWN	Author

issue	date	description
-------	------	-------------


SHEET #

A3.0


ISSUE DATE

06/05/2023


@ NorthWind Architects, LLC, Project Number: NWA-2206

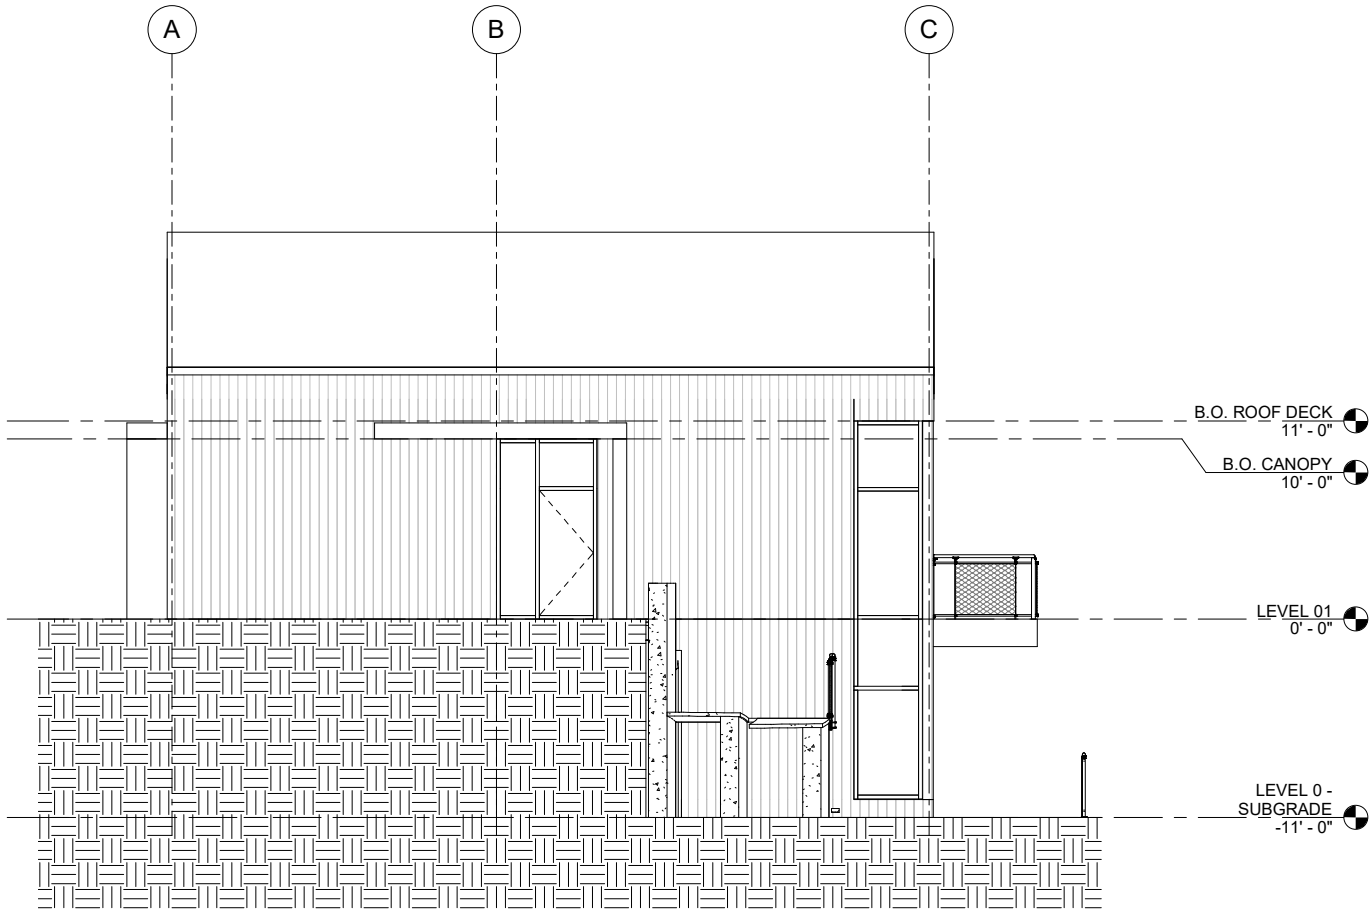


1 ELEVATION EAST
3/16" = 1'-0"

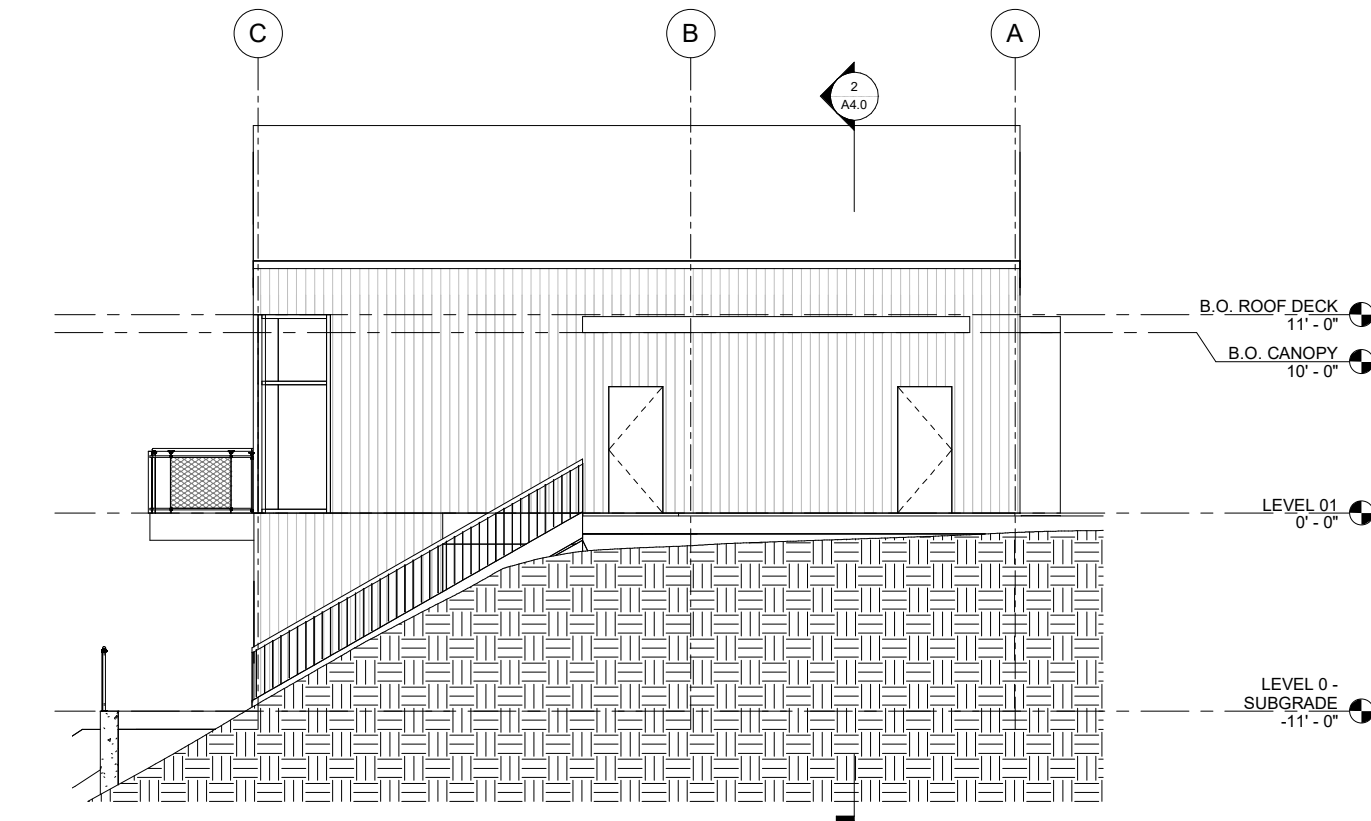


2 ELEVATION WEST
3/16" = 1'-0"

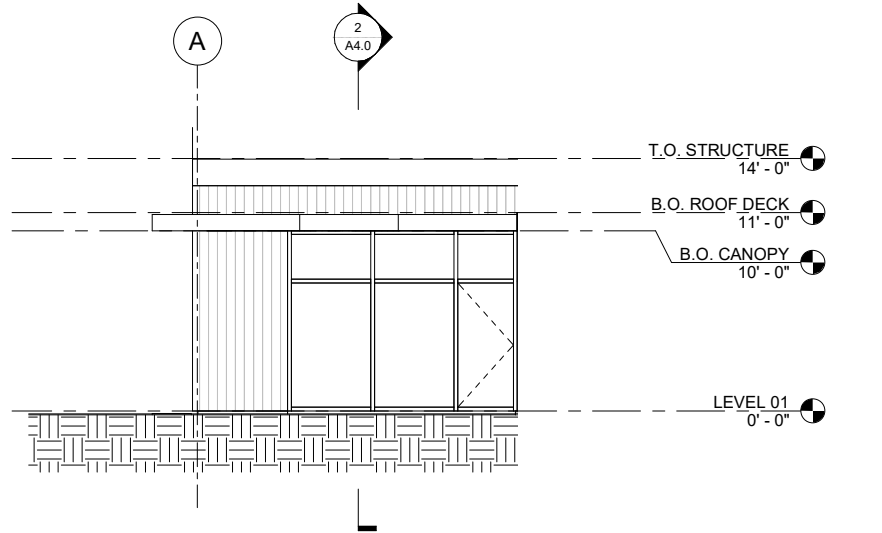

3 ELEVATION - EAST COURTYARD
3/16" = 1'-0"

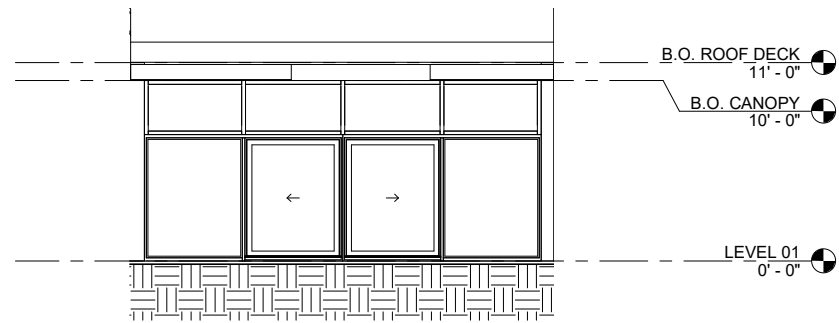

4 ELEVATION - SOUTH COURTYARD
3/16" = 1'-0"

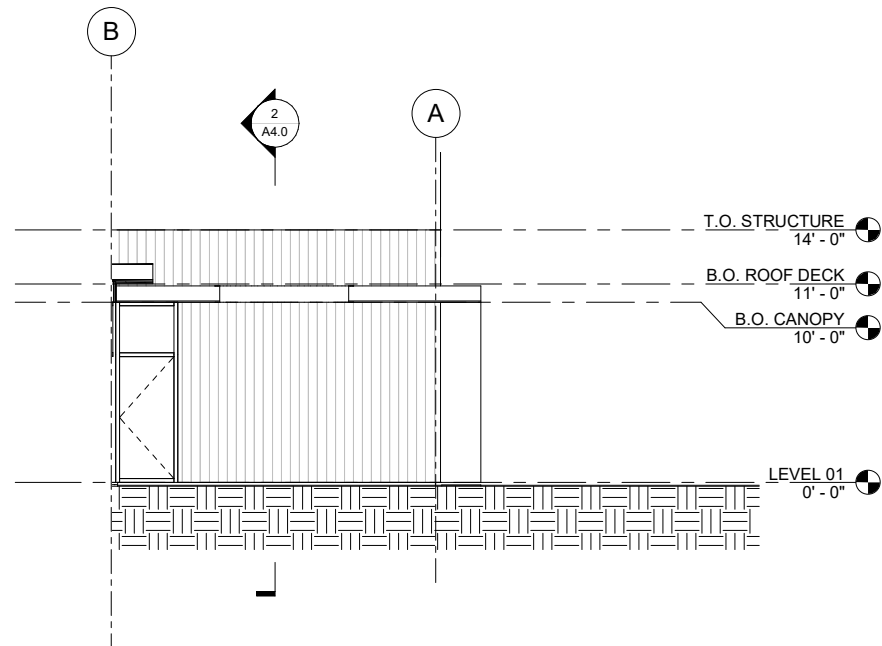


5 ELEVATION - WEST COURTYARD
3/16" = 1'-0"

GENERAL NOTES:

1. CONTRACTOR SHALL FIELD VERIFY ACTUAL BUILDING CONDITIONS AND DIMENSIONS. WHERE DISCREPANCIES OR CONFLICTS ARE FOUND, NOTIFY ARCHITECT PRIOR TO COMMENCING WORK.
2. DO NOT SCALE OFF OF DRAWINGS.
3. DIMENSIONS ARE TO GRIDLINE, FACE OR CENTER OF FRAMING UNO.
4. STRUCTURAL ELEMENTS SHOWN IN ARCHITECTURAL DRAWINGS FOR REFERENCE ONLY. SEE STRUCTURAL DRAWINGS FOR ALL STRUCTURAL INFORMATION.
5. SECTION DRAWINGS FOR REFERENCE ONLY IDENTIFY DATUM AND DETAILS. NOT FOR CONSTRUCTION.
6. TAPERED INSULATION SLOPES NOT SHOWN FOR CLARITY.

SHEET NOTES:

1. #SPEC DESCRIPTION

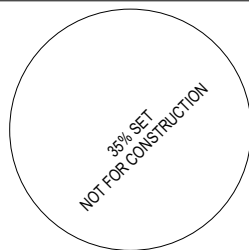

NorthWind
Architects, LLC

126 Seward St
Juneau, AK 99801
Ph #907.586.6150
www.northwindarch.com

IF THE ABOVE DIMENSION DOES NOT MEASURE ONE INCH (1") EXACTLY, THIS DRAWING WILL HAVE BEEN ENLARGED OR REDUCED, AFFECTING ALL LABEL SCALES.

AYAYD Cultural Center

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT

ST. ANNS AVENUE
DOUGLAS, ALASKA

SHEET TITLE:

EXTERIOR
ELEVATIONS

CHECKED Approver
DRAWN Author


issue date description

SHEET #


A3.1

ISSUE DATE

06/05/2023

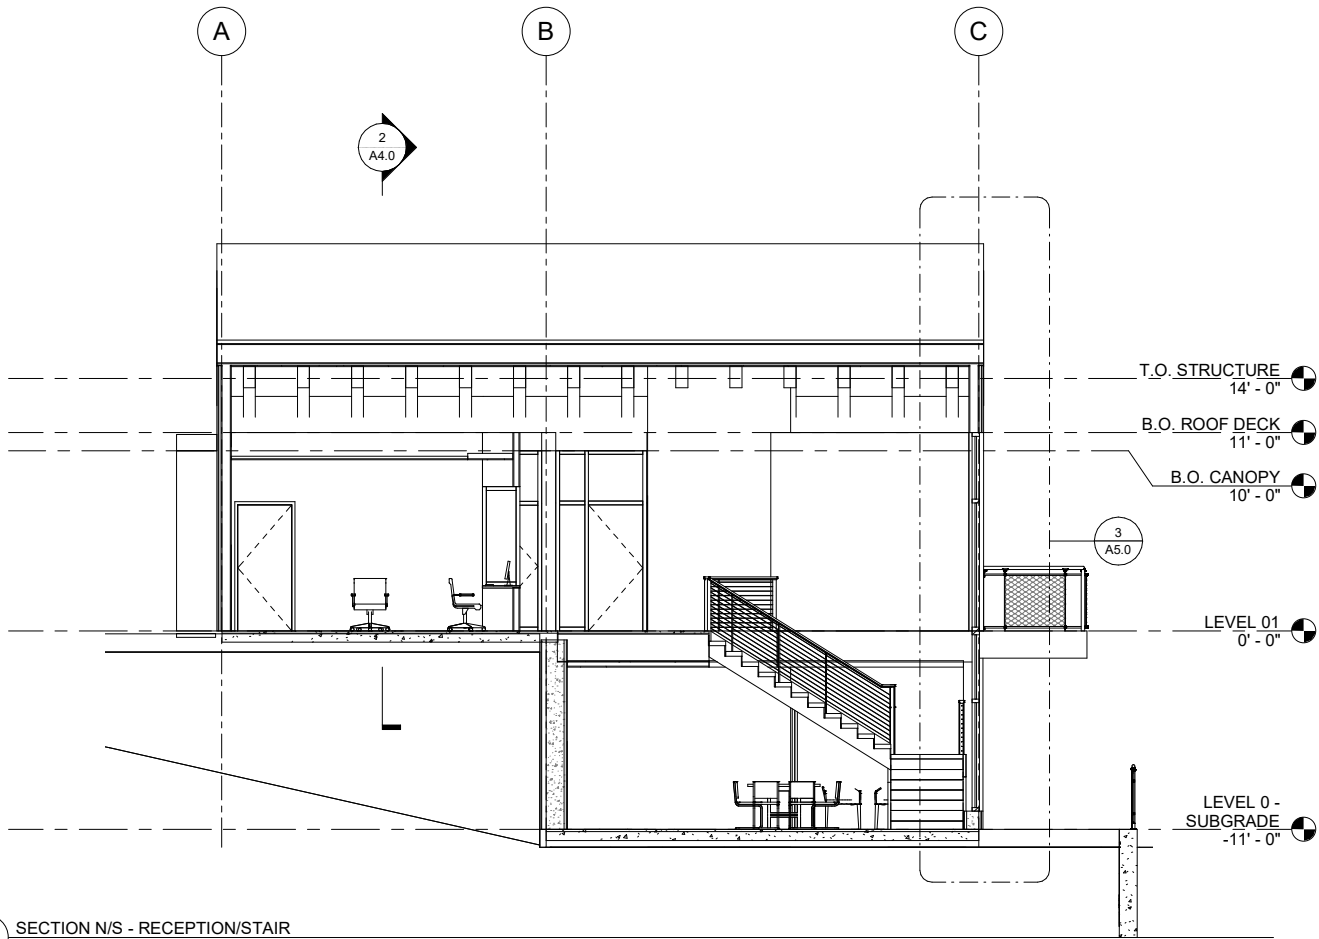

1 SECTION N/S - RECEPTION/STAIR
3/16" = 1'-0"

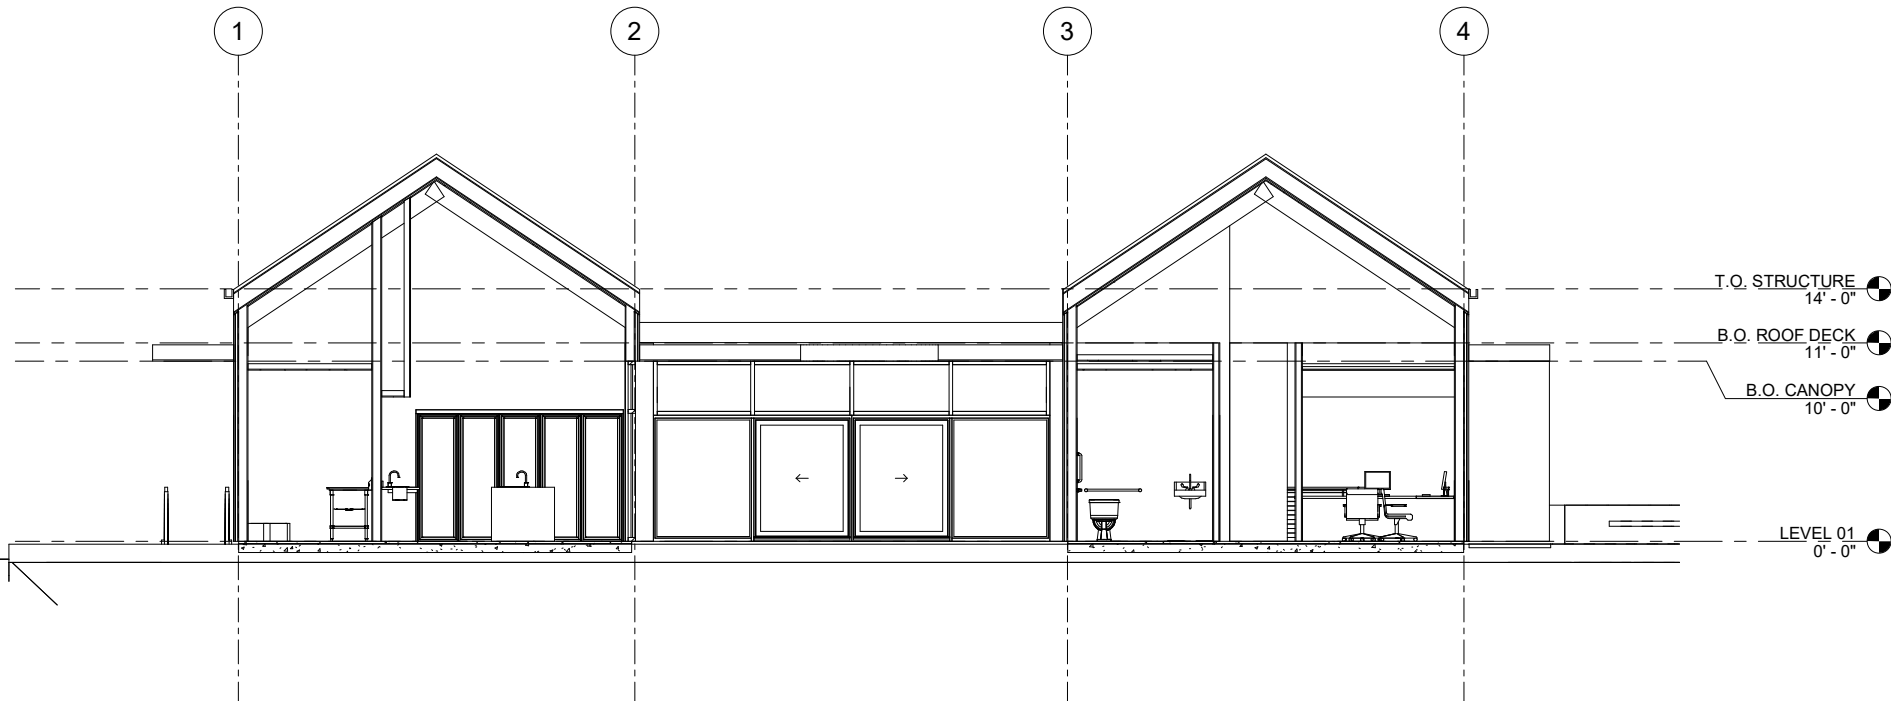

2 SECTION E/W - COURTYARD
3/16" = 1'-0"

GENERAL NOTES:

1. CONTRACTOR SHALL FIELD VERIFY ACTUAL BUILDING CONDITIONS AND DIMENSIONS. WHERE DISCREPANCIES OR CONFLICTS ARE FOUND, NOTIFY ARCHITECT PRIOR TO COMMENCING WORK.
2. DO NOT SCALE OFF OF DRAWINGS.
3. DIMENSIONS ARE TO GRIDLINE, FACE OR CENTER OF FRAMING UNO.
4. STRUCTURAL ELEMENTS SHOWN IN ARCHITECTURAL DRAWINGS FOR REFERENCE ONLY. SEE STRUCTURAL DRAWINGS FOR ALL STRUCTURAL INFORMATION.
5. SECTION DRAWINGS FOR REFERENCE ONLY IDENTIFY DATUM AND DETAILS. NOT FOR CONSTRUCTION.
6. TAPERED INSULATION SLOPES NOT SHOWN FOR CLARITY.

SHEET NOTES:

1. #SPEC DESCRIPTION



06/05/2023

126 Seward St
Juneau, AK 99801
Ph #907.586.6150
www.northwindarch.com

IF THE ABOVE DIMENSION DOES NOT MEASURE ONE INCH (1") EXACTLY, THIS DRAWING WILL HAVE BEEN ENLARGED OR REDUCED, AFFECTING ALL LABEL SCALES.

AYAYD Cultural Center

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT

ST. ANNS AVENUE
DOUGLAS, ALASKA

SHEET TITLE:
BUILDING
SECTIONS

CHECKED Approver
DRAWN Author


issue date description

SHEET #

A4.0

ISSUE DATE

06/05/2023

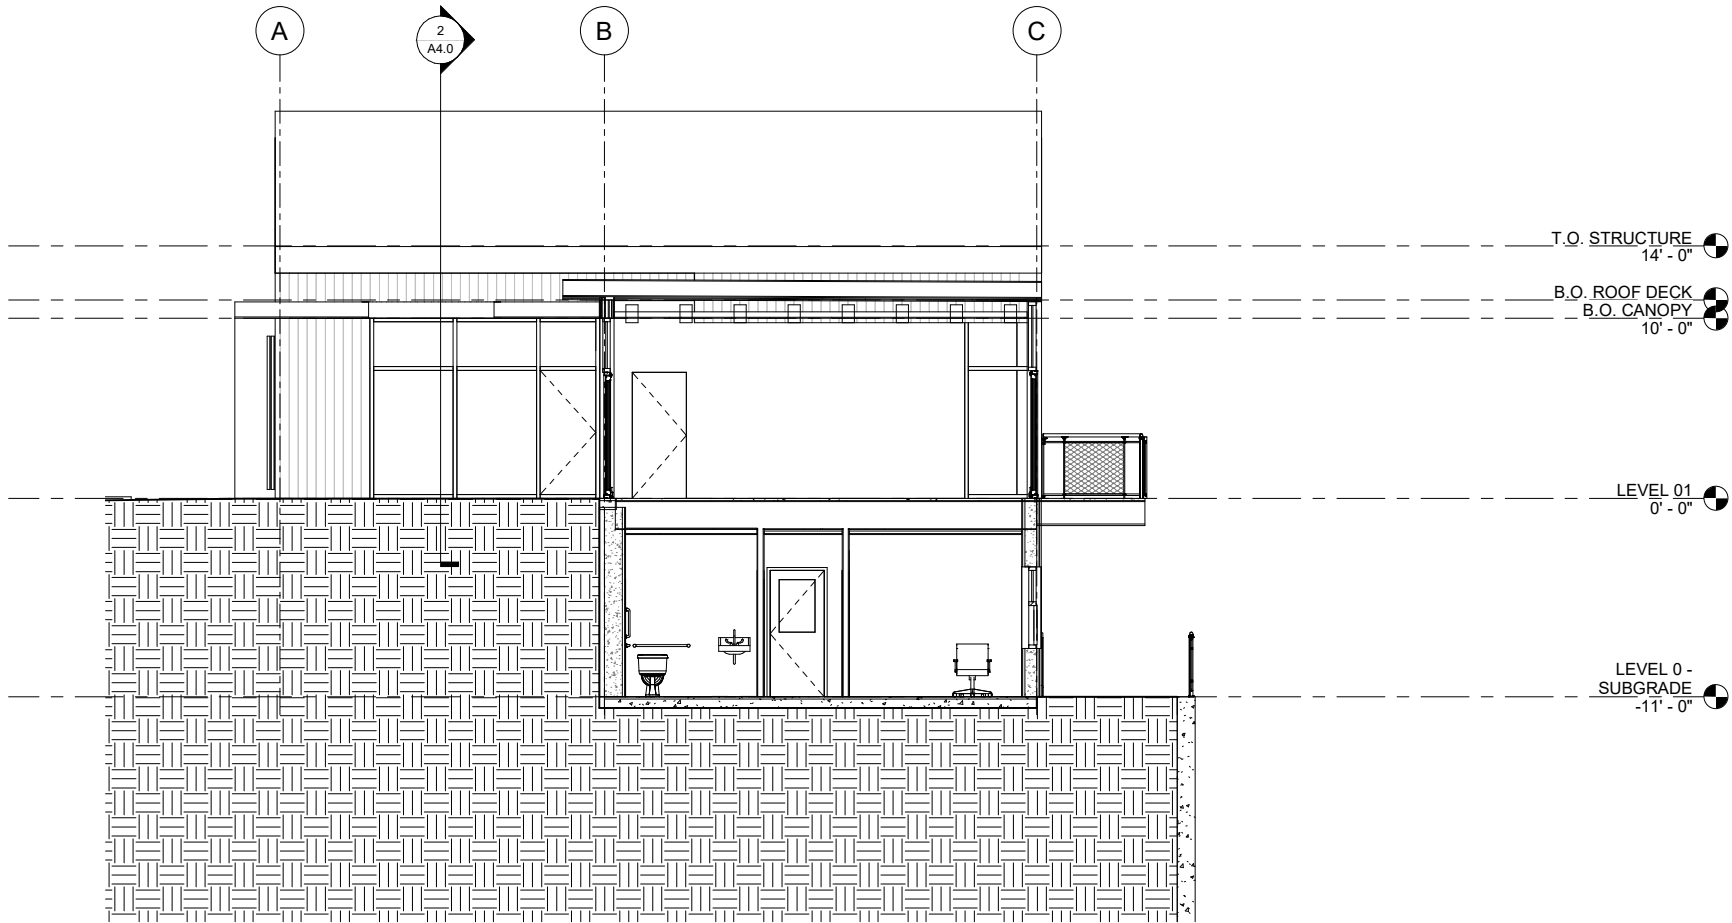

2 SECTION N/S - COURTYARD
3/16" = 1'-0"




1 SECTION E/W - CLASSROOM/LOWER LEVEL
3/16" = 1'-0"

GENERAL NOTES:

1. CONTRACTOR SHALL FIELD VERIFY ACTUAL BUILDING CONDITIONS AND DIMENSIONS. WHERE DISCREPANCIES OR CONFLICTS ARE FOUND, NOTIFY ARCHITECT PRIOR TO COMMENCING WORK.
2. DO NOT SCALE OFF OF DRAWINGS.
3. DIMENSIONS ARE TO GRIDLINE, FACE OR CENTER OF FRAMING UNO.
4. STRUCTURAL ELEMENTS SHOWN IN ARCHITECTURAL DRAWINGS FOR REFERENCE ONLY. SEE STRUCTURAL DRAWINGS FOR ALL STRUCTURAL INFORMATION.
5. SECTION DRAWINGS FOR REFERENCE ONLY IDENTIFY DATUM AND DETAILS. NOT FOR CONSTRUCTION.
6. TAPERED INSULATION SLOPES NOT SHOWN FOR CLARITY.

SHEET NOTES:

1. #SPEC DESCRIPTION



06/05/2023

NorthWind
Architects, LLC

126 Seward St
Juneau, AK 99801
Ph #907.586.6150
www.northwindarch.com

IF THE ABOVE DIMENSION DOES NOT MEASURE ONE INCH (1") EXACTLY, THIS DRAWING WILL HAVE BEEN ENLARGED OR REDUCED, AFFECTING ALL LABEL SCALES.

AYAYD Cultural Center

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT

ST. ANNS AVENUE
DOUGLAS, ALASKA

SHEET TITLE:

**BUILDING
SECTIONS**

CHECKED Approver
DRAWN Author


issue date description

SHEET #


A4.1

ISSUE DATE


06/05/2023

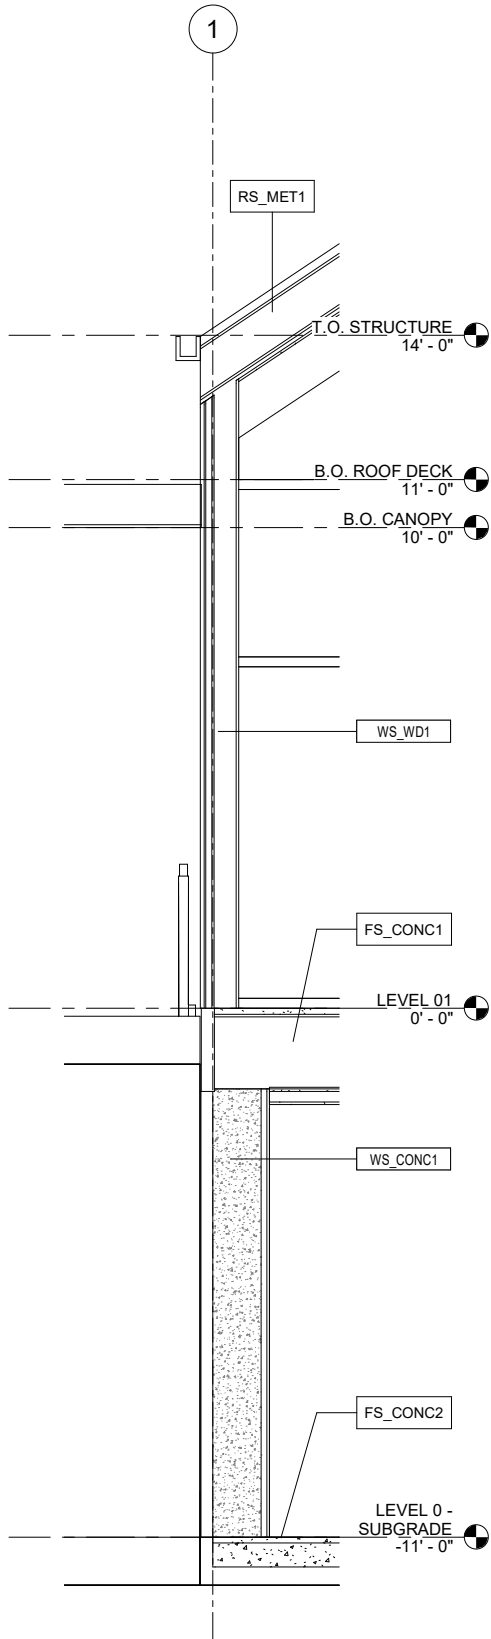

1 WALL SECTION FOUNDATION WALL TO EXTERIOR WALL SECTION TYP.
1/2" = 1'-0"

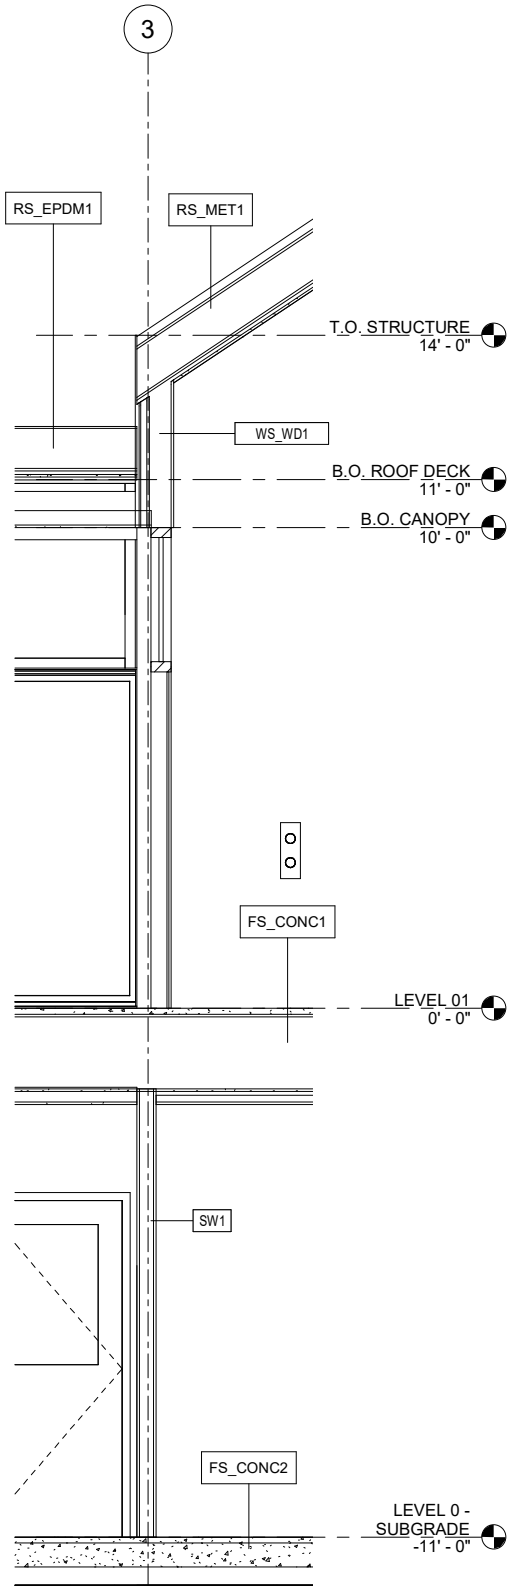

2 WALL SECTION INTERIOR WALL AT GABLED ROOF TYP.
1/2" = 1'-0"

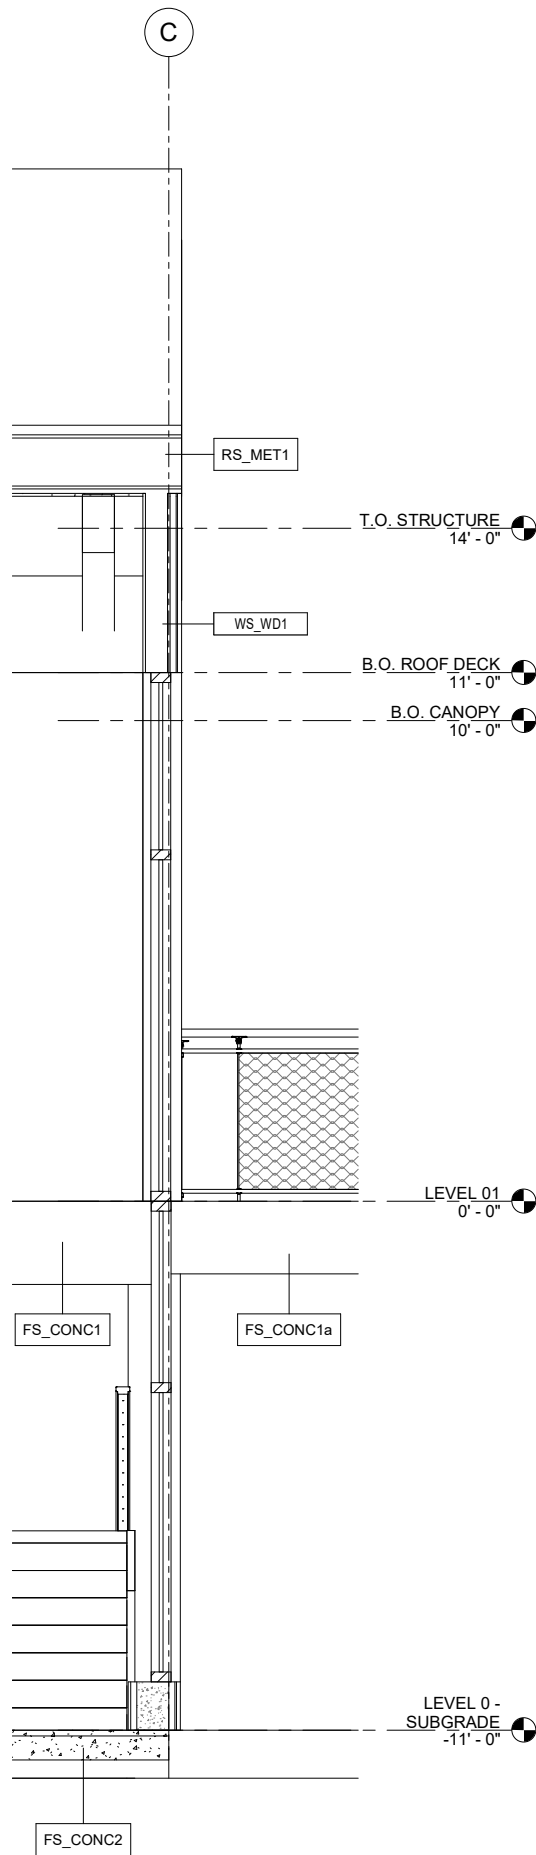

3 WALL SECTION DECK AT DAYLIGHT BASEMENT
1/2" = 1'-0"

GENERAL NOTES:

1. CONTRACTOR SHALL FIELD VERIFY ACTUAL BUILDING CONDITIONS AND DIMENSIONS. WHERE DISCREPANCIES OR CONFLICTS ARE FOUND, NOTIFY ARCHITECT PRIOR TO COMMENCING WORK.
2. DO NOT SCALE OFF OF DRAWINGS.
3. DIMENSIONS ARE TO GRIDLINE, FACE OR CENTER OF FRAMING UNO.
4. STRUCTURAL ELEMENTS SHOWN IN ARCHITECTURAL DRAWINGS FOR REFERENCE ONLY. SEE STRUCTURAL DRAWINGS FOR ALL STRUCTURAL INFORMATION.
5. SECTION DRAWINGS FOR REFERENCE ONLY IDENTIFY DATUM AND DETAILS. NOT FOR CONSTRUCTION.
6. TAPERED INSULATION SLOPES NOT SHOWN FOR CLARITY.

SHEET NOTES:

1. #SPEC DESCRIPTION



06/05/2023

NorthWind
Architects, LLC

126 Seward St
Juneau, AK 99801
Ph #907.586.6150
www.northwindarch.com

IF THE ABOVE DIMENSION DOES NOT MEASURE ONE INCH (1") EXACTLY, THIS DRAWING WILL HAVE BEEN ENLARGED OR REDUCED, AFFECTING ALL LABEL SCALES.

AYAYD Cultural Center

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT

ST. ANNS AVENUE
DOUGLAS, ALASKA

SHEET TITLE:

**ENLARGED
SECTIONS**

CHECKED Approver
DRAWN Author


issue date description

SHEET #


A5.0

ISSUE DATE


06/05/2023

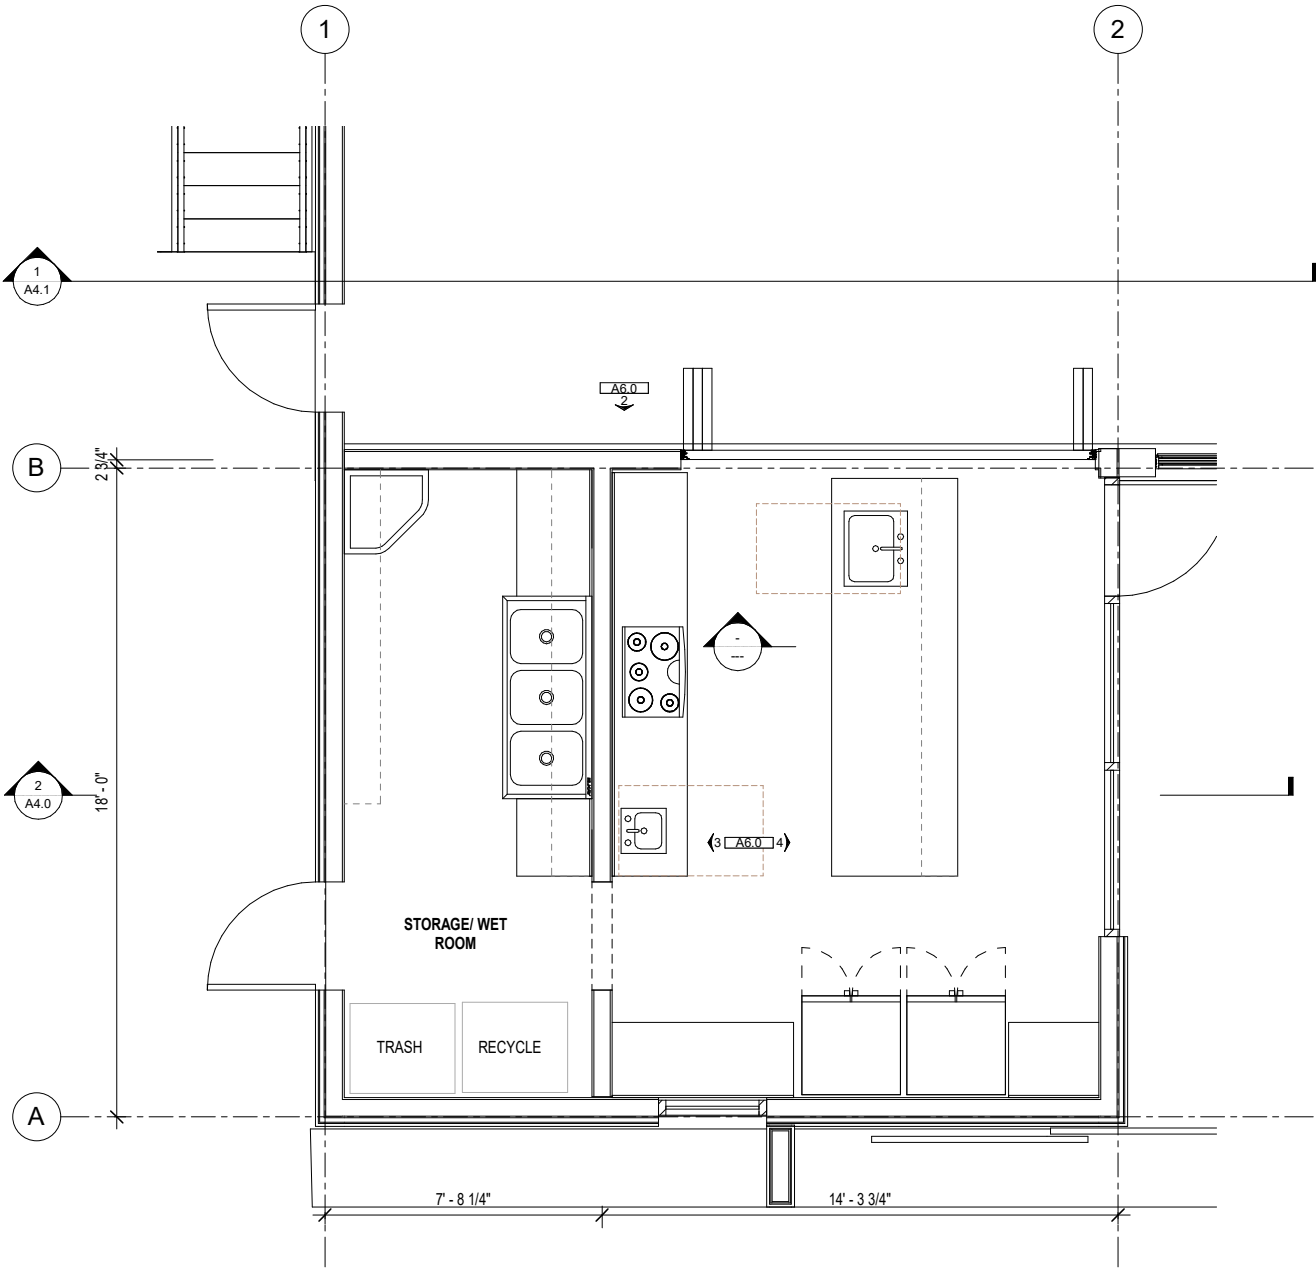


1 ENLARGED PLAN - LEVEL 01 - KITCHEN
3/8" = 1'-0"

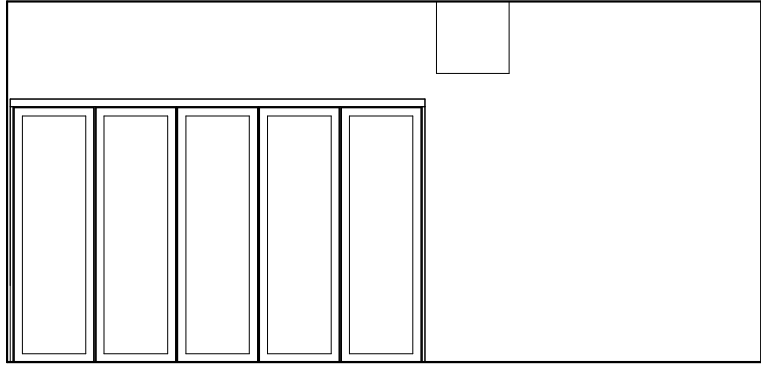

2 KITCHEN SOUTH
3/8" = 1'-0"

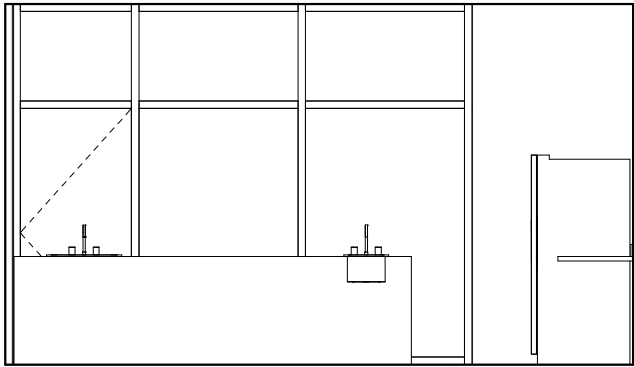

4 KITCHEN EAST
3/8" = 1'-0"

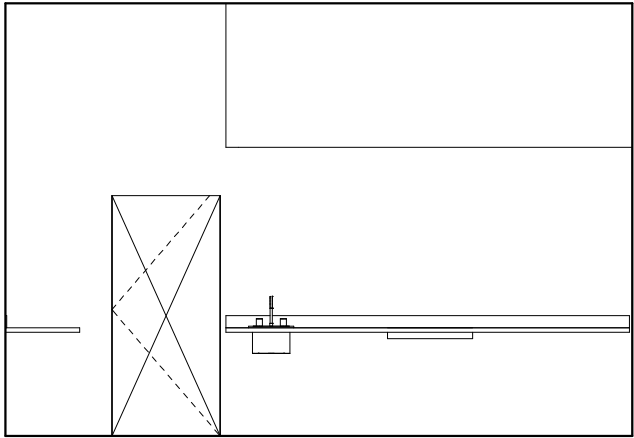

3 KITCHEN WEST
3/8" = 1'-0"

GENERAL NOTES:

1. CONTRACTOR SHALL FIELD VERIFY ACTUAL BUILDING CONDITIONS AND DIMENSIONS. WHERE DISCREPANCIES OR CONFLICTS ARE FOUND, NOTIFY ARCHITECT PRIOR TO COMMENCING WORK.
2. DO NOT SCALE OFF OF DRAWINGS
3. COORDINATE WIRE GROMMET LOCATIONS WITH OWNER IN FIELD.
4. COUNTER BRACKET SPACING NOT TO EXCEED 4'0" O.C. COORDINATE EXACT LOCATION WITH OWNERS EQUIPMENT, KEYBOARD, TRAYS AND ACCESSORY PLACEMENT. ALL COUNTER BRACKETS TO HAVE CONTINUOUS BACKING
5. CORNER GUARDS AND WALL PROTECTION NOT SHOWN FOR EVERY LOCATION. SEE FINISH PLANS AND ELEVATIONS FOR LOCATIONS.
6. THE MAJORITY OF ALL FFE ITEMS ARE OFOI AND ARE NOT IN CONTRACT. HOWEVER LIMITED ITEMS ARE SHOWN IN DRAWINGS FOR COORDINATION PURPOSES. SEE FFE SHEETS FOR GENERAL FFE INFORMATION AND FFE SHEETS AND PROJECT MANUAL FOR CFCI FFE INFORMATION

SHEET NOTES:

1. #SPEC DESCRIPTION



06/05/2023



126 Seward St
Juneau, AK 99801
Ph #907.586.6150
www.northwindarch.com

IF THE ABOVE DIMENSION DOES NOT MEASURE ONE INCH (1") EXACTLY, THIS DRAWING WILL HAVE BEEN ENLARGED OR REDUCED, AFFECTING ALL LABEL SCALES.

AYAYD Cultural Center

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT

ST. ANNS AVENUE
DOUGLAS, ALASKA

SHEET TITLE:

ENLARGED PLANS
& INTERIOR
ELEVATIONS

CHECKED Approver
DRAWN Author


issue date description

SHEET #


A6.0

ISSUE DATE


06/05/2023

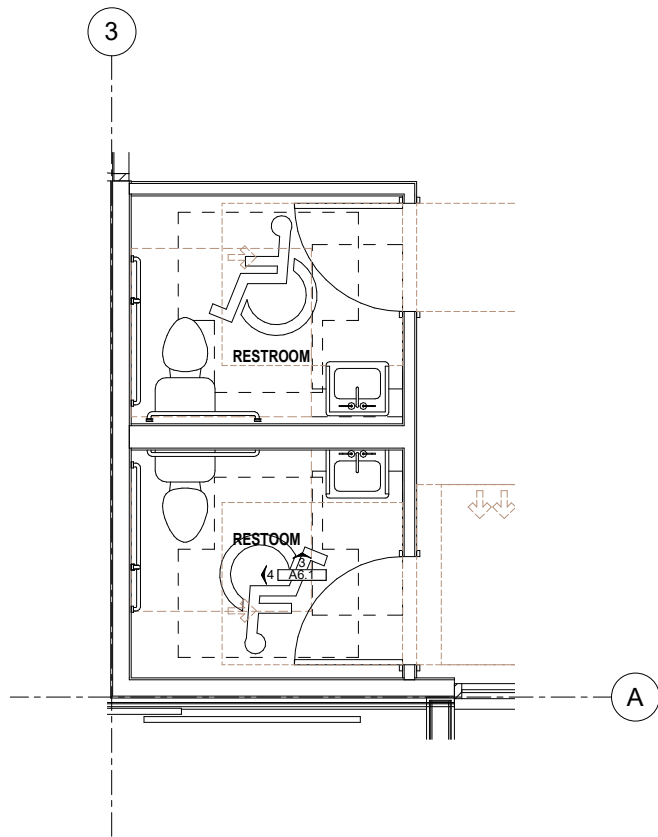


2 ENLARGED PLAN - LEVEL 1 - RESTROOMS
3/8" = 1'-0"

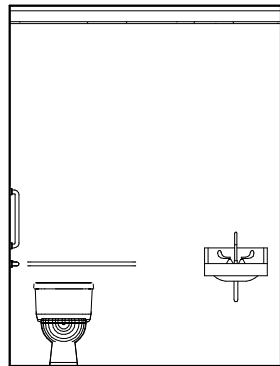


3 LEVEL 1 RESTROOM NORTH
3/8" = 1'-0"

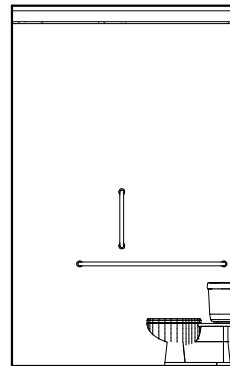


4 LEVEL 1 RESTROOM WEST
3/8" = 1'-0"

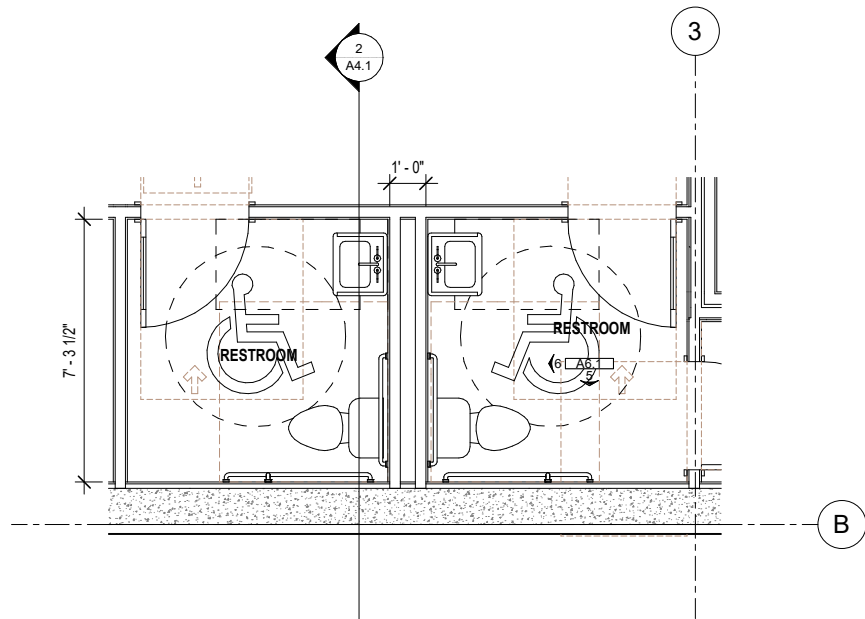

1 ENLARGED PLAN - LEVEL 0 RESTROOMS
3/8" = 1'-0"

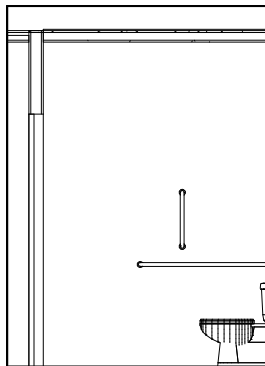

5 LEVEL 0 RESTROOM SOUTH
3/8" = 1'-0"

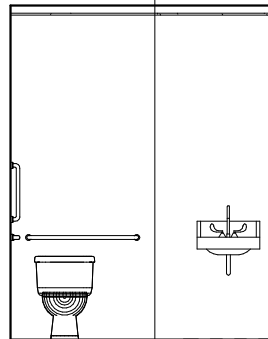


6 LEVEL 0 RESTROOM WEST
3/8" = 1'-0"

GENERAL NOTES:

1. CONTRACTOR SHALL FIELD VERIFY ACTUAL BUILDING CONDITIONS AND DIMENSIONS. WHERE DISCREPANCIES OR CONFLICTS ARE FOUND, NOTIFY ARCHITECT PRIOR TO COMMENCING WORK.
2. DO NOT SCALE OFF OF DRAWINGS
3. COORDINATE WIRE GROMMET LOCATIONS WITH OWNER IN FIELD.
4. COUNTER BRACKET SPACING NOT TO EXCEED 4'0" O.C. COORDINATE EXACT LOCATION WITH OWNERS EQUIPMENT, KEYBOARD, TRAYS AND ACCESSORY PLACEMENT. ALL COUNTER BRACKETS TO HAVE CONTINUOUS BACKING
5. CORNER GUARDS AND WALL PROTECTION NOT SHOWN FOR EVERY LOCATION. SEE FINISH PLANS AND ELEVATIONS FOR LOCATIONS.
6. THE MAJORITY OF ALL FFE ITEMS ARE OFOI AND ARE NOT IN CONTRACT. HOWEVER LIMITED ITEMS ARE SHOWN IN DRAWINGS FOR COORDINATION PURPOSES. SEE FFE SHEETS FOR GENERAL FFE INFORMATION AND FFE SHEETS AND PROJECT MANUAL FOR CFCI FFE INFORMATION

SHEET NOTES:

1. #SPEC DESCRIPTION



06/05/2023

NorthWind Architects, LLC

126 Seward St
Juneau, AK 99801
Ph #907.586.6150
www.northwindarch.com

IF THE ABOVE DIMENSION DOES NOT MEASURE ONE INCH (1") EXACTLY, THIS DRAWING WILL HAVE BEEN ENLARGED OR REDUCED, AFFECTING ALL LABEL SCALES.

AYAYD Cultural Center

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT

ST. ANNS AVENUE
DOUGLAS, ALASKA

SHEET TITLE:

ENLARGED PLANS & INTERIOR ELEVATIONS

CHECKED Approver

DRAWN Author


issue date description

SHEET #


A6.1

ISSUE DATE

06/05/2023

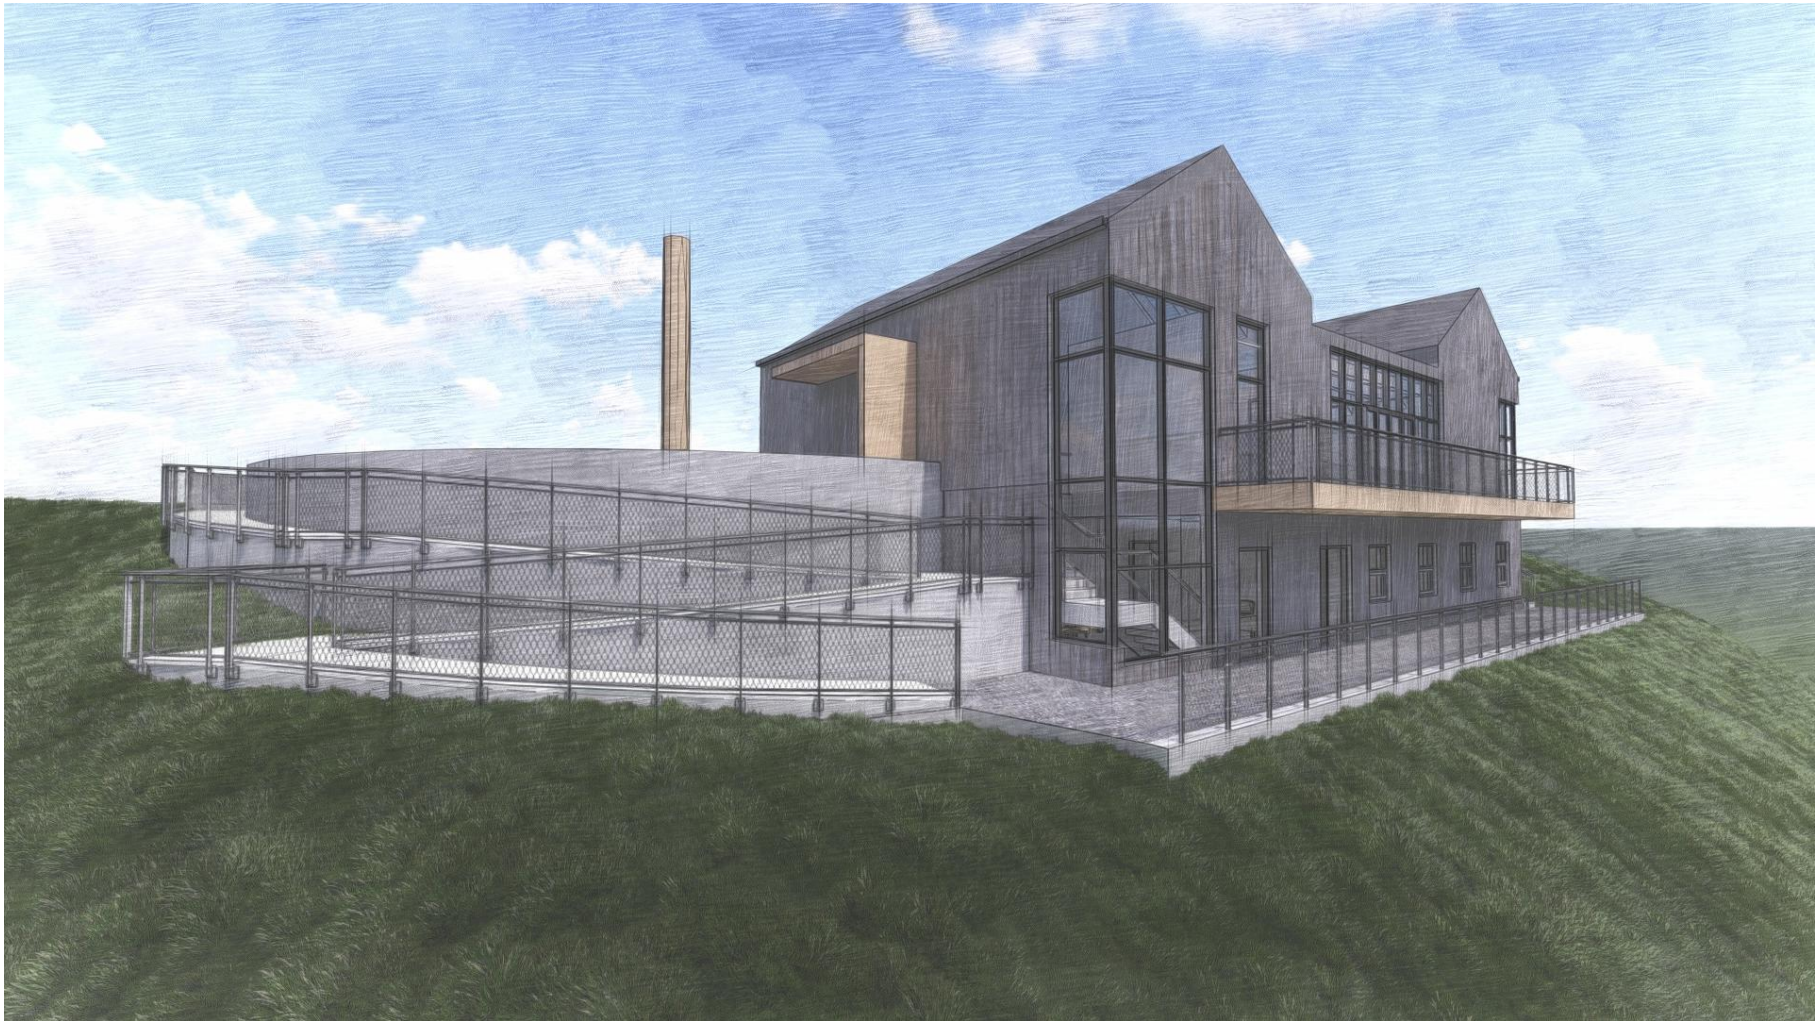

06/05/2023



NorthWind
Architects, LLC

126 Seward St
Juneau, AK 99801
Ph #907.586.6150
www.northwindarch.com

← 1" ACTUAL →
IF THE ABOVE DIMENSION DOES NOT
MEASURE ONE INCH (1") EXACTLY, THIS
DRAWING WILL HAVE BEEN ENLARGED OR
REDUCED, AFFECTING ALL LABEL SCALES.

AYAYD Cultural Center

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT

ST. ANNS AVENUE
DOUGLAS, ALASKA

SHEET TITLE:
3D VIEWS

CHECKED	Approver
DRAWN	Author

issue	date	description
-------	------	-------------

SHEET #

A10.0

ISSUE DATE

06/05/2023

DESIGN CRITERIA:

1. CODE: 2021 INTERNATIONAL BUILDING CODE
2. FLAT ROOF SNOW LOAD: 50 PSF
3. BASIC WIND SPEED: 140 MPH (3 SEC. GUST)
EXPOSURE D
4. SEISMIC DESIGN CRITERIA:
SITE CLASS: D
RISK CATEGORY: II
SEISMIC DESIGN CATEGORY: D
S_{DS} = 0.480
5. FLOOR LIVE LOADS:
FLOORS: 100 PSF
DECKS: 100 PSF

GENERAL NOTES:

1. THE PLANS AND SPECIFICATIONS ARE A GUIDE ONLY AND DO NOT DEPICT OR CALL OUT EVERY COMPONENT NECESSARY FOR COMPLETION OF THE PROJECT.
2. ENGINEER'S OBLIGATION AND/OR LIABILITY FOR ERRORS OR OMISSIONS SHALL BE LIMITED TO REDESIGNING AND REDRAWING THESE DRAWINGS TO CORRECT THE SITUATION.
3. PRIOR TO SUBMITTAL TO BUILDING DEPARTMENT, THE DESIGNER SHALL REVIEW THE STRUCTURAL DRAWINGS AND DETAILS FOR DIMENSIONAL ACCURACY.
4. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY THAT ALL DIMENSIONS ARE EQUIVALENT ON STRUCTURAL AND ARCHITECTURAL DRAWINGS. ANY DISCREPANCIES SHALL IMMEDIATELY BE BROUGHT TO THE ATTENTION OF THE DESIGNER AND ENGINEER FOR RESOLUTION PRIOR TO CONSTRUCTION.
5. AT EACH PHASE OF WORK, THE CONTRACTOR SHALL VERIFY ALL RELEVANT GRADES, DIMENSIONS, MEMBER SIZES, CONNECTIONS, AND CONDITIONS PRIOR TO ORDERING ANY MATERIALS OR COMMENCING ANY WORK.
6. IT IS THE CONTRACTOR'S RESPONSIBILITY TO PROVIDE ADEQUATE SHORING, BRACING, FORMWORK, ETC., AS REQUIRED FOR THE PROTECTION OF LIFE AND PROPERTY DURING CONSTRUCTION.
7. STRUCTURAL OBSERVATION OR FIELD INSPECTION IS NOT THE RESPONSIBILITY OF TIMBERLINE ENGINEERING LLC.

ABBREVIATIONS:

AB	ANCHOR BOLT	HD	HOLDDOWN	PSF	POUNDS PER SQUARE FOOT
ACI	AMERICAN CONCRETE INSTITUTE	HDR	HEADER	PSI	POUNDS PER SQUARE INCH
ARCH	ARCHITECT	HF	HEM-FIR	PT	PRESSURE TREATED
AYC	ALASKA YELLOW CEDAR	HORIZ.	HORIZONTAL	PWD	PLYWOOD
BCI	BOISE CASCADE	HT	HEIGHT	RO	ROUGH OPENING
BM	BEAM	IBC	INTERNATIONAL BUILDING CODE	RS	ROUGH SAWN
BTM	BOTTOM	KS	KING STUD	SIM.	SIMILAR
COL	COLUMN	LAG	STANDARD HEX LAG SCREW	SQ	SQUARE
CONC	CONCRETE	LONG.	LONGITUDINAL	TN	TOE-NAILED
CONT	CONTINUOUS	MAX.	MAXIMUM	TP	TOP PLATE
DIA (Ø)	DIAMETER	MIN.	MINIMUM	TR.	TRIMMER STUDS
DBL	DOUBLE	MTE	MATCH TO EXISTING	TRANS.	TRANSVERSE
DF	DOUGLAS-FIR (NORTH)	NDS	NATIONAL DESIGN SPECIFICATION	TYP.	TYPICAL
EA	EACH	NFS	NON-FROST SUSCEPTIBLE	T&B	TOP & BOTTOM
EW	EACH WAY	NTS	NOT TO SCALE	T&G	TONGUE & GROOVE
FTG	FOOTING	O.C.	ON CENTER	UNO	UNLESS NOTED OTHERWISE
GALV.	GALVANIZED	OSB	ORIENTED STRAND BOARD	VERT.	VERTICAL
GLB	GLULAM	PLY	PLYWOOD	VL	VERSA-LAM

FOUNDATION:

1. NO GEOTECHNICAL REPORT OR SOILS REPORT WAS PREPARED FOR THIS PROJECT.
2. CONTRACTOR TO VERIFY THAT THE UNDISTURBED SOILS AT THE BOTTOM OF EXCAVATION HAVE A MINIMUM BEARING CAPACITY OF 2,000 PSF (WELL-GRADED SAND OR GRAVEL).
3. ORGANIC AND/OR WEAK SOILS ENCOUNTERED DURING EXCAVATION SHALL BE REMOVED AND REPLACED WITH WELL-COMPACTED, NON-FROST SUSCEPTIBLE STRUCTURAL FILL.
4. EXTERIOR FOOTINGS SHALL BEAR 2'-8" MINIMUM BELOW FINISHED GRADE OR ON NON-FROST SUSCEPTIBLE, FREE-DRAINING SOIL.
5. CONCRETE COMPRESSIVE STRENGTH SHALL BE 3,000 PSI MIN. FOR STEMWALLS, AND FOOTINGS.
6. AIR ENTRAINING AGENT (3% - 6%) SHALL BE USED IN ALL CONCRETE EXPOSED TO WEATHER.
7. ALL MATERIALS AND PROCEDURES SHALL BE IN CONFORMANCE WITH ACI 318 AND OTHER APPLICABLE BUILDING CODES.
8. REINFORCING STEEL SHALL CONFORM TO ASTM A615. FOR #3 BARS AND SMALLER USE GRADE 40. FOR #4 BARS AND LARGER USE GRADE 60.
9. LAP SPLICE ALL BARS NO LESS THAN 40 BAR DIAMETERS U.N.O.
10. REBAR CONCRETE COVER:
3" FOR CONCRETE CAST AGAINST AND PERMANENTLY EXPOSED TO EARTH.
1-1/2" FOR CONCRETE EXPOSED TO EARTH OR WEATHER, AND BEAMS AND COLUMNS NOT EXPOSED TO WEATHER.
3/4" FOR SLABS AND WALLS NOT EXPOSED TO EARTH OR WEATHER.
11. HOLDOWN ANCHOR BOLTS SHALL BE GALV. ASTM F1554 GRADE 36 THREADED ROD WITH 22"-EMBEDMENT AND NUT & WASHER ON EMBEDDED END, U.N.O.
12. CONTROL JOINT SPACING SHALL BE 15' O.C. MAXIMUM IN ALL SLABS. LOCATION TO BE DETERMINED BY CONTRACTOR. SAW CUT JOINTS TO BE MADE 12 TO 24 HOURS AFTER CONCRETE PLACEMENT.
13. 1/2" EXPANSION JOINTS SHALL BE PLACED AT ALL SLAB BOUNDARIES AND SEALED WITH ELASTOMERIC CAULKING.

FRAMING NOTES:

1. ALL MATERIALS, FASTENERS AND PROCEDURES SHALL BE IN CONFORMANCE WITH THE 2012 NDS, AND SHOULD BE INSTALLED PER THE MANUFACTURER'S SPECIFICATIONS. NAILS SHALL BE COMMON U.N.O.
2. ALL ROOF & FLOOR SHEATHING SHALL BE INSTALLED WITH THE LONG DIRECTION RUNNING PERPENDICULAR TO THE FRAMING MEMBERS.
3. ALL SAWN LUMBER MEMBERS SHALL BE DF-L(N)#2 U.N.O.
4. ALL HARDWARE SHALL BE SIMPSON STRONG TIE, OR APPROVED EQUAL, AND SHALL BE INSTALLED WITH THE MANUFACTURER'S SPECIFIED FASTENERS.
5. MOISTURE CONTENT OF WALL AND FLOOR FRAMING MEMBERS SHALL BE VERIFIED PRIOR TO ENCLOSURE. FRAMING MEMBERS SHALL NOT BE ENCLOSED IF THE MOISTURE CONTENT EXCEEDS 19%.
6. ALL WOOD IN CONTACT WITH CONCRETE SHALL BE PRESSURE TREATED.
7. SOLID 2x BLOCKING SHALL BE PROVIDED AT ENDS AND AT ALL INTERMEDIATE SUPPORTS OF JOISTS AND TRUSSES.
8. PROVIDE THRU-FLOOR SOLID BLOCKING AT ALL COLUMN LOCATIONS FOR A CONTINUOUS LOAD PATH TO THE FOUNDATION.
9. ALL JOISTS, BEAMS, AND RAFTERS SHALL BE PLACED WITH CAMBER UP.
10. ALL HARDWARE IN CONTACT WITH PRESSURE-TREATED WOOD OR EXPOSED TO WEATHER OR SOIL SHALL HAVE A CORROSION RESISTANT COATING.
11. ATTACH RAFTERS, RIM JOISTS AND PERIMETER FLOOR/ROOF BLOCKING TO TOP PLATES w/ 16d T.N. @ 6" O.C., U.N.O.
12. TOP PLATES SHALL HAVE 48" MIN. LAP AT SPLICES WITH (16) STAGGERED 16d NAILS PER CONNECTION.
13. ALL GLULAM BEAMS SHALL BE DF/DF 24F-V4.
14. ALL GLULAM POSTS SHALL BE DF L2D.



TIMBERLINE ENGINEERING
LLC

JUNEAU, ALASKA
907-635-1433
JAGRAVES77@GMAIL.COM

1" ACTUAL

IF THE ABOVE DIMENSION DOES NOT MEASURE ONE INCH (1") EXACTLY, THIS DRAWING WILL HAVE BEEN ENLARGED OR REDUCED, AFFECTING ALL LABELED SCALES.

35% SUBMITTAL
DOUGLAS INDIAN ASSOCIATION AND
TRIBAL GOVERNMENT CULTURAL CENTER

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT
ST. ANNS AVENUE, DOUGLAS, ALASKA


SHEET TITLE:
GENERAL NOTES
& ABBREVIATIONS

CHECKED	JG	
DRAWN	JG	
issue	date	description

SHEET #

S1

ISSUE DATE 06/02/2023

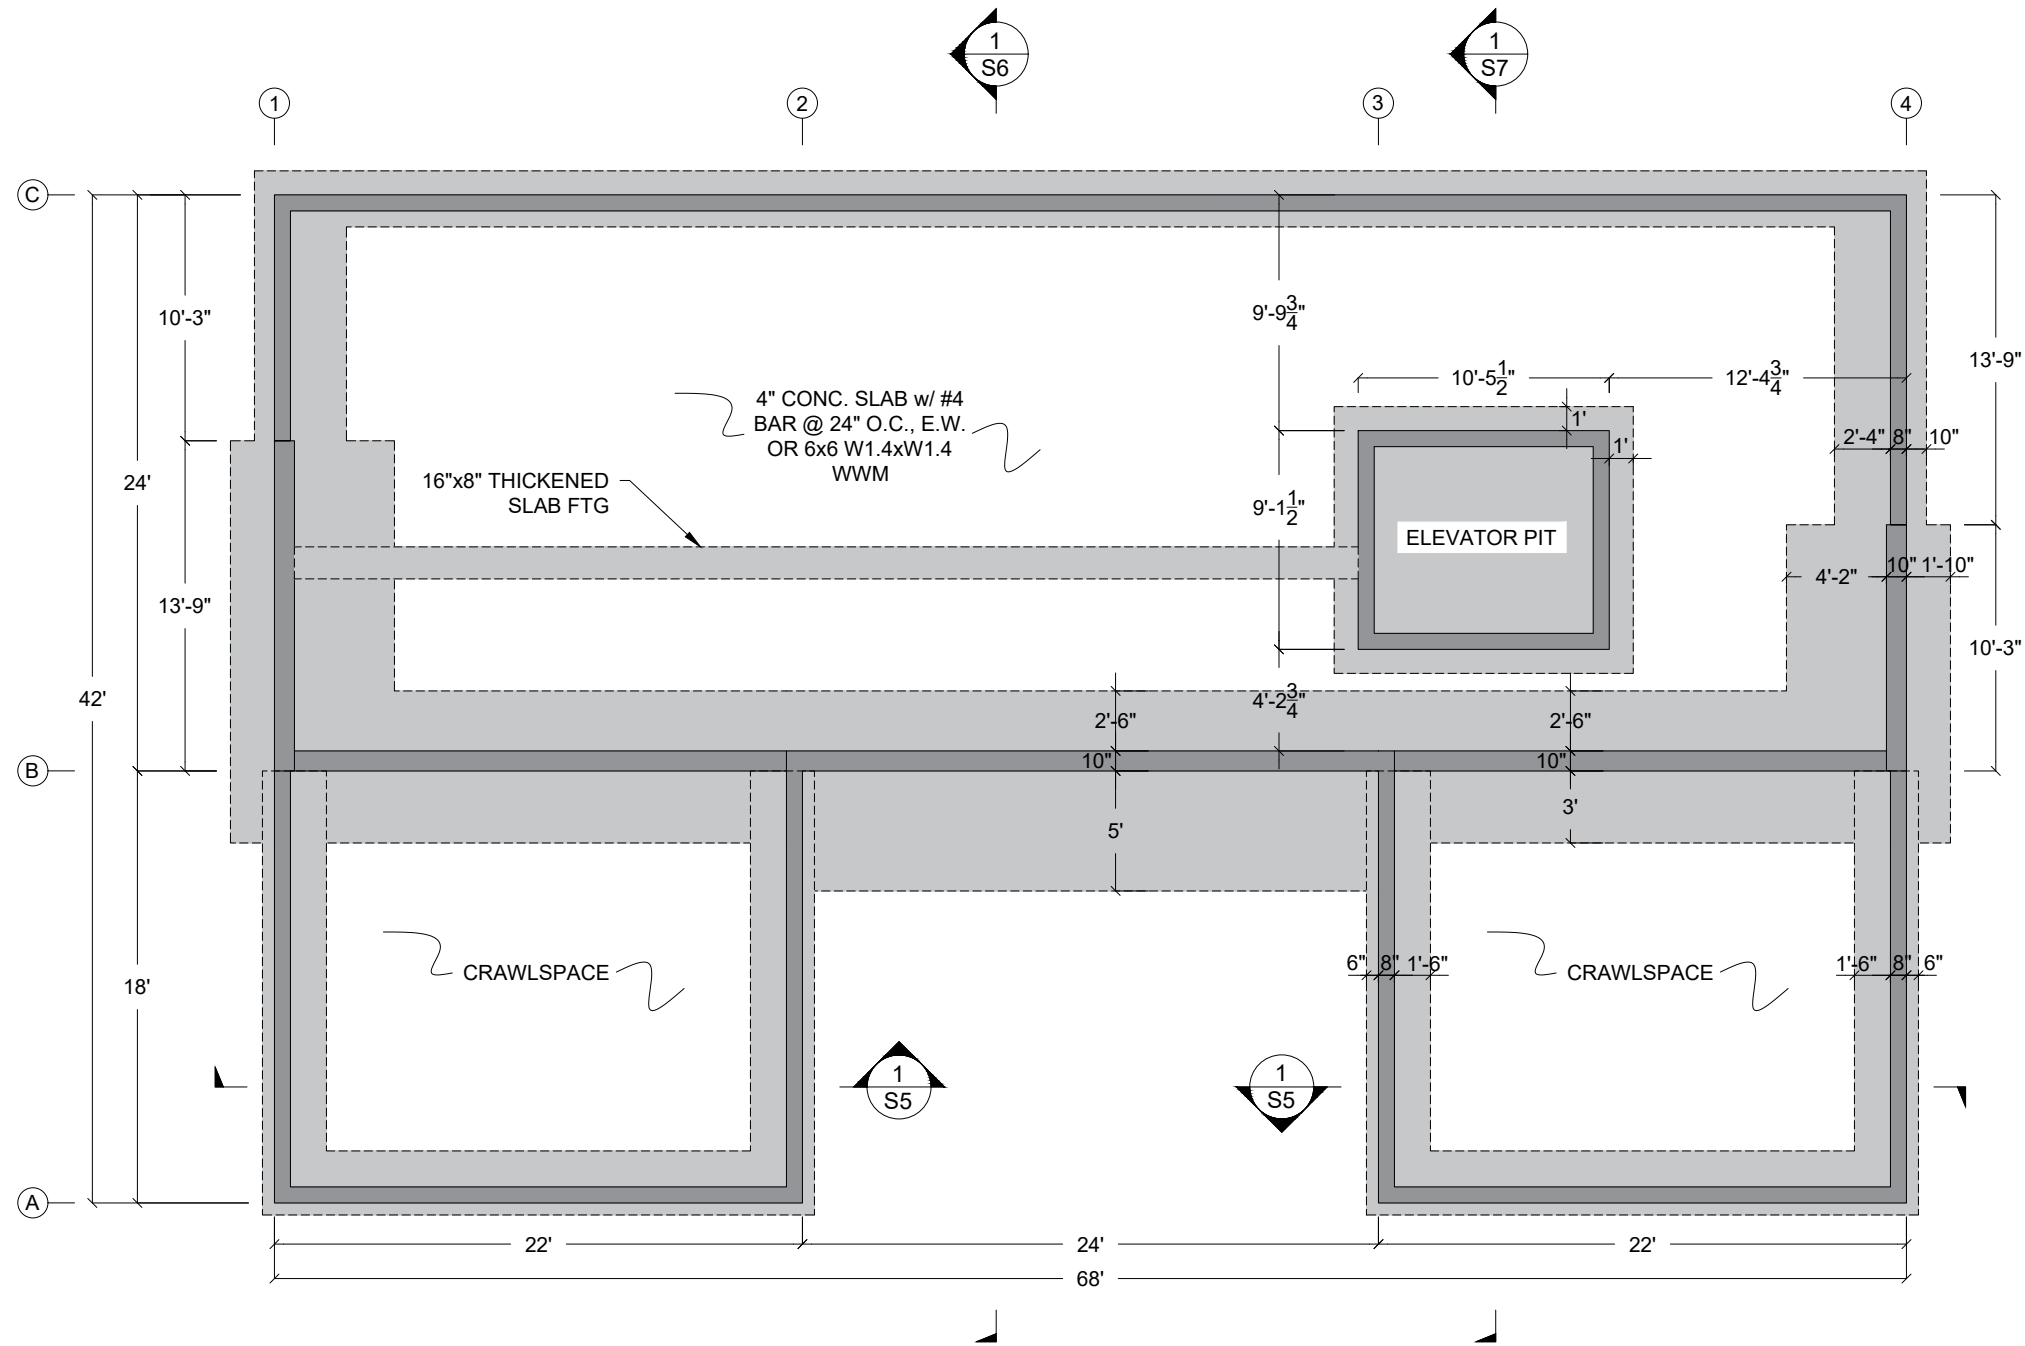

1 FOUNDATION PLAN
1/4" = 1'-0"



TIMBERLINE ENGINEERING
LLC

JUNEAU, ALASKA
907-635-1433
JAGRAVES77@GMAIL.COM

1" ACTUAL

IF THE ABOVE DIMENSION DOES NOT
MEASURE ONE INCH TO EXACTLY THIS
DRAWING WILL HAVE BEEN ENLARGED OR
REDUCED, AFFECTING ALL LABELED SCALES.

35% SUBMITTAL
DOUGLAS INDIAN ASSOCIATION AND
TRIBAL GOVERNMENT CULTURAL CENTER


DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT
ST. ANN'S AVENUE, DOUGLAS, ALASKA

SHEET TITLE:
FOUNDATION PLAN

CHECKED	JG	
DRAWN	JG	
issue	date	description

SHEET #

S2

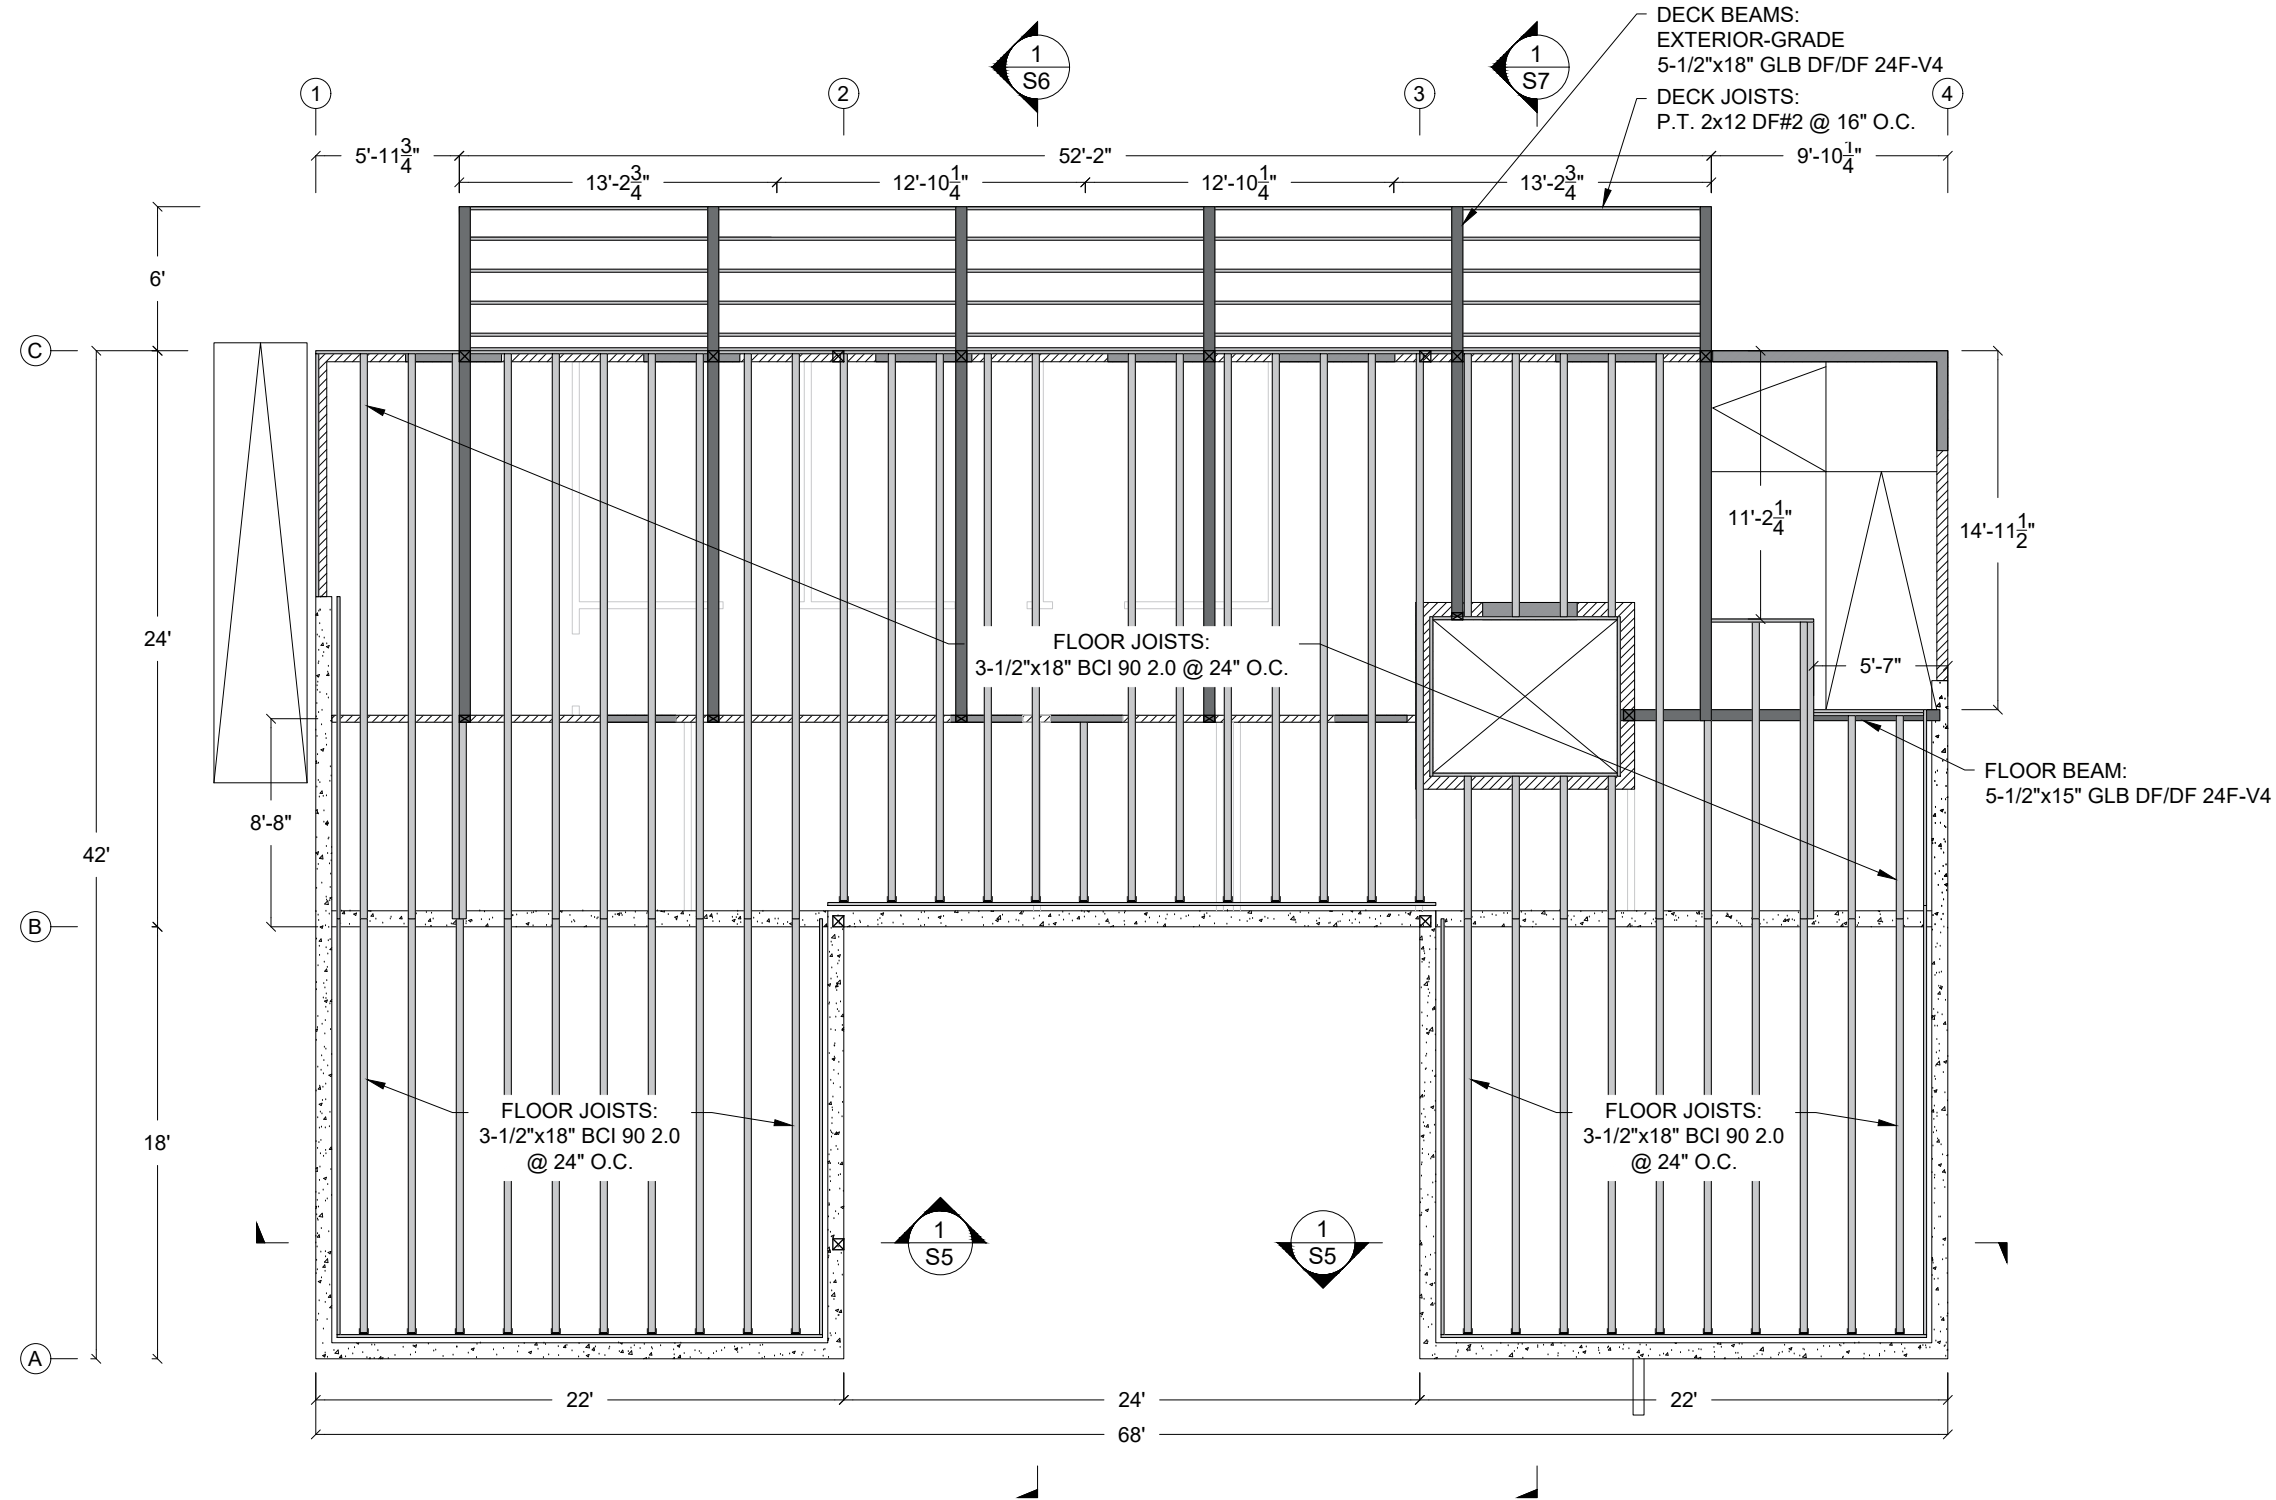

35% SUBMITTAL

DOUGLAS INDIAN ASSOCIATION AND
TRIBAL GOVERNMENT CULTURAL CENTER

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT
ST. ANNS AVENUE, DOUGLAS, ALASKA

SHEET TITLE:
FIRST FLOOR
FRAMING PLAN

CHECKED	JG
DRAWN	JG


issue	date	description
-------	------	-------------


1 FIRST FLOOR FRAMING PLAN
1/4" = 1'-0"



SHEET #
S3

NOTE:
1. HEADERS 6x12 DF#2 U.N.O.

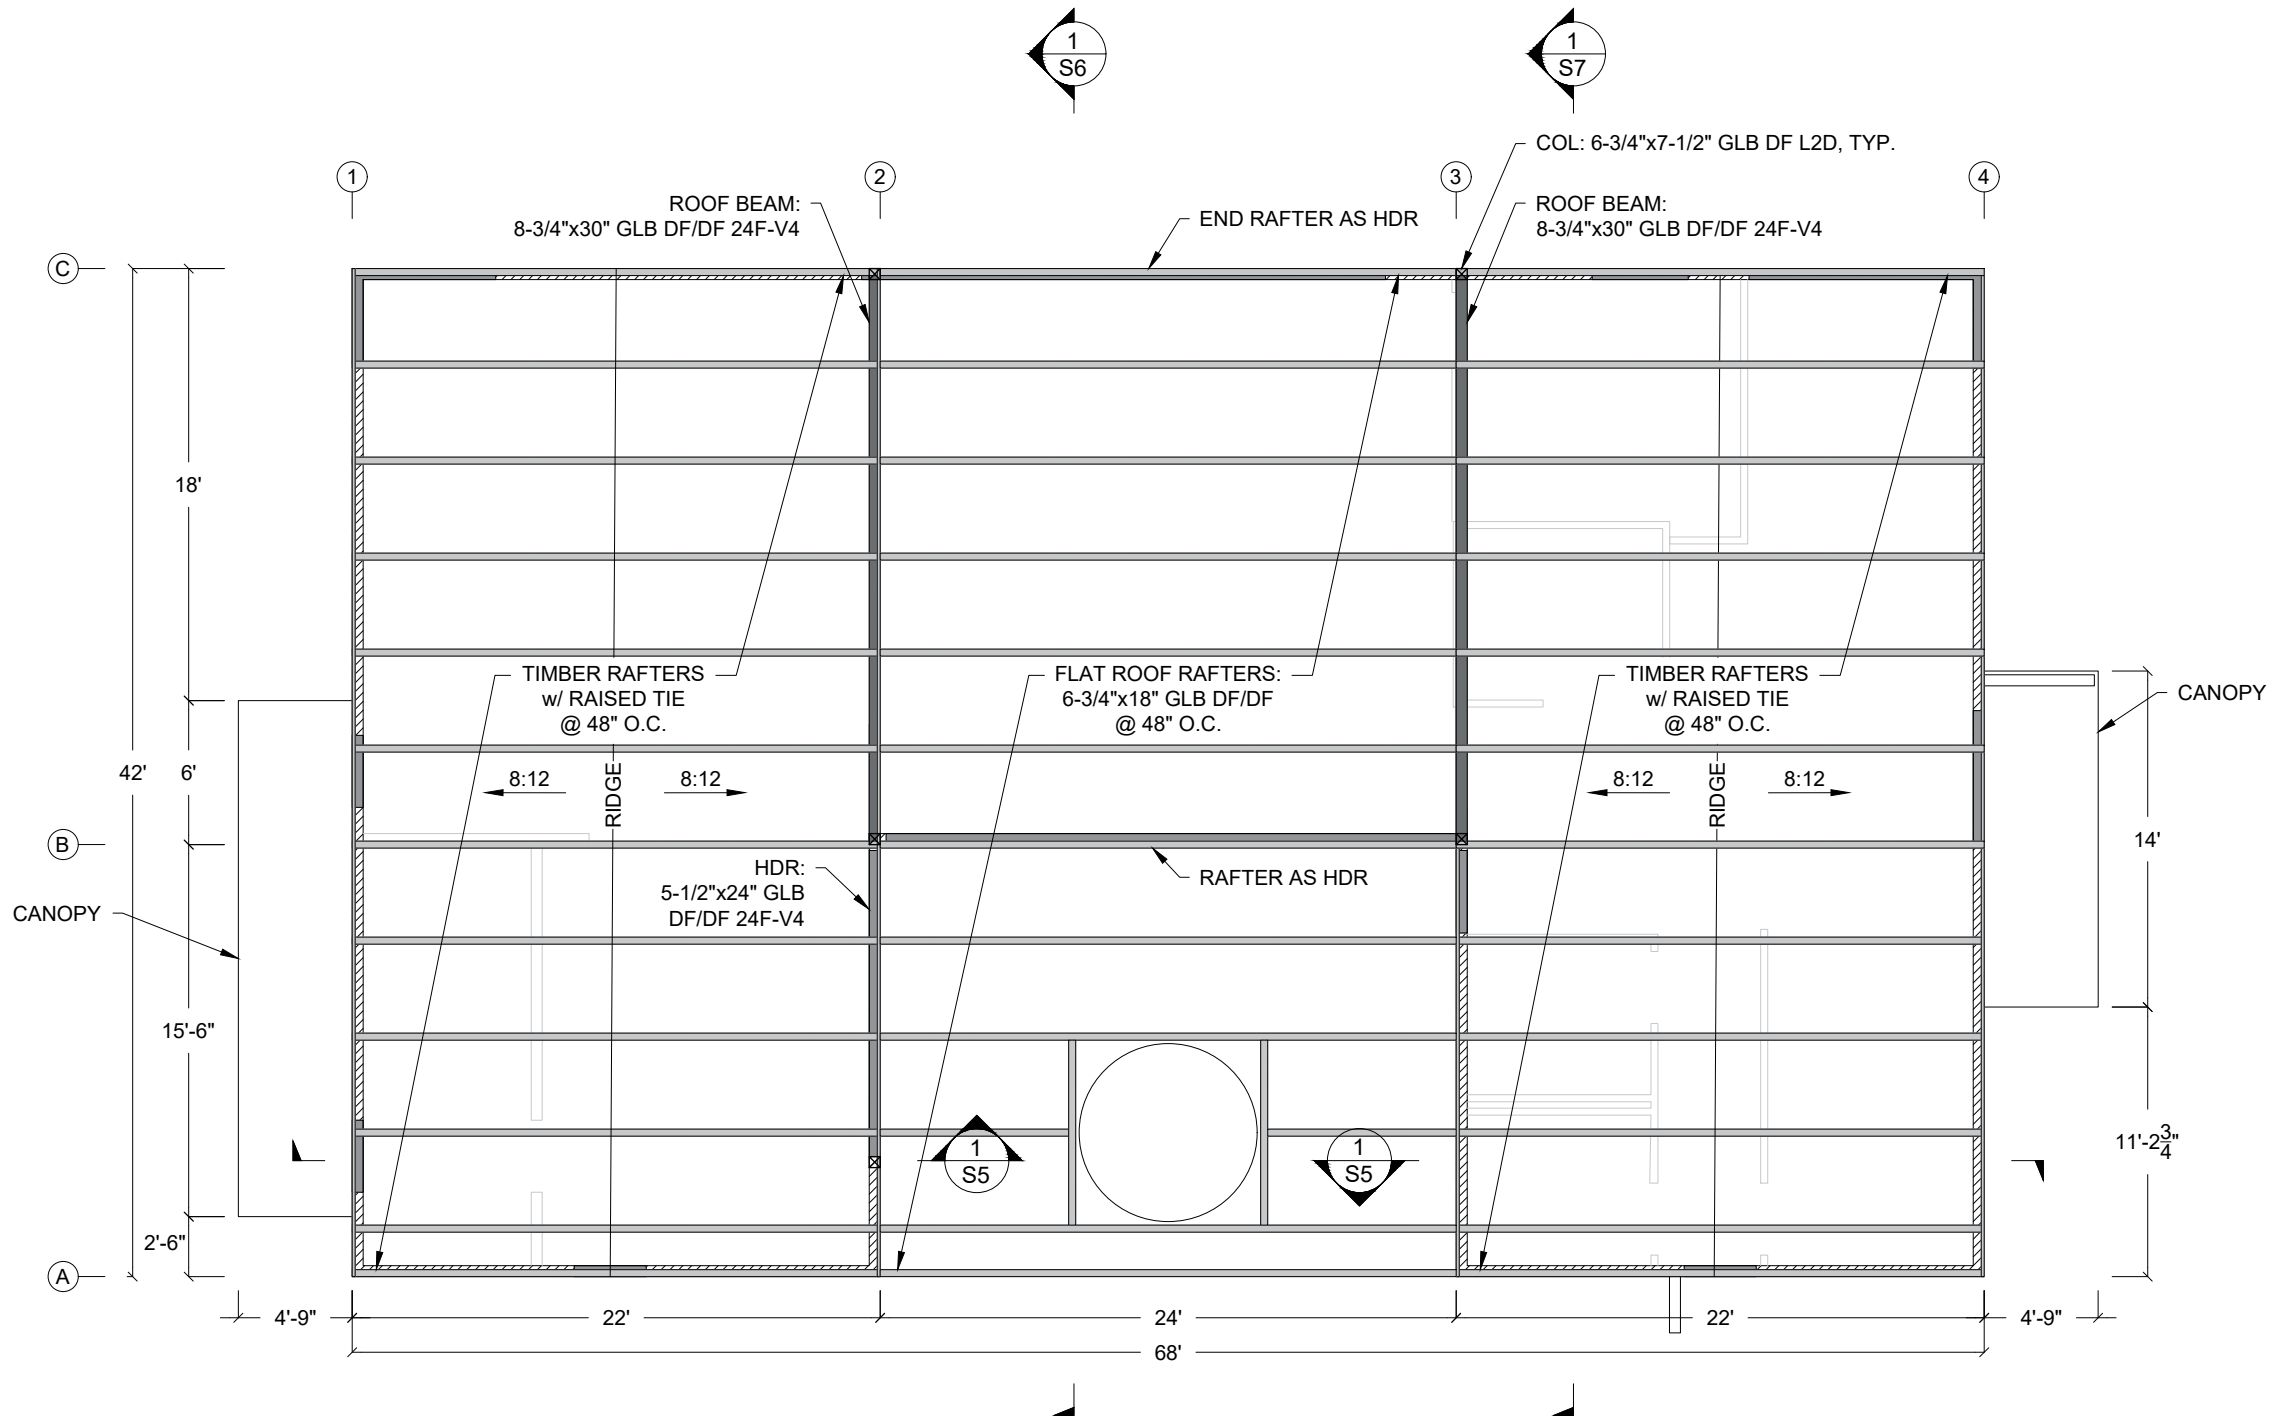



TIMBERLINE ENGINEERING
LLC

JUNEAU, ALASKA
907-635-1433
JAGRAVES77@GMAIL.COM

1" ACTUAL

IF THE ABOVE DIMENSION DOES NOT
MEASURE ONE INCH TO EXACTLY THE
DRAWING WILL HAVE BEEN ENLARGED OR
REDUCED, AFFECTING ALL LABELED SCALES.

35% SUBMITTAL

DOUGLAS INDIAN ASSOCIATION AND
TRIBAL GOVERNMENT CULTURAL CENTER

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT
ST. ANNS AVENUE, DOUGLAS, ALASKA


SHEET TITLE:
ROOF FRAMING PLAN

CHECKED	JG	
DRAWN	JG	
issue	date	description


SHEET #
S4

NOTES:

1. 6" MINIMUM BASE COURSE, GRADING D-1, COMPACTED TO 95% OF MAXIMUM DRY DENSITY, BELOW ALL FOOTINGS AND SLABS

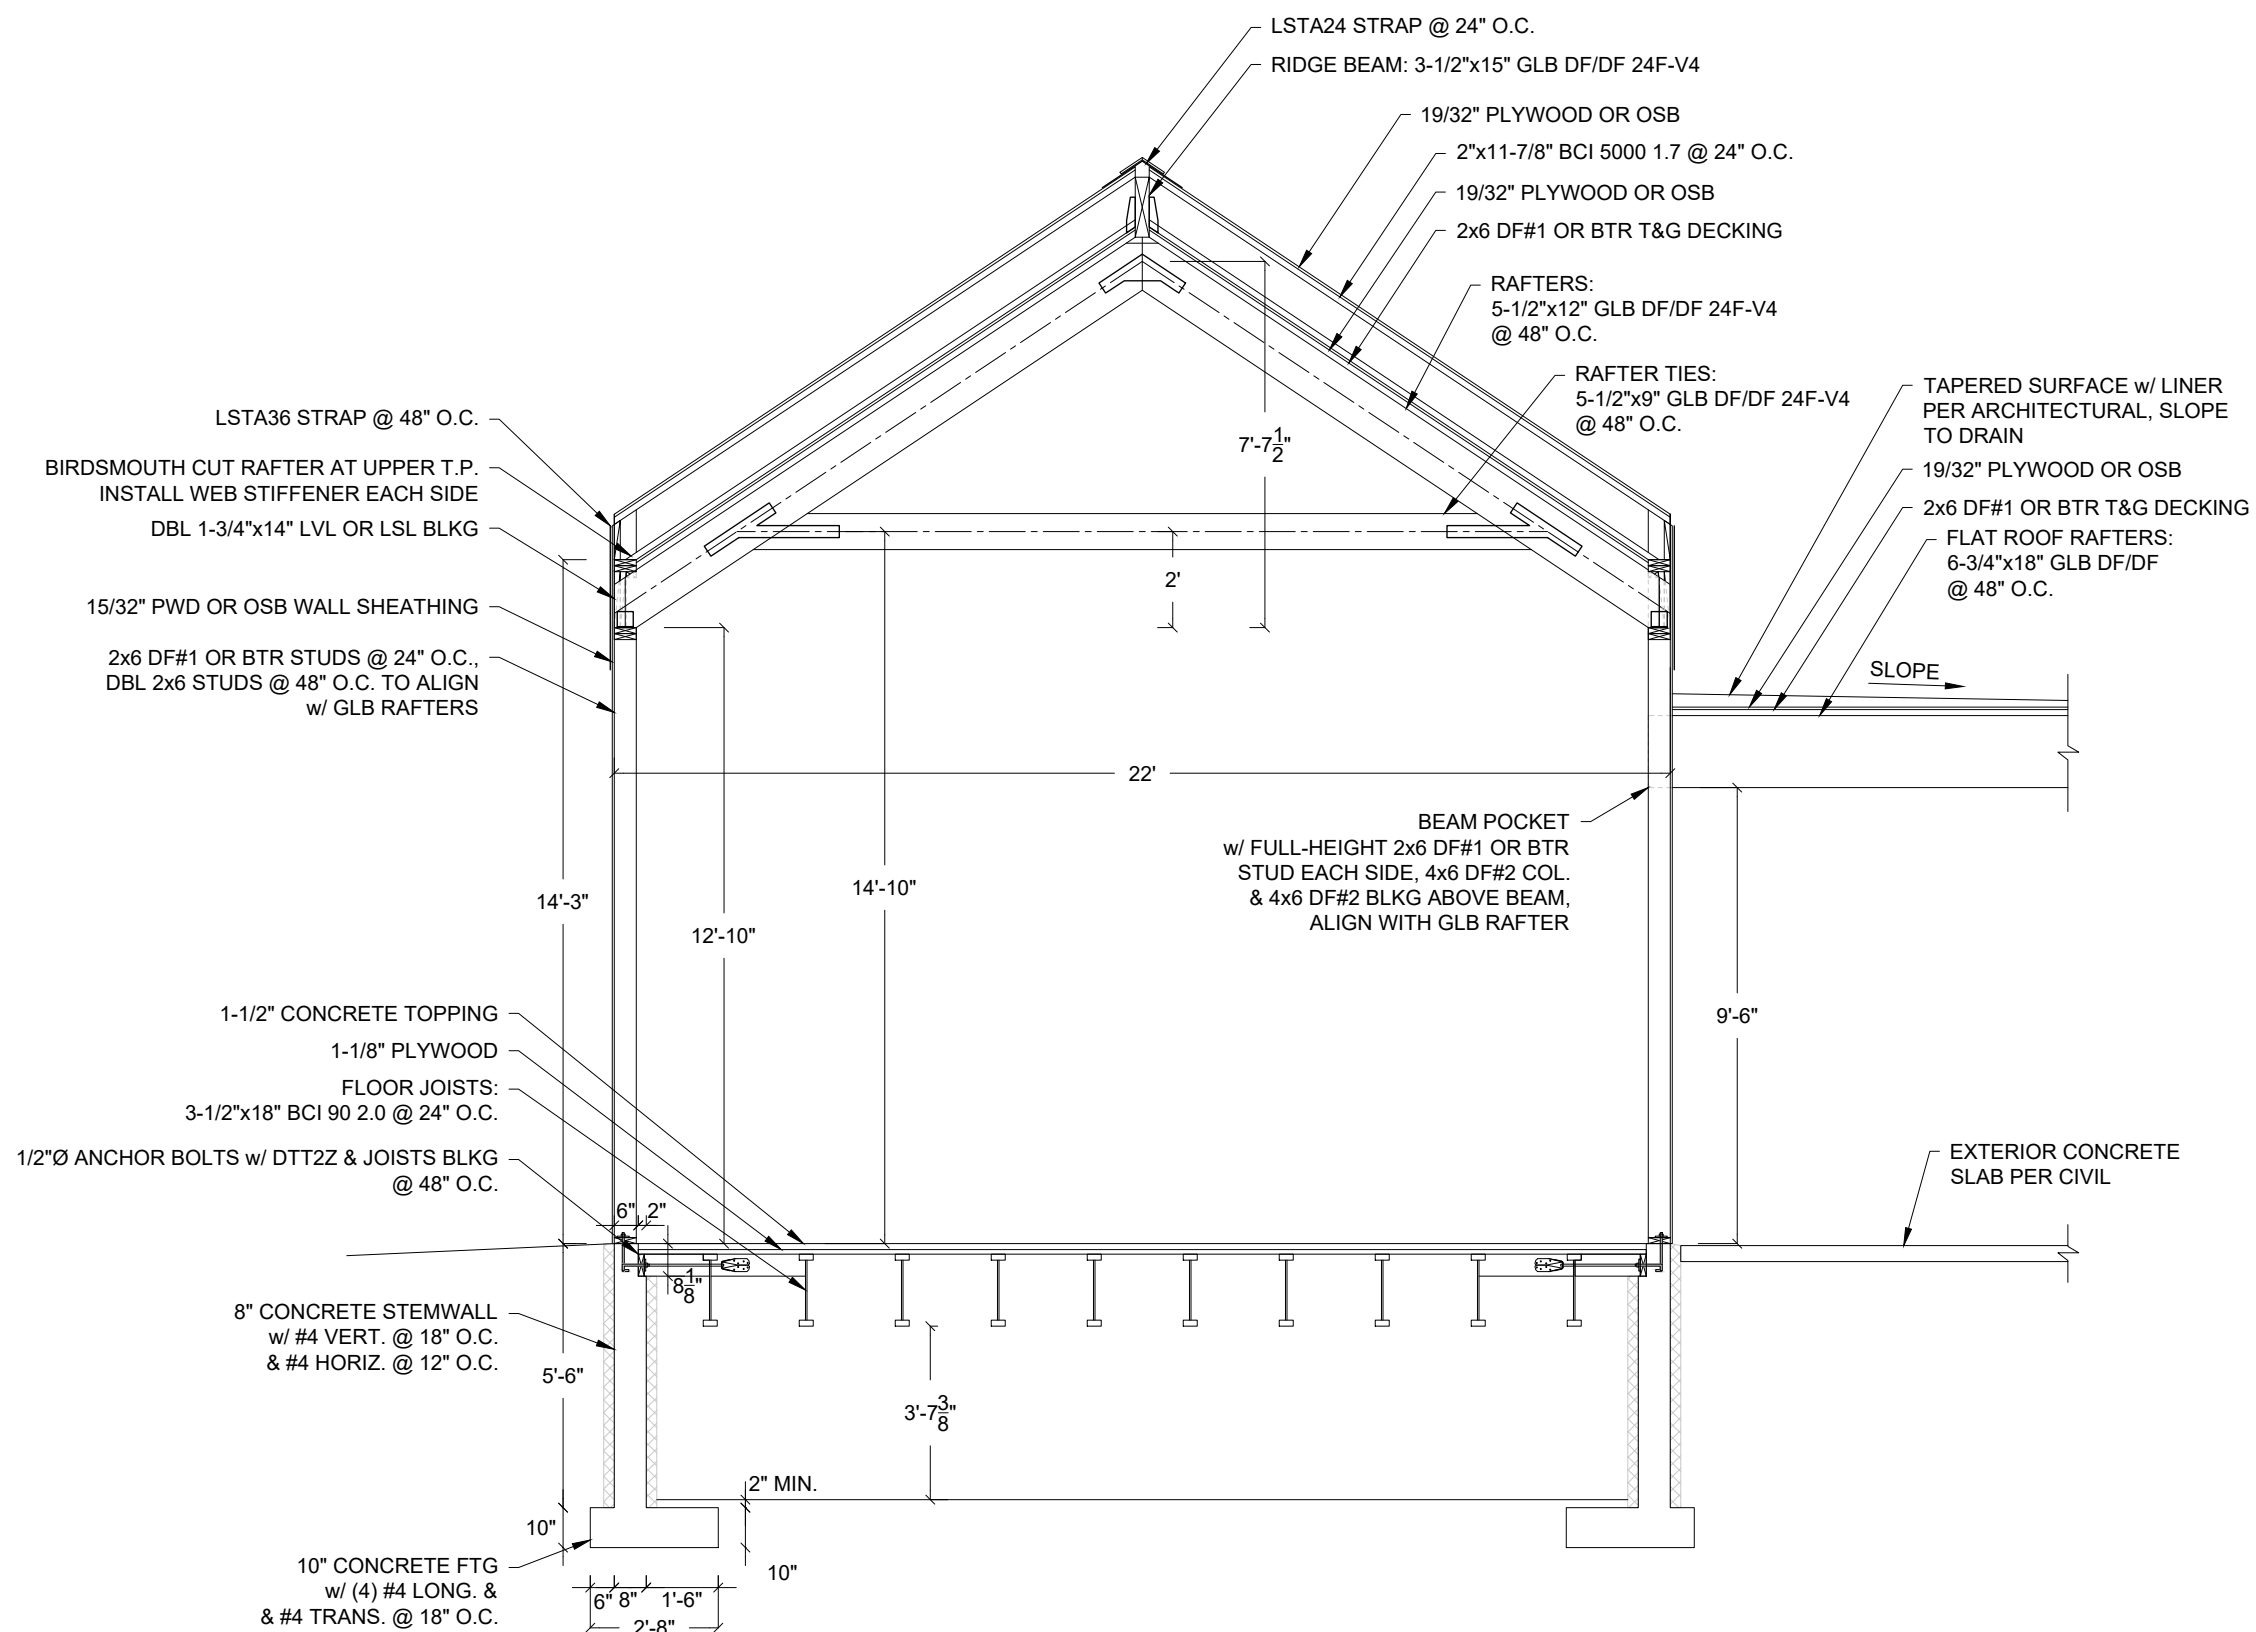

1 SECTION
1/2" = 1'-0"



TIMBERLINE ENGINEERING
LLC

1" ACTUAL

IF THE ABOVE DIMENSION DOES NOT
MEASURE ONE INCH (1") EXACTLY, THIS
DRAWING WILL HAVE BEEN ENLARGED OR
REDUCED, AFFECTING ALL LABELED SCALE

35% SUBMITTAL

**DOUGLAS INDIAN ASSOCIATION AND
TRIBAL GOVERNMENT CULTURAL CENTER**

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT
ST. ANN'S AVENUE, DOUGLAS, ALASKA

SHEET TITLE:
SECTION

CHECKED	JG
DRAWN	JG


issue	date	description
-------	------	-------------


SHEET #

S5

FILE SIZE: 22"x34" ISSUE DATE 06/02/2023

NOTES:
1. 6" MINIMUM BASE COURSE, GRADING D-1, COMPACTED TO 95% OF MAXIMUM DRY DENSITY, BELOW ALL FOOTINGS AND SLABS

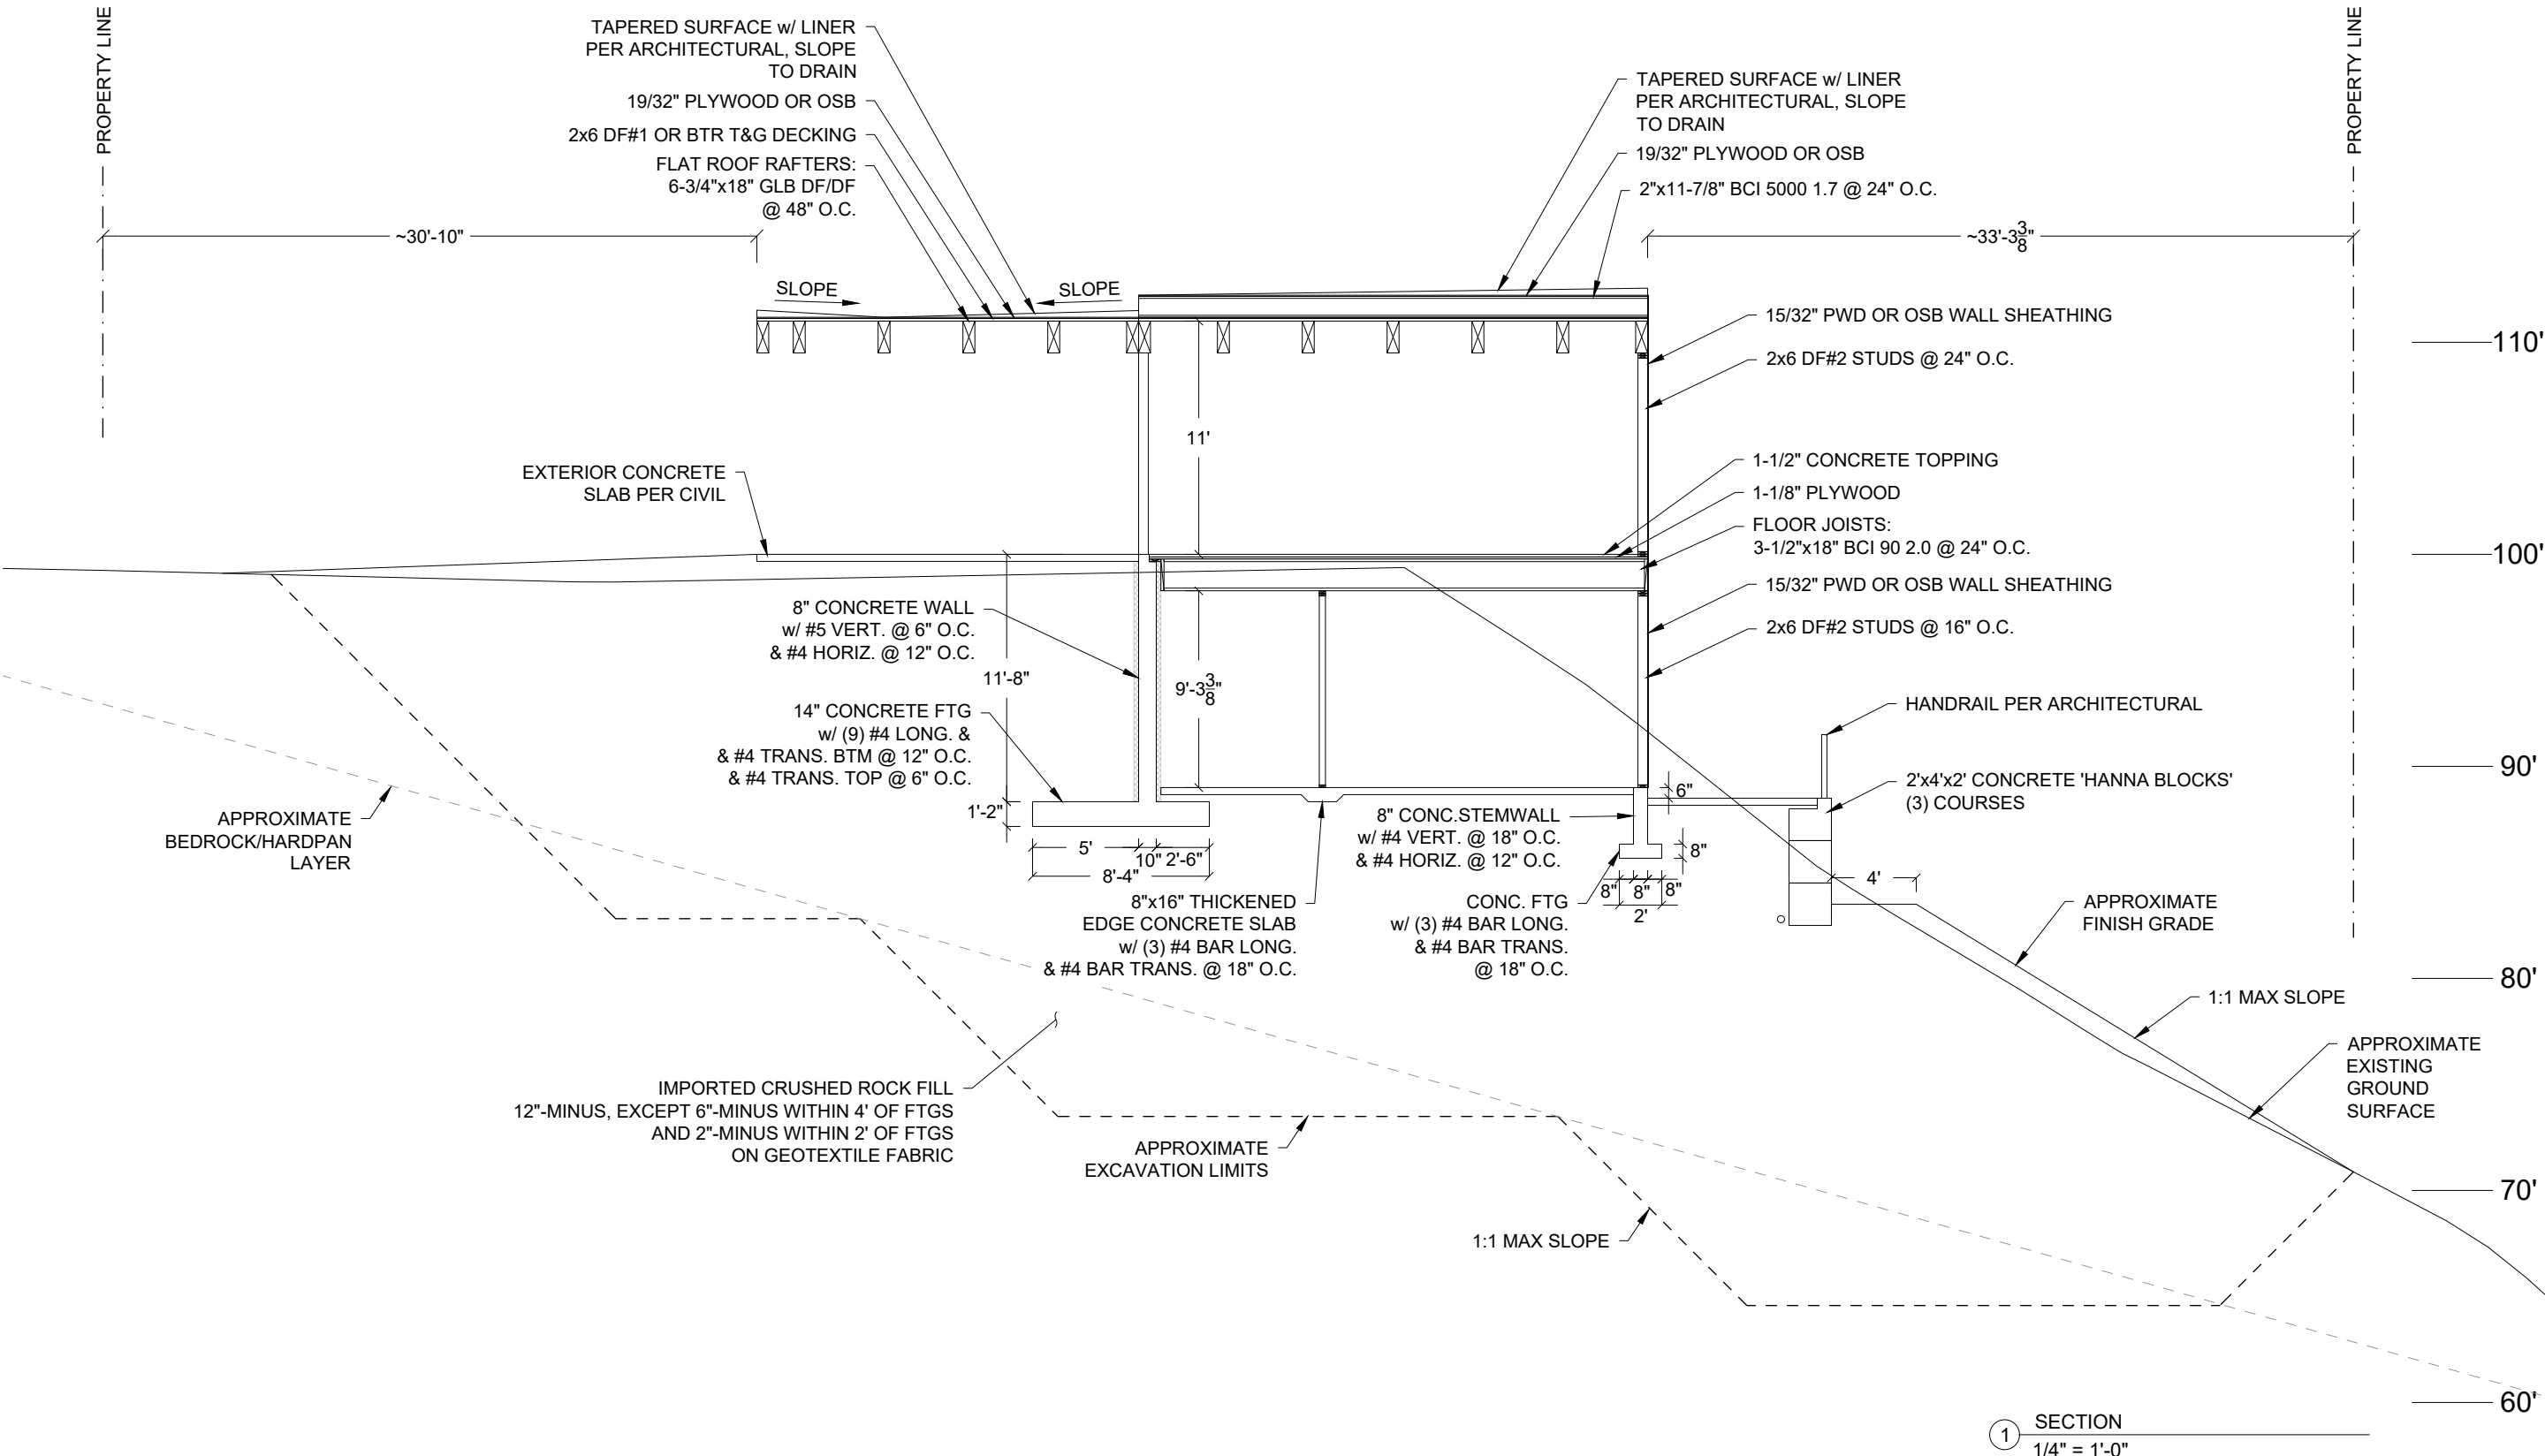



TIMBERLINE ENGINEERING
LLC

JUNEAU, ALASKA
907-635-1433
JAGRAVES77@GMAIL.COM

1" ACTUAL

IF THE ABOVE DIMENSION DOES NOT MEASURE ONE INCH TO EXACTLY THIS DRAWING WILL HAVE BEEN ENLARGED OR REDUCED, AFFECTING ALL LABELED SCALES.

35% SUBMITTAL

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT CULTURAL CENTER

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT
ST. ANN'S AVENUE, DOUGLAS, ALASKA


SHEET TITLE:
SECTION


CHECKED	JG
DRAWN	JG

issue	date	description
-------	------	-------------

SHEET #
S6

NOTES:
1. 6" MINIMUM BASE COURSE, GRADING
D-1, COMPACTED TO 95% OF MAXIMUM
DRY DENSITY, BELOW ALL FOOTINGS
AND SLABS

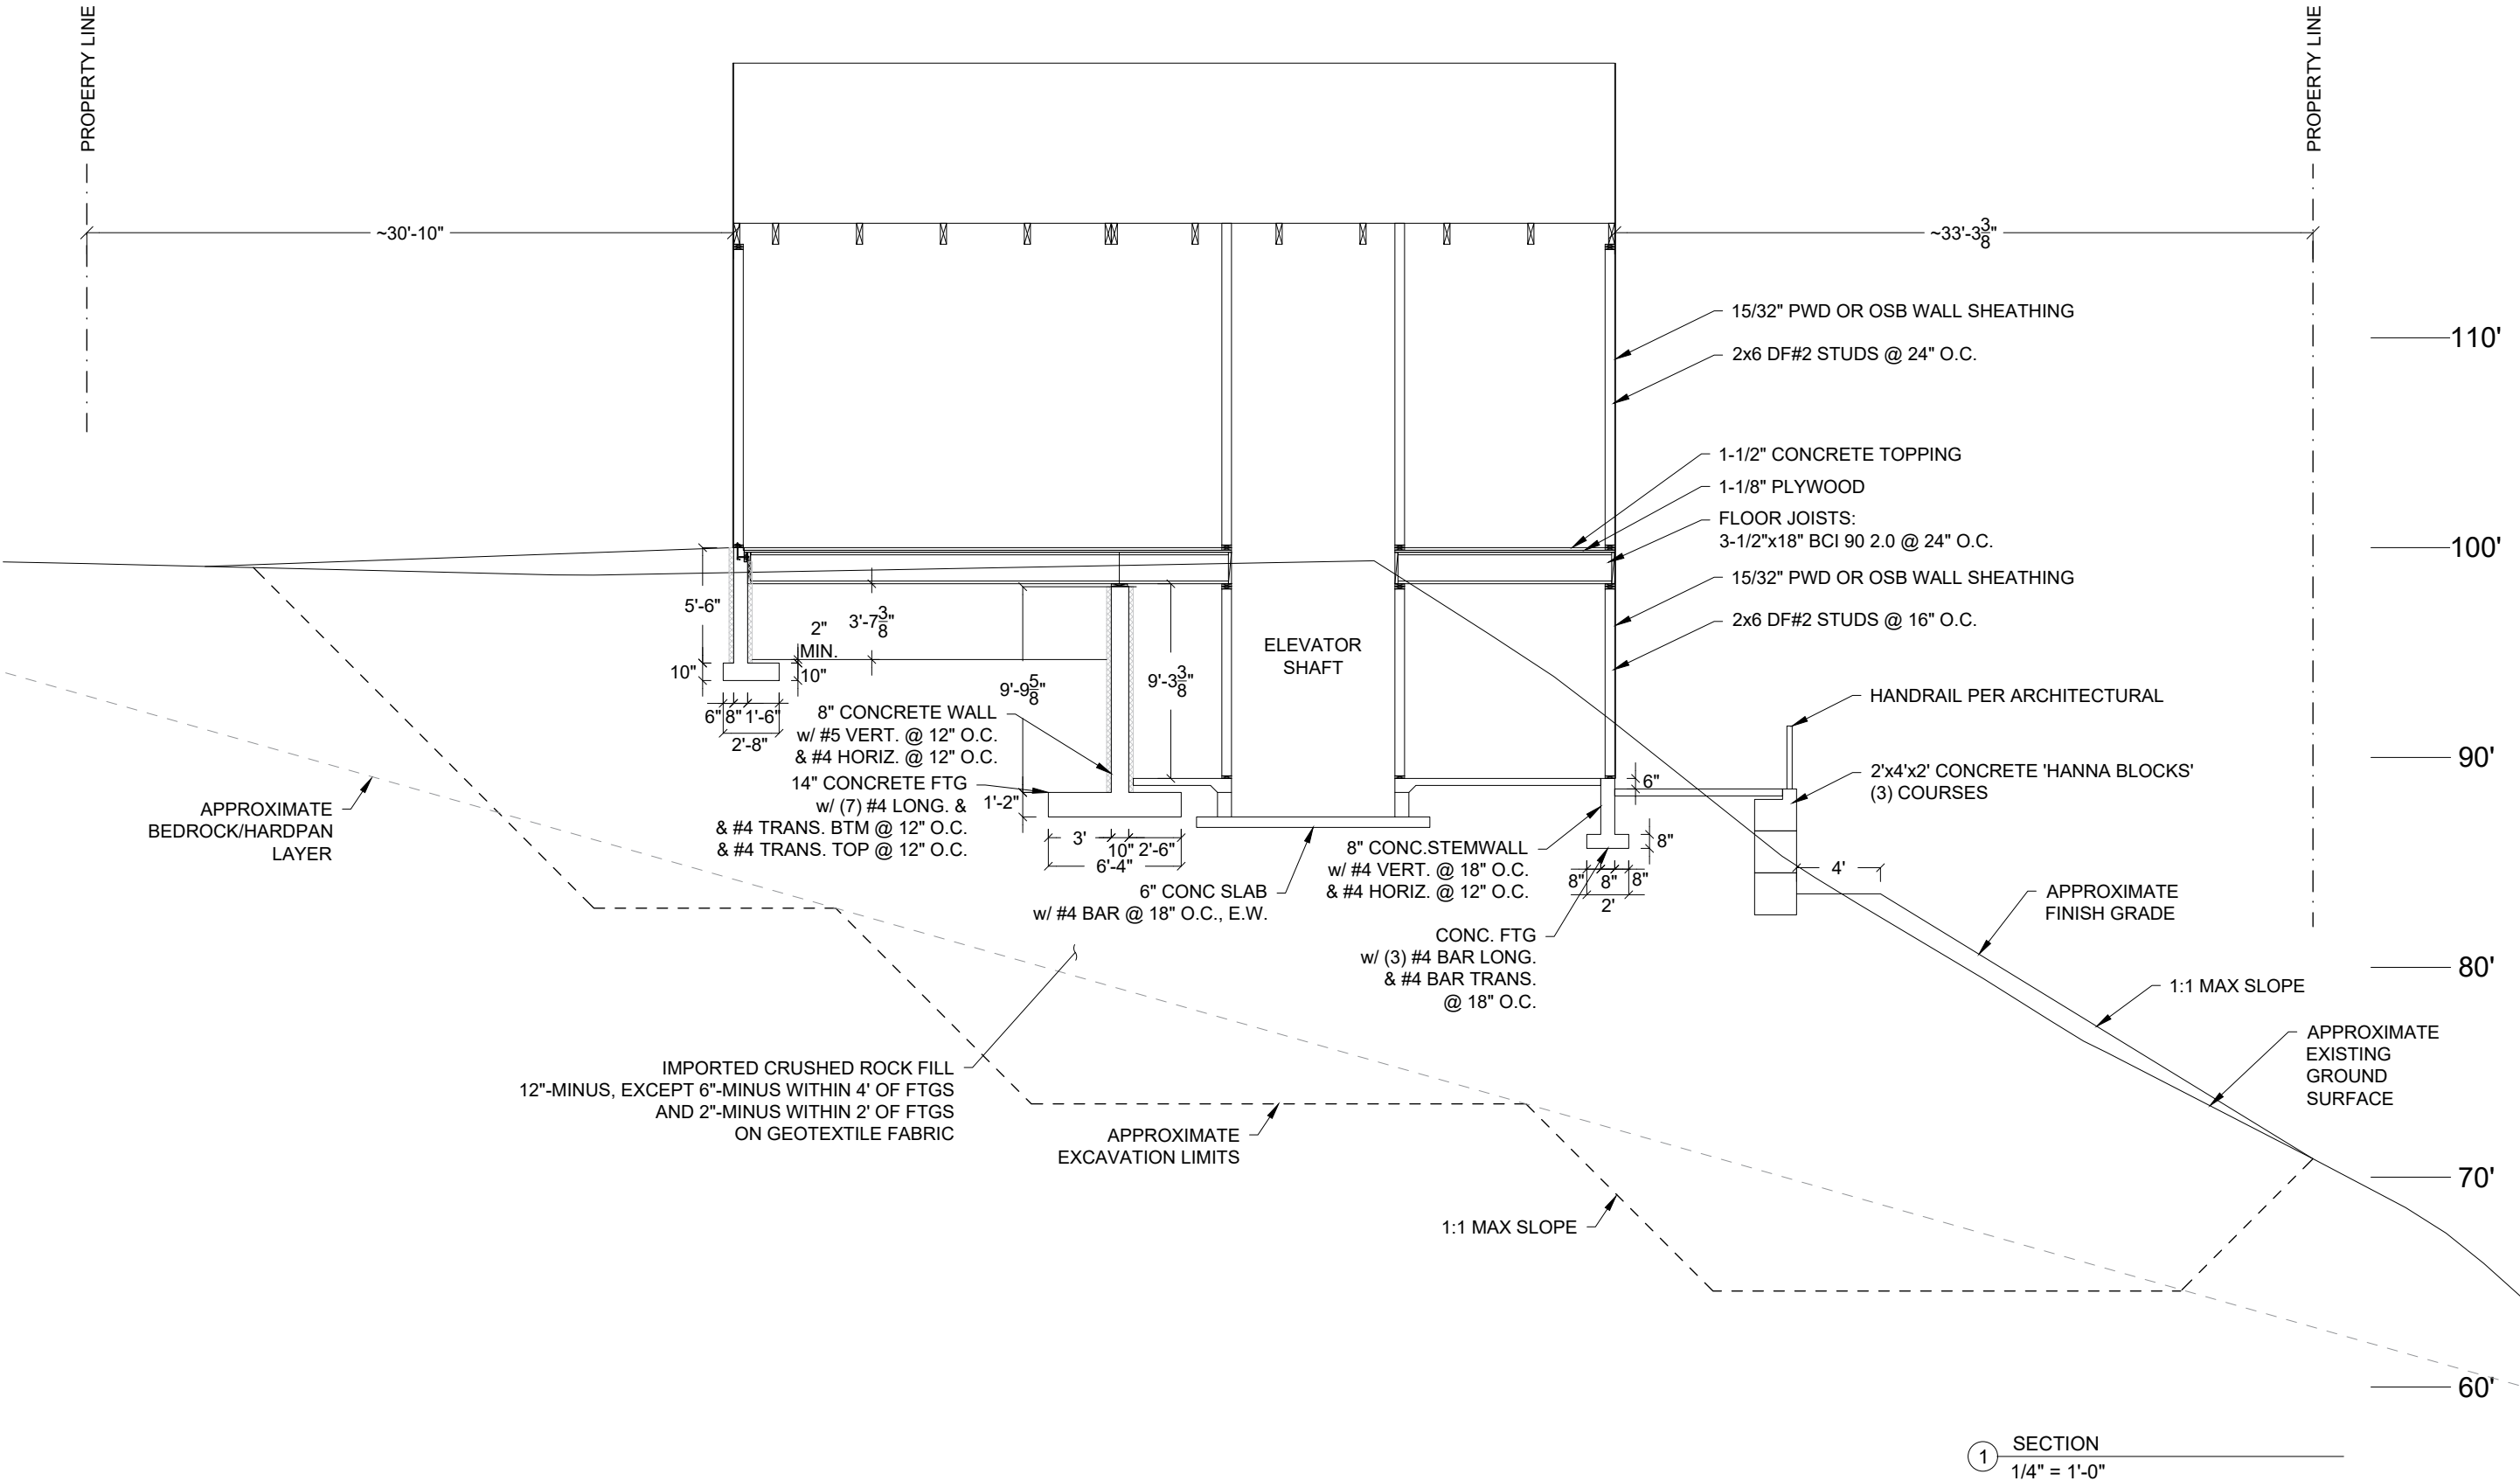



TIMBERLINE ENGINEERING
LLC

JUNEAU, ALASKA
907-635-1433
JAGRAVES77@GMAIL.COM

1" ACTUAL

IF THE ABOVE DIMENSION DOES NOT
MEASURE ONE INCH TO EXACTLY 1" THIS
DRAWING WILL HAVE BEEN ENLARGED OR
REDUCED, AFFECTING ALL LABELED SCALES.

35% SUBMITTAL

DOUGLAS INDIAN ASSOCIATION AND
TRIBAL GOVERNMENT CULTURAL CENTER

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT
ST. ANN'S AVENUE, DOUGLAS, ALASKA

SHEET TITLE:
SECTION

CHECKED	JG	
DRAWN	JG	
issue	date	description

SHEET #

S7

@ NorthWind Architects, LLC, Project Number: NWA-2206

PLUMBING FIXTURE SCHEDULE								
LABEL	FIXTURE	HW	CW	W	V	DESIGN MANUFACTURER	MODEL	COMMENTS
FD	FLOOR DRAIN	-	1/2"	3"	1-1/2"	ZURN	FD1	SUPPLY WITH TRAP PRIMER CONNECTION.
ET-1	EXPANSION TANK	-	1/2"	-	-	AMTROL	ST-5	2 GALLON TANK .9 GALLON ACCEPTANCE, 1 EACH WATER HEATER
HB	NON-FREEZE HOSE BIBB	-		-	-	WOODFORD	MODEL 25	8" WALL THICKNESS
KS	KITCHEN SINK	1/2"	1/2"	2"	1-1/2"	KOHLER	SINK -K-5267-3 FAUCET -K-R10651-SD	DROP-IN INSTALLATION 3-HOLE 8" O.C. , INSTALL CLEAN OUT ABOVE TRAP ARM.
L	LAVATORY	1/2"	1/2"	1-1/2"	1-1/2"	SINK -KOHLER FAUCET -AMERICAN STANDARD	SINK- K-2356 FAUCET- K-16027-4	SINGLE HOLE COUNTERTOP LAVATORY AND FAUCET
RD	ROOF DRAIN	-	-	3"	-	ZURN	Z-Z121-C	3" NO HUB
WC	WATER CLOSET	-	1"	3"	2"	AMERICAN STANDARD	3351.101	SUPPLY WITH SLOAN TOUCH LESS FLUSH VALVE #111 ESS-1.28-OR-HW, BEMIS #1955SSCT OPEN FRONT SEAT, PDI SIZE "A" HAMMER ARRESTER AND NECESSARY WALL CARRIER.

KITCHEN EQUIPMENT SCHEDULE												
LABEL	LOCATION	BASIS OF DESIGN		DRIVE	AIR FLOW MAX	ESP	RPM	ELECTRICAL				COMMENTS
		MANUFACTURER	MODEL					PH	V	HP	AMPS	
KEH-1	KITCHEN	CAPTIVEAIRE	5424 ND-2	-	800 CFM	0.58" W.C.	-	1	120V	-	-	LIGHTS CONTROL PANEL, 15 AMP CIRCUIT, FIRE SUPPRESSION AND CONTROL CABINET ON RIGHT, ZERO CLEARANCE TO COMBUSTIBLES ON BACK AND TOP OF HOOD.
KEF-1	ROOF	CAPTIVEAIRE	DU85HFA	DIRECT	800 CFM	1.3" W.C.	1229	1	115V	0.75	8.9FLA	ECM EXHAUST FAN, PROVIDE WITH INSULATED VENTED PITCHED ROOF CURB.
MAU-1	STORAGE/WET ROOM	ELECTRO INDUSTRIES	EM-MD10-208-3-10	DIRECT	600 CFM	0.5" W.C.	-	3	208V	0.20	26.6	MAKE UP AIR UNIT TO BE ENERGIZED WHEN KEF-1 IS ENERGIZED. 9.6KW ELECTRIC COIL.

HRV SCHEDULE											
LABEL	LOCATION	BASIS OF DESIGN		DRIVE	CFM	TSP	ELECTRICAL				COMMENTS
		MANUFACTURER	MODEL				PH	V	MCA	CONTROL	
HRV-1	MECH	GREENHECK	ECV-10H-VG-P	DIRECT	900 SA 900 EA	0.675" SA 0.7" EA	1	208V	15.8	MICRO PROCESSOR	HINGED ACCESS, MICRO PROCESSOR CONTROLLER, CONSTANT VOLUME, ON/OFF CONTROL, ELECTRIC HEATER ENABLE WITH OA RESET, REMOTE PANEL WITH 75' CORD, DIRTY FILTER SENSORS, TIMED EXHAUST FROST CONTROL, OUTDOOR AND RETURN AIR LOW LEAKAGE CONTROL DAMPERS.

OUTDOOR UNIT SCHEDULE												
LABEL	TYPE	BASIS OF DESIGN		NOMINAL		ELECTRICAL				REFRIGERANT TYPE	PIPING CONNECTIONS	COMMENTS
		MANUFACTURER	MODEL	COOLING CAPACITY	HEATING CAPACITY	PH	V	MCA	MOP			
ODU-1, 2	AIR TO WATER	SPACEPAK	ILAHP	45,500 BTU/HR	53,200 BTU/HR	1	230V	45.0	50	410A	1-1/4" NPT	


FAN COIL SCHEDULE										
LABEL	SERVICE	BASIS OF DESIGN		CAPACITY	AIRFLOW		ELECTRICAL			COMMENTS
		MANUFACTURER	MODEL		CFM	ESP	PH	V	AMPS	
FC-1	CULTURAL EDUCATION	SPACEPAK	WCSP-3642J	42,000 BTU/HR	850 CFM	0.50" W.C.	1	230V	3.8	7/8" NPT SUPPLY AND RETURN WATER CONNECTIONS
FC-2	MAIN FLOOR EAST WING	SPACEPAK	WCSP-3642J	42,000 BTU/HR	850 CFM	0.50" W.C.	1	230V	3.8	7/8" NPT SUPPLY AND RETURN WATER CONNECTIONS

PUMP SCHEDULE													
LABEL	DESCRIPTION	BASIS OF DESIGN		TYPE	FLOW	HEAD	FLUID	ELECTRICAL					COMMENTS
		MANUFACTURER	MODEL					PH	V	HP	AMPS	CONTROL	
SP-1	BASEMENT SEWAGE EJECTOR	E ONE	IH091	GRINDER STATION	13 GPM	15'	WASTE	1	115V	1	-	INTEGRAL FLOAT	

WATER HEATER SCHEDULE										
LABEL	SERVICE	BASIS OF DESIGN		TYPE	STORAGE	FIRST HOUR RATING	ELECTRICAL			COMMENTS
		MANUFACTURER	MODEL				PH	V	MOP	
WH-1, 2	DOMESTIC FULL BUILDING	AO SMITH	HPTS-50	HYBRID	50 GAL	65 GAL	1	208V	30	DUAL 4,500W NON-SIMULTANEOUS HEATING ELEMENTS FOR BACKUP

ELECTRIC BOILER SCHEDULE								
LABEL	BASIS OF DESIGN		FLUID	ELECTRICAL			CONNECTIONS	COMMENTS
	MANUFACTURER	MODEL		PH	V	AMPS		
B-1	ELECTRO INDUSTRIES	EB-CX-36-20	100% WATER	3	208V	100	2" NPT	36KW ELECTRIC BOILER

BUFFER TANK SCHEDULE						
LABEL	SERVICE	BASIS OF DESIGN		PORTS	STORAGE	COMMENTS
		MANUFACTURER	MODEL			
BT-1	HEATING FULL BUILDING	IBC	IWT 119-MAX	4	119MAX	INSTALL AQUASTAT IN FACTORY THERMOWELL
BT-2	COOLING FULL BUILDING	IBC	IWT 119-MAX	4	119MAX	INSTALL AQUASTAT IN FACTORY THERMOWELL

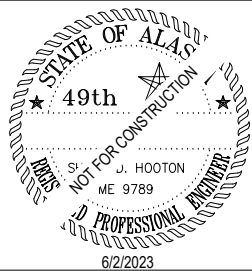

MODERN MECHANICAL

Mechanical Engineers

11001 Black Bear Rd.
Juneau, Alaska 99801

(907) 789-9320 phone
shane@modern-mechanical.com

←1" ACTUAL →
IF THE ABOVE DIMENSION DOES NOT MEASURE ONE INCH (1") EXACTLY, THIS DRAWING WILL HAVE BEEN ENLARGED OR REDUCED, AFFECTING ALL LABEL SCALES.

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT

TRIBAL GOVERNMENT CULTURAL CENTER

DOUGLAS INDIAN ASSOCIATION AND TRIBAL GOVERNMENT
ST. ANAS AVENUE
DOUGLAS, ALASKA

SHEET TITLE: SCHEDULES		
CHECKED	SDH	
DRAWN	DRB	
issue	date	description



June 2, 2023

Douglas Indian Association and Tribal Government Cultural Center
Electrical Narrative

General

The electrical systems will comply with accepted codes, standards and recommended practices common to the electrical industry and as required by local and state authorities, including the following:

- National Electrical Code (NEC)
- International Fire Code (IFC)
- National Fire Protection Association (NFPA)
- Illuminating Engineering Society (IES)
- National Electrical Manufacturers Association (NEMA)
- National Electrical Contractors Association (NECA)

All equipment will be listed and labeled by a nationally recognized testing agency acceptable to the State of Alaska.

Utility Services and Distribution Equipment

The building will require a three-phase service for mechanical equipment loads and the elevator. An overhead utility extension is required from the 400-block on St. Anns Avenue to bring three-phase power to the site. Primary power will route from the nearest utility pole, underground to a pad mounted transformer located on the west side of the building. The transformer will feed a combination utility meter and 400 amp main circuit breaker located on the west exterior wall. A 400 amp, 120/208 volt three-phase main panelboard will be located in the Mechanical Room to serve the elevator, mechanical equipment, and Level 0 workstations, lighting and convenience receptacles. A sub-feed panelboard rated 225 amp, 120/208 volt, three-phase will be located in the Storage / Wet Room to supply Level 01 workstations, lighting, convenience receptacles and kitchen equipment. Both panelboards will be provided with surge protection devices to protect downstream equipment from transient voltages.

Indoor equipment will be NEMA 250, Type 1. Equipment buses and conductor connections will be tin-plated aluminum. Panelboards will be surface mounted. Overcurrent protective devices will be molded case circuit breakers. All equipment will be commercial grade.

Communications Services and Distribution Equipment

Telephone and coax services will terminate on a 2-foot wide plywood backboard in the mechanical space. A data rack will be provided in the storage / computer lab space. The data rack will house patch panels, Owner provided network equipment, and head-end equipment for access control and camera surveillance systems. An uninterruptible power supply will be provided to supply back-up power to the communications head-end equipment and data rack.

Connecting blocks, cross-connects, and patch panels will be 110-style with insulation displacement connectors. Patch panels will be 48-port, minimum. The racks will be equipped with horizontal and vertical cable management and power strips.

Feeders and Branch Circuits

Feeders and branch circuits will be single conductors in conduit. All conductors will be copper with insulation Type THHN-THWN. Connectors and splices will be of size, ampacity rating, material, type, and class for application and service required. Feeders and branch circuits will be concealed, except in unfinished spaces.

Grounding and Bonding

Insulated copper equipment grounding conductors will be provided with all feeders and branch circuits.

Hangers and Supports

The project will comply with NECA for application of hangers and supports for electrical equipment and systems. Interior support devices will be steel; exterior will be hot-dip galvanized with stainless steel hardware.

Raceways and Boxes

Exposed, outdoor conduit and interior locations subject to damage will be galvanized rigid steel. Electrical metallic tubing will be utilized for interior raceways not subject to damage or concealed in finished surfaces. Connections to vibrating equipment shall be flexible metal conduit, except liquid-tight flexible metal conduit will be applied in damp or wet locations. Outlet and device boxes will be sheet metal.

Identification for Electrical Systems

Branch circuit conductors will be identified with self-adhesive vinyl labels where conductors are accessible in panels, junction and pull boxes. All feeders and branch circuits will be color-coded for phase identification with factory applied color or half-lapped tape.

Equipment identification labels will be provided on each unit of equipment including disconnect switches and protection equipment, central or master units, control panels, control stations, and terminal cabinets. Systems include power, lighting, control, communication, signal, monitoring, and alarm.

Mechanical Equipment

The preliminary mechanical load is estimated to be approximately 90kVA. The major loads include an electric boiler, heat pumps, a heat recovery unit with an electric coil, and miscellaneous pumps. Branch circuits and connections for all mechanical equipment will be provided as required. Motors rated ½ HP and larger will be wired 208 volts, 3 phase. Motors less than ½ HP will be wired 120 volt, single phase. Disconnect switches will be heavy-duty type with fuses as required. Motor starter switches will be quick-make, quick-break toggle with on/off indication. Full voltage, across the line, magnetic controllers with bimetallic overload relays will be used for equipment requiring automatic control.

Lighting Systems

All light fixtures will utilize LED technology. Illumination levels shall comply with recommended practices outlined by IES.

Interior light fixtures will predominately be indirect / direct or volumetric type to provide uniform, low-glare illumination. Offices, reception, and the meeting room will be controlled by wall mounted dimmer switches with integral occupancy sensors. Restrooms, mechanical, and the storage rooms will be controlled by wall mounted occupancy sensors. The education classroom will be controlled by dimmers and will likely have multiple control groups. The lobby and corridor will be switched. Exit signs and emergency illumination will be provided as required along the means of egress.

Exterior lighting will be provided in the courtyard, on the balcony, around the building perimeter, and along the exterior stair. Wall mounted light fixtures will be dark sky compliant with cutoff optics to restrict light to the intended area of illumination. Light trespass to adjacent properties will be avoided by utilizing light fixtures with low lumen output. Exterior lighting will be controlled with a photocell and timer. The courtyard may be controlled with an occupancy sensor.

Wiring Devices

Receptacles will be provided for workstations and equipment. The design will provide sufficient devices to allow for flexibility. Convenience receptacles in the lobby and corridor will be located so that no point is more than 20-feet away from a receptacle. Four receptacles will be located in each enclosed office. The education classroom walls will be provided with devices spaced approximately 10-feet apart, with accommodations for a large wall mounted monitor with in-floor connectivity to stream digital content. Receptacles with special configurations will be provided as required by the Owner.

All devices will be specification grade, or better. Convenience receptacles will be 125V, 20A. Ground fault devices will be provided as required by the NEC, non-feed through type. Toggle switches will be 120/277V, 20A. Wall box dimmers will be modular, full-wave, solid-state units with integral, on-off switches. Smooth, high-impact thermoplastic wall plates will be used, except in unfinished spaces where galvanized steel will be allowed. Wet location device plates will be NEMA 250, Type 3R with lockable cover.

Low Voltage Devices and Wiring

All components of the data system will comply with Category 6 performance criteria. Two data outlets with two jacks per outlet will be provided in each enclosed office and workstation. Common work spaces will be provided with jacks as required for convenience and equipment. Network connections will be planned for wireless access points throughout the building. The data system configuration and outlet locations will be coordinated with the Owner's network equipment provider.

Cables shall be 100-ohm, four-pair unshielded twisted pair with thermoplastic jacket. Cables will terminate on a rack mounted patch panel in the storage / computer lab. Conduit for the data system will be 1" minimum. Conduit will be utilized in concealed and exposed conditions, except above accessible ceilings where unenclosed cabling methods may be used.

Camera Surveillance

A basic camera surveillance system will be provided to monitor the building exterior and entries. The system will utilize digital cameras that record on motion, only. Content will be stored on a network video recorder mounted in the data rack located in the storage / computer lab. A network-based software interface will be provided for control and playback.

Door Control

Power will be provided for electronic access control of exterior doors.

Fire Alarm

A basic control panel will be required to monitor the elevator landings for smoke and interface with the elevator controller for recall functions. The Type 1 hood in the kitchen is also required to be monitored for an alarm condition. The control panel will dial out to a constantly attended location for dispatch and sound a local audible and visual signal.