

□ = OPTION NOT INCLUDED IN SET ■ = OPTION INCLUDED IN SET

GENERAL NOTES	ABBREVIATIONS	CODE DATA AND SQUARE FOOTAGE	SHEET INDEX	PROJECT TEAM DIRECTORY
---------------	---------------	------------------------------	-------------	------------------------

PROJECT TEAM DIRECTORY

- | | | | |
|--------|--|--------|-------------------------------|
| | CENTERLINE | I.D. | INSIDE DIAMETER |
| ACM | ALUMINUM COMPOSITE PANEL | INSUL. | INSULATION |
| ACT | ACOUSTICAL CEILING TILE | JT. | JOINT |
| ADJ. | ADJUSTABLE | KED | KITCHEN EQUIPMENT DISTRIBUTOR |
| A.F.F. | ABOVE FINISH FLOOR | LAM | LAMINATE |
| A.H.J. | AUTHORITY HAVING JURISDICTION | LB(S). | POUND(S) |
| ALUM. | ALUMINUM | MAX. | MAXIMUM |
| A.O.R. | ARCHITECT OF RECORD | MECH. | MECHANICAL |
| ARCH. | ARCHITECTURAL | MFR. | MANUFACTURER |
| BD. | BOARD | MGR. | MANAGER |
| BLDG. | BUILDING | MIN. | MINIMUM |
| BLKG. | BLOCKING | MISC | MISCELLANEOUS |
| BM. | BEAM | MTL. | METAL |
| BOT. | BOTTOM | N. | NORTH |
| CAB. | CABINET | N.I.C. | NOT IN CONTRACT |
| CER. | CERAMIC | N.T.S. | NOT TO SCALE |
| CLG. | CEILING | (N) | NEW |
| CLKG. | CAULKING | NO. | NUMBER |
| CLR. | CLEAR | NOM. | NOMINAL |
| COL. | COLUMN | O.D. | OUTSIDE DIAMETER |
| CONC. | CONCRETE | OPNG. | OPENING |
| CONT. | CONTINUOUS | OPP. | OPPOSITE |
| COORD. | COORDINATE | P.LAM. | PLASTIC LAMINATE |
| DBL. | DOUBLE | P.L. | PLATE |
| DET. | DETAIL | PLAS. | PLASTER |
| DIA. | DIAMETER | PLYWD. | PLYWOOD |
| DIM. | DIMENSION | PR. | PAIR |
| DND | DO NOT DISTURB | PT. | POINT |
| DR. | DOOR | P.T. | PRESSURE-TREATED |
| DS. | DOWNSPOUT | P.U.W. | PULL UP WINDOW |
| DWG. | DRAWING | RAD. | RADIUS |
| (E) | EXISTING | REF. | REFERENCE |
| EA. | EACH | REG. | REGISTER |
| ELEV. | ELEVATION | REQ'D. | REQUIRED |
| ELEC. | ELECTRICAL | RM. | ROOM |
| EMER. | EMERGENCY | S. | SOUTH |
| EQ. | EQUAL | S.C. | SOLID CORE |
| F/MAS | FACE OF MASONRY | S.F. | SQUARE FOOT |
| F.D. | FLOOR DRAIN | S.S. | STAINLESS STEEL |
| F.S. | FLOOR SINK | SCHED. | SCHEDULE |
| F.D.N. | FOUNDATION | SHT. | SHEET |
| F.E. | FIRE EXTINGUISHER | SHTHG. | SHEATHING |
| F.O. | FACE OF | SIM. | SIMILAR |
| F.O.F. | FACE OF FINISH | S.O.W. | SCOPE OF WORK |
| F.O.S. | FACE OF STUDS | SPEC. | SPECIFICATION |
| F/F | FINISH TO FINISH | SQ. | SQUARE |
| F.R. | FIRE RETARDANT | STD. | STANDARD |
| FIN. | FINISH | STL. | STEEL |
| FL. | FLOOR | STOR. | STORAGE |
| FLUOR. | FLUORESCENT | SUSP. | SUSPENDED |
| FT. | FOOT, FEET | T.C. | TIME CLOCK |
| F.V. | FIELD VERIFY | T.O. | TOP OF |
| G.B. | GRAB BAR | TEL. | TELEPHONE |
| G.C. | GENERAL CONTRACTOR | THK. | THICK |
| GA. | GAUGE | TYP. | TYPICAL |
| GL. | GLASS | U.N.O. | UNLESS NOTED OTHERWISE |
| GYP. | GYPSUM | VERT. | VERTICAL |
| H. | HIGH | V.I.F. | VERIFY IN FIELD |
| H.C. | HOLLOW CORE | W. | WEST |
| H.M. | HOLLOW METAL | W/ | WITH |
| HC. | HANDICAPPED | W/C | WATER CLOSET |
| HDWD. | HARDWOOD | W/O | WITHOUT |
| HORIZ. | HORIZONTAL | W/R | WATER RESISTANT |
| HGT. | HEIGHT | WD. | WOOD |
| H.T. | HANGER-TIGHT UNIT | | |
| HVAC | HEATING, VENTILATION, AIR CONDITIONING | | |

WATER DISTRICT: SAN DIEGUITO WATER DISTRICT
PH: 760-633-2650

SANITATION DISTRICT: ENCINITAS SANITARY DISTRICT
PH: 760-633-2770

	NEW GRID LINE		DETAIL REFERENCE SHEET NUMBER				
	DOOR MARK	9	ELEVATION NUMBER & DIRECTION				
	WINDOW MARK	11 (6A) 12	SHEET NUMBER				
	KEY NOTE	10					
	EQUIPMENT NOTE		ELEVATION HEIGHT TARGET LOCATION IN SPACE				
	ELEVATION REFERENCE SHEET NUMBER	<table border="1" data-bbox="854 1784 930 1808"> <tr> <td>CEILING</td> <td>WALL</td> </tr> <tr> <td>FLOOR</td> <td>BASE</td> </tr> </table>	CEILING	WALL	FLOOR	BASE	FINISH CODE (SEE SCHEDULE)
CEILING	WALL						
FLOOR	BASE						
	SECTION DETAIL REFERENCE SHEET NUMBER		REVISION SYMBOL				
	ROOM NAME		REVISION CLOUD				

FRANCHISEES HAVE THE OPTION OF NOT FOLLOWING WENDY'S
CORPORATE WARRANTY RECOMMENDATIONS OUTLINED IN THE THESE
DOCUMENTS.

SITE AREA CALCULATIONS	
<u>BLDG. COVERAGE</u>	
WENDY'S BLDG.	2,232 SF
NORTH BLDG.	46,194 SF
WEST BLDG.	8,032 SF
	TOTAL 56,458 SF
<u>LOT SQUARE FEET</u>	
GROSS LOT AREA	271,057 SF (PL TOTAL)
NET LOT AREA	271,057SF - 60,143SF (EASEMENTS) = 210,914SF
<u>LOT COVERAGE</u>	30% / 19%
<u>FAIR</u>	56,458/ 271,057= 0.208
	1.0 MAX. / 0.208 ACTUAL
<u>BUILDING SUMMARY:</u>	
EXISTING: 2,232 SQ.FT.	
THE SQUARE FOOTAGE REMAINS UNCHANGED	

OCCUPANCY CALCULATIONS:					
FLOOR	USE	SQUARE FOOTAGE	OCCUPANT LOAD FACTOR	NUMBER OF OCCUPANTS	NUMBER OF SEATS
1 OF: 1	DINING (UNCONCENTRATED)	901 SQ.FT.	1:15	60	62
1 OF: 1	DINING (STANDING)	109 SQ.FT.	1:5	22	-
1 OF: 1	KITCHEN	952 SQ.FT.	1:200	5	-
1 OF: 1	RESTROOMS	94 SQ.FT.	-	-	-
1 OF: 1	UNOCCUPIED AREAS*	176 SQ.FT.	-	-	-

TOTAL NUMBER OF OCCUPANTS:			87	-
* UNOCCUPIED AREAS INCLUDE: FREEZER/COOLER, WALLS, CLOSET, HALL, AND VESTIBULE				
** BOOTH (FIXED SEATING CALCULATIONS BASED ON LENGTH OF BOOTHS: 1 PER 24" OF BOOTH LENGTH).				
EGRESS CALCULATION:	TOTAL OCCUPANTS	INCH PER OCCUPANT	EGRESS WIDTH REQUIRED:	EGRESS WIDTH PROVIDED:
	87	0.20"	18"	96" TOTAL

TOTAL EXITS REQUIRED:		2	TOTAL EXITS PROVIDED:		3
EGRESS WIDTH PROVIDED PER EXIT:					32"
THE LOSS OF ONE REQUIRED MEANS OF EGRESS SHALL NOT REDUCE THE EGRESS CAPACITY TO LESS THAN 50% OF REQUIRED.					

A map showing the project site location. A red pin marks the site at 102 Encinitas Boulevard. A line points from the text 'PROJECT SITE' to the pin. Nearby landmarks include a Shell gas station and an ATM. The map also shows Encinitas Blvd and a green area to the left.

		REVISION				
		1	2	3	4	5
G1.1	COVER SHEET					
G2.1	SUPPLIER'S LIST & RESPONSIBILITY CHRT.					
AS1	ACCESSIBILITY SHEET					
AS2	ACCESSIBILITY SHEET					
AS3	ACCESSIBILITY SHEET					
D1.1	DEMOLITION FLOOR PLAN					
SP1.0	OVERALL SITE PLAN					
SP1.1	SITE PLAN					
ASD1.0	ENLARGED SITE PLANS AND DETAILS					
A1.1	FLOOR, FINISH, & EQUIPMENT PLAN					
A1.2	REFLECTED CEILING PLAN					
A1.3	ROOF PLAN					
A2.1	EXTERIOR ELEVATIONS DEMOLITION					
A2.2	EXTERIOR ELEVATIONS					
A3.1	WALL SECTIONS & DETAILS					
A4.1	SECTION DETAILS & MISC. DETAILS					
A4.2	PLAN DETAILS & MISC. DETAILS					
A5.1	FINISH DETAILS					
A6.1	FINISH SCHEDULE					
A7.1	INTERIOR ELEVATIONS - DINING ROOM					
A7.2	INTERIOR ELEVATIONS - RESTROOMS & WAREWASH					
SN1	STRUCTURAL NOTES AND SPECIFICATIONS					
S1.0	FOUNDATION PLAN					
S2.0	ROOF FRAMING PLAN					
SD1	STRUCTURAL DETAILS					
SD2	STRUCTURAL DETAILS					
P1.1	PLUMBING PLAN & SCHEDULE					
E1.1	ELECTRICAL PLAN					
SP1	SPECIFICATIONS					
SP2	SPECIFICATIONS					
SP3	SPECIFICATIONS					
SP4	SPECIFICATIONS					

THE WORK INCLUDES ALL LABOR, MATERIALS, AND EQUIPMENT TO REPLACE EXISTING PRE-FABRICATED FASCIA AND INTERIOR FINISHES FOR A PROPOSED REFRESH OF AN EXISTING RESTAURANT FOR THE "OWNER". THE WORK SHALL INCLUDE ALL ITEMS REQUIRED AS SHOWN ON THE DRAWINGS. ALL ELECTRICAL SYSTEMS AND PLUMBING ARE TO BE INCLUDED FOR A COMPLETE OPERATING SYSTEM WITH COORDINATION AND INSTALLATION INCLUDED. SCOPE INCLUDES DINING ROOM REMODEL NEW SEATING LIGHTING WALL PER/ PAINT, ADA UPGRADE OF RESTROOMS AND SITE (INSTALL NEW RAMP TO PUBLIC RIGHT OF WAY). EXTERIOR PAINT AND CLADDING. REFURBISH OF EXISTING SITE SIGNAGE, NO INCREASE IN SQ. FT. REMOVE AND PLACE (E) BUILDING WALL SIGNS. EXISTING LANDSCAPE TO REMAIN NO CHANGE. PAINT AND REPAIR (E) 72" TALL CMU TRASH ENCLOSURE. THERE WILL BE NO ONSITE CONSTRUCTION TRAILER.

CLIENT	WKS RESTAURANT GROUP
	2735 CARSON ST, STE 200
	LAKEWOOD, CA 90712
	CONTACT: RANDY HALE
	TEL: (562) 354-4828
ARCHITECT	PM DESIGN GROUP
	6930 DESTINY DR., STE 100
	ROCKLIN, CA 95677
	CONTACT: JACK POWERS
	TEL: (707) 205-4460
RESTAURANT DESIGN	THE WENDY'S COMPANY
	ONE DAVE THOMAS BLVD.
	DUBLIN, OH. 43017
	CONTACT:
	TEL:
	FAX:
MEP ENGINEER	ROBISON ENGINEERS
	19401 40TH AVE W, STE 302
	LYNNWOOD, WA 98036
	CONTACT: JAMES YBARRA
	TEL: (206) 364-3343
	FAX: (425) 835-0098
STRUCTURAL ENGINEER	CULLUMBER ENGINEERING & DESIGN INC.
	6930 DESTINY DR #300
	ROCKLIN, CA 95677
	CONTACT: COLLIN DILLWORTH
	TEL: (916) 251-9798
GENERAL CONTRACTOR	TBD

Map of the Project Site area in Encinitas, CA. The map shows the intersection of Encinitas Blvd and 100 Encinitas Boulevard. Key landmarks include the Encinitas Library, Encinitas High School, and the Encinitas Community Center. The project site is marked with a red dot and labeled 'PROJECT SITE'. A north arrow and 'N.T.S.' (Not To Scale) are also present.



**PM
DESIGN**

**Architectural
Solutions Group**

6930 DESTINY DRIVE
SUITE 100
ROCKLIN, CA 95677

(916) 415-3338
rpedro@pmdginc.com

Roy W. Pedro, Architect


Wendy's.
102 ENCINITAS BLVD.
ENCINITAS, CA 92024

ISSUE DATE: 04/20/2018

PROJECT NUMBER: WKS18003.0

DRAWN BY: KTA

CHECKED BY: JC

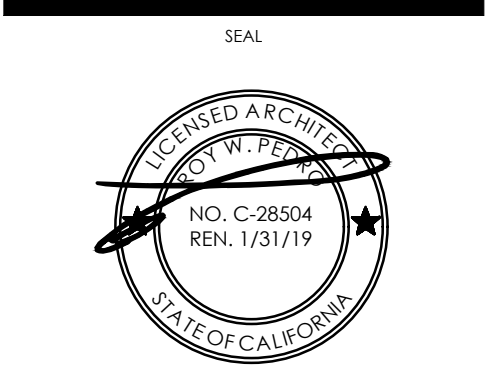


SHEET NUMBER

G1.1

12/22/2018, 1:10:09 AM, P:\DENIAL-Projects Colorado\Wendy's\WKS18003.0 102 Encinitas Blvd. Encinitas 383901-Architectural\03 - Construction Documents\01 3835 SD1 0 SITE PLAN.dwg, jhuggins

COTTONWOOD
CREEK PARK

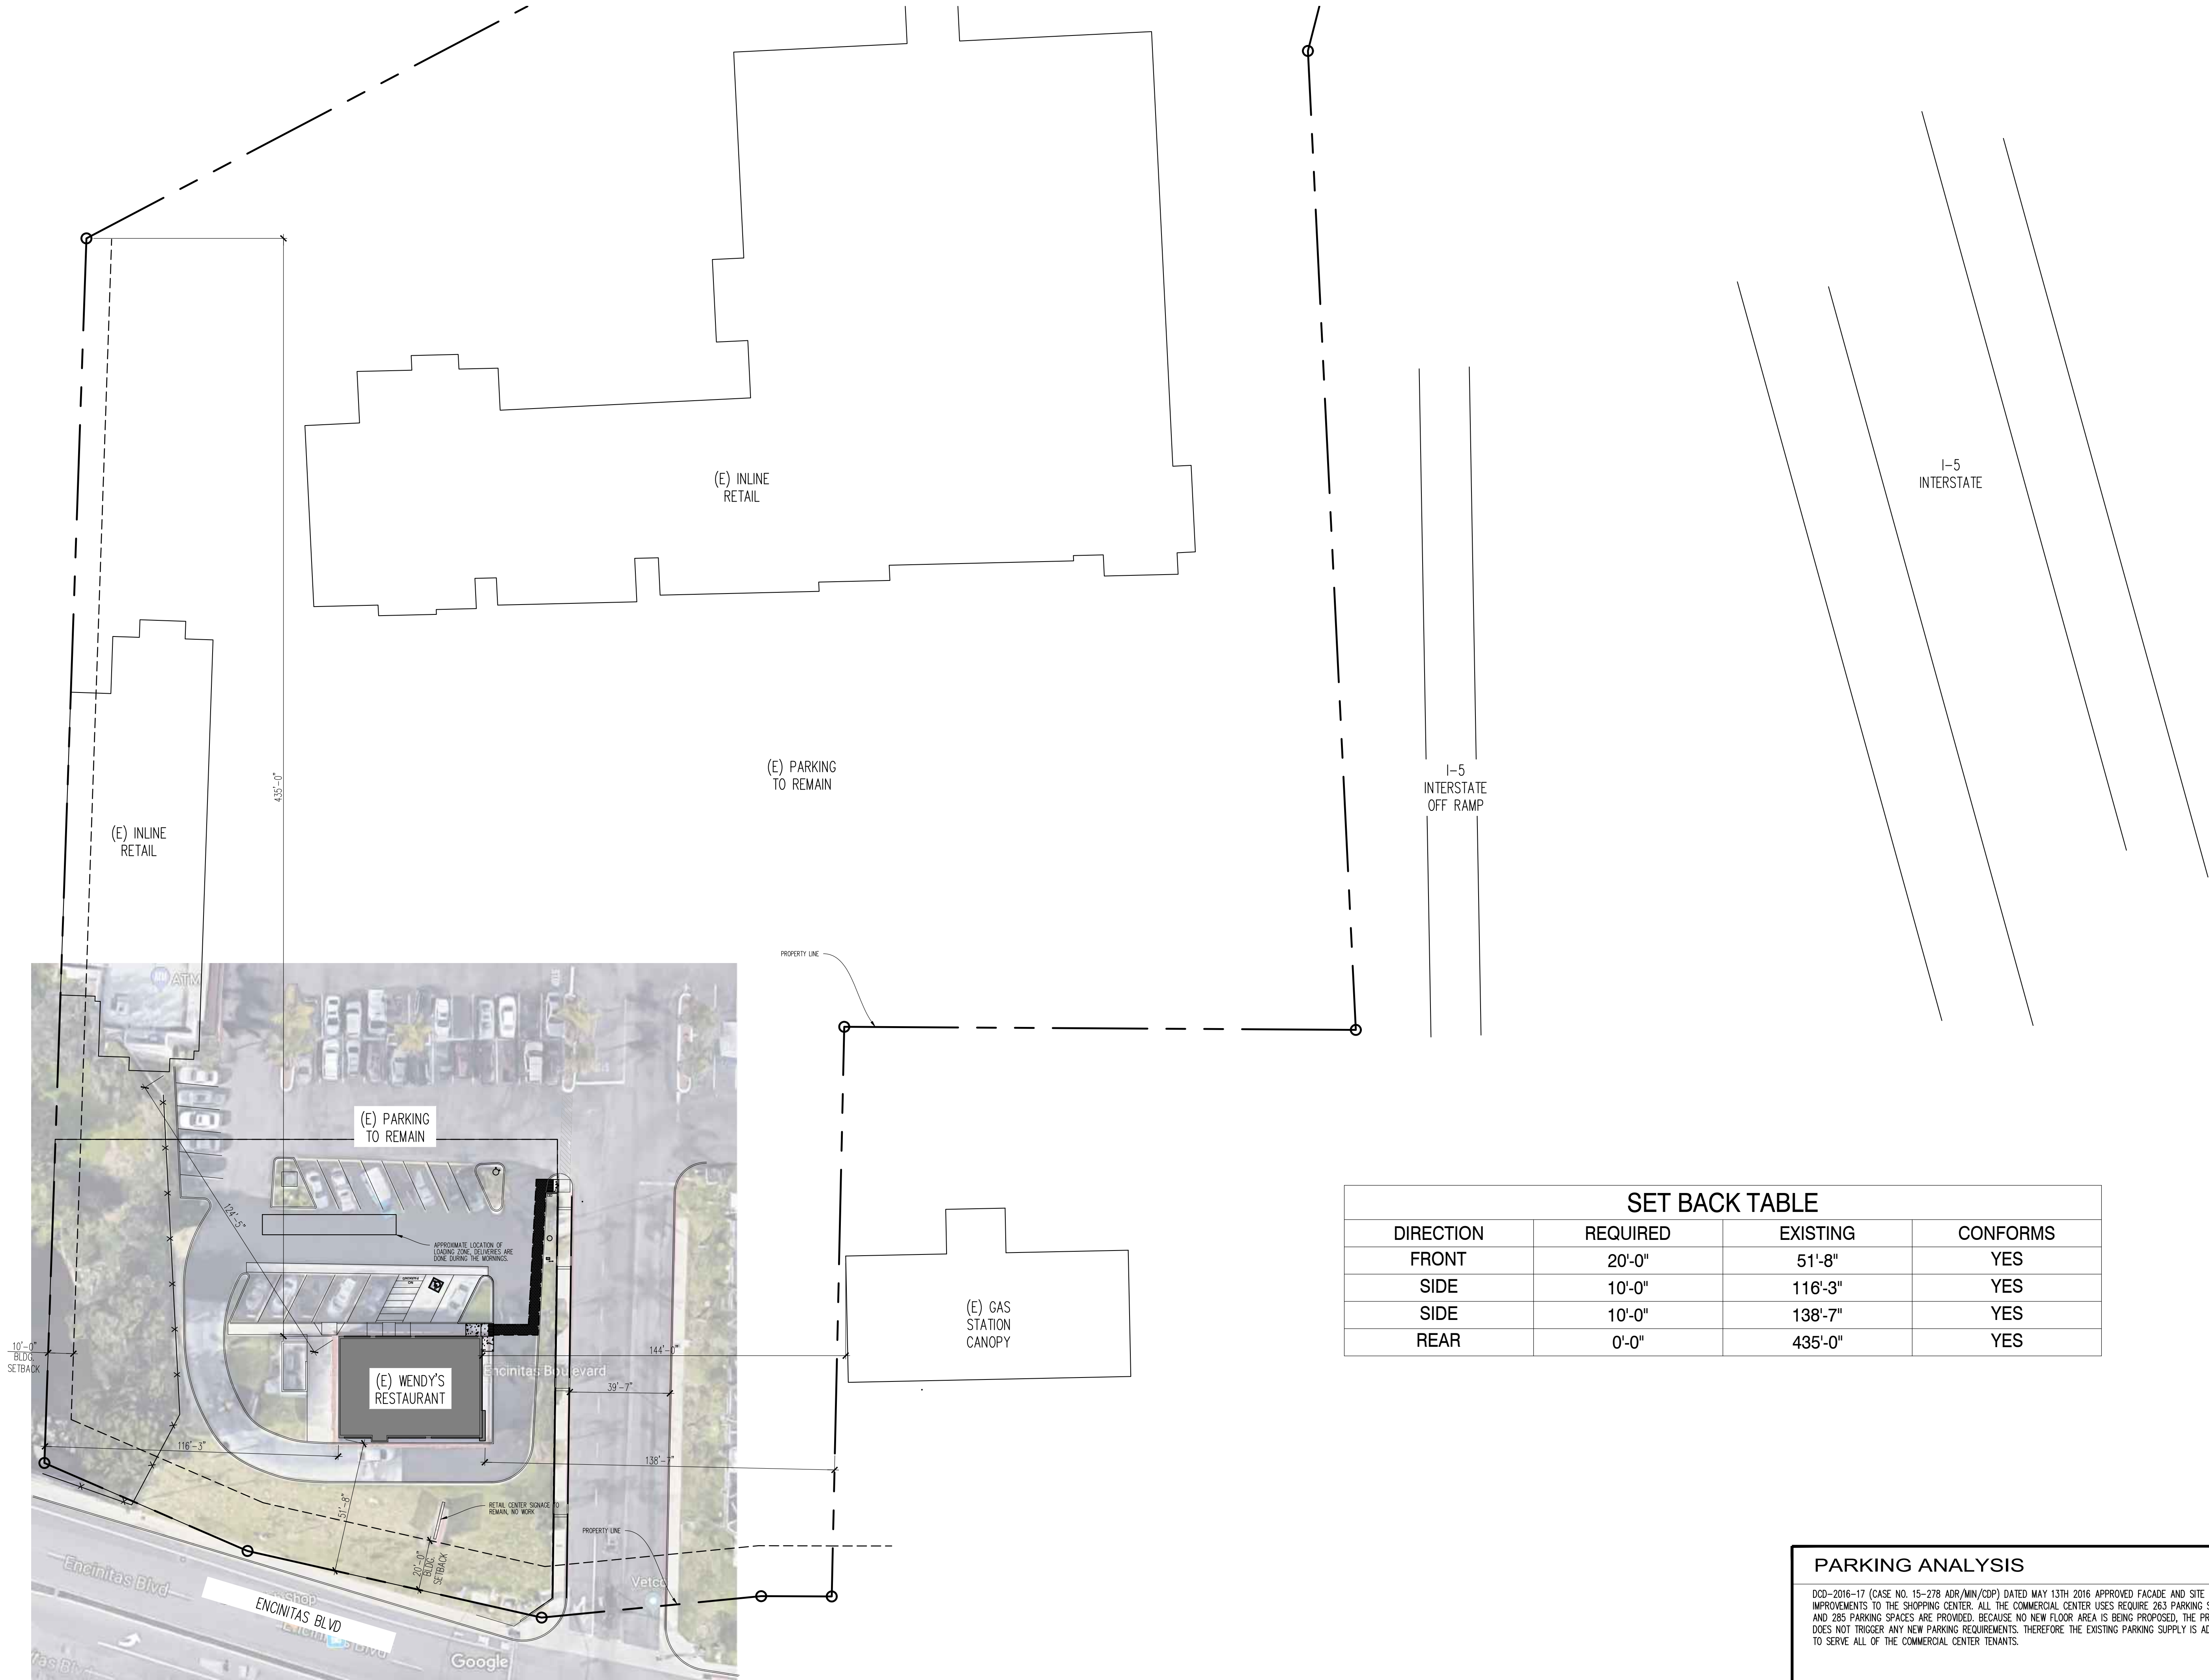

SET BACK TABLE			
DIRECTION	REQUIRED	EXISTING	CONFORMS
FRONT	20'-0"	51'-8"	YES
SIDE	10'-0"	116'-3"	YES
SIDE	10'-0"	138'-7"	YES
REAR	0'-0"	435'-0"	YES

PARKING ANALYSIS

DCD-2016-17 (CASE NO. 15-278 ADR/MIN/CDP) DATED MAY 13TH, 2016 APPROVED FACADE AND SITE IMPROVEMENTS TO THE SHOPPING CENTER. ALL THE COMMERCIAL CENTER USES REQUIRE 263 PARKING SPACES, AND 285 PARKING SPACES ARE PROVIDED. BECAUSE NO NEW FLOOR AREA IS BEING PROPOSED, THE PROJECT DOES NOT TRIGGER ANY NEW PARKING REQUIREMENTS. THEREFORE THE EXISTING PARKING SUPPLY IS ADEQUATE TO SERVE ALL OF THE COMMERCIAL CENTER TENANTS.

SITE NUMBER:	3835
BASE MODEL:	4058
ASSET TYPE:	COMPANY/FRANCHISE
CLASSIFICATION:	REFRESH LITE
OWNER:	OWNER NAME
BASE VERSION:	2017 SPRING
UPGRADE CLASSIFICATION:	N/A
PROJECT YEAR:	2018
FURNITURE PACKAGE:	2018
DRAWING RELEASE:	MARCH 2017

PM
DESIGN

Architectural
Solutions Group

6930 DESTINY DRIVE
SUITE 100
ROCKLIN, CA 95677

(916) 415-5358
rpedro@pmdginc.com
Roy W. Pedro, Architect


PROJECT TYPE: E4056
REFRESH LITE

Wendy's.

102 ENCINITAS BLVD.
ENCINITAS, CA 92024

REV.	DATE	DESCRIPTION
	9/30/2019	BLDG 1ST SUBMITTAL
	10/10/2019	PLANNING REVISIONS
1	10/24/2019	BLDG. COMMENTS
2	10/31/2019	PLANNING COMMENTS
3	10/31/2019	QA/QC COMMENTS

ISSUE DATE: 04/20/2018
PROJECT NUMBER: WKS18003.0
DRAWN BY: KTA
CHECKED BY: JC

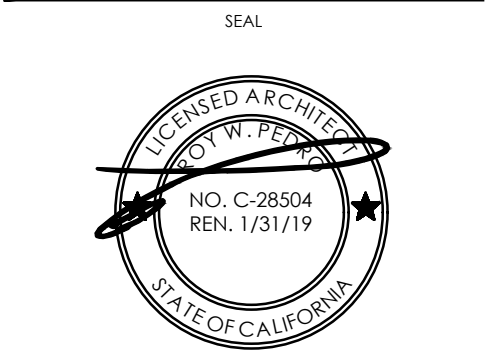

SHEET NAME
OVERALL
SITE PLAN

SHEET NUMBER
SP1.0

12/22/2019, 12:10 PM, P:\DENOT-Projects Colorado\Wendy's\WKS18003.1, 102 Encinitas Blvd, Encinitas 383901, Drawings Current\01-Architectural\03 - Construction Documents\01 3839 SD1 0 SITE PLAN.dwg, Hughes

COTTONWOOD
CREEK PARK



01 SITE PLAN
SCALE: 1" = 20'

GENERAL NOTES

1. IN THE EVENT OF DISCREPANCIES BETWEEN THE DRAWINGS, SPECIFICATIONS, OR SCOPE OF WORK SUMMARY IN THIS PACKAGE, NOTIFY THE CLIENT REP. IMMEDIATELY.
2. THE CONTRACTOR IS RESPONSIBLE TO SEE THAT WORK IN FIELD IS DONE IN ACCORDANCE WITH ALL CURRENT APPLICABLE NATIONAL, STATE & LOCAL CODES, ORDINANCES & REQUIREMENTS BY GOVERNING AGENCIES. WHETHER OR NOT SAID CODES, ORDINANCES, REQUIREMENTS, ETC. ARE SPECIFICALLY SHOWN ON DRAWINGS AND/OR CALLED FOR IN SPECIFICATIONS.
3. THE CONTRACTOR SHALL PROTECT ALL EXISTING ITEMS AND FACILITIES TO REMAIN THROUGHOUT CONSTRUCTION. CONTRACTOR SHALL REPAIR AND/OR REPLACE, AT CONTRACTOR'S EXPENSE, ANY EXISTING ITEMS AND FACILITIES TO REMAIN THAT ARE DAMAGED BY THE CONTRACTOR'S OPERATIONS, TO THE SATISFACTION OF THE THE CLIENT REP.
4. UNLESS DELIVERY IS BY THE CLIENT TO THE JOB SITE, CONTRACTOR SHALL DELIVER SUCH EQUIPMENT, DAMAGE-FREE TO THE JOB SITE.
5. PRIOR TO ANY EXCAVATION, DETERMINE AND VERIFY LOCATION OF UTILITY SERVICES IN ALL AREAS TO BE EXCAVATED.
6. THE CONTRACTOR SHALL COMPLY WITH ALL PERTINENT LAWS, CODES, REGULATIONS, BUILDING CODES, GOVERNING AGENCIES & MANUFACTURER SPECIFICATIONS, UNLESS GREATER REQUIREMENTS ARE INDICATED, AND/OR ARE NECESSARY FOR THE SAFETY OF THE PROJECT.
7. THE CONTRACTOR SHALL BE RESPONSIBLE FOR NOTIFYING JURISDICTIONS AS REQUIRED FOR INSPECTIONS.
8. THE CONTRACTOR SHALL PROVIDE THE THE CLIENT REPRESENTATIVE WITH A CONSTRUCTION SCHEDULE PRIOR TO STARTING THE WORK. A QUALIFIED JOB SUPERINTENDENT THROUGHOUT THE WORK, PHOTOS SHOWING PIPING AND ELECTRICAL TRENCHES PRIOR TO BACKFILL, AND RECORD DRAWINGS OF ALL UNDERGROUND CONSTRUCTION.
9. THE CONTRACTOR SHALL PROVIDE BARRICADES AND SAFETY SIGNS PER OSHA REQUIREMENTS.
10. THE CONTRACTOR IS RESPONSIBLE FOR OVERALL CONSTRUCTION SITE CLEANLINESS, INCLUDING PROVISION OF A DEBRIS BOX WITH WEEKLY SERVING, REMOVAL OF ALL CONTRACTOR/SUBCONTRACTOR REFUSE AND DEBRIS, AND SWEEPING OF THE ENTIRE YARD AREA AT THE COMPLETION OF THE WORK.
11. UNLESS STATED OTHERWISE IN THE SCOPE OF WORK SUMMARY, ALL OTHER PROCEDURES, TESTING, MATERIALS AND EQUIPMENT SHOWN ON THE PLANS SHALL BE FURNISHED AND INSTALLED BY THE CONTRACTOR.
12. DRAWINGS SHOULD NOT BE SCALED. N.T.S. INDICATES "NOT TO SCALE" AND THE LISTED DIMENSION SHALL GOVERN.
13. EACH CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIR OF DAMAGE TO THE WORK OF OTHER TRADES CAUSED BY HIS OPERATIONS. THE NATURE OF SUCH REPAIR WORK MUST RECEIVE THE PRIOR APPROVAL OF THE CLIENT REP.
14. CONSTRUCTION MATERIAL, ASSEMBLIES AND PROCEDURES ARE TO LOCALLY ADOPTED BUILDING CODES AND SUPPLEMENTARY ORDINANCES. WHEN A CONFLICT OCCURS BETWEEN SUCH LOCAL CODE AND INFORMATION SHOWN ON THE PLANS, CONSULT THE CLIENT REP. FOR RESOLUTION PRIOR TO COMMENCING WORK.
15. THE CONTRACTOR SHALL NOTIFY THE CLIENT REP. IF SITE CONDITIONS OR DIMENSIONS DISAGREE WITH INFORMATION SHOWN ON THE DRAWINGS. WORK IS NOT TO PROCEED UNTIL SUCH DIFFERENCES ARE RESOLVED.
16. DO NOT USE THE BUILDING PERMIT SET FOR CONSTRUCTION OR FIELD REFERENCE. THE PERMIT SET GENERALLY LACKS CERTAIN DRAWINGS AND SPATIEOFICONS, WHICH ARE IN THE BID AND CONSTRUCTION SETS IN ADDITION TO REVISIONS MADE AFTER THE PERMIT PROCESS. FOR CONSTRUCTION AND FIELD REFERENCE, CONTRACTOR SHALL USE ONLY THE SET, WHICH IS CLEARLY SIGNED AND DATED "ISSUED FOR CONSTRUCTION". THE APPROVED PERMIT SET SHALL BE KEPT ON SITE AND REFERENCED FOR PROJECT SPECIFIC MARK-UPS AND/ OR REQUIREMENTS WHICH MAY HAVE BEEN NOTED BY LOCAL AGENCIES DURING PLAN CHECK.

BARRIER REMOVAL NOTE

SITE SCOPE OF WORK LIMITED TO READILY ACHIEVABLE BARRIER REMOVAL AS REQUIRED BY THE ADA - TITLE III REGULATION 28 CFR PART 36. A PUBLIC ACCOMMODATION SHALL REMOVE ARCHITECTURAL BARRIERS IN EXISTING FACILITIES, INCLUDING COMMUNICATION BARRIERS THAT ARE STRUCTURAL IN NATURE, WHERE SUCH REMOVAL IS READILY ACHIEVABLE, I.E., EASILY ACCOMPLISHABLE AND ABLE TO BE CARRIED OUT WITHOUT MUCH DIFFICULTY OR EXPENSE.

FOR THE PURPOSE OF THIS STORE, SITE BARRIER REMOVAL IS IDENTIFIED AS PROVIDING AN ACCESSIBLE ROUTE FROM THE PUBLIC RIGHT OF WAY, PROVIDING ACCESSIBLE PARKING AND SIGNAGE, AND PROVIDING AN ACCESSIBLE ENTRANCE.

ACCESSIBLE ROUTE NOTES

1. PROVIDE ISA DIRECTIONAL SIGNS AS REQUIRED.
2. PRELIMINARY SITE INVESTIGATION DETERMINED THAT EXISTING ACCESSIBLE ROUTES PROVIDE 5% MAXIMUM RUNNING SLOPES WITH 2% MAX CROSS SLOPES. GENERAL CONTRACTOR TO VERIFY SITE CONDITIONS AND ROUTES MAINTAIN COMPLIANT SLOPES, CHANGES OF LEVEL AND GAPS.

LEGEND

- (N) CONCRETE PAVING. MATCH EXISTING PAVEMENT AND BASE COURSE.
- (N) ASPHALT PAVING. MATCH EXISTING PAVEMENT AND BASE COURSE
- (E) PAVING TO BE USED AS ACCESSIBLE ROUTE. SEE DETAIL 8/AS1
- ACCESSIBLE ROUTE

PARKING ANALYSIS

DCD-2016-17 (CASE NO. 15-278 ADR/MIN/CDP) DATED MAY 13TH 2016 APPROVED FACADE AND SITE IMPROVEMENTS TO THE SHOPPING CENTER. ALL THE COMMERCIAL CENTER USES REQUIRE 263 PARKING SPACES, AND 285 PARKING SPACES ARE PROVIDED. BECAUSE NO NEW FLOOR AREA IS BEING PROPOSED, THE PROJECT DOES NOT TRIGGER ANY NEW PARKING REQUIREMENTS. THEREFORE THE EXISTING PARKING SUPPLY IS ADEQUATE TO SERVE ALL OF THE COMMERCIAL CENTER TENANTS.

FIRE DEPARTMENT NOTES

MAINTAIN FIRE DEPARTMENT EMERGENCY ACCESS THROUGHOUT THE RENOVATION

SITE NUMBER:	3835
BASE MODEL:	4058
ASSET TYPE:	COMPANY/FRANCHISE
CLASSIFICATION:	REFRESH LITE
OWNER:	OWNER NAME
BASE VERSION:	2017 SPRING
UPGRADE CLASSIFICATION:	
	N/A
PROJECT YEAR:	2018
FURNITURE PACKAGE:	2018
DRAWING RELEASE:	MARCH 2017



6930 DESTINY DRIVE
SUITE 100
ROCKLIN, CA 95677

(916) 415-5358
rpedro@pmdesign.com

Roy W. Pedro, Architect

PROJECT TYPE: E4056
REFRESH LITE

Wendy's
102 ENCINITAS BLVD.
ENCINITAS, CA 92024

REV.	DATE	DESCRIPTION
	9/30/2019	BLDG 1ST SUBMITTAL
	10/10/2019	PLANNING REVISIONS
1	10/24/2019	BLDG. COMMENTS
2	10/31/2019	PLANNING COMMENTS
3	10/31/2019	QA/QC COMMENTS


ISSUE DATE: 04/20/2018

PROJECT NUMBER: WKS18003.0

DRAWN BY: KTA

CHECKED BY: JC

SEAL

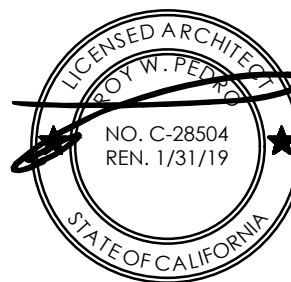

SHEET NAME

SITE PLAN

SHEET NUMBER

SP1.1

PLANT SCHEDULE

SHRUBS	QTY	BOTANICAL / COMMON NAME	CONT	WUCOLS
	8	Aloe vera / Medicinal Aloe	1 gal	Low
	8	Callistemon viminalis 'Little John' / Dwarf Weeping Bottlebrush	5 gal.	Low
	3	Cycas revoluta / Sago Palm	5 gal.	Low
	6	Furcraea foetida 'Mediopicta' / Mauritius Hemp	5 gal.	Low
	7	Phormium tenax 'Amazing Red' / Dwarf Red Flax	5 gal.	Low
	4	Sansevieria trifasciata / Mother-in-law's Tongue	1 gal	Low
	18	Senecio mandraliscae 'Blue Chalk Sticks' / Senecio	1 gal	Low
VINES/ESPALLIERS	QTY	BOTANICAL / COMMON NAME	CONT	WUCOLS
	4	Bougainvillea x 'La Jolla' / La Jolla Bougainvillea Trellis	5 gal.	Moderate

GENERAL NOTES

- All landscape planting areas shall receive a minimum 2"-3" layer of organic mulch top dressing.
- Landscape planting and irrigation shall conform to City of Encinitas Conservation Standards.
- Contact USA North (811) prior to commencing construction in order to determine any conflicts with existing utilities.

IRRIGATION NOTES

- Existing irrigation system to be repaired, modified and/or replaced top provide efficient watering of plant material. Equipment such as, and not limited to, backflow device, mainline piping, sleeves and irrigation controller shall remain in place to the extent that it satisfies local code(s) and ordinances and at the discretion of the owner or landscape contractor. Landscape contractor to evaluate and confirm adequacy and locations of existing irrigation infrastructure as it relates to improvements shown on this plan. discrepancies, inconsistencies or modifications to the existing system shall be presented to the owner and/or landscape architect prior to commencing work.

Water Efficient Landscape Worksheet-New Landscape Area

HYDROZONE/PLANTING DESCRIPTION	PLANT FACTOR (PF)	IRRIG. METHOD	IRRIG. EFFICIENCY (IE)	ETAF (PF/IE)	LANDSCAPE AREA (Sq. Ft.)	ETAF x AREA	ESTIMATED TOTAL WATER USE (ETWU)
REGULAR LANDSCAPE AREA							
LOW WATER USE PLANTS	.3	DRIP	.81	.37	904	334	8,242 GAL.
MODERATE WATER USE PLANTS	.5	DRIP	.81	.62	-	-	- GAL.
TOTALS					(A) 904	(B) 334	

ETWU Total 8,242 GAL.



Maximum Applied Water Allowance (MAWA). $MAWA = \frac{ETU}{(39.8)} \cdot \frac{(Conversion\ factor)}{(.62)} \cdot \frac{((ETAF)(Landscape\ Area))}{(.45 \times 904)} + \frac{((1-ETAF) \times SLA)}{(1-.45) \times 0} = 10,038 \text{ GALLONS}$

Estimated Total Water use (ETWU). $ETWU = \frac{ETU}{(39.8)} \cdot \frac{(Conversion\ factor)}{(.62)} \cdot \frac{((ETAF)(Area))}{(334)} = 8,242 \text{ GALLONS}$


ETAF Calculations

Regular Landscape Areas	
Total ETAF x Area	(B) 334
Total Area	(A) 904
Average ETAF	(B / A) .37

Note:
1. Average ETAF for Regular Landscape Areas must be below .55 for residential areas and .45 for non-residential areas.

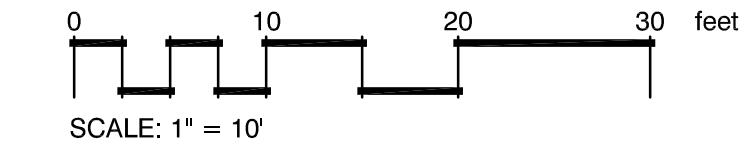

COTTONWOOD CREEK PARK

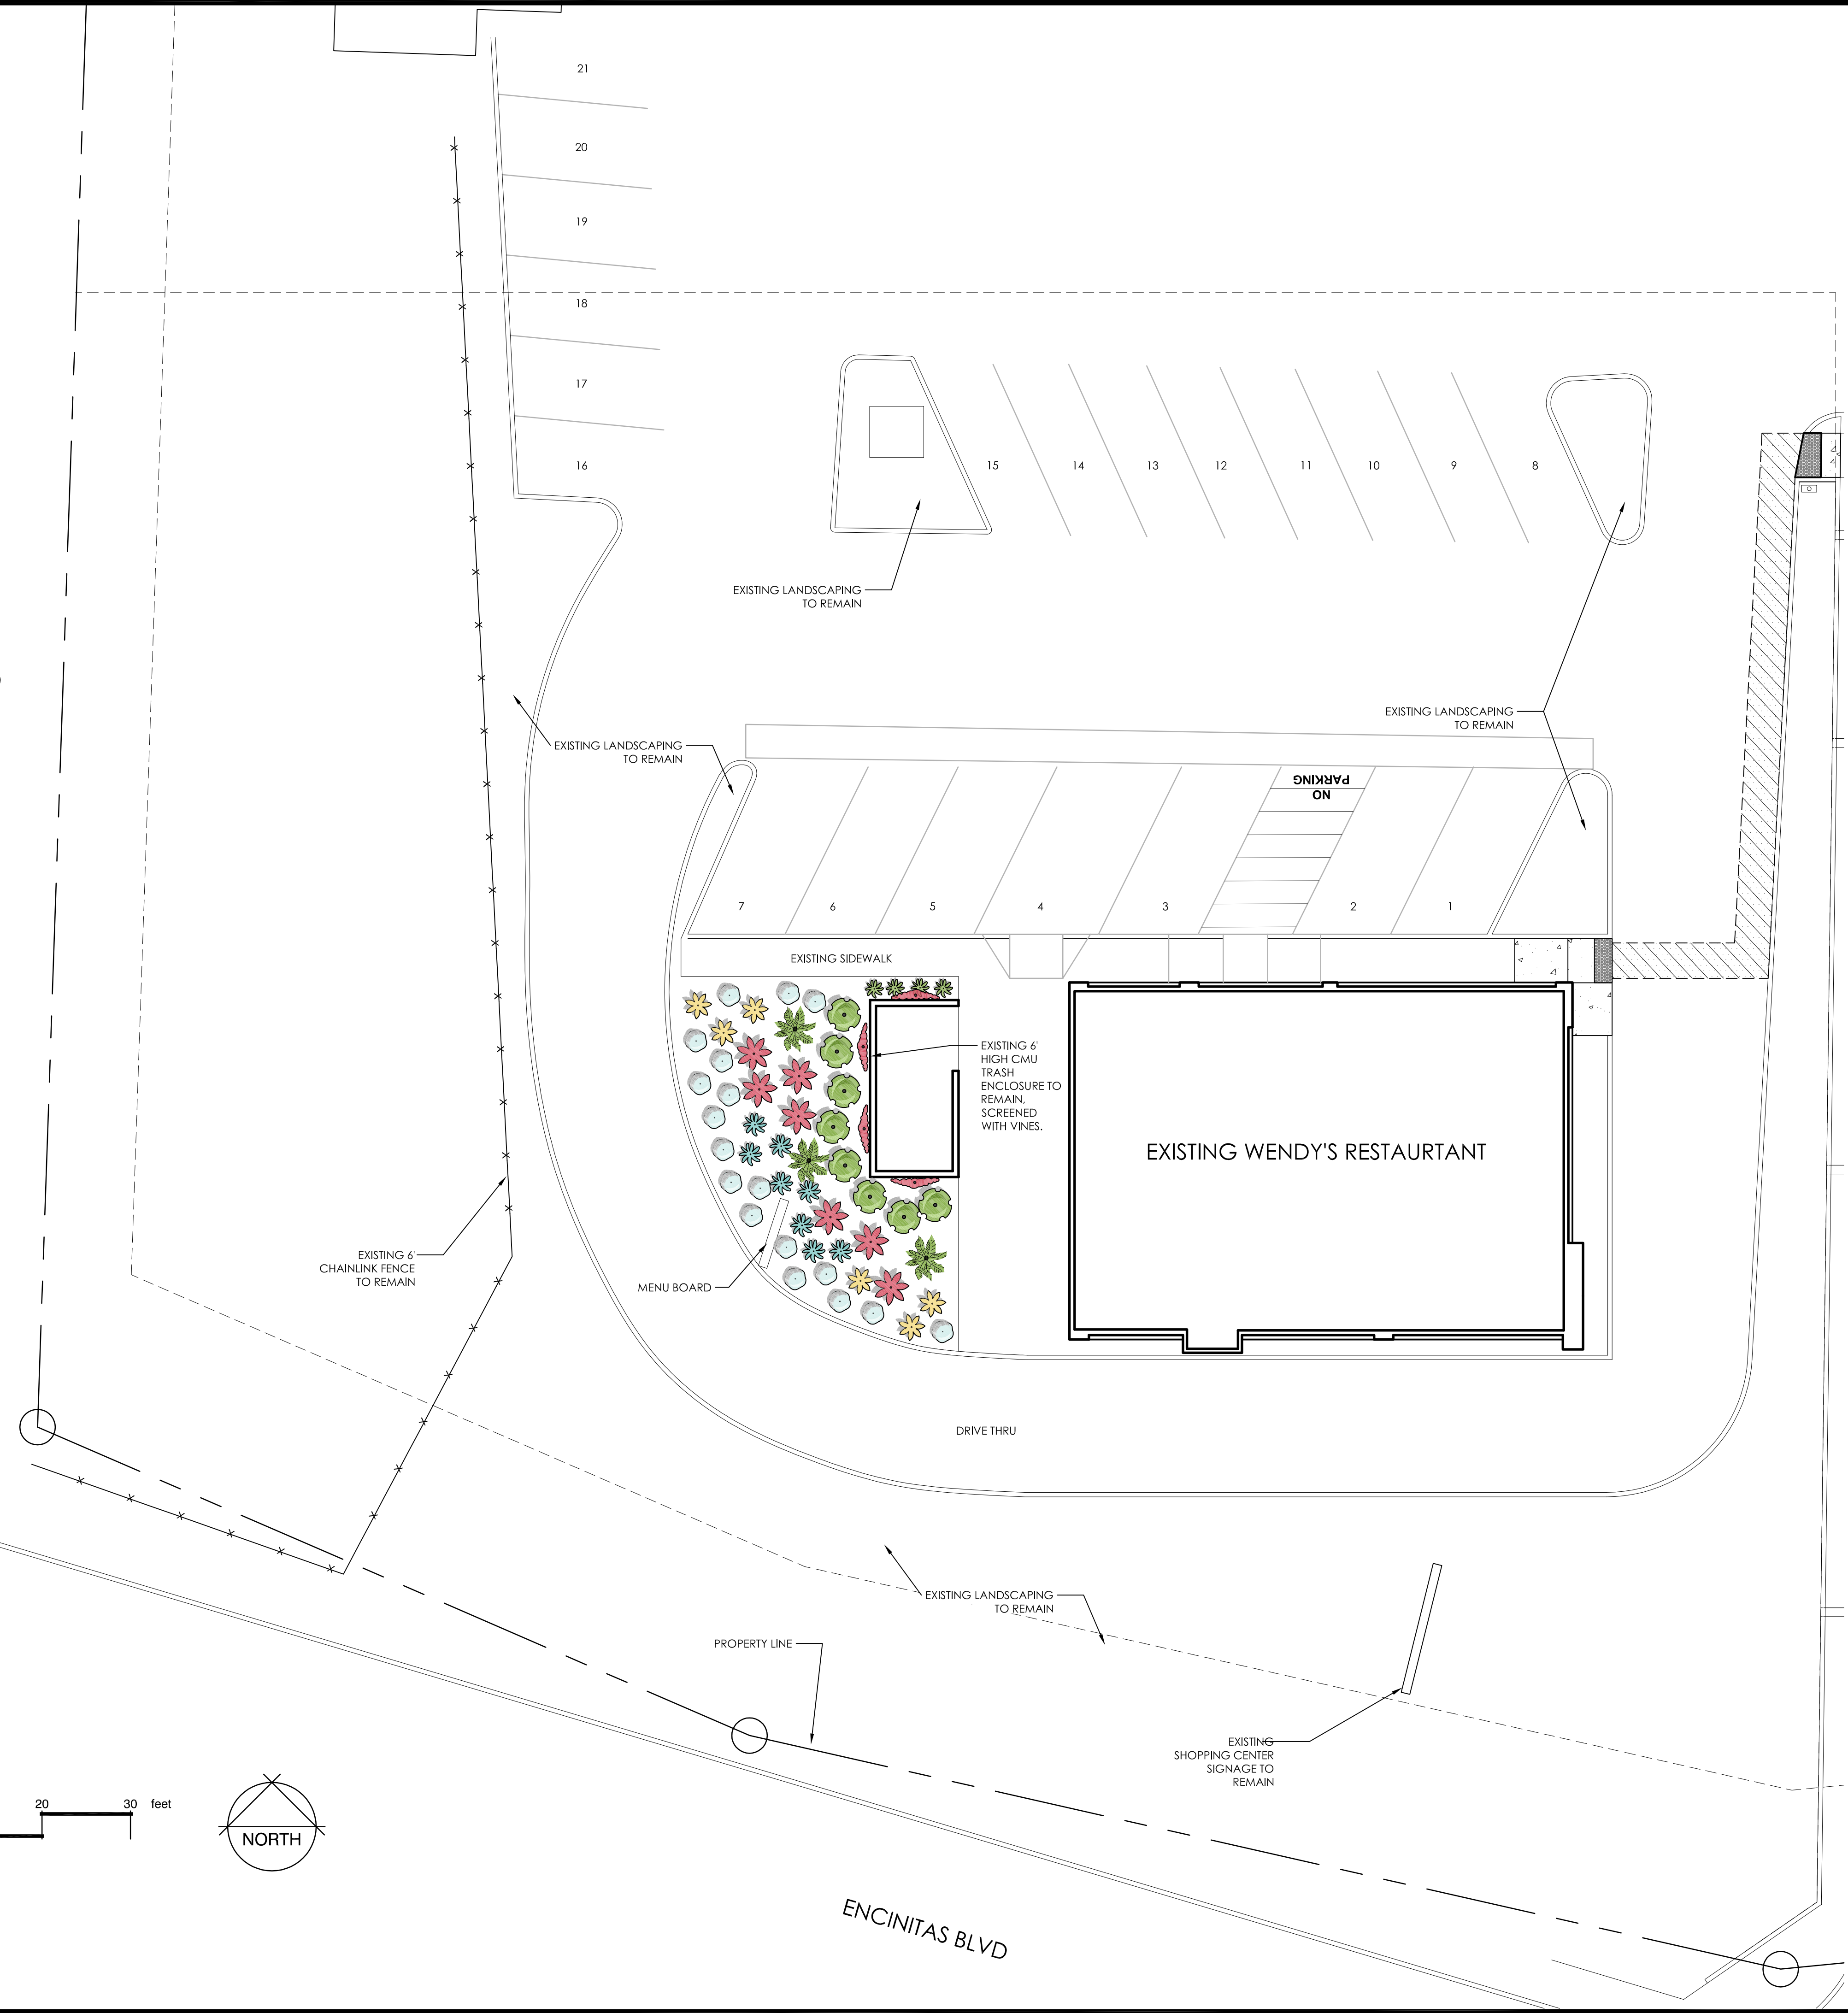

SITE NUMBER:	3835
BASE MODEL:	4058
ASSET TYPE:	COMPANY/FRANCHISE
CLASSIFICATION:	REFRESH LITE
OWNER:	OWNER NAME
BASE VERSION:	2017 SPRING
UPGRADE CLASSIFICATION:	N/A
PROJECT YEAR:	2018
FURNITURE PACKAGE:	2018
DRAWING RELEASE:	MARCH 2017



6930 DESTINY DRIVE
SUITE 100
ROCKLIN, CA 95677

(916) 415-5338
rpedro@pmdgnc.com
Ray W. Pedro, Architect

PROJECT TYPE: E4056
REFRESH LITE

Wendy's
102 ENCINITAS BLVD.
ENCINITAS, CA 92024

REV.	DATE	DESCRIPTION
	9/30/2019	BLDG 1ST SUBMITTAL
	10/10/2019	PLANNING REVISIONS
1	10/24/2019	BLDG. COMMENTS
2	10/31/2019	PLANNING COMMENTS
3	10/31/2019	QA/QC COMMENTS

ISSUE DATE: 04/20/2018
PROJECT NUMBER: WKS18003.0
DRAWN BY: RLS
CHECKED BY: -




SHEET NAME

LANDSCAPE PLAN

SHEET NUMBER


L1

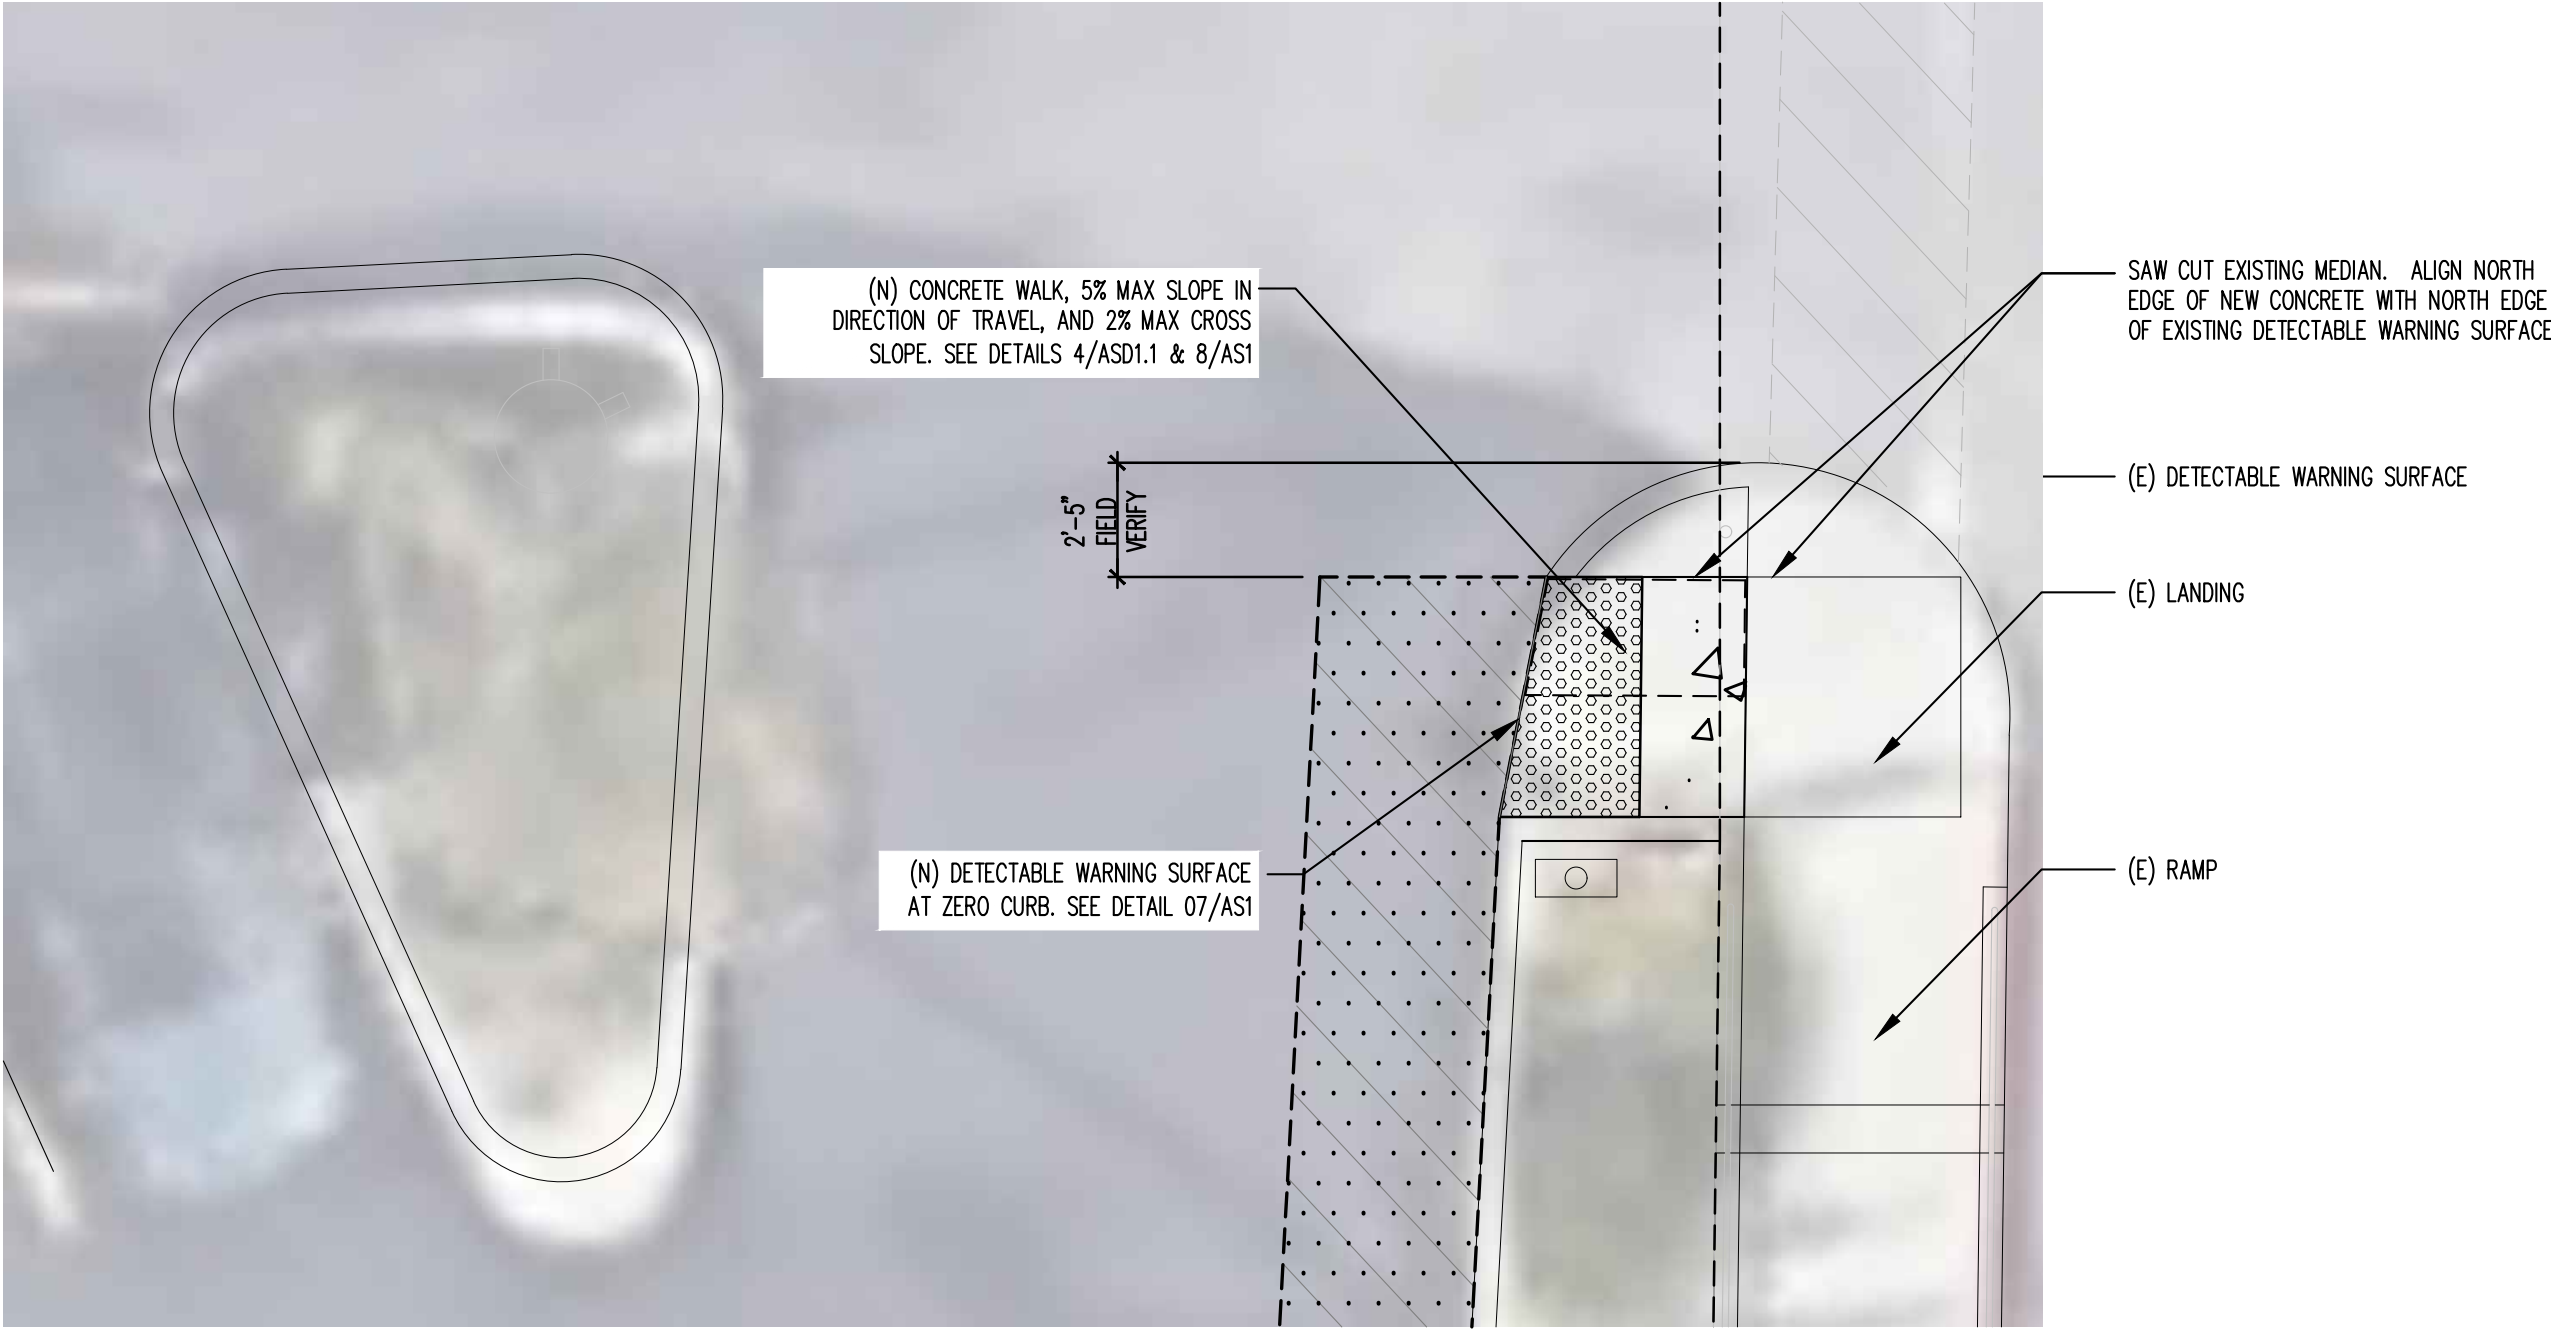


06 ENLARGED SITE PLAN
SCALE: 1/4" = 1'-0"

PAVING NOTE:
GENERAL PAVING SLOPES ARE PROVIDED FOR ACCESSIBILITY COMPLIANCE. GC SHALL ENSURE PROPER DRAINAGE IS MAINTAINED WITH NEW CONSTRUCTION, SO THAT WATER IS DIRECTED AWAY FROM BUILDINGS. NEW PAVING SHALL CONFORM TO EXISTING SITE, IN ORDER TO DIRECT WATER FLOW TOWARDS EXISTING ESTABLISHED DRAINAGE PATTERNS AND INLETS.


LANDSCAPE NOTE:
CONTRACTOR TO REPAIR/REPLACE IN KIND ANY LANDSCAPE DISTURBED DURING CONSTRUCTION.

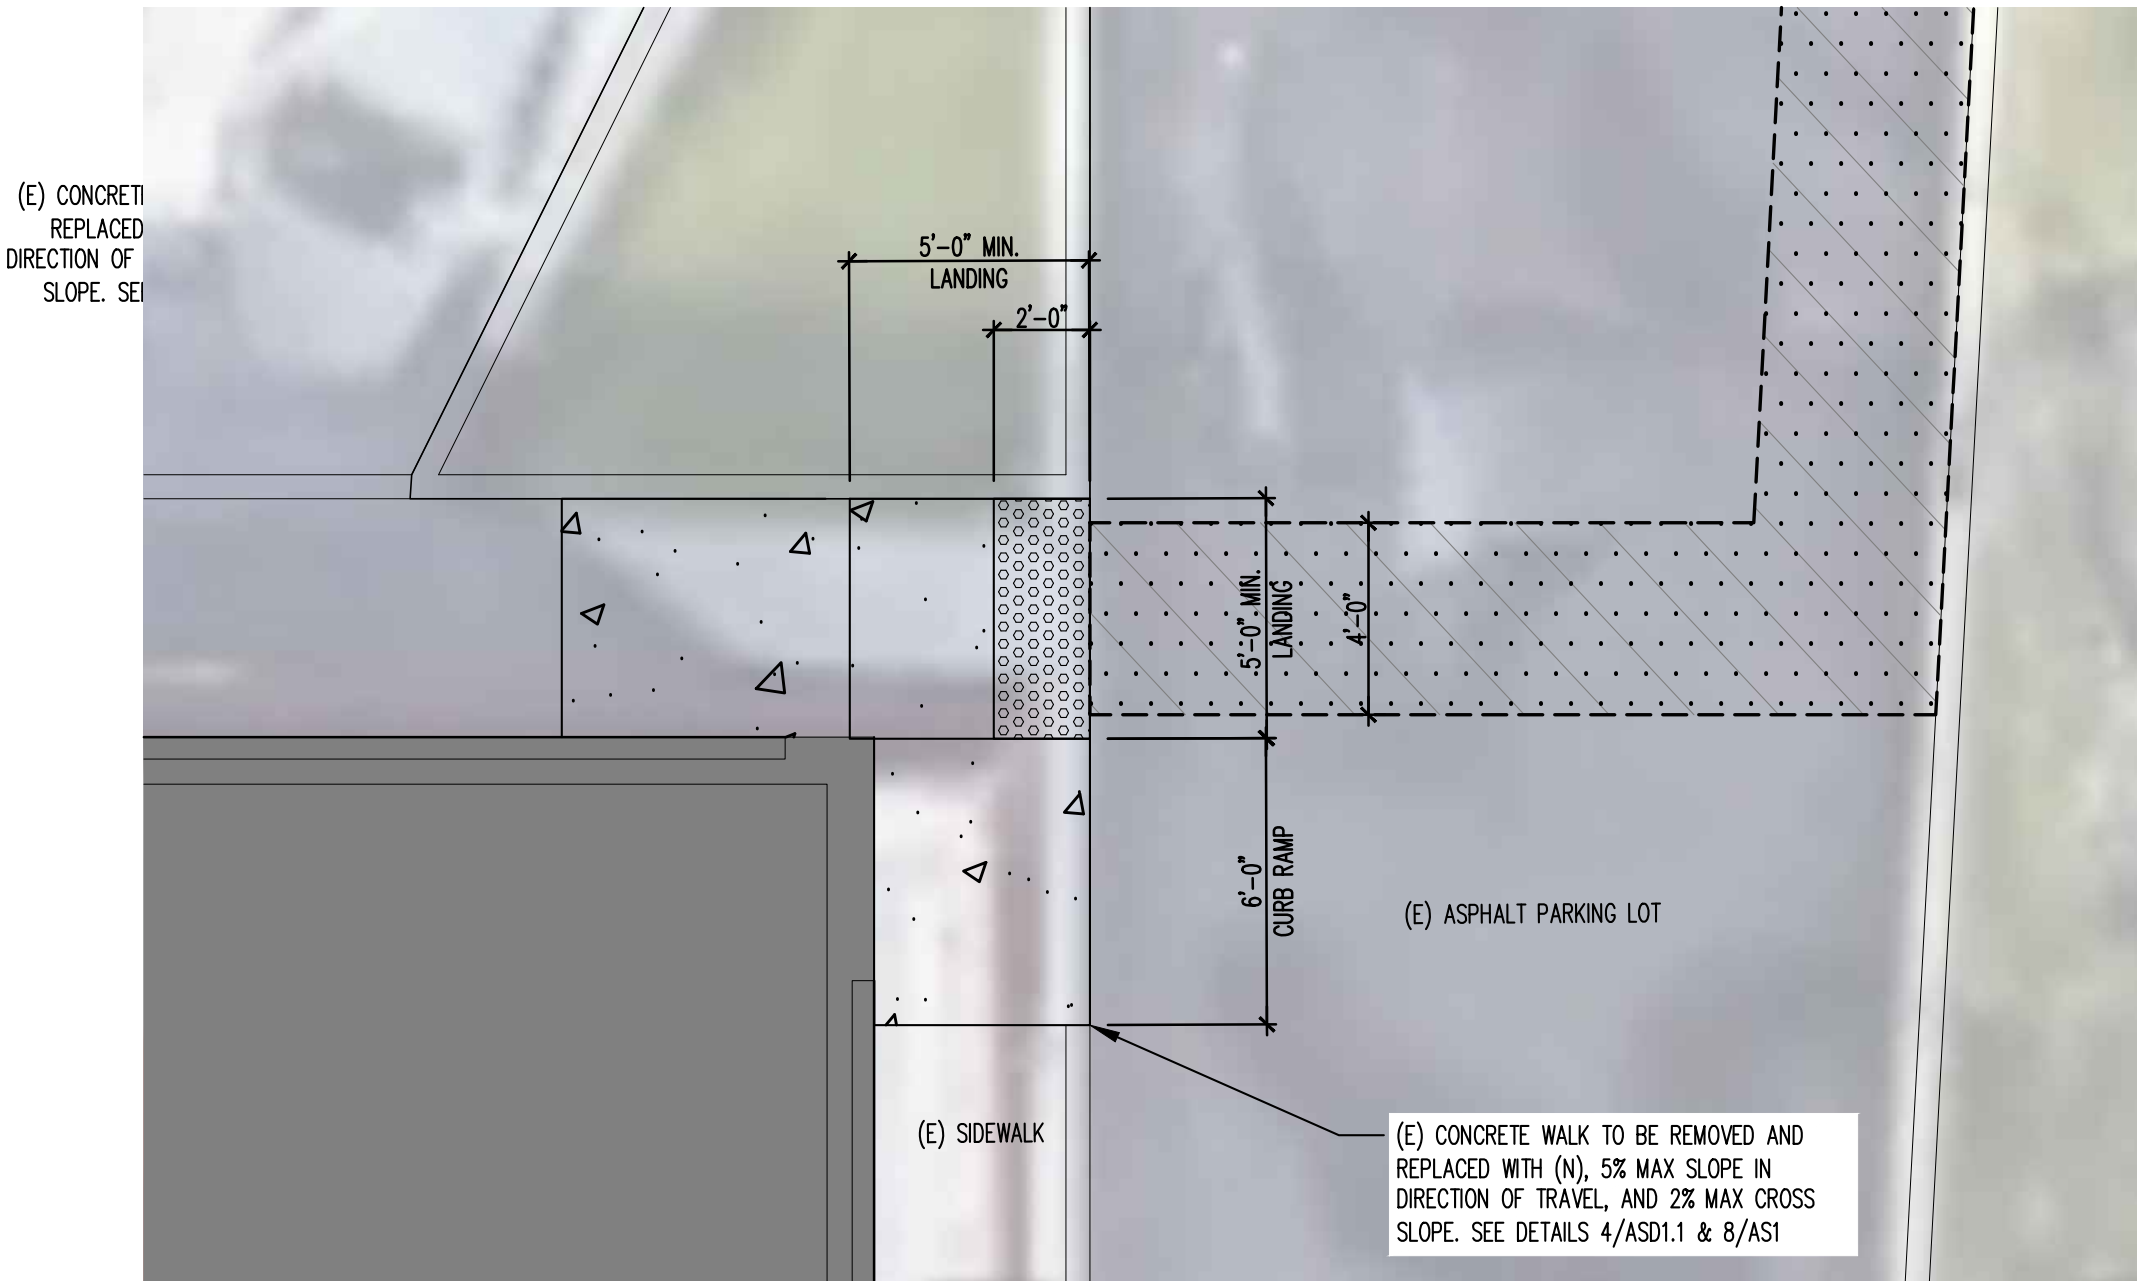

07 ENLARGED SITE PLAN
SCALE: 1/4" = 1'-0"

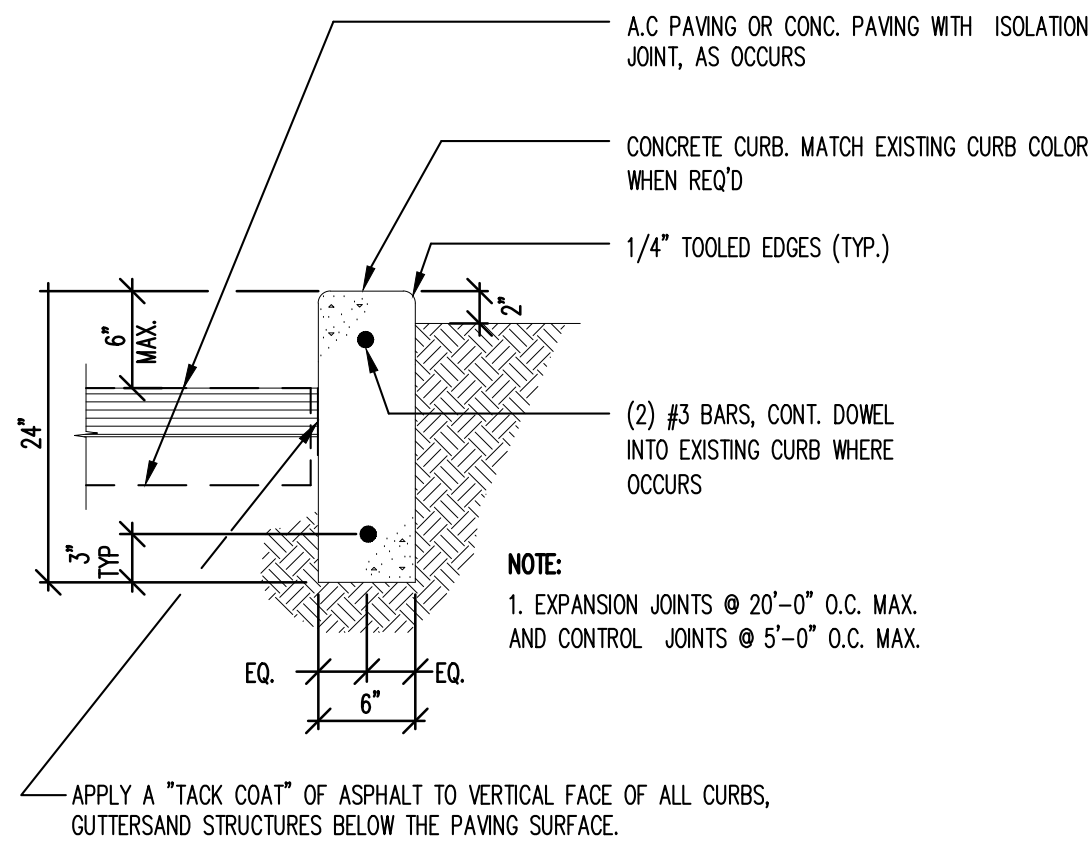


04 CONC. SIDEWALK/ PAVING SECTION (TYP)
SCALE: N.T.S.

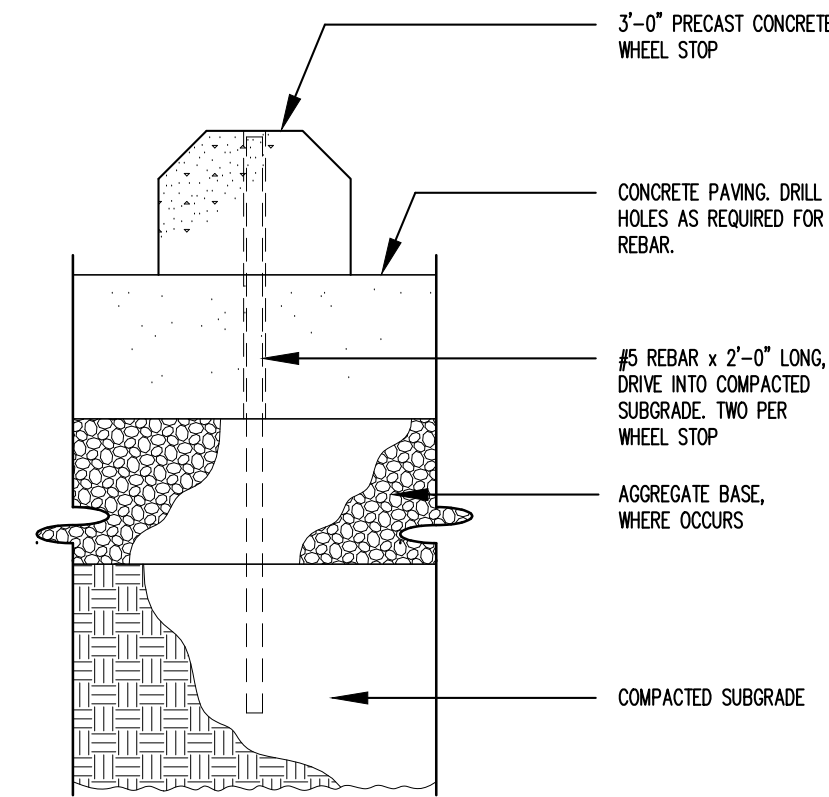


05 CONCRETE WHEEL STOP
SCALE: 1-1/2" = 1'-0"

01 NOT USED

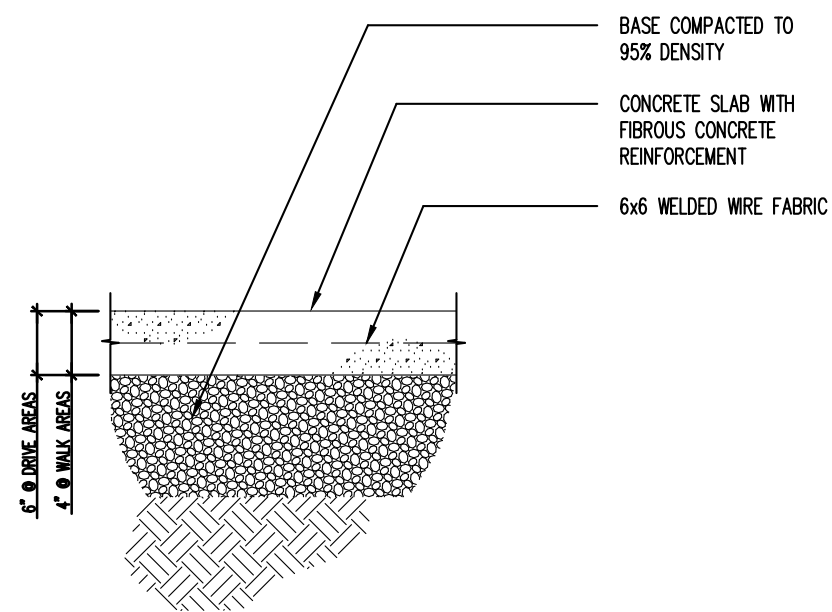

02 CONC. SIDEWALK/PAVING SECT. (TYP)
SCALE: 1" = 1'-0"

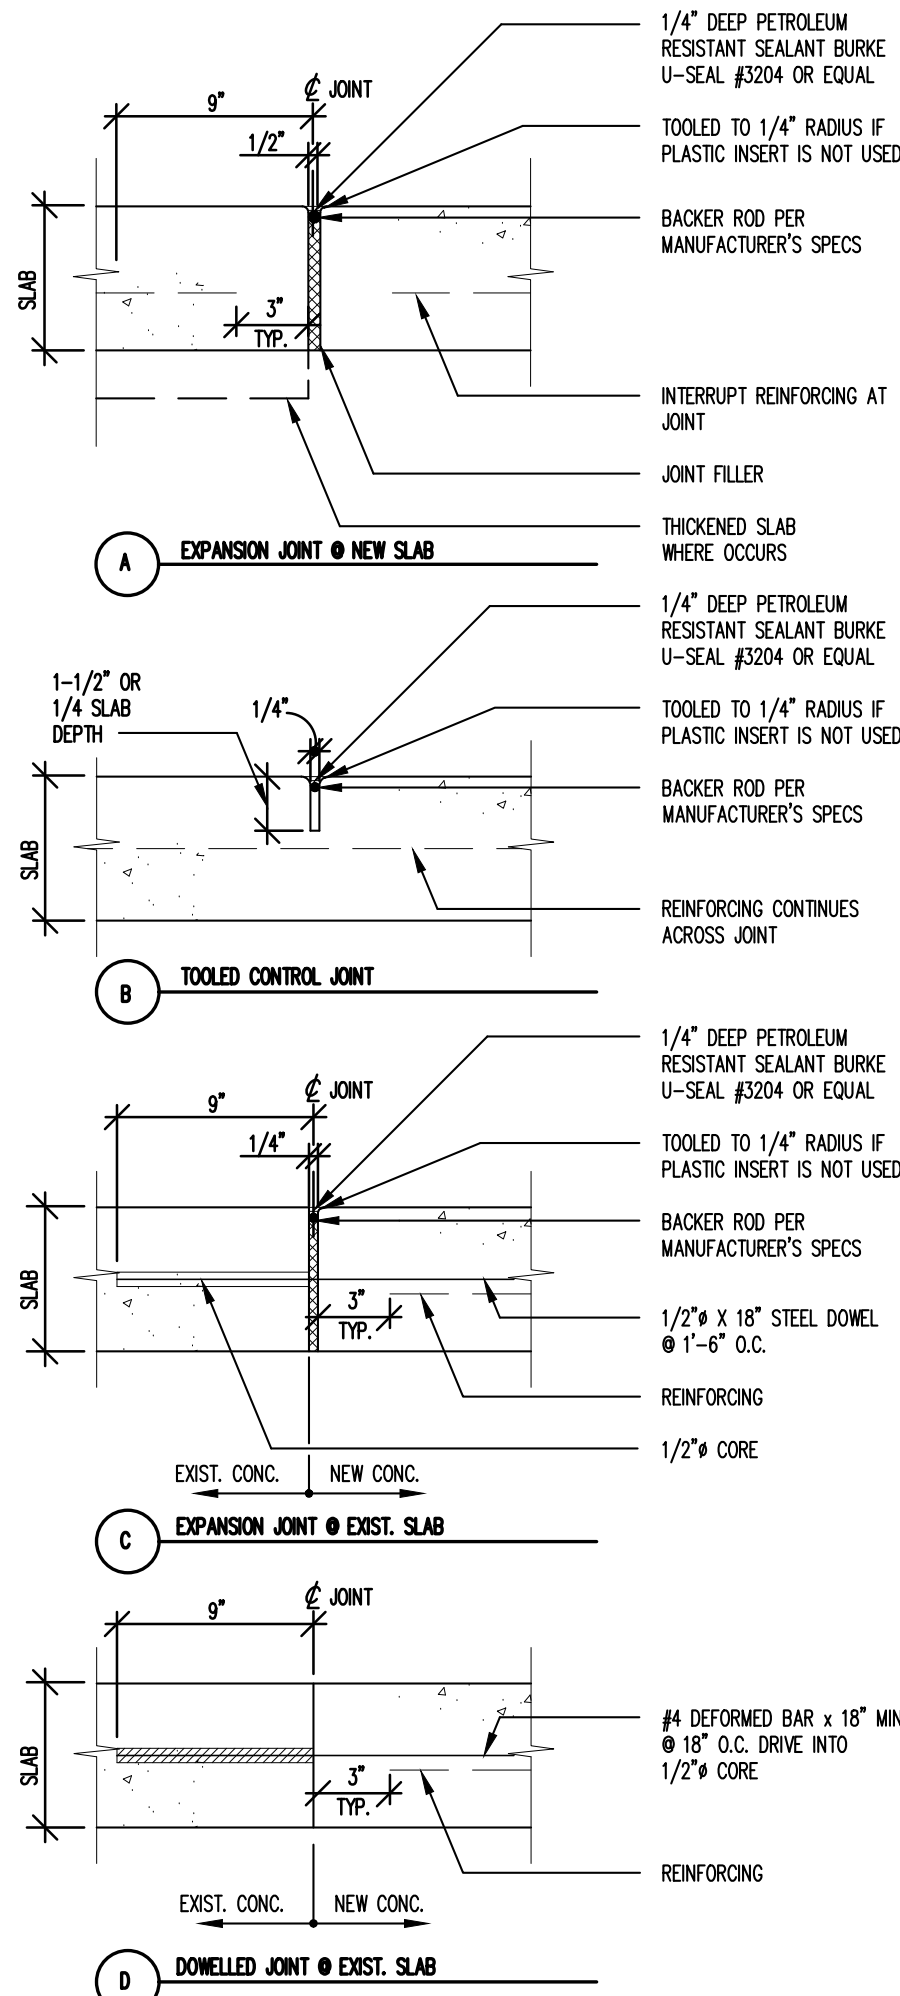

03 CONCRETE JOINTS
SCALE: 1-1/2" = 1'-0"

SITE NUMBER:	3835
BASE MODEL:	4058
ASSET TYPE:	COMPANY/FRANCHISE
CLASSIFICATION:	REFRESH LITE
OWNER:	OWNER NAME
BASE VERSION:	2017 SPRING
UPGRADE CLASSIFICATION:	
	N/A
PROJECT YEAR:	2018
FURNITURE PACKAGE:	2018
DRAWING RELEASE:	MARCH 2017



6930 DESTINY DRIVE
SUITE 100
ROCKLIN, CA 95677
(916) 415-5358
rpedro@pmdginc.com
Roy W. Pedro, Architect

PROJECT TYPE: E4056
REFRESH LITE

Wendy's
102 ENCINITAS BLVD.
ENCINITAS, CA 92024

REV.	DATE	DESCRIPTION
	9/30/2019	BLDG 1ST SUBMITTAL
	10/10/2019	PLANNING REVISIONS
1	10/24/2019	BLDG. COMMENTS
2	10/31/2019	PLANNING COMMENTS
3	10/31/2019	QA/QC COMMENTS


ISSUE DATE: 04/20/2018

PROJECT NUMBER: WKS18003.0

DRAWN BY: KTA

CHECKED BY: JC

SEAL

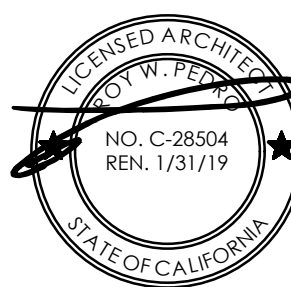


SHEET NAME
**ENLARGED SITE PLANS
& DETAILS**

SHEET NUMBER

ASD1.1


THIS DETAIL IS BASED ON DURO-LAST DETAIL 4070

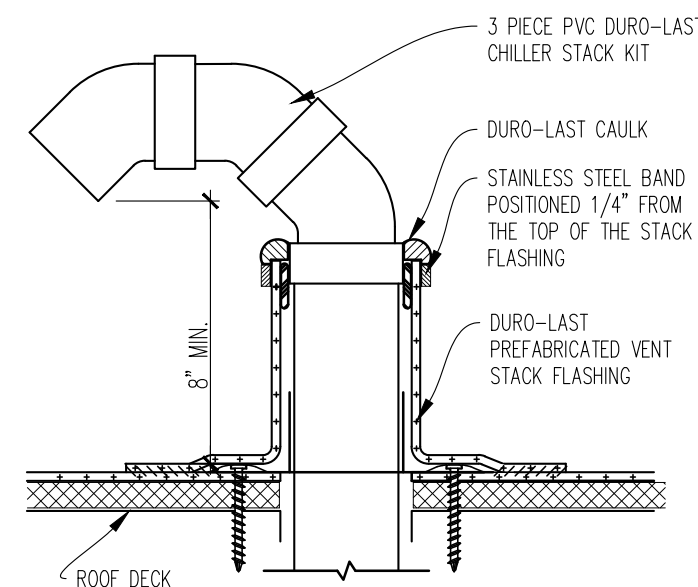

03 GOOSE-NECK CONDENSER PIPE DETAIL

SCALE: 1 1/2" = 1'-0"


THIS DETAIL IS BASED ON DURO-LAST DETAIL 4020

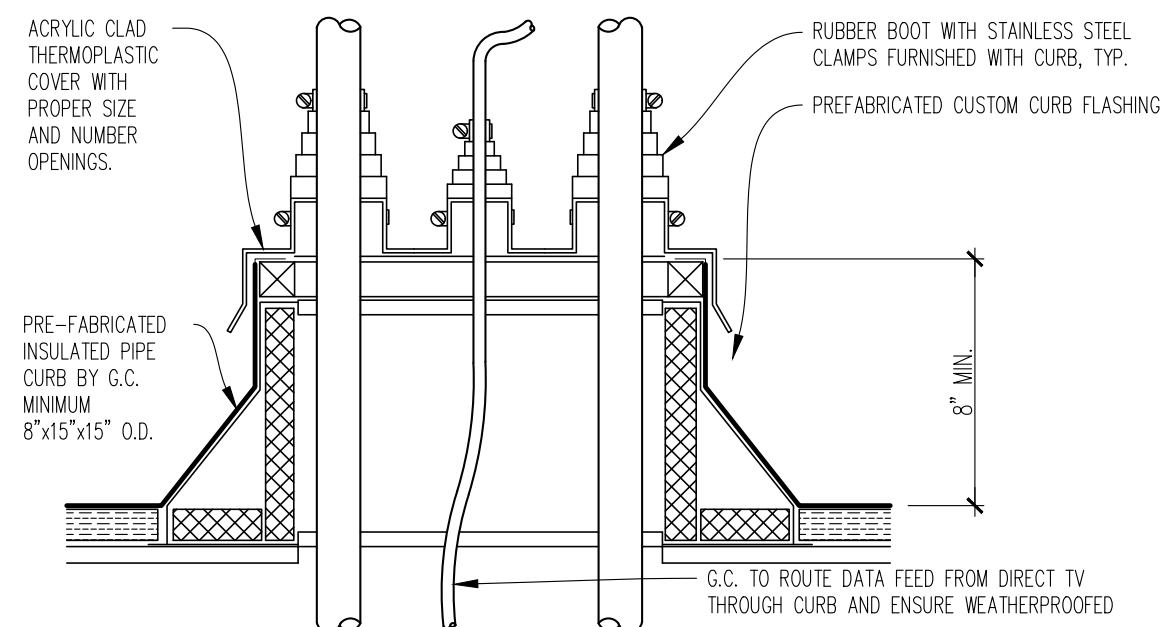

02 CONDENSER PIPE CURB DETAIL

SCALE: 1 1/2" = 1'-0"

DRINK STAND OPTIONS

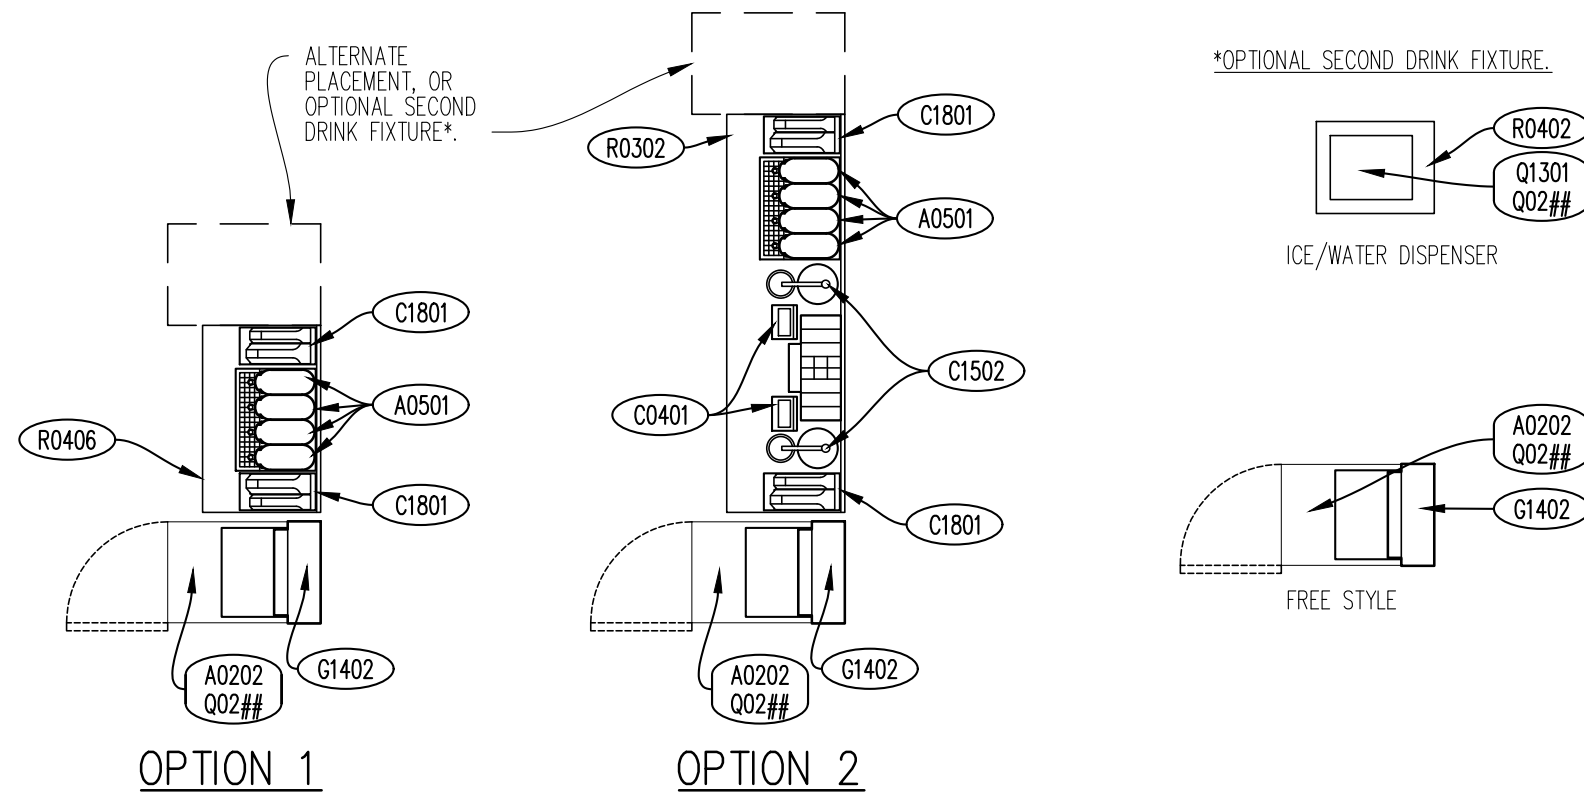

NOTE: OPTIONAL CONFIGURATIONS ABOVE ARE SHOWN FOR REFERENCE ONLY. REFER TO CONSTRUCTION PLAN CONFIGURATION BELOW FOR SELF SERVE DRINK TOWER LOCATION (MAY BE AT EITHER END OR BOTH). COORDINATE FINAL ORIENTATION AND PLACEMENT WITH OWNER'S REPRESENTATIVE.

SYMBOL LEGEND

SYMBOL	DESCRIPTION
XX-X XX-X XX-X XX-X	CEILING FINISHES, SEE FINISH SCHEDULE WALL FINISHES, SEE FINISH SCHEDULE BASE FINISHES, SEE FINISH SCHEDULE FLOOR FINISHES, SEE FINISH SCHEDULE
1-X 1-X	FLOORING TRANSITION WHERE DIMENSION PROVIDED IS WITHIN 2" OF EXISTING, TRANSITION SHALL BE LOCATED AT EXISTING.
XXXX XXXX XXXX	EQUIPMENT TAGS

ARTPACK & WAYFINDING LEGEND

AP-1	ENTRY BRAND MOMENT	WF-6	WOMEN'S ROOM DOOR SIGN
AP-1B		WF-7	MEN'S ROOM SIGN ADA
AP-2	QUALITY IS OUR RECIPE (NOT USED)	WF-8	WOMEN'S ROOM SIGN ADA
AP-3	DAVE THOMAS QUOTE	WF-9	CREW MUST WASH HANDS
AP-4	MEDALLION WENDY'S SEAL	WF-10	RESTROOM CLEANLINESS
WF-1	TACTILE EXIT SIGN	WF-12	EMPLOYEES ONLY
WF-3	WI-FI SIGN	WVK-H	HEISMAN - DITFA
WF-4	NO SMOKING SIGN	NP	NUTRITION POSTER
WF-5	MEN'S ROOM DOOR SIGN		

FLOOR & FINISH PLAN GENERAL NOTES

- G.C. SHALL BE RESPONSIBLE FOR VERIFYING "AS-BUILT" CONDITIONS AND LAYING OUT WORK BEFORE PROCEEDING WITH WORK
- EXTERIOR FINISHES ARE NOTED ON EXTERIOR ELEVATIONS.
- SEE INTERIOR ELEVATIONS FOR EXTENT OF NEW INTERIOR WALL FINISHES.
- KITCHEN EQUIPMENT DISTRIBUTOR WILL SUPPLY CRITICAL DIMENSIONS, PLUMBING AND ELECTRICAL SPECIFICATIONS FOR EQUIPMENT SUPPLIED BY THE KITCHEN EQUIPMENT DISTRIBUTOR.
- ELECTRICAL AND PLUMBING CONTRACTOR TO MAKE FINAL CONNECTION TO EQUIPMENT
- DESIGN INTENT IS FOR EXISTING FINISHES TO BE REPLACED WITH EQUIVALENT NEW FINISHES, U.N.O. COORDINATE WITH OWNER FOR OPTIONAL FINISH UPGRADES.
- G.C. TO PROVIDE AND INSTALL CRACK ISOLATION/WATERPROOF MEMBRANE AT ALL AREAS OF PORCELAIN, CERAMIC AND MARBLE TILES. "HYDRO BAN" BY LATIOTRETE. PROVIDE "LATASIL" SEALANT @ ALL AREAS OF EXPANSION JOINTS IN SUBSTRATE PRIOR TO INSTALLATION OF "HYDRO BAN". CONTACT LATIOTRETE AT (203) 376.8113
- PAINTER SHALL BE RESPONSIBLE FOR THE REMOVAL OF HARDWARE, SWITCH AND OUTLET COVERS, ETC, AND REINSTALLATION OF SAME AFTER PAINTING.
- RETOUCH OR REFRESH SURFACES DAMAGED BY SUBSEQUENT WORK AS DIRECTED BY GENERAL CONTRACTOR. THE COST OF SUCH RESTORATION WORK SHALL BE BORNE BY THE CONTRACTOR.
- THE CONTRACTOR IS RESPONSIBLE FOR PROVIDING PROPER PROTECTION AGAINST DAMAGE TO EXISTING FURNITURE, ADJACENT FINISHED WORK, FLOORING, ETC. IF APPLICABLE.
- REFER TO REFLECTED CEILING PLAN FOR CEILING TYPES, HEIGHTS, & FINISHES.
- COORDINATE MUSIC & WI-FI SYSTEM REQUIREMENTS WITH WENDY'S REPRESENTATIVE.
- FOR NEW DRINK STATIONS BEING ADDED, NEW CONDENSERS ON ROOF ARE REQUIRED. CONDENSERS TO BE INSTALLED ON EQUIPMENT RAILS SUPPLIED WITH UNITS. G.C. TO INSTALL EQUIPMENT RAILS AND CONDENSERS NO CLOSER THAN 10'-0" FROM ANY ROOF EDGE AND OUTSIDE AIR INTAKE. INSTALL RAILS PARALLEL WITH ROOF SLOPE TO ENSURE POSITIVE DRAINAGE. G.C. TO INSTALL NEW PIPE CURB FOR CONDENSER LINES PER DETAIL 02/A1.1. COORDINATE FINAL LOCATION OF CONDENSERS AND PIPE CURB WITH WENDY'S CONSTRUCTION MANAGER AND A.H.J. PATCH AND REPAIR EXISTING ROOF MEMBRANE AS REQUIRED USING MEMBRANE MANUFACTURER'S STANDARD DETAILS TO ENSURE EXISTING WARRANTY IS MAINTAINED.
- VERIFY LOCATION(S) OF EXISTING FLOOR DRAIN TO SERVE DRINK STAND. PROVIDE NEW DRAIN TO SERVE DRINK STAND WHERE EXISTING IS NOT AVAILABLE. SAW CUT FLOOR SLAB AS REQUIRED FOR INSTALLATION OF NEW DRAIN AND PATCH TO MATCH ADJACENT AFTER INSTALLATION. COORDINATE EXACT LOCATION.
- (N) SOLID SURFACE COUNTERTOP & RETROFIT FRONT COUNTER BASE CABINET AS REQUIRED FOR ORDER/PAY AND PICK-UP SEPARATION, INCLUDING (N) UNDER-COUNTER ICE BIN MAINTAIN (E) ICE BIN DRAIN FOR REUSE. RETROFIT KIT AVAILABLE THROUGH K.E.D., COORDINATE REQUIREMENTS WITH K.E.D. & GC AS REQUIRED. GC SHALL COORDINATE FINAL CASH DROP SAFE PLACEMENT WITH WENDY'S REPRESENTATIVE, INCLUDING ACCESS TO SAFE KEYS FROM RESTAURANT MANAGER.

CRITICAL NOTE:

THE GENERAL CONTRACTOR SHALL PROVIDE A CONTINGENCY BID FOR WORK IN THE BACK OF HOUSE/KITCHEN AREA BEYOND THE SCOPE OF THIS REFRESH SHOWN ON THESE DOCUMENTS. COORDINATE ANY/ALL WORK BID, PROPOSED, OR REQUIRED WITH THE WENDY'S CONSTRUCTION REPRESENTATIVE PRIOR TO PURCHASING OR BEGINNING ANY WORK BEYOND THE LIMITED SCOPE SHOWN ON THESE CONSTRUCTION DOCUMENTS.

EQUIPMENT SCHEDULE

MARK	DESCRIPTION OF EQUIPMENT	REMARKS	FURNISHED BY	INSTALLED BY
A0105/A0106	BEVERAGE SYSTEM DRIVE-THRU	FREESTYLE OR BEVAREITY	0	0
A0202	BEVERAGE SYSTEM SELF-SERVE DINING ROOM	FREESTYLE US SITES: "SILVER", CANADA SITES: "RED"	0	0
A0501	ICED TEA DISPENSER-NARROW OVAL		ES	ES
C0401	NAPKIN DISPENSER		ES	ES
C1502	KETCHUP PUMP		ES	ES
C1801	LID/STRAW DISPENSER		ES	ES
D0100	POS MONITOR	RUNNER SCREEN ON ARM	0	0
D0200	POS TERMINAL	EXISTING TO BE RELOCATED, OR (NEW OPTIONAL)	0	0
E1405	FRONT COUNTER (COUNTER TOP ONLY)		ES	ES
N0202	CASH DROP BOX	EXISTING TO BE RELOCATED, OR (NEW OPTIONAL)	ES	ES
E4302	DESSERT CASE / BAKERY CASE (US ONLY)		ES	ES
001##	REMOTE CONDENSING UNIT - DINING ROOM (ROOF)	# KITCHEN EQUIPMENT SUPPLIER TO VERIFY ACTUAL EQUIPMENT / MODEL / FINISH TO BE USED	ES	ES
002##	ICE MACHINE - DINING ROOM	*QUANTITY WILL VARY DEPENDING ON EXACT BEVERAGE SYSTEM CONFIGURATION	ES	ES
Q1301	ICE & WATER DISPENSER	OPTIONAL		
*R0102	TRASH RECEPTACLE		ES	ES
R0302	CONDIMENT STAND (W/DRAIN)	OPTIONAL	ES	ES
R0402	ICE & WATER CABINET	OPTIONAL		
R0406	SMALL DRINK CONDIMENT STAND (W/DRAIN)		ES	ES
G1402	SELF SERVE CHASE ASSEMBLY		ES	ES
R0503	LOUNGE CHAIR			
R0505	CHAIR - STANDARD HEIGHT			
R0506	CHAIR - COUNTER HEIGHT		ES	ES
R0507	CHAIR - BAR HEIGHT		ES	ES
R1603	HIGH CHAIRS		ES	ES
R1705	BOOSTER CHAIR		ES	ES
R2001	TABLE TOP 20"x24"			
R2005	TABLE TOP 22"x42" (W/ 4 EASED CORNERS)			
R2010	TABLE TOP 20"x42"		ES	ES
R2015	TABLE TOP 20 1/2"x20 1/2"			
R2022	TABLE TOP 24" ROUND CLIPPED			
R2025	TABLE TOP 42" ROUND			
R2043	6-TOP FAMILY TABLE AND BASE			
R2045	FREESTANDING COMMUNITY W-TABLE (8 SEAT)			
R2046	CANTILEVERED COMMUNITY W-TABLE (8 SEAT)			
R2101	TABLE BASE (22"x22") - STANDARD HEIGHT			
R2102	TABLE BASE (22"x22") - COUNTER HEIGHT			
R2106	TABLE BASE (42") STANDARD HEIGHT			
R2105	TABLE BASE (ACCESSIBLE) - STANDARD HEIGHT	2 BASES PER TABLE		
R2121	TABLE BASE (20x20) - LOUNGE TABLE			
R2601	14'-0" DINQUETTE			
R2607	WIFI BAR (8 SEAT)	POWER RECEPTACLES REQUIRED		
R3001	CONDIMENT STAND - 54"			
R3201	WELCOME WALL			
R3202	8'-0" INTERIOR RED BLADE			
U0504	BACKLIT STATIC MERCHANDISER (RED/HEAD ROASTERS)	# OWNER TO VERIFY ACTUAL EQUIPMENT/MODEL TO BE USED	0	0
U0511	BACKLIT STATIC QUELING BOARDS	# OWNER TO VERIFY ACTUAL EQUIPMENT/MODEL TO BE USED	0	0
U0510	BACKLIT STATIC MENU BOARDS	# OWNER TO VERIFY ACTUAL EQUIPMENT/MODEL TO BE USED	0	0
R0000	CUSTOMER ORDER TERMINAL	OPTIONAL	0	0

FIRE DEPARTMENT NOTES

MAINTAIN FIRE DEPARTMENT EMERGENCY ACCESS THROUGHOUT THE RENOVATION

01 FLOOR, FINISH AND EQUIPMENT PLAN

SCALE: 1/4" = 1'-0"

SITE NUMBER:	3835
BASE MODEL:	4058
ASSET TYPE:	COMPANY/FRANCHISE
CLASSIFICATION:	REFRESH LITE
OWNER:	OWNER NAME
BASE VERSION:	2017 SPRING
UPGRADE CLASSIFICATION:	
	N/A
PROJECT YEAR:	2018
FURNITURE PACKAGE:	2018
DRAWING RELEASE:	MARCH 2017



6930 DESTINY DRIVE
SUITE 100
ROCKLIN, CA 95677

(916) 415-5358
rpedra@pmdesign.com

Ray W. Pedra, Architect

PROJECT TYPE:	E4056
	REFRESH LITE

Wendy's

102 ENCINITAS BLVD.
ENCINITAS, CA 92024

REV.	DATE	DESCRIPTION
	9/30/2019	BLDG 1ST SUBMITTAL
	10/10/2019	PLANNING REVISIONS
1	10/24/2019	BLDG. COMMENTS
2	10/31/2019	PLANNING COMMENTS
3	10/31/2019	QA/QC COMMENTS


ISSUE DATE: 04/20/2018

PROJECT NUMBER: WKS18003.0

DRAWN BY: XXX

CHECKED BY: XXX

SEAL

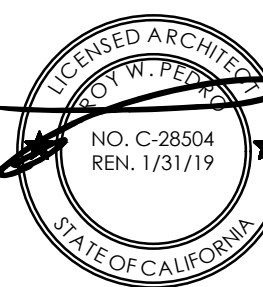


SHEET NAME
FLOOR, FINISH
& EQUIPMENT PLAN


SHEET NUMBER

A1.1

12/22/2018, 11:09 AM, P:\DENOT-Projects Colorado\Wendy's\WKS18003.0 102 Encinitas Blvd, Encinitas\Bldg, Encinitas 383901-Drawings Current\01-Architectural\03 - Construction Documents\10_3835_A1.3 ROOF PLAN.dwg, jhughes

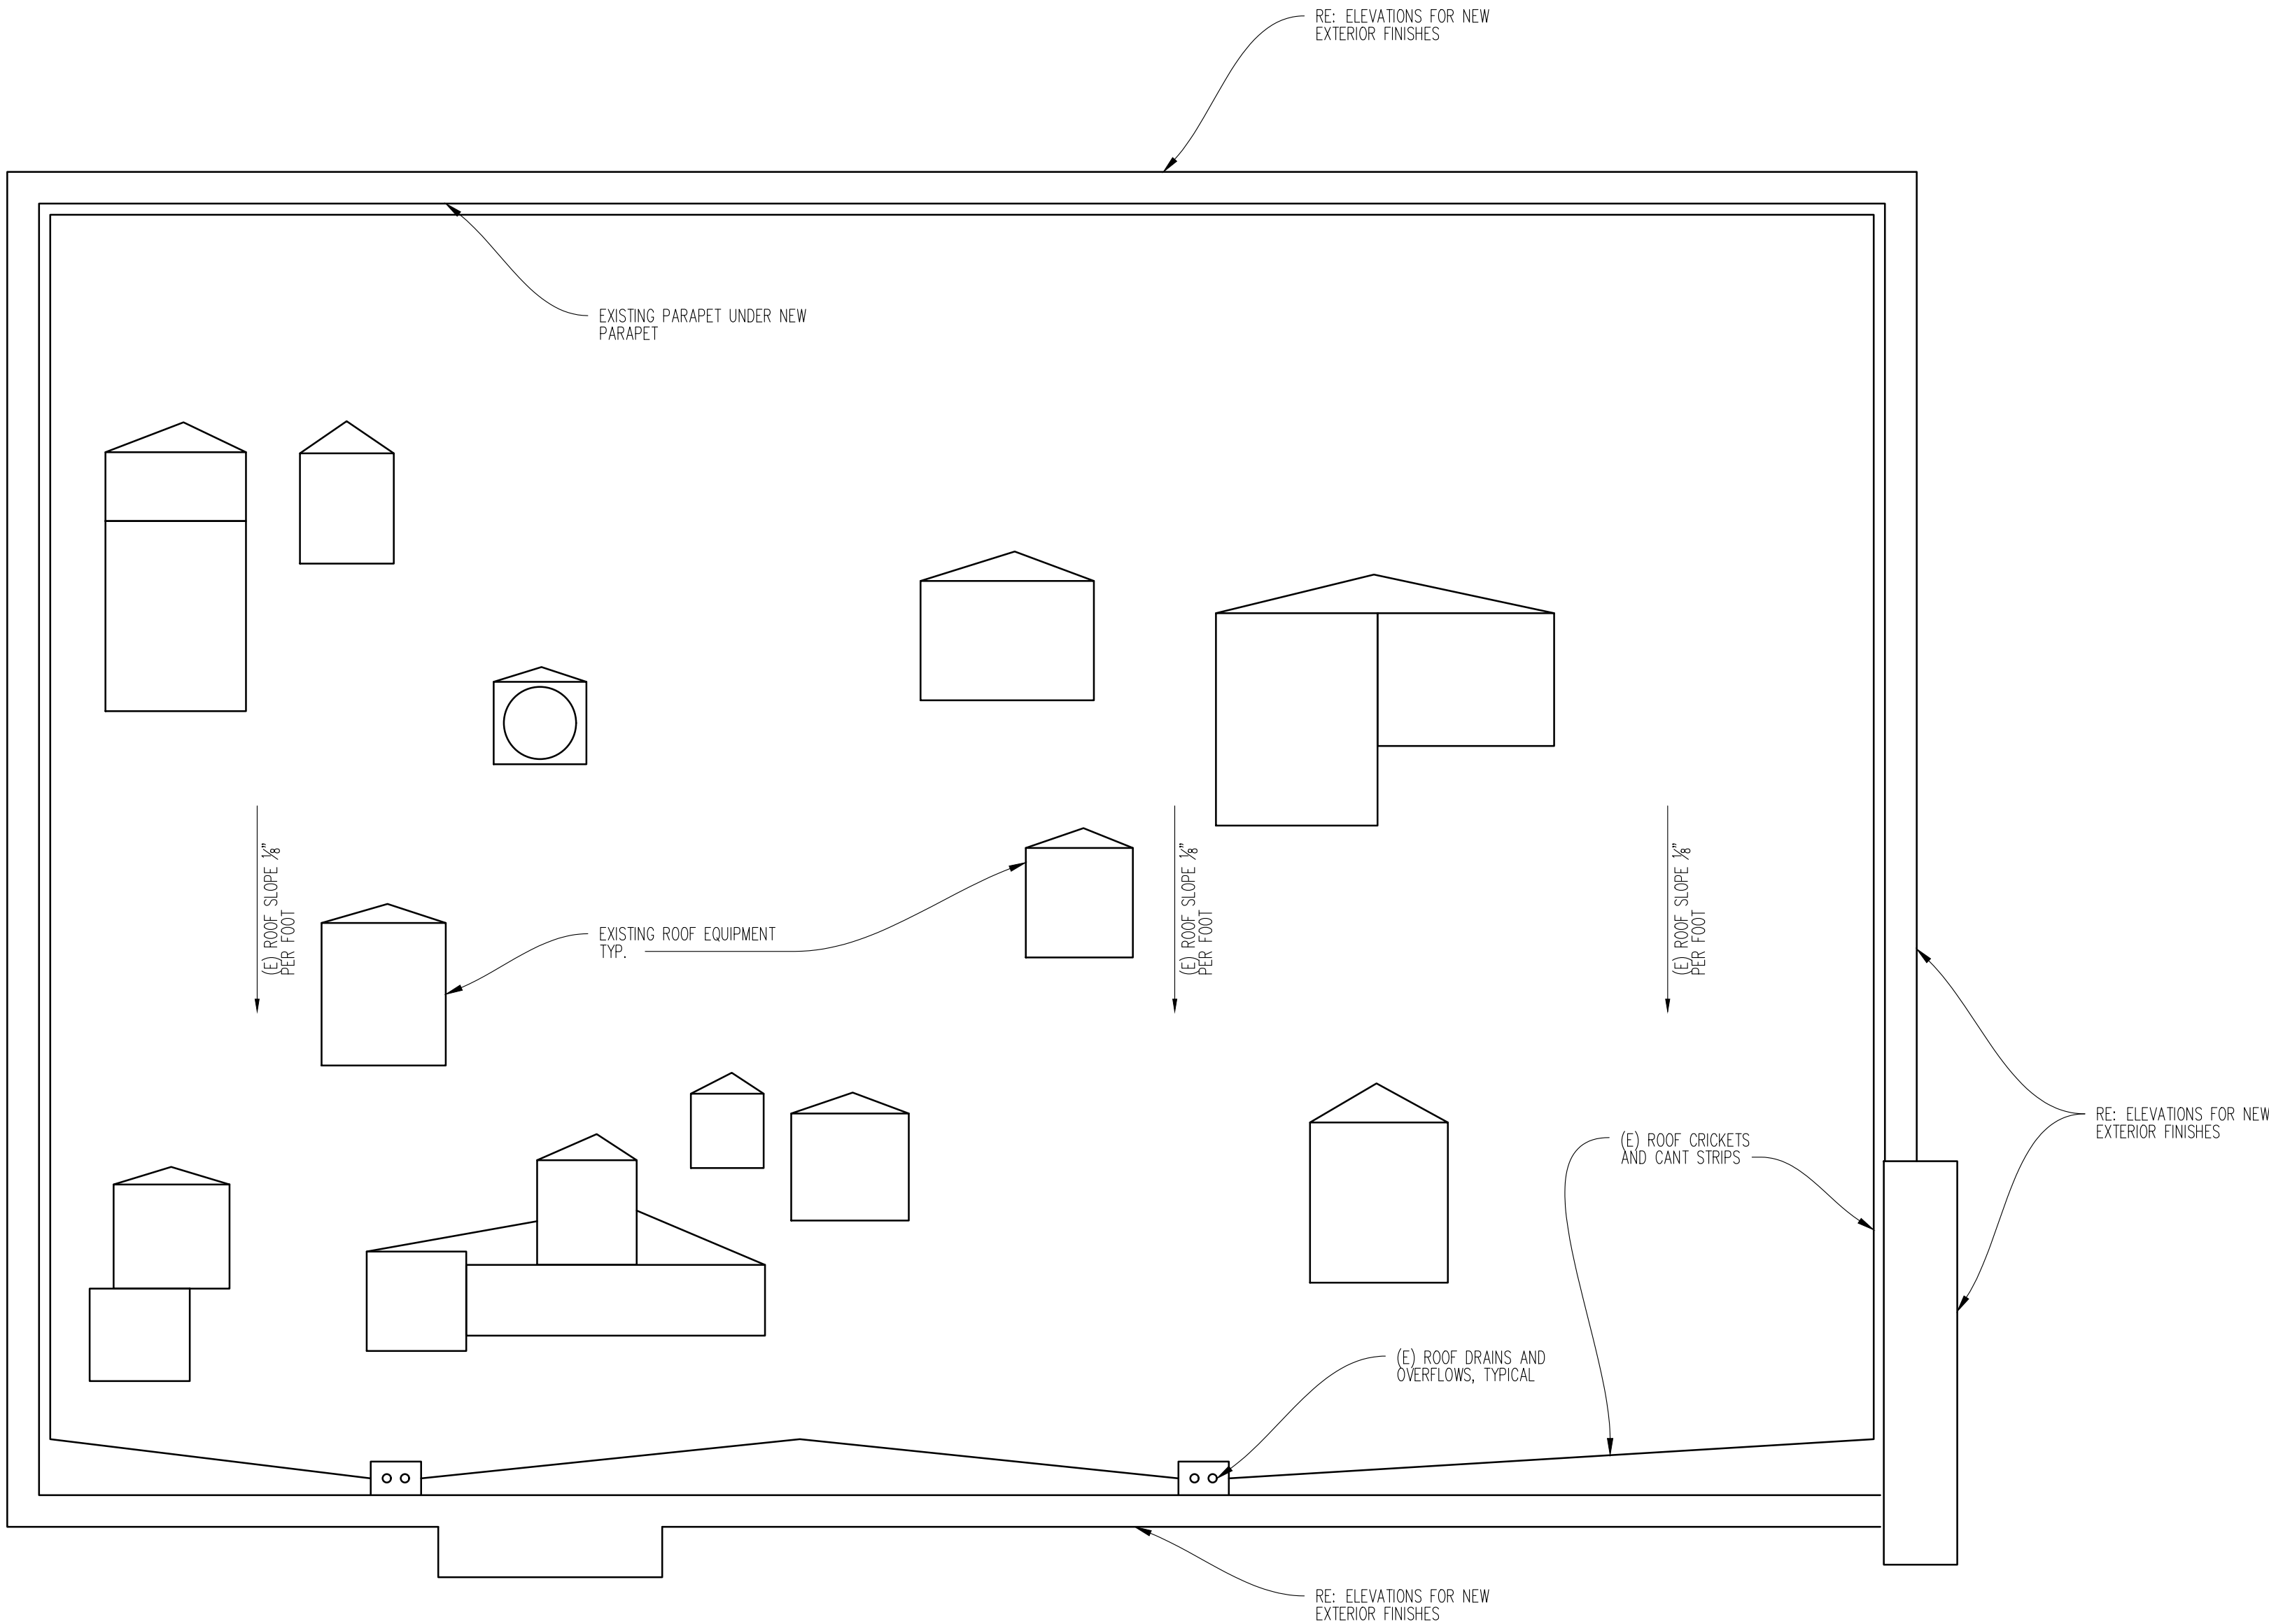

01 ROOF PLAN
SCALE: 1/4" = 1'-0"



SITE NUMBER:	3835
BASE MODEL:	4058
ASSET TYPE:	COMPANY/FRANCHISE
CLASSIFICATION:	REFRESH LITE
OWNER:	OWNER NAME
BASE VERSION:	2017 SPRING
UPGRADE CLASSIFICATION:	N/A
PROJECT YEAR:	2018
FURNITURE PACKAGE:	2018
DRAWING RELEASE:	MARCH 2017



6930 DESTINY DRIVE
SUITE 100
ROCKLIN, CA 95677

(916) 415-5358
rpedro@pmdgnc.com

Roy W. Pedro, Architect

PROJECT TYPE: E4056
REFRESH LITE

Wendy's.
102 ENCINITAS BLVD.
ENCINITAS, CA 92024

REV.	DATE	DESCRIPTION
	9/30/2019	BLDG 1ST SUBMITTAL
	10/10/2019	PLANNING REVISIONS
1	10/24/2019	BLDG. COMMENTS
2	10/31/2019	PLANNING COMMENTS
3	10/31/2019	QA/QC COMMENTS


ISSUE DATE: 04/20/2018

PROJECT NUMBER: WKS18003.0

DRAWN BY: XXX

CHECKED BY: XXX

SEAL

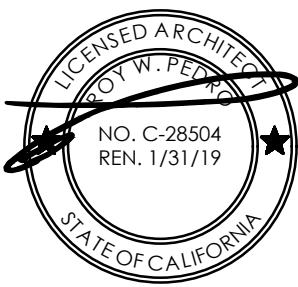

SHEET NAME
ROOF PLAN

SHEET NUMBER

A1.3

NOTE:
Existing storefront and storefront doors are
Dark Bronze Aluminum finish.



04 SOUTH ELEVATION
SCALE: 1/4" = 1'-0"



03 NORTH ELEVATION
SCALE: 1/4" = 1'-0"



02 EAST ELEVATION
SCALE: 1/4" = 1'-0"



01 WEST ELEVATION
SCALE: 1/4" = 1'-0"

MATERIAL LEGEND



E.F.I.S.
Color: Wendy's Red



Ribbed Metal Panel
System
ALCOA Reynolux
7.2" rib panel
Color: Classic Bronze



Paint
Sherwin Williams
Color: Biscuit SW6112



Exterior Tile
Crossville
Color: Wendy's Wood
Grain



Pre-Finished Cap
Color: Dark
Bronze



Paint
Sherwin Williams
Color: Mississippi
Bronze

SITE NUMBER:	3635
BASE MODEL:	4058
ASSET TYPE:	COMPANY/FRANCHISE
CLASSIFICATION:	REFRESH LITE
OWNER:	OWNER NAME
BASE VERSION:	2017 SPRING
UPGRADE CLASSIFICATION:	N/A
PROJECT YEAR:	2018
FURNITURE PACKAGE:	2018
DRAWING RELEASE:	MARCH 2017



6930 DESTINY DRIVE
SUITE 100
ROCKLIN, CA 95677
916.415.5358
pdesign@pdesignco.com
Roy W. Pdesign, Architect

PROJECT TYPE: E4058
REFRESH LITE

Wendy's®

102 ENCINITAS BLVD.
ENCINITAS, CA 92024

REV.	DATE	DESCRIPTION
1		
2		
3		
4		
5		

ISSUE DATE: 04/20/2018
PROJECT NUMBER: WKS18001.0
DRAWN BY: XXX
CHECKED BY: XXX



SHEET NAME
ELEV RENDERING





SHEET NUMBER
A2.1

BUILDING SIGNAGE TABLE		
ELEVATION	EXISTING	PROPOSED
SOUTH	36.30 S.F.	16.25S.F.
NORTH	36.30 S.F.	16.25 S.F.
EAST	36.30 S.F.	22.1 S.F.
WEST	36.30 S.F.	0 S.F.

(N) WENDYS SIGN	
TOTAL	16.25 S.F.
(N) SIGN QUALITY IS OUR RECIPE	
TOTAL	5.85 S.F.

NOTE:

1. ALL LIGHT FIXTURES WILL BE SHIELDED AND POINTED DOWNWARD.
2. PAINT EXISTING TRASH ENCLOSURE, "BISCUIT" SW6112,
3. NEW PARAPET HEIGHT WILL NOT EXCEED 40' IN HEIGHT PER CBC 504.3

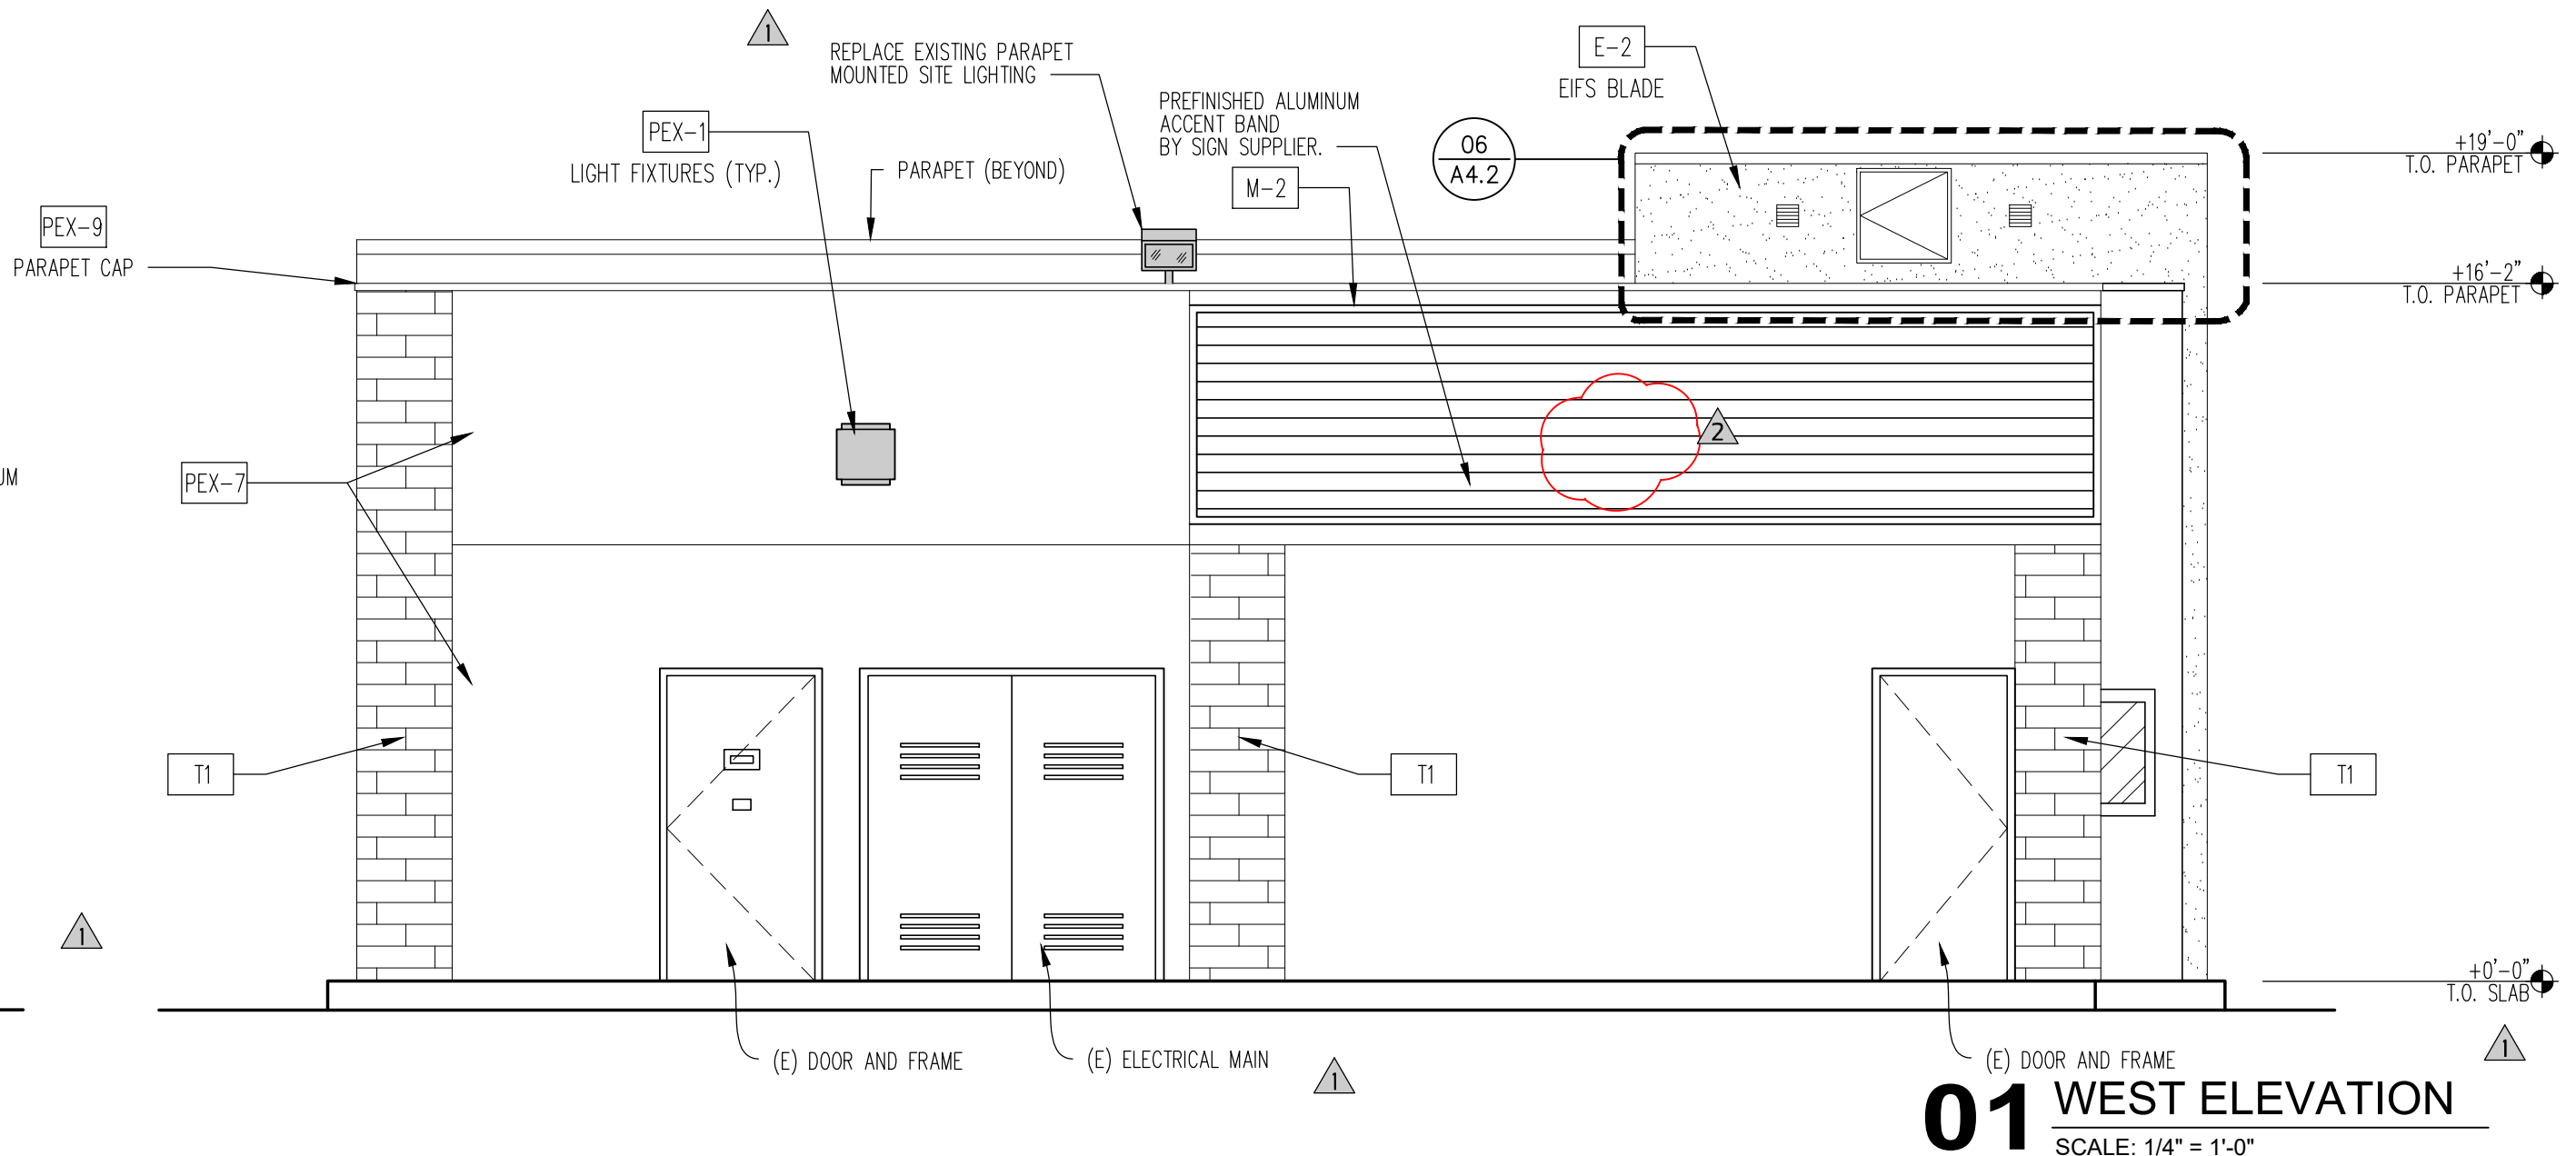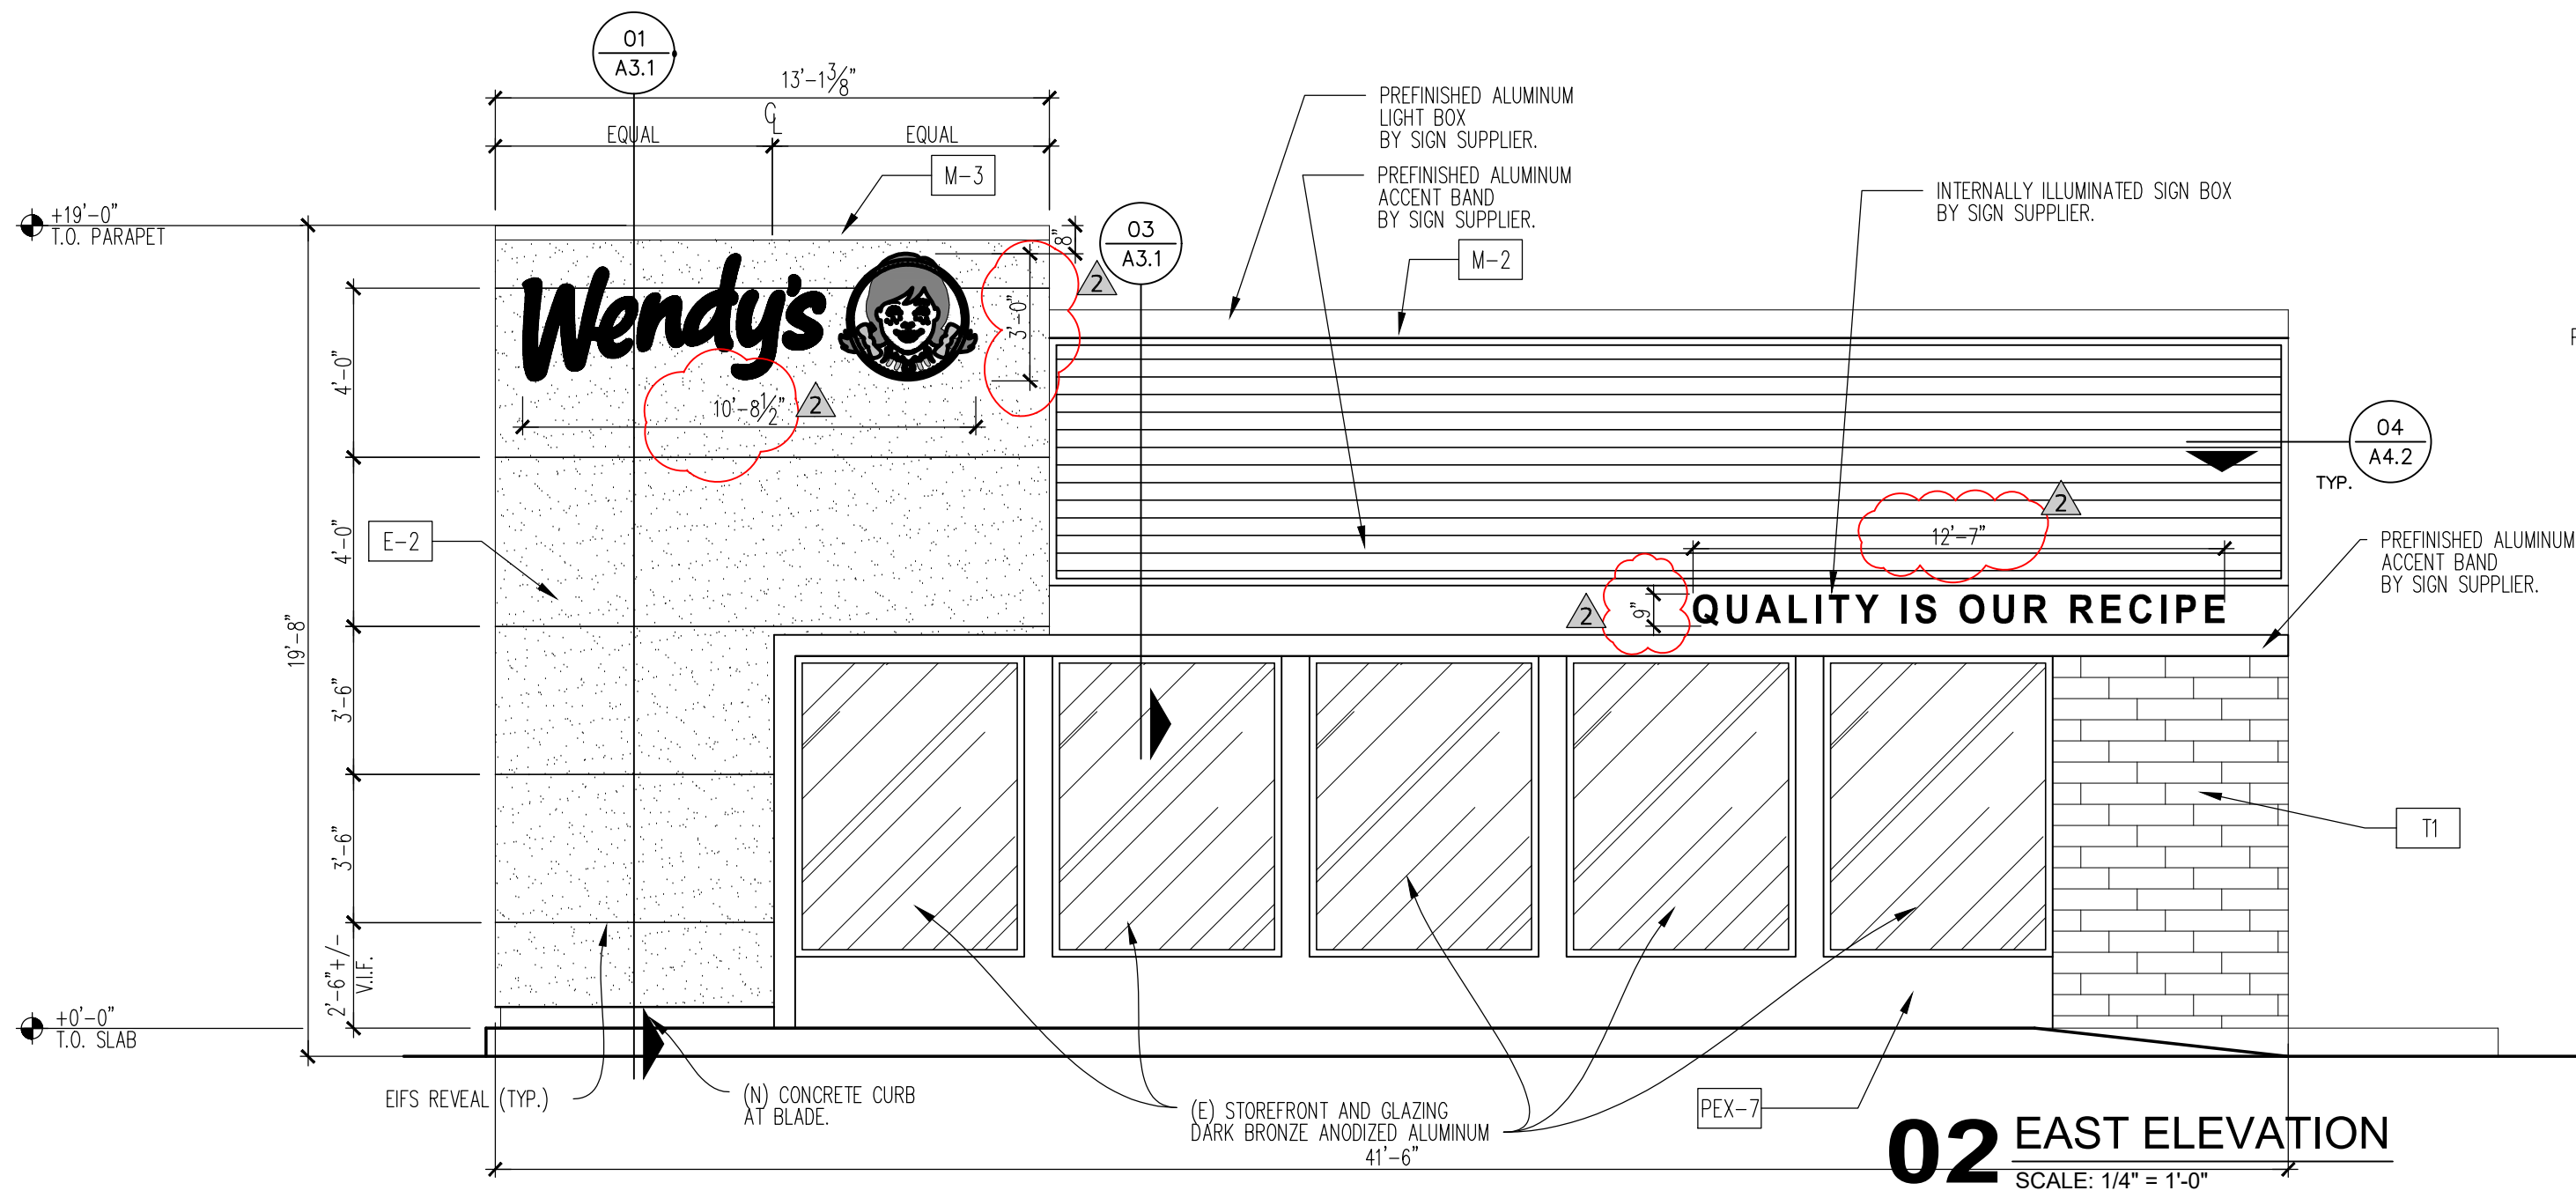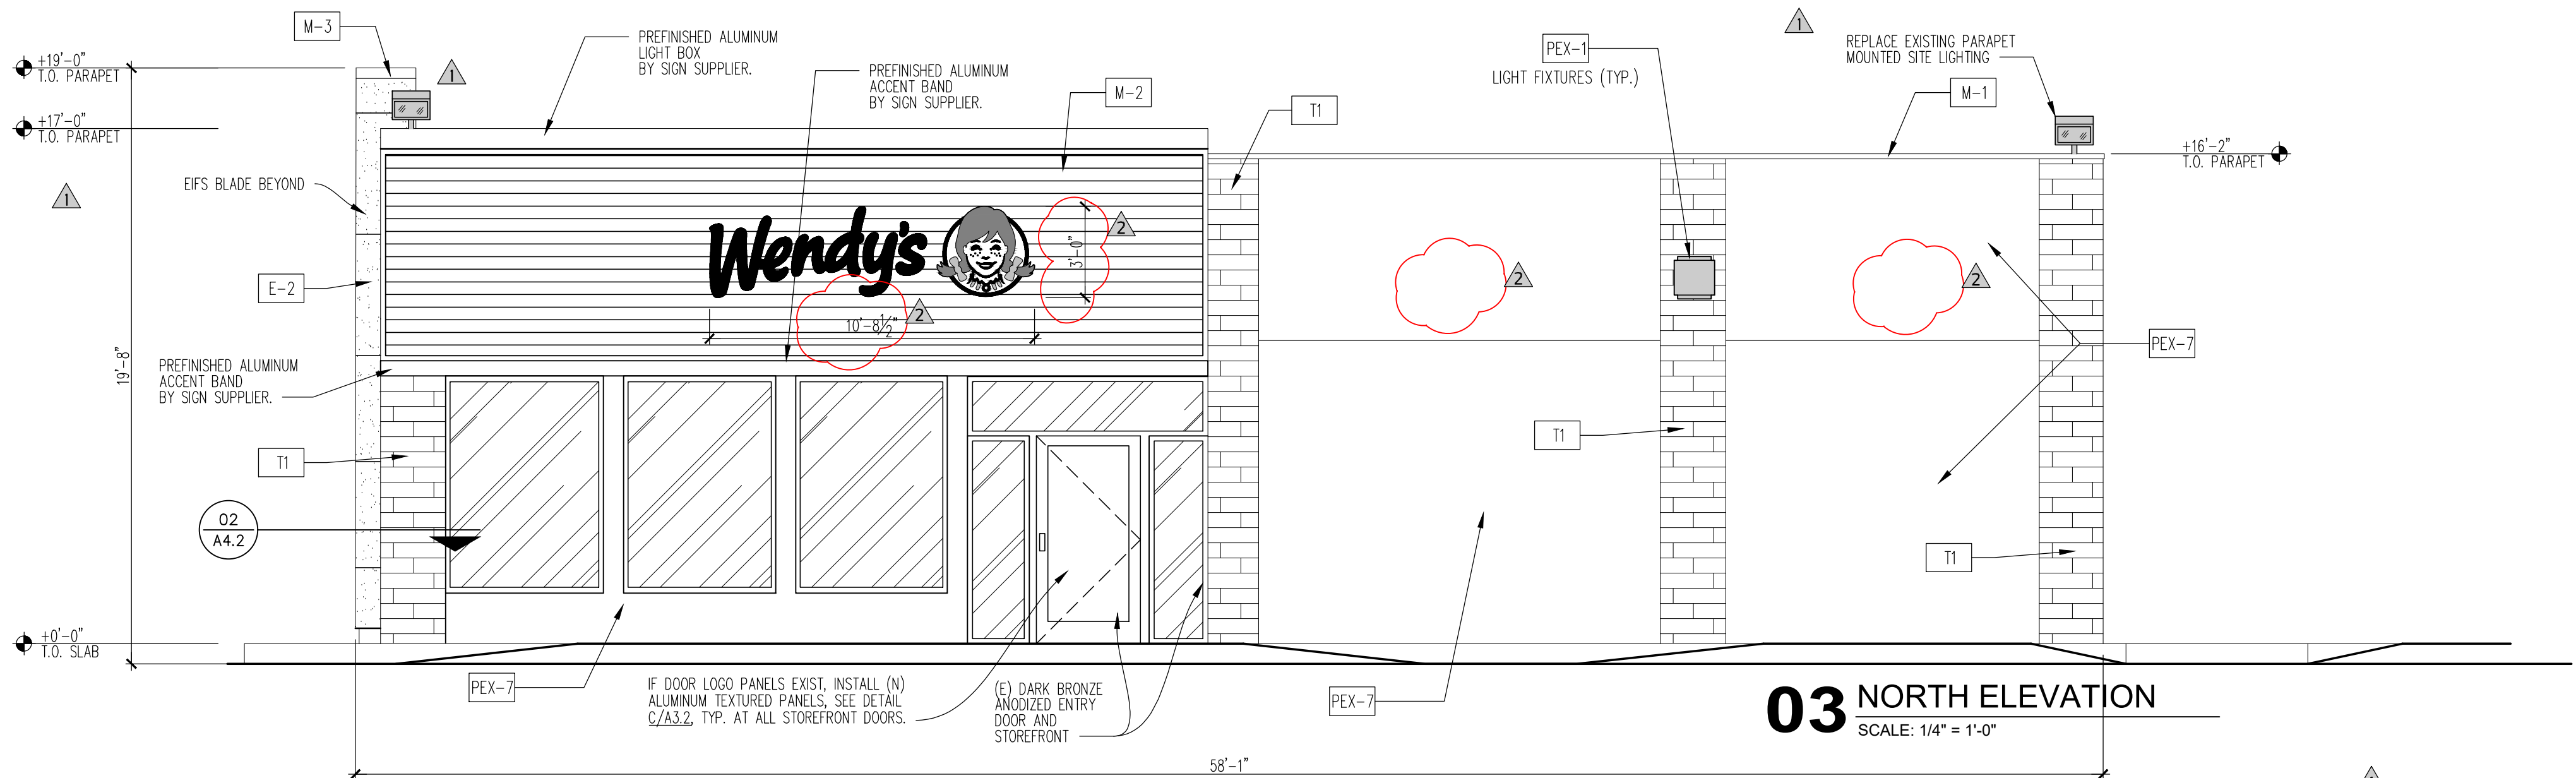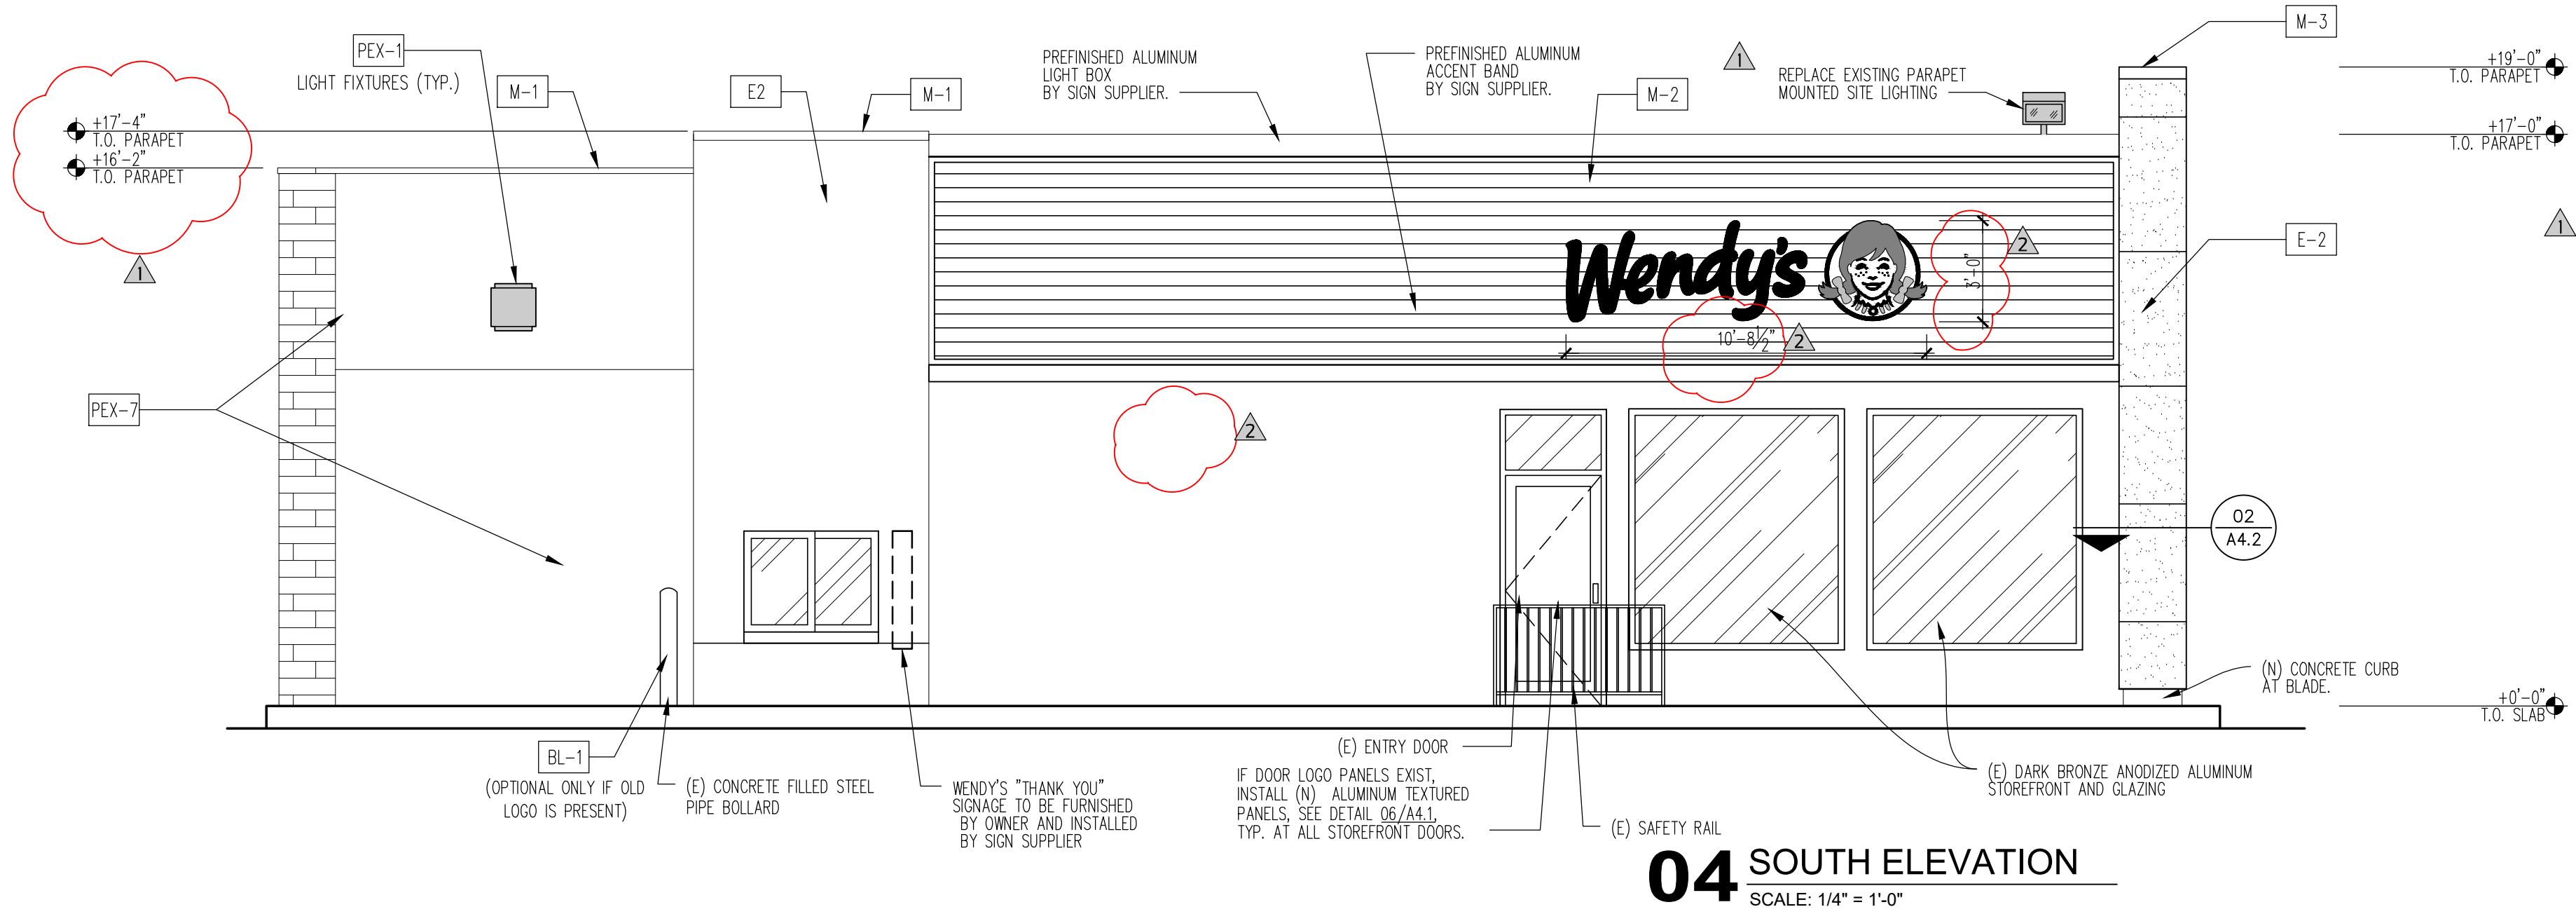

SITE NUMBER:	3835
BASE MODEL:	4058
ASSET TYPE:	COMPANY/FRANCHISE
CLASSIFICATION:	REFRESH LITE
OWNER:	OWNER NAME
BASE VERSION:	2017 SPRING
UPGRADE CLASSIFICATION:	N/A
PROJECT YEAR:	2018
FURNITURE PACKAGE:	2018
DRAWING RELEASE:	MARCH 2017



6930 DESTINY DRIVE
SUITE 100
ROCKLIN, CA 95677

(916) 415-5358
rpedro@pmdgnc.com

Roy W. Pedro, Architect

PROJECT TYPE: E4056
REFRESH LITE

Wendy's

102 ENCINITAS BLVD.
ENCINITAS, CA 92024

REV.	DATE	DESCRIPTION
	9/30/2019	BLDG 1ST SUBMITTAL
	10/10/2019	PLANNING REVISIONS
1	10/24/2019	BLDG./ HEALTH COMMENTS
2	10/31/2019	PLANNING COMMENTS
3	10/31/2019	QA/QC COMMENTS


ISSUE DATE: 04/20/2018

PROJECT NUMBER: WKS18003.0

DRAWN BY: XXXX

CHECKED BY: XXXX

SEAL

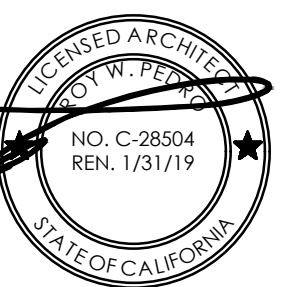

SHEET NAME
EXTERIOR ELEVATIONS

SHEET NUMBER
A2.2

FLOORING



**PM
DESIGN**

**Architectural
Solutions Group**

6930 DESTINY DRIVE
SUITE 100
ROCKLIN, CA 95677

[916] 415-5358
rpedro@pmdginc.com

Roy W. Pedro, Architect

REV.	DATE	DESCRIPTION
	9/30/2019	BLDG 1ST SUBMITTAL
	10/10/2019	PLANNING REVISIONS
1	10/24/2019	BLDG. COMMENTS
2	10/31/2019	PLANNING COMMENTS
3	10/31/2019	QA/QC COMMENTS

SEAL

SHEET NUMBER