

WINDOW SCHEDULE				
Type Mark	Window			Comments
	Width	Height	Head Height	
A	3' - 0"	5' - 0"	<varies>	
B	3' - 0"	2' - 0"	7' - 0"	
C	6' - 0"	6' - 8"	8' - 8"	

DOOR & FRAME SCHEDULE M+D				
NUMBER	ROOM NAME	DOOR PANEL		NOTES
		SIZE		
		W	H	
B126		16' - 0"	7' - 0"	
B127	LIVING ROOM	3' - 4"	6' - 8"	
B128	ENTRY WAY	3' - 4"	6' - 8"	
B129	BATHROOM #1	2' - 10"	6' - 8"	
B130	BEDROOM #2	2' - 4"	6' - 8"	
B131	BEDROOM #2	2' - 10"	6' - 8"	
B132	MASTER BEDROOM	2' - 10"	6' - 8"	
B133	MASTER BEDROOM	2' - 10"	6' - 8"	
B134	WIC	2' - 10"	6' - 8"	
B135	BEDROOM #1	2' - 10"	6' - 8"	
B136	BEDROOM #1	2' - 4"	6' - 8"	
B137	HALLWAY	5' - 0"	6' - 8"	
B139	MASTER BATH	2' - 4"	6' - 8"	
B141	LIVING ROOM	2' - 10"	6' - 8"	
B143	HALLWAY	2' - 4"	6' - 8"	
B144	KITCHEN	0"	0"	
B145		2' - 8"	2' - 0"	

DOOR GENERAL NOTES

- A. THIS DOOR SCHEDULE(S) IS FURNISHED FOR WHATEVER ASSISTANCE IT MAY AFFORD THE CONTRACTOR. DO NOT CONSIDER IT AS ENTIRELY INCLUSIVE. CAREFULLY EXAMINE THE DRAWINGS (ESPECIALLY THE FLOOR PLANS) AND THE SPECIFICATIONS TO DETERMINE THE EXTENT OF DOOR AND FRAME QUANTITIES REQUIRED (INCLUDING INTERIOR BORROWED LITE OR SIDELITE OPENINGS). SHOULD ANY PARTICULAR DOOR, FRAME, OR INTERIOR BORROWED LITE OR SIDELITE SHOWN ON THE DRAWINGS BE INADVERTENTLY OMITTED FROM THIS SCHEDULE, SUPPLY SAME AS REQUIRED FOR SIMILAR OPENINGS.
- B. THE "DOOR WIDTH" COLUMN DESIGNATES THE TOTAL WIDTH OF ALL LEAVES. IN MULTIPLE LEAF CONDITIONS, THE LEAVES SHALL EQUALLY DIVIDE THE "DOOR WIDTH" UNLESS NOTED OTHERWISE; HOWEVER, THE ACTIVE LEAF SHALL NOT BE LESS THAN 3'-0" WIDE.
- C. DOOR TYPE "X" DENOTES A FRAME WITH NO DOOR SUCH AS A BORROWED LITE, REFERENCE FRAME ELEVATIONS.
- D. AN ASTERISK (*) IN A DIMENSION DENOTES A WIDTH THAT VARIES, REFERENCE PLANS, ELEVATIONS, DETAILS AND SCHEDULES.
- E. VERIFY LOCKSETS WITH THE OWNER DURING SUBMITTALS.

DOOR & FRAME SCHEDULE NOTES
SEE DOOR SCHEDULE

1. SET DOOR IN FRAME TO ALLOW FOR 180" DOOR SWING
4. **INTERIOR DOORS** - 2 PANEL HOLLOW-CORE DOORS
5. **EXTERIOR DOORS** - QUARTER LITE WITH ZERO ENTRY THRESHOLD FOR OF THE EXTERIOR DOORS.

GENERAL NOTES

THE FOLLOWING GENERAL NOTES ARE APPLICABLE THROUGHOUT THESE CONSTRUCTION DRAWINGS.

1. CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND CONDITIONS PRIOR TO START OF CONSTRUCTION AND SHALL NOTIFY ARCHITECT OF ANY DISCREPANCIES IMMEDIATELY .
2. CONTRACTOR SHALL CAREFULLY STUDY ALL OF THE CONTRACT DOCUMENTS AND SHALL VERIFY ALL EXISTING SITE CONDITIONS WITH CONSTRUCTION DOCUMENTS PRIOR TO PROCEEDING WITH ANY PORTION OF THE WORK AND TO NOTIFY THE ARCHITECT OF ANY VARIANCES.
3. CONTRACTOR TO VERIFY ALL DIMENSIONS IN FIELD
4. ANY CONDITIONS, MATERIALS, DEVICES OR DETAILS NOT SPECIFICALLY SHOWN ON THE DRAWINGS SHALL BE CLARIFIED WITH THE ARCHITECT BEFORE CONSTRUCTION INSTALLATION OR APPLICATION . GENERAL SUBCONTRACTORS SHALL COMPLY WITH ALL GOVERNING CODES, BUILDINGS REGULATIONS OF FEDERAL, STATE, CITY, AND COUNTY, WHICHEVER GOVERNS THE CONSTRUCTION WORK.
5. GENERAL AND/OR SUBS SHALL PAY FOR ALL PERMITS AND FEES AND ARRANGE FOR INSPECTION BY AUTHORITIES. THEY SHALL MAKE ARRANGEMENTS AND PAY FOR WORK TO BE DONE BY UTILITY COMPANIES PERTAINING TO THIS WORK.
6. ALL MATERIAL CALLED OUT ON DRAWINGS ARE TO BE NEW UNLESS NOTED OTHERWISE OR "EXISTING."
7. EACH TRADE SHALL BE RESPONSIBLE FOR ANY LOSS OR DAMAGE TO THE OWNER OR THE WORK, MAKE GOOD ANY LOSS, DAMAGE OR INJURY WITHOUT COST TO THE OWNER.
8. KEEP PREMISES FREE FROM ACCUMULATION OF TRASH AND DEBRIS.
9. UPON COMPLETION REMOVE ALL FOREIGN MATERIALS FROM ALL EXPOSED SURFACES.
10. CONFINE ALL OPERATIONS TO AREAS OF WORK AS SHOWN. KEEP AREAS ADJACENT TO THE WORK CLEAR AT ALL TIMES.
11. SUBCONTRACTORS SHALL PROVIDE EVIDENCE OF INSURANCE, LICENSE, & WORKERS COMP. PRIOR TO WORK OF SUBCONTRACTOR AND SHALL MAINTAIN THESE REQUIREMENTS THROUGHOUT DURATION OF WORK
12. **SITE**- SEED AND STRAW IN THE YARD
13. **RADON SYSTEM** - ADD AN ACTIVE RADON REMOVAL SYSTEM
14. **DOOR HARDWARE** - BRUSH NICKEL FINISH (KWIKSET MINIMUM LEVEL OF QUALITY FOR HARDWARE MANUFACTURES.)
15. **WINDOWS** - ALL WINDOWS SHALL BE SINGLE-HUNG WINDOWS WITH A LOW-E FINISH
A. SILL SHALL BE CONSTRUCTED OF WOOD
16. **INTERIOR TRIM** - WOOD IS TO BE USED THROUGH OUT (MDF NOT ALLOWED)
17. **WALL BASE** - 4 1/4" WOOD BASE WITH SHOE MOLDING AT HARD SURFACE FLOOR FINISHES
18. **SHELVING** - WIRE BASE SHELVING
19. **FURNACE & A/C** - 92% FURNACE EFFICIENT OR BETTER (GAS) WITH 14+ SEAR FOR THE A/C
A. PAD AND CAGE FOR THE CONDENSOR
B. LOCATE THE CONDENSOR NEXT TO FURNACE ROOM.
C. ONE AIR RETURN PER FLOOR
20. **WATER HEATER** - ELEC. WATER HEATER 50 GALLON
21. **FIXTURES** - DELTA FIXTURES
22. **LIGHTING** - CAN LED LIGHTS (DAYLIGHT 5000K) IN ALL PUBLIC AREAS
A. NO CAN LIGHTS IN BEDROOM PROVIDE (J-BOX FOR CEILING FANS)
B. DAY LIGHTS 5000K FOR BEDROOM
C. EXTERIOR LIGHTS LOCATED IN PORCH CEILING
D. HANGING LIGHTS OVER BAR COUNTER- (PICKED BY OWNER)
23. **KITCHEN** - A. 30" ELEC. RANGE, B. 36" REFRIGERATOR W/ WATERLINE (ROUGH-IN FOR AN ICE MAKER)
C. KITCHEN SINK - STAINLESS STEEL, D. OVERHEAD MICROWAVE & VENT COMBO VENTED OUTSIDE
24. **CRAWL SPACE** - ONE LIGHT WITH A SUMP PUMP PIT WITH POWER.
25. **MAILBOX** - WALL MOUNTED
26. **HOSE BIB** - OPPOSITE THE KITCHEN SINK LOCATION
27. **INTERIOR DOORS** - 2 PANEL HOLLOW-CORE DOORS
28. **ROOF FRAMING** - 2X JOIST AND RAFTER FRAMING @ 16" O.C. WITH 7/16" DECKING

GENERAL FRAMING NOTES

THE FOLLOWING GENERAL NOTES ARE APPLICABLE THROUGHOUT THESE CONSTRUCTION DRAWINGS.

DESIGN LOADS

FLOOR:- 40 PSF LIVE LOAD
10 PSF DEAD LOAD
L/600 LIVE LOAD DEFLECTION

ROOF:-

20 PSF LIVE LOAD (SNOW)
10 PSF DEAD LOAD
NOTE: REFER TO STRUCTURAL DRAWINGS FOR TRUSS SPECIFICATIONS

ROUGH CARPENTRY

1. THE CARPENTER SHALL CAREFULLY LAY OUT AND ERECT ALL STRUCTURAL MEMBERS OF ROUGH CARPENTRY, FRAMING, SHEATHING, AND BRIDGING. ALL MEMBERS SHALL BE PROPERLY PLUMBED, LEVELED, AND BRACED UNTIL ALL STRUCTURAL CONNECTIONS ARE IN PLACE. A SUFFICIENT NUMBER OF NAILS, SCREWS, AND BOLTS SHALL BE USED TO INSURE THE RIGIDITY OF CONSTRUCTION.
2. FRAMING LUMBER SHALL CONFORM WITH NATIONAL DESIGN SPECIFICATIONS FOR STRESS GRADE LUMBER AND ITS FASTENINGS.
- JOIST AND ALL OTHERS: Fb = 1450 PSI
NO. 2 DOUGLAS FIR LARCH Fc = 1000 PSI
OR SOUTHER YELLOW PINE E = 1,760,000 PSI
3. ALL SILL PLATES, DIMENSIONAL FRAMING LUMBER, AND STRUCTURAL MEMBERS EXPOSED TO EITHER, CONCRETE, OR MASONRY SHALL BE PRESSURE TREATED AND ANCHORED IN PLACE WITH HOT-DIPPED GALVANIZED OR STAINLESS STEEL FASTENERS.
4. LAMINATED VENEER LUMBER (LVL) STRUCTURAL PROPERTIES:
- Fb = 2800 PSI
Fc = 2700 PSI
E = 1,900,000 PSI
5. FRAMING OVER GIRDERS AND BEARING PARTITIONS-JOISTS MAY BE BUTTED TOGETHER OVER THE CENTER BEARING, PROVIDED JOISTS ARE TIED TOGETHER, OR JOISTS MAY BE LAPPED AND NAILED TOGETHER. MINIMUM LAP, 4 INCHES; MAX. OVERHANG 12"
6. FLOOR JOISTS SHALL BE DOUBLE UNDER EACH PARALLEL PARTITION.
7. BRIDGING, MAXIMUM SPACING 10'. BRIDGING SHALL BE CROSS BRIDGING USING 1X3 INCH BOARDS OR SOLID BRIDGING OF JOIST DIMENSION, EXCEPT WHERE NOTED.
8. WHEN UTILIZING AN ENGINEERED FLOOR FRAMING SYSTEM CAREFULLY FOLLOW ALL THE MANUFACTURER'S RECOMMENDATIONS AND INSTALLATION INSTRUCTIONS. PROVIDE AND INSTALL WEB STIFFENERS AND SQUASH BLOCKS AS NECESSARY TO TRANSFER IMPOSED WALL LOADS THROUGH FLOOR FRAMING SYSTEM AND ULTIMATELY TO THE BUILDING FOUNDATION.
9. WALL & PARTITION FRAMING - UNLESS OTHERWISE SHOWN SPACE STUDS @ 16" O.C. DOUBLE STUDS AT OPENINGS. CONSTRUCT PARTITION CORNERS WITH NO LESS THAN 3 FULL MEMBERS. EXTERIOR WALLS AND BEARING PARTITIONS SHALL HAVE DOUBLE TOP PLATES. PLATES RESTING ON MASONRY OR CONCRETE SHALL BE ANCHORED WITH BOLTS.
10. SUB-FLOOR DECKING SHALL BE TONGUE AND GROOVE APA RATED SHEATHING OR STURD-I-FLOOR. GLUE AND NAIL (ALTERNATIVE GLUE AND SCREW) SUB-FLOOR USING PANEL ADHESIVE APPLIED ACCORDING TO THE MANUFACTURER'S RECOMMENDATIONS; FASTEN PANELS USING 8d RING-OR SCREW-SHANK NAILS SPACED AT 12" O.C.
11. ROOF DECKING SHALL HAVE SQUARE EDGES AND SHALL COMPLY WITH THE APA RATED SHEATHING CLASSIFICATION. INSTALL PANEL CLIPS WHEN THE RAFTER OR ROOF TRUSS SPACING IS GREATER THAN 16" O.C. SECURE PANELS ACCORDING TO THE FASTENER SCHEDULE FOUND IN THE MISSOURI RESIDENTIAL BUILDING CODE.
12. PROVIDE SECURE BLOCKING, NAILERS, AND GROUNDS AS NECESSARY FOR ATTACHMENT OF DRYWALL, FINISH TRIM, AND OTHER FINISH WORK.
13. JOIST HANGERS SHALL BE MIN. 16 GA. GALVANIZED STEEL, AND PROPERLY SIZED TO ACCEPT JOISTS, ETC.
14. JOIST HANGERS EXPOSED TO TREATED LUMBER SHALL HAVE A G185 TRIPLE ZINC COATING OR BE STAINLESS STEEL, AND FASTENERS SHALL BE HOT DIPPED GALVANIZED OR STAINLESS STEEL.

ARCHITECTURAL GENERAL NOTES

THE FOLLOWING GENERAL NOTES ARE APPLICABLE THROUGHOUT THESE CONSTRUCTION DRAWINGS.

1. THESE NOTES APPLY TO ALL ARCHITECTURAL DRAWINGS
2. DIMENSIONS ARE TO FACE OF STUDS UNLESS NOTED OTHERWISE
3. WALL CONSTRUCTION SHALL BE THE FOLLOWING UNLESS NOTED OTHERWISE:
- A. EXTERIOR WALL FRAMING SHALL BE 2x6 STUDS @ 24" O.C.
- B. INTERIOR LOAD BEARING WALLS SHALL BE 2x4 STUDS @16" O.C.
- C. INTERIOR PARTITION WALLS SHALL BE 2x4 STUDS @ 16" O.C.
4. CONTRACTOR SHALL VERIFY ALL ACCESSORY, EQUIPMENT, CASEWORK MOUNTING HEIGHTS AND PROVIDE SOLID BLOCKING FOR ALL WALL MOUNTED ITEMS THAT REQUIRE ANCHORAGE. COORDINATE WITH MANUFACTURER, OR WHERE INDICATED, THE ARCHITECT.
5. PROVIDE UNDERCUTS AS REQUIRED FOR DOORS WHERE CARPET IS TO BE INSTALLED.
6. FLOOR FINISH TRANSITIONS AT DOORS SHALL ALIGN WITH STOP SIDE OF DOOR AND CONTINUE UNDER DOOR SO THAT ALL TRANSITION MATERIALS ARE COVERED BY DOOR WHEN IN CLOSED POSITION. ALL FINISH FLOOR TRANSITION AND REDUCER STRIPS SHALL BE PROVIDED BY FLOORING CONTRACTOR.
7. FIBER CEMENT SIDING AND TRIM BOARDS TO BE INSTALLED PER MANUF. RECOMMENDATIONS. FLASH TOP OF HORIZ. TRIM BOARDS.

GENERAL PLUMBING NOTES

THE FOLLOWING GENERAL NOTES ARE APPLICABLE THROUGHOUT THESE CONSTRUCTION DRAWINGS.

1. WATER SUPPLY PLUMBING SHALL UTILIZE PEX TUBING.
2. INCOMING SERVICE LINE TO THE MANIFOLD SHALL BE SIZED TO ACCOMMODATE THE REQUIRED GPM FLOW RATE FOR THE NUMBER OF FIXTURES AT THE MINIMUM STREET PRESSURE.
3. USE THE SMALLEST DISTRIBUTION TUBE SIZE THAT MEETS EACH FIXTURE'S DEMAND, I.E. RECOMMENDED SIZE TO LAVATORIES AND SINKS IS 3/8" AND 1/2" TO TUB & SHOWERS.
4. TIE SANITARY VENT LINES TOGETHER IN ATTIC WHERE PRACTICAL TO MINIMIZE THROUGH-THE-ROOF PLUMBING VENT PENETRATIONS.

GENERAL HVAC NOTES

THE FOLLOWING GENERAL NOTES ARE APPLICABLE THROUGHOUT THESE CONSTRUCTION DRAWINGS.

1. HVAC SYSTEM SHALL CONSIST OF AN AIR TO AIR HEAT PUMP SYSTEM WITH CONVENTIONAL FORCED AIR SHEET METAL DUCTWORK SUPPLY AND RETURN DISTRIBUTION.
2. BATHROOM EXHAUST UNDER NO CIRCUMSTANCES SHALL TERMINATE IN THE ATTIC. EXHAUST DUCT LINES SHALL TERMINATE OUTSIDE THE EXTERIOR BUILDING ENVELOPE.
3. PER INHP TWO RETURN AIR GRILLES OR ONE PER FLOOR

GENERAL ROOF PLAN NOTES

THE FOLLOWING GENERAL NOTES ARE APPLICABLE THROUGHOUT THESE CONSTRUCTION DRAWINGS.

- WEATHER LIMITATIONS: PROCEED WITH INSTALLATION ONLY WHEN EXISTING AND FORECASTED WEATHER CONDITIONS PERMIT ROOFING SYSTEM TO BE INSTALLED ACCORDING TO MANUFACTURER'S WRITTEN INSTRUCTIONS AND WARRANTY REQUIREMENTS.
1. ROOF PENETRATIONS AND EQUIPMENT SHOWN SHALL NOT BE CONSIDERED ALL INCLUSIVE. COORDINATE WITH MECHANICAL, PLUMBING AND ELECTRICAL DOCUMENTS TO CONFIRM PENETRATIONS AND EQUIPMENT LOCATIONS. FLASH ALL ROOF PENETRATIONS IN ACCORDANCE WITH ROOFING MANUFACTURER'S RECOMMENDATIONS; PROVIDE CRICKETS TO ALLOW FOR PROPER DRAINAGE AROUND UNITS.
2. PROVIDE GRACE ICE & WATER SHIELD AT ALL EAVES, VALLEYS, SLOPE BREAKS, AND DORMER WALLS
3. SIZE GUTTERS & DOWNSPOUTS IN ACCORDANCE WITH SMACNA STANDARDS.
4. PLUMBING VENTS & OTHER PENETRATIONS SHALL BE LOCATED IN INCONSPICUOUS LOCATIONS. CONFIRM LOCATIONS WITH OWNER AND ARCHITECT.
5. PROVIDE PROPERLY SIZED BOOTS/FLASHINGS AT ALL ROOF PENETRATIONS
6. INSTALL METAL STEP FLASHING WHERE ROOFING MEETS WALLS, CHIMNEYS, OR OTHER VERTICAL SURFACES.
7. PROVIDE BOX TYPE ROOF VENTS WHERE ADDITIONAL VENT AREA IS REQUIRED. CONFIRM LOCATIONS WITH OWNER AND ARCHITECT.
8. PROVIDE CONTINUOUS EDGE VENTING OR VENTED SOFFIT MATERIAL, (SEE WALL SECTIONS FOR ADDITIONAL DETAIL).
9. ENSURE ALL PENETRATION CURBS/FLASHINGS ARE AT LEAST 8" ABOVE MEMBRANE.

METICULOUS



932 E. WASHINGTON STREET
INDIANAPOLIS, IN 46202

WWW.METICULOUSDA.COM
INFO@METICULOUSDA.COM

317.926.1820

CIVIL ENGINEER:

STRUCTURAL ENGINEER:

MECH/ELECT./PLUMB./FIRE PROT. ENGINEER:


INHP

3 BED_2 BATH
3852 N AUDUBON RD, INDIANAPOLIS, IN 46226

REVISIONS

#	Revision	Date
---	----------	------

CERTIFIED BY:

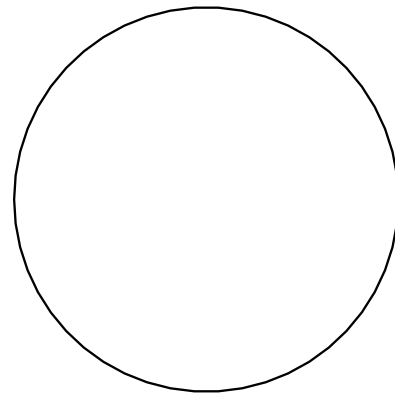

ISSUE DATE:

04-02-2024

DRAWN:

JT

CHECKED:

SZ

PROJECT NO.:

P22-0129

REVISION NO.:

ARCHITECTURAL
GENERAL NOTES AND
ABBREVIATIONS

G-002