



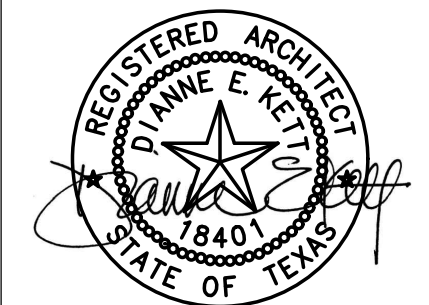

The Seal appearing on this document was authorized by Dianne Kett on January 31, 2025

1802 NORTHWOOD RD.
AUSTIN, TX

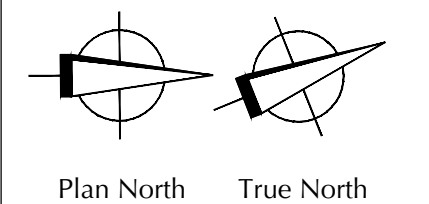

ISSUES:
PERMIT SET
01-31-25

Project Number
24-009

Drawn By
DEK/KB

A1.1
Site Plan &
Visiblity Plan

SHEET INDEX

A1.1 SITE PLAN & VISITABILITY PLAN
A2.1 ADU FLOOR PLANS AND ROOF PLAN
A3.1 EXTERIOR ELEVATIONS

S0.0 GENERAL NOTES
S1.0 FOUNDATION PLAN
S2.0 FRAMING PLANS
S2.1 LATERAL BRACING PLANS
S3.0 FOUNDATION DETAILS
S4.0 FRAMING DETAILS
S4.1 LATERAL BRACING DETAILS

GENERAL NOTES

*ALL PLANS TO COMPLY WITH 2021 IRC AND ALL CITY OF AUSTIN AND LOCAL AMENDMENTS.

DOOR NOTES

- ALL GLAZING IN DOORS SHALL BE TEMPERED.
- COORDINATE KEYING AND HARDWARE FOR DOORS WITH OWNER.
- ALL EXTERIOR DOORS SHALL BE FULLY WEATHER STRIPPED.
- ALL HAND ACTIVATED DOOR OPENING HARDWARE SHALL BE MOUNTED 34" TO 48" ABOVE FINISH FLOOR.
- INTERIOR DOOR UNDERCUTS SHALL NOT EXCEED 3/4".
- PROVIDE A CAULK BEAD AT THE BASE OF EACH DOOR FRAME THAT TERMINATES AT ANY NON-CARPET FLOORING.

WINDOW NOTES

- GLAZING WITHIN 24" OF EITHER SIDE OF ANY DOOR SHALL BE TEMPERED.
- GLAZING GREATER THAN 9 SQ.FT. IN AREA WITH A BOTTOM EDGE LESS THAN 18" ABOVE (AND HORIZONTALLY WITHIN 36") OF WALKING SURFACES SHALL BE TEMPERED.
- ALL WINDOWS TO BE DOUBLE PANE, INSULATED, LOW-E WITH AN ARGON FILLING.
- AT LEAST ONE WINDOW IN EACH BEDROOM SHALL BE 44" AFF. MAX. AND OPEN 20" WIDE MIN. BY 24" HIGH MIN. AND OPEN 5.7 SQ.FT. COORDINATE EGRESS WITH ACTUAL MANUFACTURER AS EACH VARIES.

FIRE PROTECTION

- PROVIDE CARBON MONOXIDE ALARM-HARD WIRED WITH BATTERY BACKUP, INSTALLED OUTSIDE OF EACH SEPARATE SLEEPING AREA IN THE IMMEDIATE VICINITY OF THE BEDROOMS IN DWELLING UNITS WITHIN WHICH FUEL-FIRED APPLIANCES ARE INSTALLED AND/OR HAVE ATTACHED GARAGE.
- PROVIDE SMOKE ALARMS-HARD WIRED WITH BATTERY BACKUP AT EACH SLEEPING ROOM AND IMMEDIATE COMMON AREA OUTSIDE OF SLEEPING ROOMS AND LOCATED AT NOT LESS THAN 3FT. FROM A DOOR TO A BATHROOM WITH TUB OR SHOWER EXCEPT WHEN THIS REQUIREMENT WILL PREVENT THE INSTALLATION OF A SMOKE ALARM IN A REQUIRED LOCATION, AND IF APPLICABLE, ON EACH ADDITIONAL STORY INCLUDING BASEMENTS AND HABITABLE ATTICS.
- NOTE: INTERCONNECTIONS ON SMOKE ALARMS IN EXISTING AREAS SHALL NOT BE REQUIRED WHERE ALTERATIONS/REPAIRS DO NOT RESULT IN REMOVAL OF INTERIOR WALL OR CEILING FINISHES EXPOSING THE STRUCTURE.
- ALL EAVES WITHIN 5'-0" OF PROPERTY LINES ARE TO BE OF FIRE RATED CONSTRUCTION BY PROVIDING BLOCKING FROM THE TOP PLATE TO THE UNDERSIDE OF THE EAVE.

AUSTIN VISIBILITY

- ALL SWITCHES AND TEMPERATURE CONTROLS ARE TO BE MOUNTED 48" AFF MAXIMUM
- ALL OUTLETS ARE TO BE MOUNTED 15" AFF MINIMUM
- LEVEL ONE MUST HAVE A 32" CLEAR PATH FROM DESIGNATED VISITABLE ENTRANCE TO LEVEL 1 RESTROOM, KITCHEN, LIVING AND DINING. PROVIDE A MINIMUM 32" WIDE DOOR TO ALLOW 30" CLEAR AT BATHROOM DOORWAY.
- PROVIDE 2x6 BLOCKING IN DESIGNATED LEVEL ONE VISIBILITY RESTROOM AROUND PERIMETER OF ROOM @ 34" AFF TO CENTER
- ONE ENTRY INTO LEVEL ONE MUST HAVE A CHANGE IN LEVEL OF NO MORE THAN 1/2" MAX AND PROVIDE 32" CLEAR @ DOORWAY

TREE PROTECTION

- PROVIDE TREE PROTECTION PER CITY OF AUSTIN GUIDELINES AT ALL TIMES.
- PRIOR TO CONSTRUCTION, PROVIDE PROTECTIVE FENCING AROUND TREES LOCATED WITHIN THE LIMITS OF CONSTRUCTION TO PROTECT ENTIRE CRITICAL ROOT ZONE AREA OR AS MUCH OF THE CRITICAL ROOT ZONE AS IS PRACTICAL. WHEN PROTECTIVE FENCING CANNOT INCORPORATE THE ENTIRE 1/2 CRITICAL ROOT ZONE, AN 8" LAYER OF MULCH WITHIN THE ENTIRE AVAILABLE ROOT ZONE AREA IS REQUIRED FOR ALL TREES WHICH HAVE ANY DISTURBANCE INDICATED WITHIN ANY PORTION OF THE CRITICAL ROOT ZONE.
- NO CANOPY PRUNING WILL BE PROVIDED ON PROTECTED TREES.
- ALL DEMOLITION IN THE 1/2 & 1/2 CRZ OF PROTECTED TREES MUST BE DONE WITH HAND TOOLS.
- ANY EXCAVATION FOR UTILITIES WITHIN THE 1/2 CRZ WILL BE DONE USING AIR SPADING BY A CERTIFIED ARBORIST.
- CONCRETE LINE PUMP: WRAP CONNECTIONS OF CONCRETE LINE PUMP WITH PLASTIC TO PREVENT CONCRETE SLURRY FROM LEACHING INTO GROUND AND NEAR ROOTS OF TREES.
- CONCRETE TRUCK: IF HEAVY EQUIPMENT WILL BE ROLLING OVER ANY AREA OF THE FULL CRZ OF PROTECTED TREES, PROVIDE 3/4" PLYWOOD OVER 2X4 LUMBER OVER 12" LAYER OF MULCH TO BRIDGE OVER THE ROOTS AND PREVENT SOIL/ROOT COMPACTION. AFTER CONSTRUCTION IS COMPLETED, SPREAD MULCH AROUND SITE TO LEAVE A MAX LAYER OF 3" WITHIN ROOT ZONES.
- MATERIAL STORAGE MAY NOT BE WITHIN 1/2 CRZ OF PROTECTED TREES.
- PORTABLE TOILET, CONCRETE WASH, AND PAINT WASHOUT MUST NOT BE PLACED WITHIN THE FULL CRITICAL ROOT ZONE OF ANY PROTECTED TREE.

BUILDING AREA CALCULATIONS


EXISTING HOUSE 968 SQ. FT.
EXISTING PORCH 136 SQ.FT.
EXISTING UNCOVERED WOOD DECK (FULLY COUNTED) 173 SQ.FT.
EXISTING GRAVEL DRIVEWAY 684 SQ.FT.
EXISTING CONCRETE PADS, PAVERS, AND STEPS 79 SQ.FT.

ADU FIRST FLOOR 643 SQ.FT.
ADU SECOND FLOOR 643 SQ.FT.
ADU PORCH 18 SQ.FT.
ADU UNCOVERED PATIO 190 SQ.FT.
CONCRETE PAD 9 SQ.FT.

LOT AREA (PER SURVEY) 8,233.54 SQ.FT.
FRONT YARD AREA 1,258.24 SQ.FT.
FRONT YARD IMPERVIOUS COVERAGE 284 SQ.FT. (22.5%)
IMPERVIOUS COVERAGE 2,940.50 SQ.FT. (35.7%)
BUILDING COVERAGE 1,765 SQ.FT. (22.46%)
EXISTING HOUSE GROSS FLOOR AREA 1,104 SQ.FT. (13.40%)
ADU GROSS FLOOR AREA 1,304 SQ.FT. (15.84%)

LEGEND


- WALL TO BE DEMOLISHED
- EXISTING WALL TO REMAIN
- NEW WALL
- SMOKE DETECTOR INSTALLED IN ACCORDANCE WITH IRC R314
- CARBON MONOXIDE DETECTOR INSTALLED IN ACCORDANCE WITH IRC R315

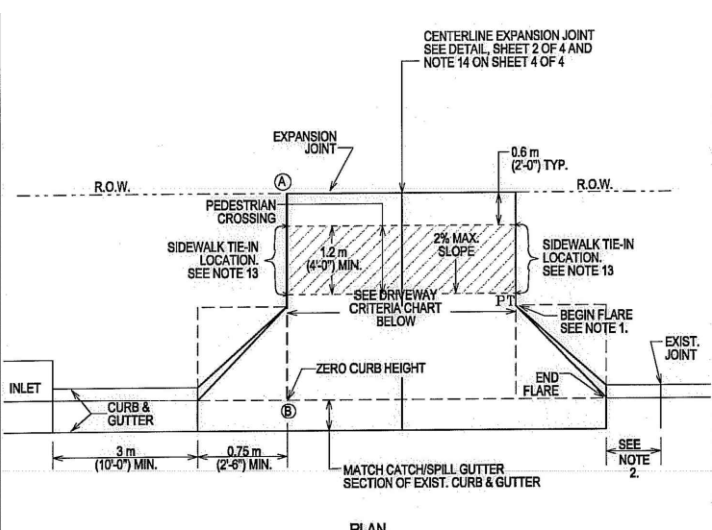

DRIVEWAY	WIDTH	DEPTH	THICKNESS
DRIVEWAY	10'-0"	10'-0"	12"
DRIVEWAY	10'-0"	10'-0"	12"
DRIVEWAY	10'-0"	10'-0"	12"
DRIVEWAY	10'-0"	10'-0"	12"
DRIVEWAY	10'-0"	10'-0"	12"
DRIVEWAY	10'-0"	10'-0"	12"
DRIVEWAY	10'-0"	10'-0"	12"
DRIVEWAY	10'-0"	10'-0"	12"
DRIVEWAY	10'-0"	10'-0"	12"
DRIVEWAY	10'-0"	10'-0"	12"


3 DRIVEWAY APRON DETAIL

Scale: N/A

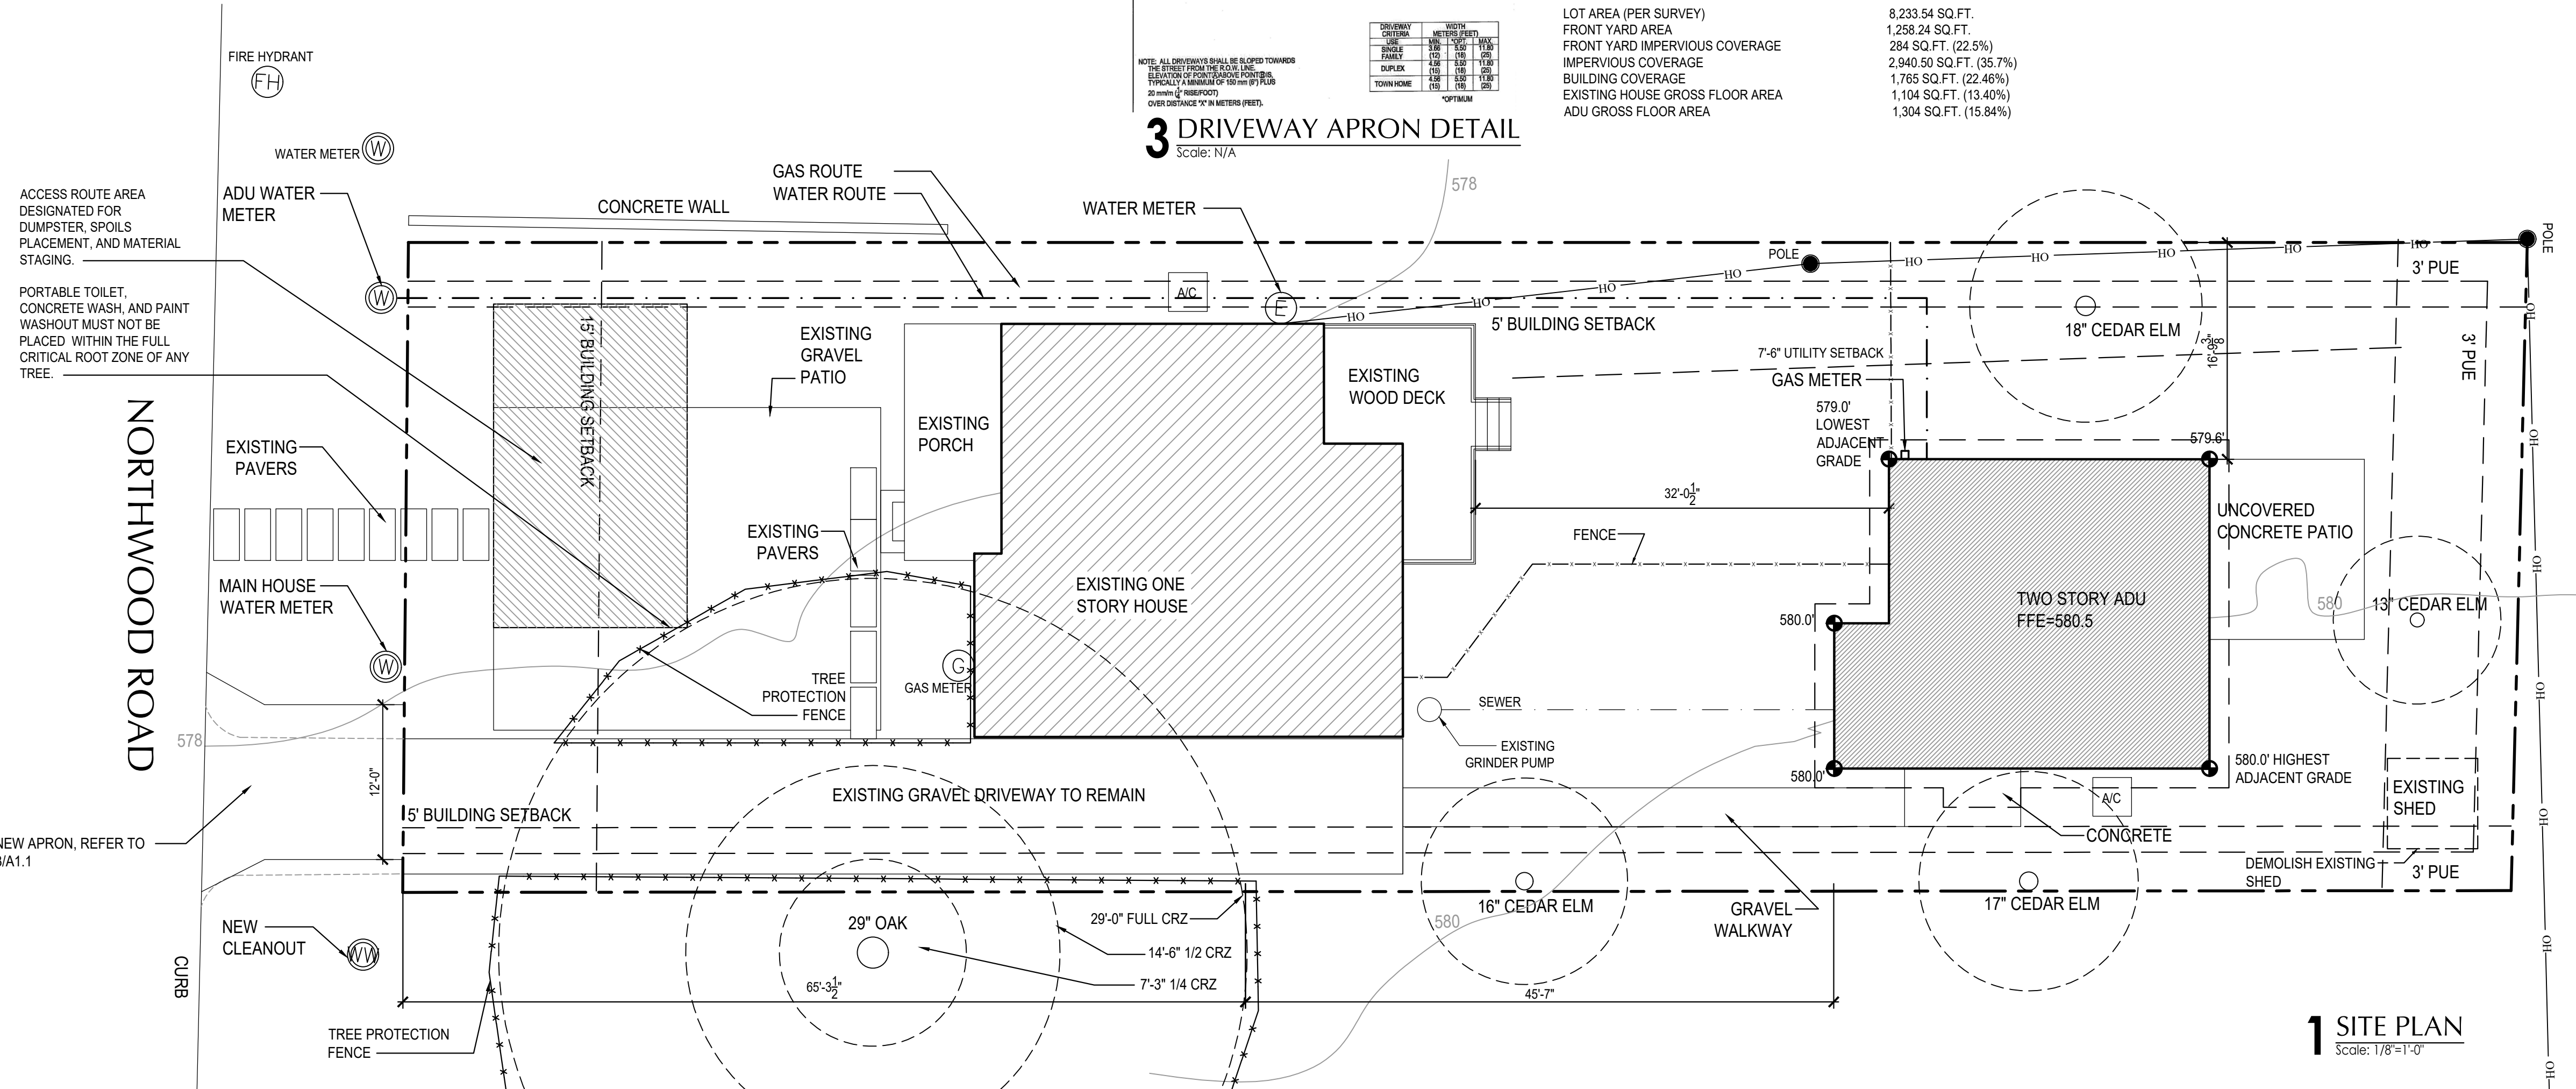

1 SITE PLAN

Scale: 1/8"=1'-0"

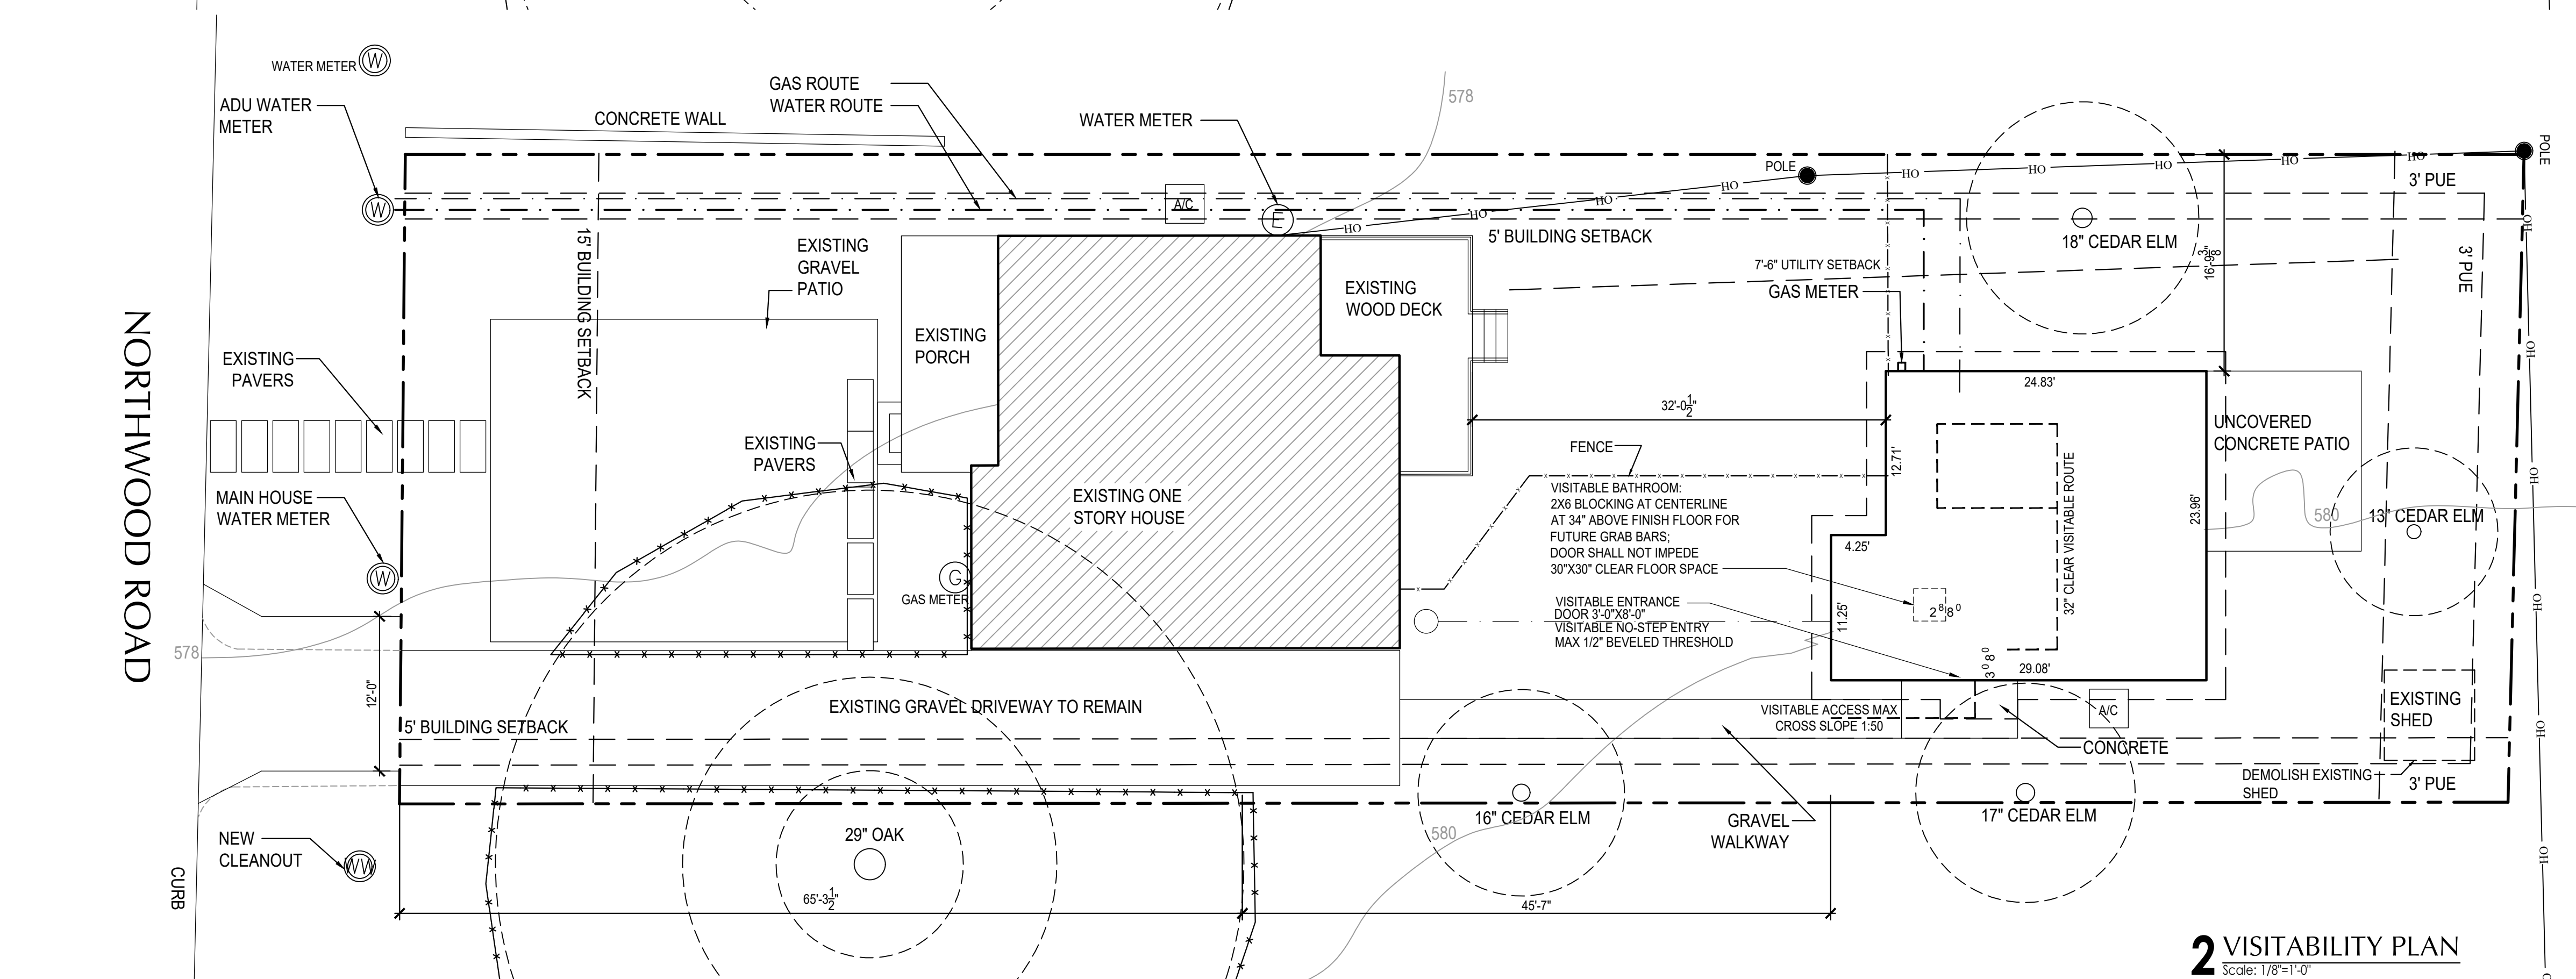

2 VISITABILITY PLAN

Scale: 1/8"=1'-0"