



The Seal appearing on this document was authorized by Dianne Kett on January 31, 2025

1802 NORTHWOOD RD.
AUSTIN, TX




BUILDING AREA CALCULATIONS

EXISTING HOUSE	968 SQ. FT.
EXISTING PORCH	136 SQ. FT.
EXISTING UNCOVERED WOOD DECK (FULLY COUNTED)	173 SQ. FT.
EXISTING GRAVEL DRIVEWAY	684 SQ. FT.
EXISTING CONCRETE PADS, PAVERS, AND STEPS	79 SQ. FT.
ADU FIRST FLOOR	643 SQ. FT.
ADU SECOND FLOOR	643 SQ. FT.
ADU PORCH	18 SQ. FT.
ADU UNCOVERED PATIO	190 SQ. FT.
CONCRETE PAD	9 SQ. FT.

LOT AREA (PER SURVEY)	8,233.54 SQ. FT.
FRONT YARD AREA	1,258.24 SQ. FT.
FRONT YARD IMPERVIOUS COVERAGE	284 SQ. FT. (22.5%)
IMPERVIOUS COVERAGE	2,940.50 SQ. FT. (35.7%)
BUILDING COVERAGE	1,765 SQ. FT. (22.46%)
EXISTING HOUSE GROSS FLOOR AREA	1,104 SQ. FT. (13.40%)
ADU GROSS FLOOR AREA	1,304 SQ. FT. (15.84%)

LEGEND

- WALL TO BE DEMOLISHED
- ===== EXISTING WALL TO REMAIN
- ===== NEW WALL
- ⊙ SMOKE DETECTOR INSTALLED IN ACCORDANCE WITH IRC R314
- ⊙ CARBON MONOXIDE DETECTOR INSTALLED IN ACCORDANCE WITH IRC R315

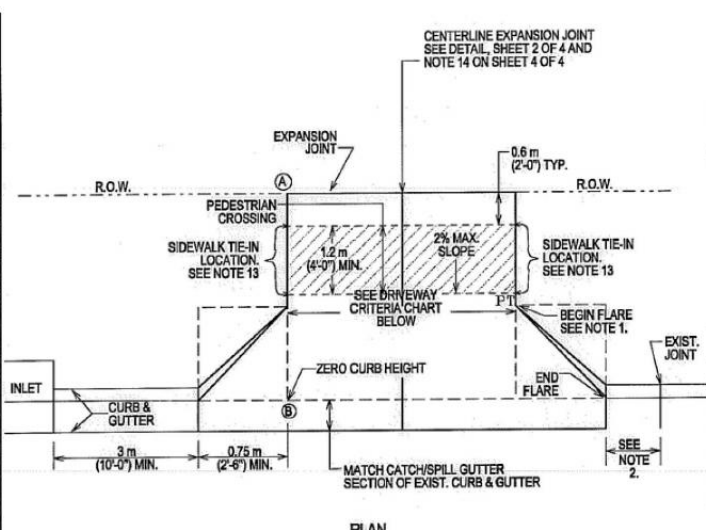

DRIVEWAY	APPROXIMATE	APPROXIMATE
WIDTH	LENGTH	AREA
10'0"	10'0"	100'0"
10'0"	10'0"	100'0"
10'0"	10'0"	100'0"
10'0"	10'0"	100'0"
10'0"	10'0"	100'0"
10'0"	10'0"	100'0"
10'0"	10'0"	100'0"
10'0"	10'0"	100'0"
10'0"	10'0"	100'0"
10'0"	10'0"	100'0"

3 DRIVEWAY APRON DETAIL

Scale: N/A

1 SITE PLAN

Scale: 1/8"=1'-0"

SHEET INDEX

- A1.1 SITE PLAN & VISITABILITY PLAN
- A2.1 ADU FLOOR PLANS AND ROOF PLAN
- A3.1 EXTERIOR ELEVATIONS
- S0.0 GENERAL NOTES
- S1.0 FOUNDATION PLAN
- S2.0 FRAMING PLANS
- S2.1 LATERAL BRACING PLANS
- S3.0 FOUNDATION DETAILS
- S4.0 FRAMING DETAILS
- S4.1 LATERAL BRACING DETAILS

GENERAL NOTES

*ALL PLANS TO COMPLY WITH 2021 IRC AND ALL CITY OF AUSTIN AND LOCAL AMENDMENTS.

DOOR NOTES

- ALL GLAZING IN DOORS SHALL BE TEMPERED.
- COORDINATE KEYING AND HARDWARE FOR DOORS WITH OWNER.
- ALL EXTERIOR DOORS SHALL BE FULLY WEATHER STRIPPED.
- ALL HAND ACTIVATED DOOR OPENING HARDWARE SHALL BE MOUNTED 34" TO 48" ABOVE FINISH FLOOR.
- INTERIOR DOOR UNDERCUTS SHALL NOT EXCEED 3/4".
- PROVIDE A CAULK BEAD AT THE BASE OF EACH DOOR FRAME THAT TERMINATES AT ANY NON-CARPET FLOORING.

WINDOW NOTES

- GLAZING WITHIN 24" OF EITHER SIDE OF ANY DOOR SHALL BE TEMPERED.
- GLAZING GREATER THAN 9 SQ.FT. IN AREA WITH A BOTTOM EDGE LESS THAN 18" ABOVE (AND HORIZONTALLY WITHIN 36") OF WALKING SURFACES SHALL BE TEMPERED.
- ALL WINDOWS TO BE DOUBLE PANE, INSULATED, LOW-E WITH AN ARGON FILLING.
- AT LEAST ONE WINDOW IN EACH BEDROOM SHALL BE 44" AFF. MAX. AND OPEN 20" WIDE MIN. BY 24" HIGH MIN. AND OPEN 5.7 SQ.FT. COORDINATE EGRESS WITH ACTUAL MANUFACTURER AS EACH VARIES.

FIRE PROTECTION

- PROVIDE CARBON MONOXIDE ALARM-HARD WIRED WITH BATTERY BACKUP, INSTALLED OUTSIDE OF EACH SEPARATE SLEEPING AREA IN THE IMMEDIATE VICINITY OF THE BEDROOMS IN DWELLING UNITS WITHIN WHICH FUEL-FIRED APPLIANCES ARE INSTALLED AND/OR HAVE ATTACHED GARAGE.
- PROVIDE SMOKE ALARMS-HARD WIRED WITH BATTERY BACKUP AT EACH SLEEPING ROOM AND IMMEDIATE COMMON AREA OUTSIDE OF SLEEPING ROOMS AND LOCATED AT NOT LESS THAN 3FT. FROM A DOOR TO A BATHROOM WITH TUB OR SHOWER EXCEPT WHEN THIS REQUIREMENT WILL PREVENT THE INSTALLATION OF A SMOKE ALARM IN A REQUIRED LOCATION, AND IF APPLICABLE, ON EACH ADDITIONAL STORY INCLUDING BASEMENTS AND HABITABLE ATTICS.
- NOTE: INTERCONNECTIONS ON SMOKE ALARMS IN EXISTING AREAS SHALL NOT BE REQUIRED WHERE ALTERATIONS/REPAIRS DO NOT RESULT IN REMOVAL OF INTERIOR WALL OR CEILING FINISHES EXPOSING THE STRUCTURE.
- ALL EAVES WITHIN 5'-0" OF PROPERTY LINES ARE TO BE OF FIRE RATED CONSTRUCTION BY PROVIDING BLOCKING FROM THE TOP PLATE TO THE UNDERSIDE OF THE EAVE.

AUSTIN VISIBILITY

- ALL SWITCHES AND TEMPERATURE CONTROLS ARE TO BE MOUNTED 48" AFF MAXIMUM
- ALL OUTLETS ARE TO BE MOUNTED 15" AFF MINIMUM
- LEVEL ONE MUST HAVE A 32" CLEAR PATH FROM DESIGNATED VISITABLE ENTRANCE TO LEVEL 1 RESTROOM, KITCHEN, LIVING AND DINING. PROVIDE A MINIMUM 32" WIDE DOOR TO ALLOW 30" CLEAR AT BATHROOM DOORWAY.
- PROVIDE 2x6 BLOCKING IN DESIGNATED LEVEL ONE VISITABILITY RESTROOM AROUND PERIMETER OF ROOM @ 34" AFF TO CENTER
- ONE ENTRY INTO LEVEL ONE MUST HAVE A CHANGE IN LEVEL OF NO MORE THAN 1/2" MAX AND PROVIDE 32" CLEAR DOORWAY

TREE PROTECTION

- PROVIDE TREE PROTECTION PER CITY OF AUSTIN GUIDELI AT ALL TIMES.
- PRIOR TO CONSTRUCTION, PROVIDE PROTECTIVE FENCING AROUND TREES LOCATED WITHIN THE LIMITS OF CONSTR TO PROTECT ENTIRE CRITICAL ROOT ZONE AREA OR AS OF THE CRITICAL ROOT ZONE AS IS PRACTICAL. WHEN PROTECTIVE FENCING CANNOT INCORPORATE THE ENTIRE CRITICAL ROOT ZONE, AN 8" LAYER OF MULCH WITHIN T ENTIRE AVAILABLE ROOT ZONE AREA IS REQUIRED FOR T TREES WHICH HAVE ANY DISTURBANCE INDICATED WITHI PORTION OF THE CRITICAL ROOT ZONE.
- NO CANOPY PRUNING WILL BE PROVIDED ON PROTECTED TREES.
- ALL DEMOLITION IN THE 1/2 & 1/2 CRZ OF PROTECTED TREE MUST BE DONE WITH HAND TOOLS.
- ANY EXCAVATION FOR UTILITIES WITHIN THE 1/2 CRZ WILL I DONE USING AIR SPADING BY A CERTIFIED ARBORIST.
- CONCRETE LINE PUMP: WRAP CONNECTIONS OF CONCRET PUMP WITH PLASTIC TO PREVENT CONCRETE SLURRY FRI LEACHING INTO GROUND AND NEAR ROOTS OF TREES.
- CONCRETE TRUCK: IF HEAVY EQUIPMENT WILL BE ROLLIN OVER ANY AREA OF THE FULL CRZ OF PROTECTED TREE PROVIDE 3/4" PLYWOOD OVER 2X4 LUMBER OVER 12" L OF MULCH TO BRIDGE OVER THE ROOTS AND PREVENT SOIL/ROOT COMPACTION. AFTER CONSTRUCTION IS COMPLETED, SPREAD MULCH AROUND SITE TO LEAVE A

