



708 HIGHLAND AVE

PROJECT INFORMATION

LEGAL DESCRIPTION:	LOT 5, BLOCK B OLT 3 DIV Z TERRACE PARK
ZONING:	SF-3-HD-NP
YEAR CONSTRUCTED:	1922
OCCUPANCY:	R-1
CONSTRUCTION TYPE:	V-B

GENERAL NOTES

- All work shall be performed in a professional matter, and in accordance with the International Residential Code, 2021, related trade codes, and applicable local codes, ordinances and laws.
- Base drawings used in these documents may contain small dimensional discrepancies. Contractor shall verify critical dimensions before beginning work. Do not scale drawings. Ask Architect for needed dimensions if not provided.
- This property is a contributing building in the Smoot-Terrace Park Historic District. Historic designation of this building requires the Contractor and his subcontractors to exercise special caution in executing the work to prevent unnecessary damage to historic features, conditions, or materials. Contractor shall inform all subcontractors and workmen of these requirements.
- The Contractor shall thoroughly example and familiarize himself with the requirements of the Contract Documents. Any conflicts shall be brought to the Architect's attention for resolution prior to the work being installed.
- Perform all work in a safe and conscientious manner to prevent injuries and damage to the building and workers. Contractor shall maintain OSHA Standards for job safety and worker protection, and comply with applicable state and local government requirements.
- Building permitting will be coordinated by the Owner and Architect prior to construction. Contractor is responsible for all trade permits, inspections, and compliance requirements.
- Maintain the building and site in a safe, clean and orderly condition.
- The Contractor shall visit the site of the proposed work and full acquaint himself with the existing conditions regarding site access, staging, parking limitations, security, and other aspects of constructibility.
- The Contractor shall coordinate work between all trades in this contract to ensure a smooth and timely workflow.
- All work to be warranted for one year from the date of Substantial Completion unless otherwise noted.

ARCHITECT

O'CONNELL ARCHITECTURE, LLC
TERE O'CONNELL, AIA
3908 AVENUE B, SUITE 309
AUSTIN, TEXAS 78751
512.751.1374



STRUCTURAL ENGINEER

ARCH CONSULTING ENGINEERS, PLLC
JUSTIN BILLODEAU, P.E.
2579 WESTERN TRAILS BLVD., SUITE 230
AUSTIN, TEXAS 78745
512.328.5353

SCOPE OF WORK

- ROOF: Replace metal roof with composition shingles over 15# felt on ½” plywood sheathing. Add dormer on west elevation. Add gutters and downspouts.
- FOUNDATION: Replace cedar posts with new concrete piers, reinforce or replace beams per structural recommendations; pour concrete pads for mechanical equipment. Repair/replace stucco skirting as needed.
- MASONRY: Remove stone veneer and replace cement cladding to match historic.
- PORCH AND EXTERIOR WOODWORK: Replace existing stairs at front of porch with new wood stairs and landing to match original. Replace non-original porch railings and columns. Repair or replace rotted wood at eaves, trim, siding to match original; replace deck at rear (west) elevation; prep, prime and paint exterior of house.
- WINDOWS: Restore historic double hung window. Repair screen frames and replace screening material. Enlarge windows at rear of house and replace with windows that match historic. Reconfigure existing windows in attic gable. New metal-clad wood windows at new attic dormer. Prep, prime and paint all historic windows and screens.
- INTERIORS: Repair and replace drywall throughout. Restore hardwood floors. Paint all interiors. Reconfigure interior spaces to create primary bath; remove small first-floor bath. Enlarge kitchen. Configure mud room and laundry and staircase to attic. Reconfigure entry to Bedroom 1. Restore or repair fireplace and add bar flanking. Repair existing shelving.
- ATTIC: Finish out attic for additional bedroom, including a closet, bath and office. Remove decommissioned and failing chimney in attic. Repair second chimney. Add window on north elevation to match historic.
- HVAC: Relocate air handler and ductwork to beneath the house and install new tankless hot water heater on exterior rear wall.
- ELECTRICAL: Examine all electrical components; replace and upgrade as needed. Install new outlets as needed, located to comply with the NEC requirements. Remove any wiring not in use. Install new smoke and CO detectors.
- PLUMBING: Examine, repair or replace the existing water, wastewater, and gas lines as needed. Remove water heater and replace with tankless water heater. Install new plumbing fixtures in kitchen and bathroom. Reconfigure primary bath, remove secondary bath, add bath in attic. Add laundry on first level and consider adding small washer and dryer in attic space.
- SITEWORK: Make grade modifications to correct any drainage issues on steeply sloped site. Add plant material to slow run-off and help erosion. Add wooden deck at back of house. Trim, fertilize or remove trees as needed. Improve ribbon style driveway on south side, extend to back of lot. Repair or replace fencing.

SYMBOL LEGEND

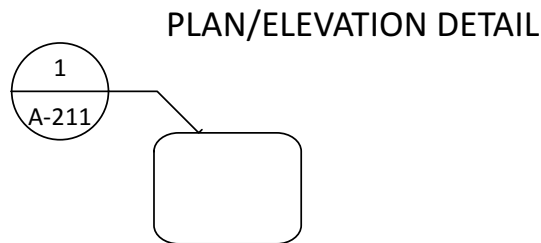


SHEET LIST

A-000	Cover Sheet
A-100	Site Plan
A-101	Setback Compliance Diagrams
A-111	Demo Floor Plans
A-112	Demo Roof Plan
A-120	Plan of Crawlspc
A-121	Floor Plan
A-122	Second Floor Plan
A-210	Demo Exterior Elevations E/N
A-211	Demo Exterior Elevations W/S
A-220	Exterior Elevations E/N
A-221	Exterior Elevations W/S
A-311	Building Section
A-501	Exterior Details
A-502	Front Porch Details
A-503	Stair Landing Details
A-601	Door & Window Schedules

STRUCTURAL DRAWINGS

S0.0	General Notes
S1.0	Foundation Plan
S2.0	Framing Plans
S2.1	Lateral Bracing Plan
S3.0	Foundation Details
S4.0	Framing Details
S4.1	Lateral Bracing Details

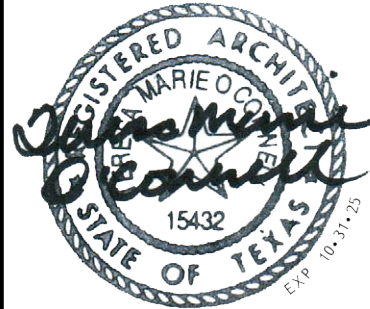

4/3/2025

FIVE BIRDS DEVELOPMENT
708 HIGHLAND AVENUE
AUSTIN, TEXAS 78701

ISSUE DATE
PERMIT SET: 4/3/25

SHEET NAME
COVER SHEET

SHEET NUMBER
A-000

PRINT: 4/3/25