


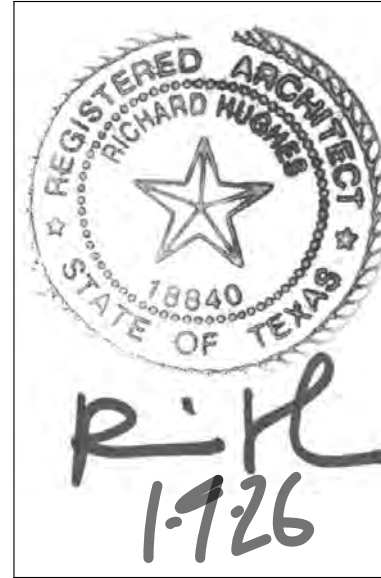

Richard HUGHES Principal, Architect
1606 West 11th Street, Austin, TX 78703
T: 512.789.6959
info@richardhughesarchitect.com

NEIL NEW DUPLEX ADDITION & REMODEL

3102 GLENVIEW AVENUE, AUSTIN, TX 78703

DATE:
10-16-24
10-31-24
11-18-24
11-20-24
11-21-24
12-13-24
8-15-25
9-3-25
10-14-25
10-17-25
10-20-25
10-28-25
12-5-25
12-18-25
12-19-25
12-19-25
1-7-26
1-9-26

AI



- INDEX OF DRAWINGS:**
A1: SITE PLAN, 'VISIT-ABILITY' PLAN, SITE AREA CALCULATIONS, GENERAL NOTES
A2: FIRST FLOOR FLOOR PLAN, DOOR & WINDOW SCHEDULES
A3: SECOND FLOOR PLAN & ROOF PLAN
A4: EXTERIOR ELEVATIONS
A5: EXTERIOR ELEVATIONS
A6: BUILDING SECTIONS
A7: INTERIOR ELEVATIONS
A8: INTERIOR ELEVATIONS
A9: CONSTRUCTION DETAILS
MEP: FIRST FLOOR ELECTRICAL, PLUMBING & MECH. PLANS
S101- S121: STRUCTURAL ENGINEERING DRAWINGS

3102 GLENVIEW AVE. SQUARE FOOT CALCS.


LOT AREA: 9,765 SF.
EXISTING EXPOSED FIRST FLOOR CONDITIONED AREA: 1,224 SF.
EXISTING REMODELED SECOND FLOOR CONDITIONED AREA: 916 SF.
EXISTING COVERED FRONT PORCH: 216 SF.
PROPOSED FIRST FLOOR CONDITIONED ADDITION AREA: 677 SF.
PROPOSED SECOND FLOOR CONDITIONED ADDITION AREA: 764 SF.
PROPOSED COVERED BACK PORCH AREA: 262 SF.
PROPOSED COVERED ENTRIES: 26 SF.
EXISTING BRICK DRIVEWAY: 384 SF.
EXISTING CONCRETE POOL PAD & COPING: 272 SF.
EXISTING FRONT STONE PAVERS & STEP: 132 SF.
EXISTING REAR MASONRY WALL: 36 SF.
EXISTING POOL EQUIPMENT: 18 SF.
RELOCATED HVAC PADS: 18 SF.
NEW UNCOVERED CONCRETE STEPS: 57 SF.
NEW HVAC PAD: 9 SF.

- GENERAL NOTES**
A. All work specified herein and specified or shown on the Contract Drawings shall conform to 2024 IRC Building Code.
B. The contractor shall verify all dimensions in field.
C. If any work shown or specified is unclear or ambiguous, contact the Architect before proceeding w/ work.
D. The contractor shall familiarize him or herself with the Contract Documents. Any discrepancies shall be brought to the attention of the Architect before proceeding with affected work. Any variation or substitution of materials or details from those indicated on the drawings may be made only with prior written approval of the Architect.
E. These drawings have been compiled from the best available information and are not intended to limit the scope of work. The Contractor may encounter hidden or uncovered conditions not shown in the contract. It will be assumed that the Contractor has inspected the site prior to bidding and verified the information herein specified.
F. Unless otherwise indicated, details shown on any drawings are to be considered typical for all similar conditions.
G. Any additional work beyond the scope of these drawings and specifications deemed necessary by the Contractor for the proper completion of this project shall not be performed without prior expressed approval from the Owner and the Architect.
H. The Contractor shall obtain and pay for all fees, permits and changes required to perform and complete this work.
I. Contractor to perform boundary survey prior to any construction in order to confirm all property & building set back lines.
J. DO NOT SCALE DRAWINGS! Dimensions govern. If any questions arise regarding dimensions contact Architect.
K. Dimensions are to face of stud at locations of new walls and to face of existing walls unless otherwise indicated.


CHAIN LINK FENCE AS PER CITY OF AUSTIN TREE PROTECTION REQUIREMENTS
INSTALL 8" LAYER OF MULCH AT FULL CRITICAL ROOT ZONE. HATCHED AREAS OUTSIDE TREE PROTECTION FENCE.

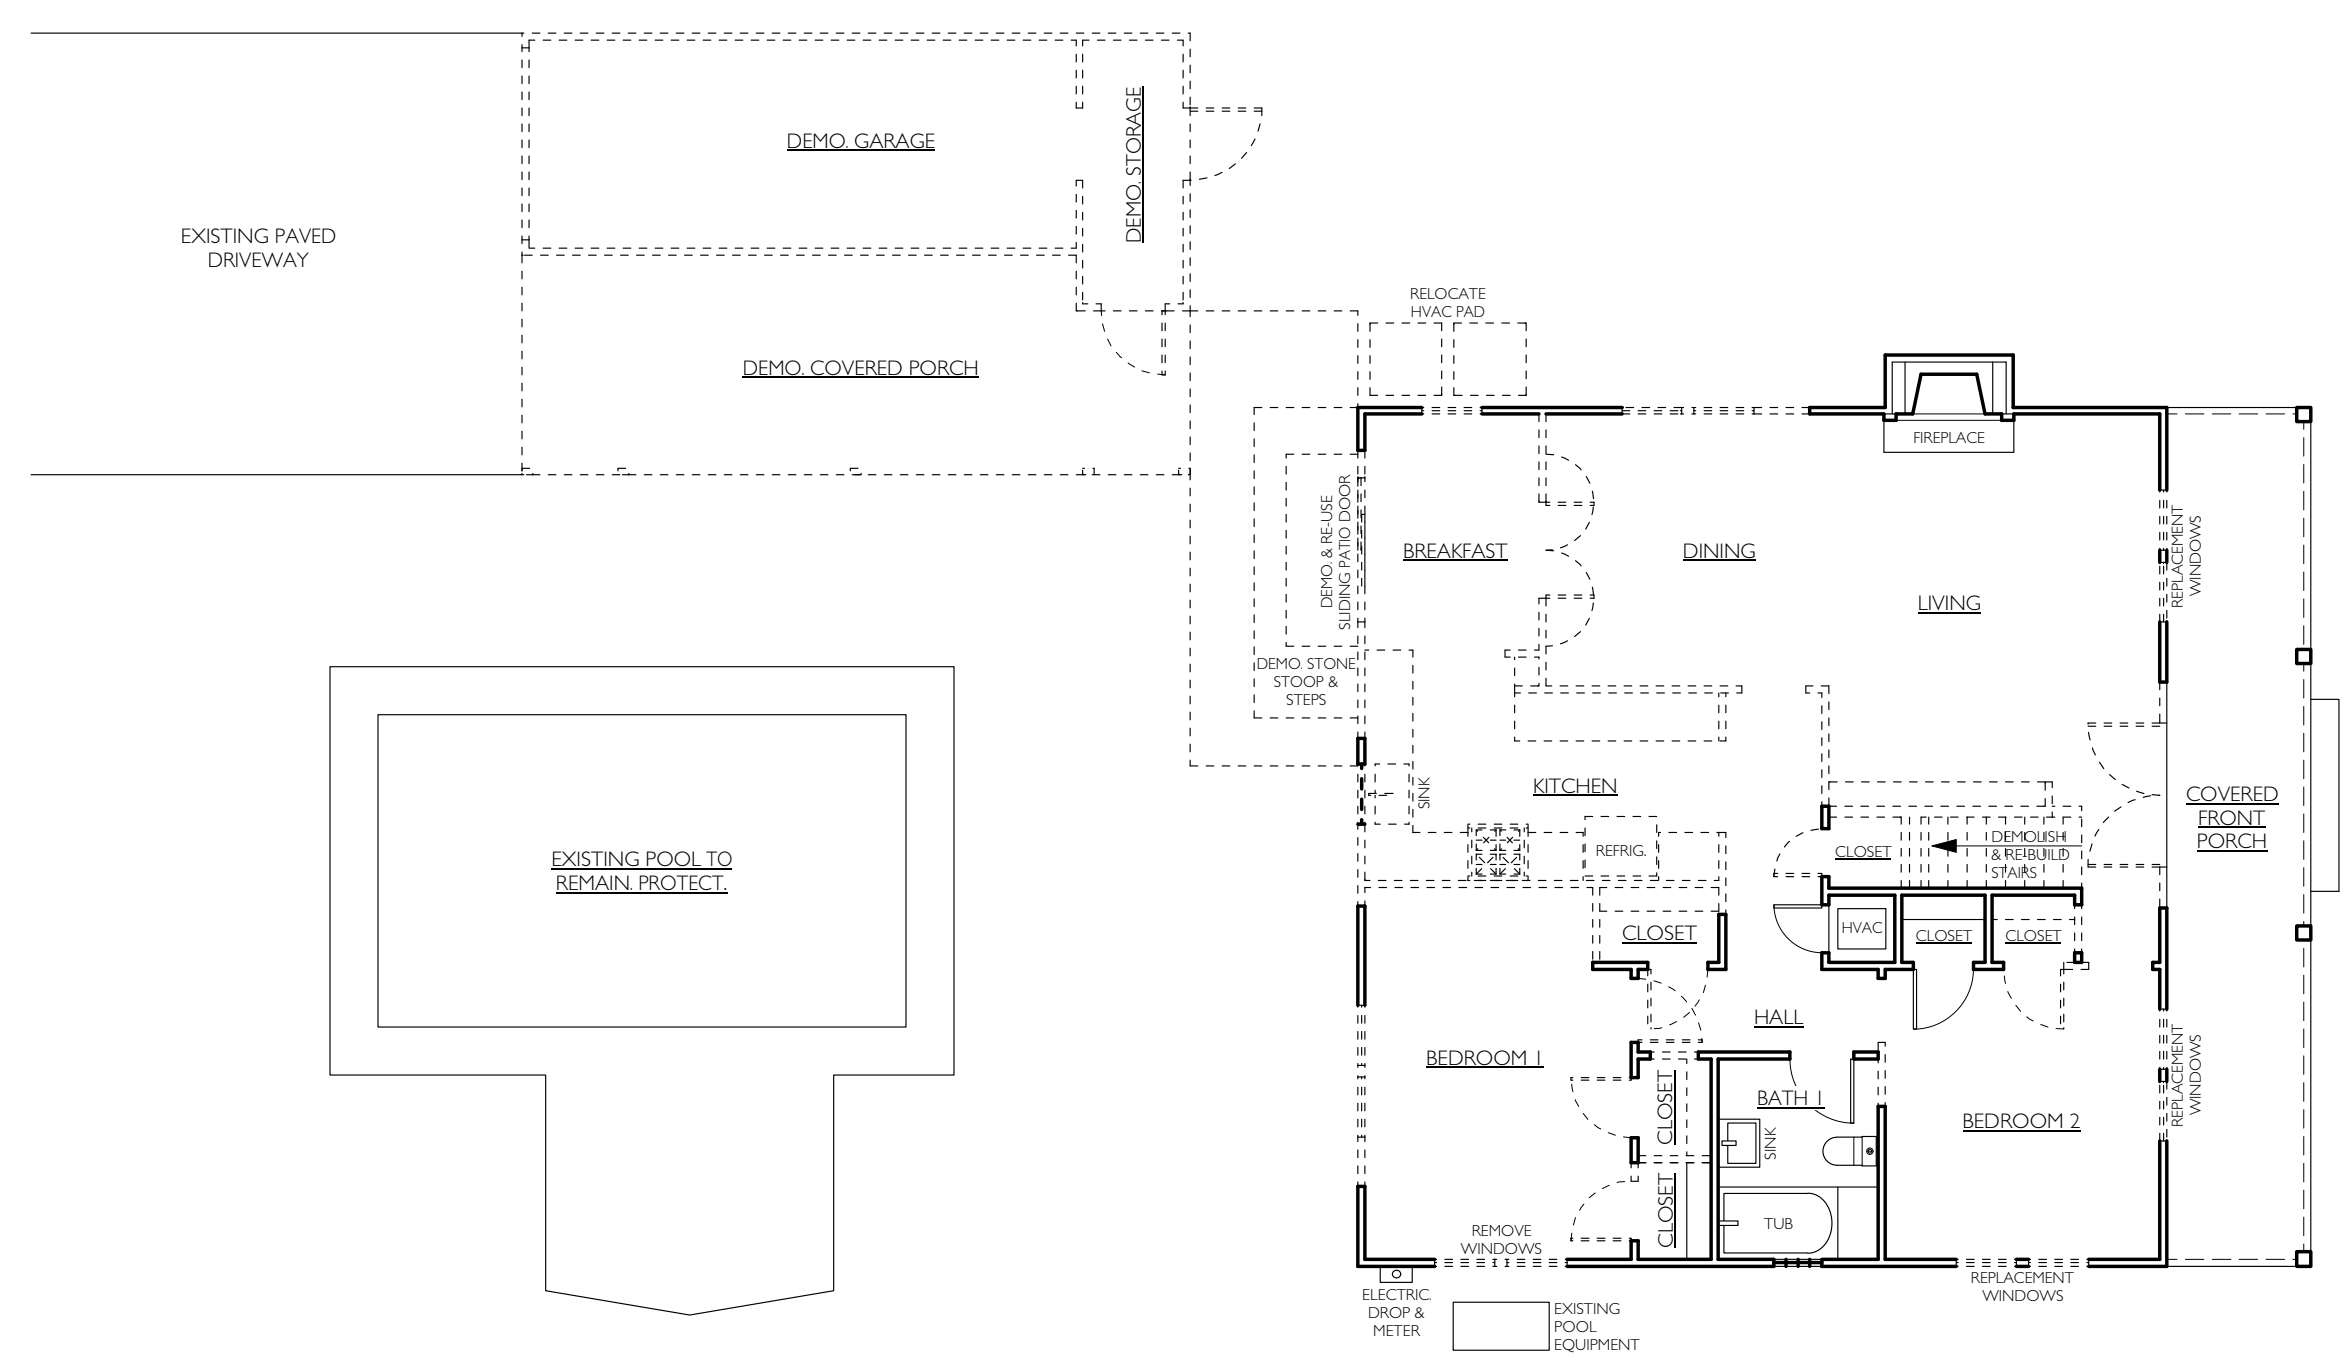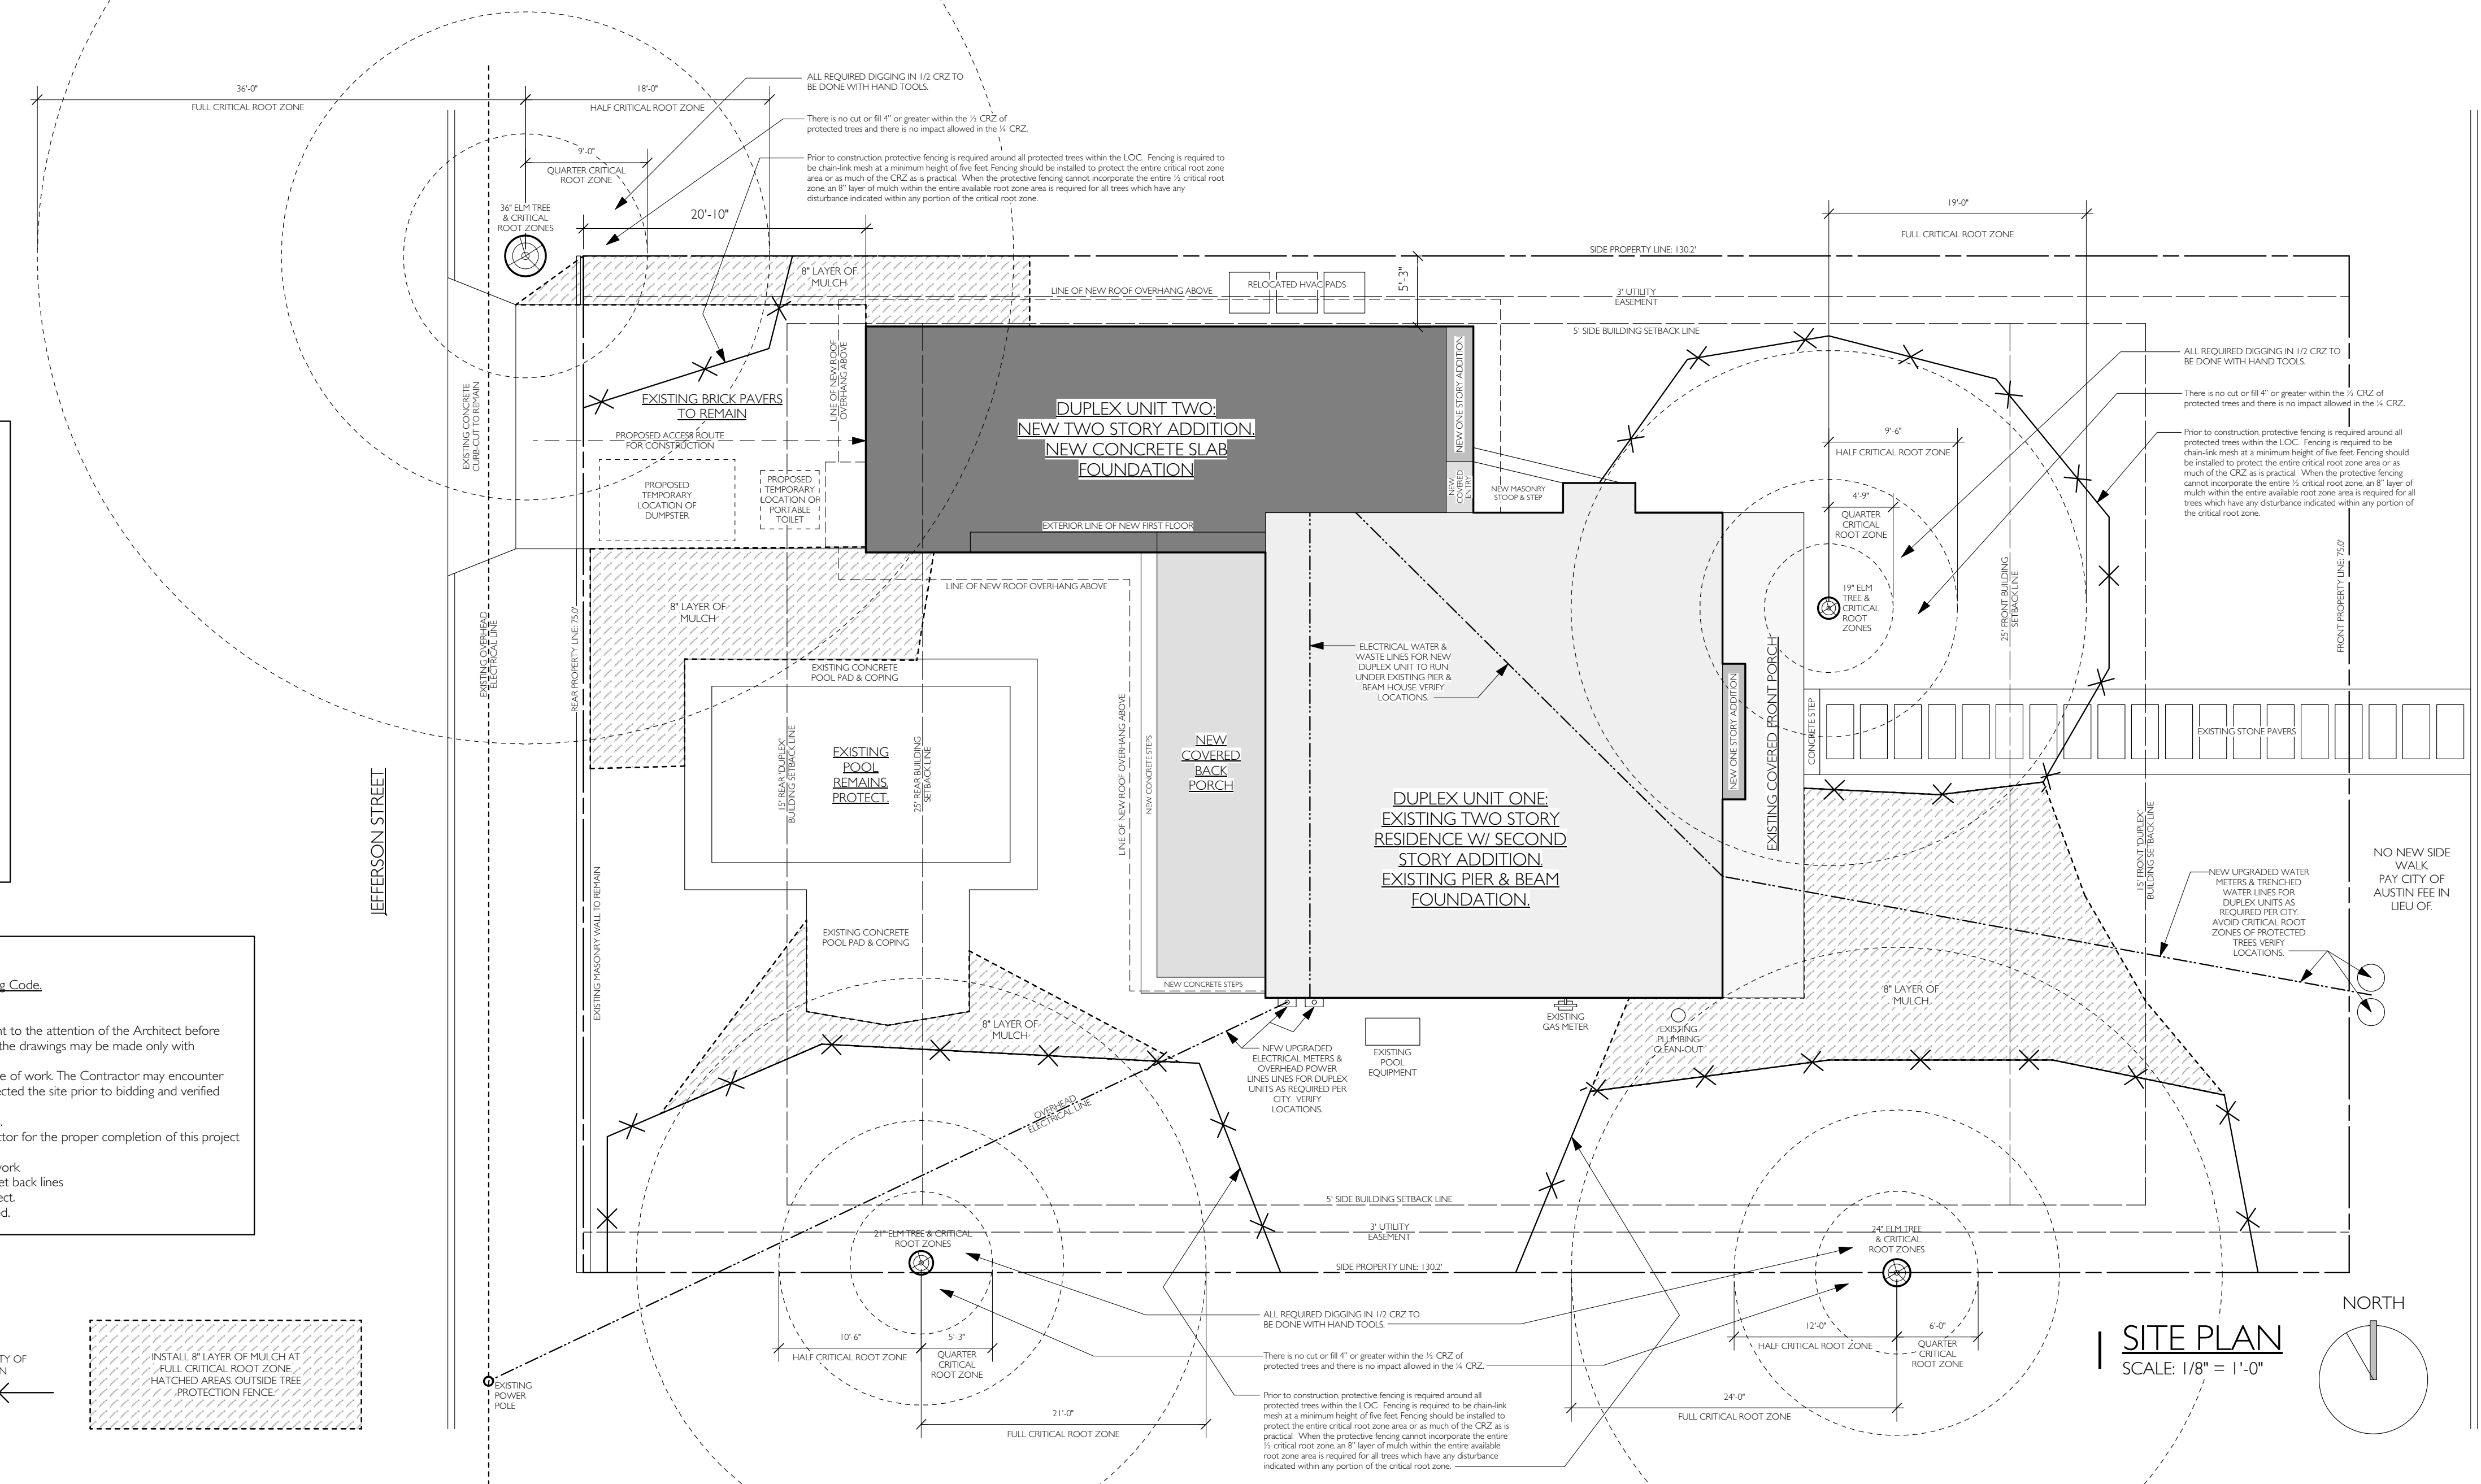

2 FIRST FLOOR DEMOLITION PLAN
SCALE: 1/8" = 1'-0"

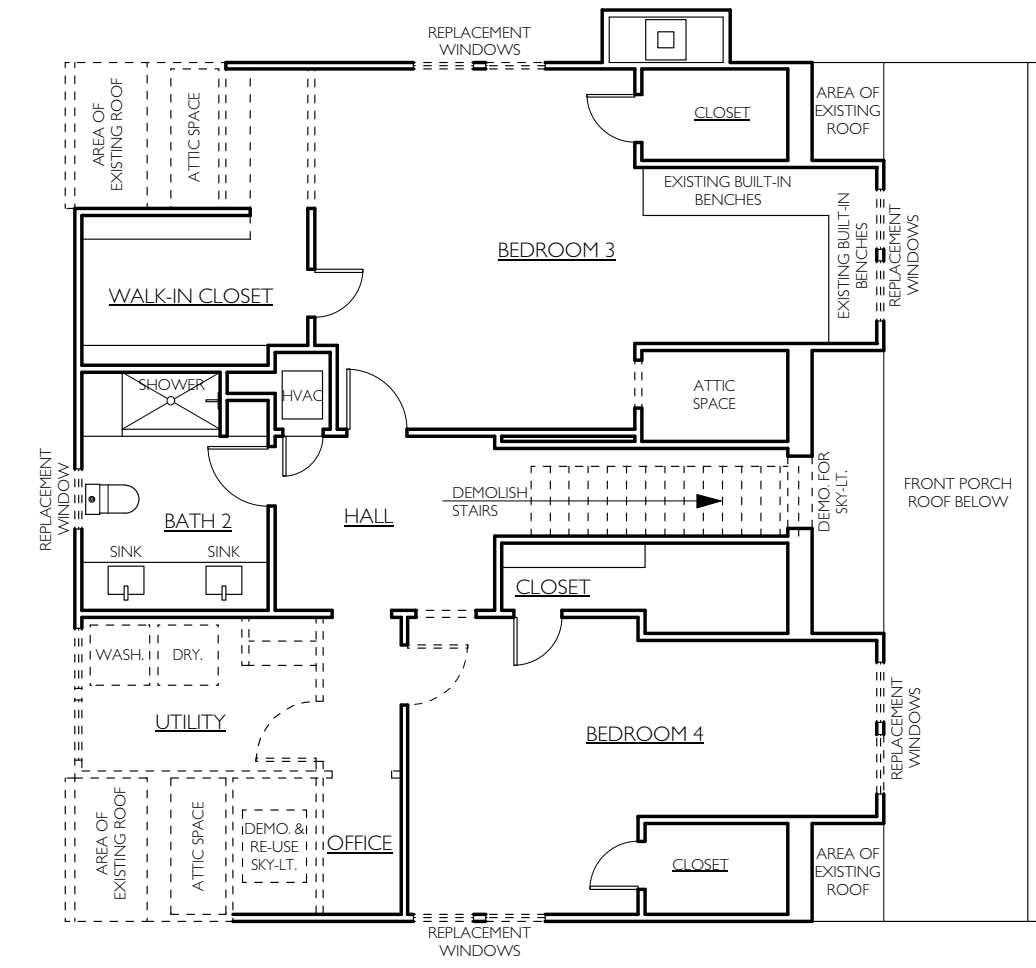

3 SECOND FLOOR DEMOLITION PLAN
SCALE: 1/8" = 1'-0"

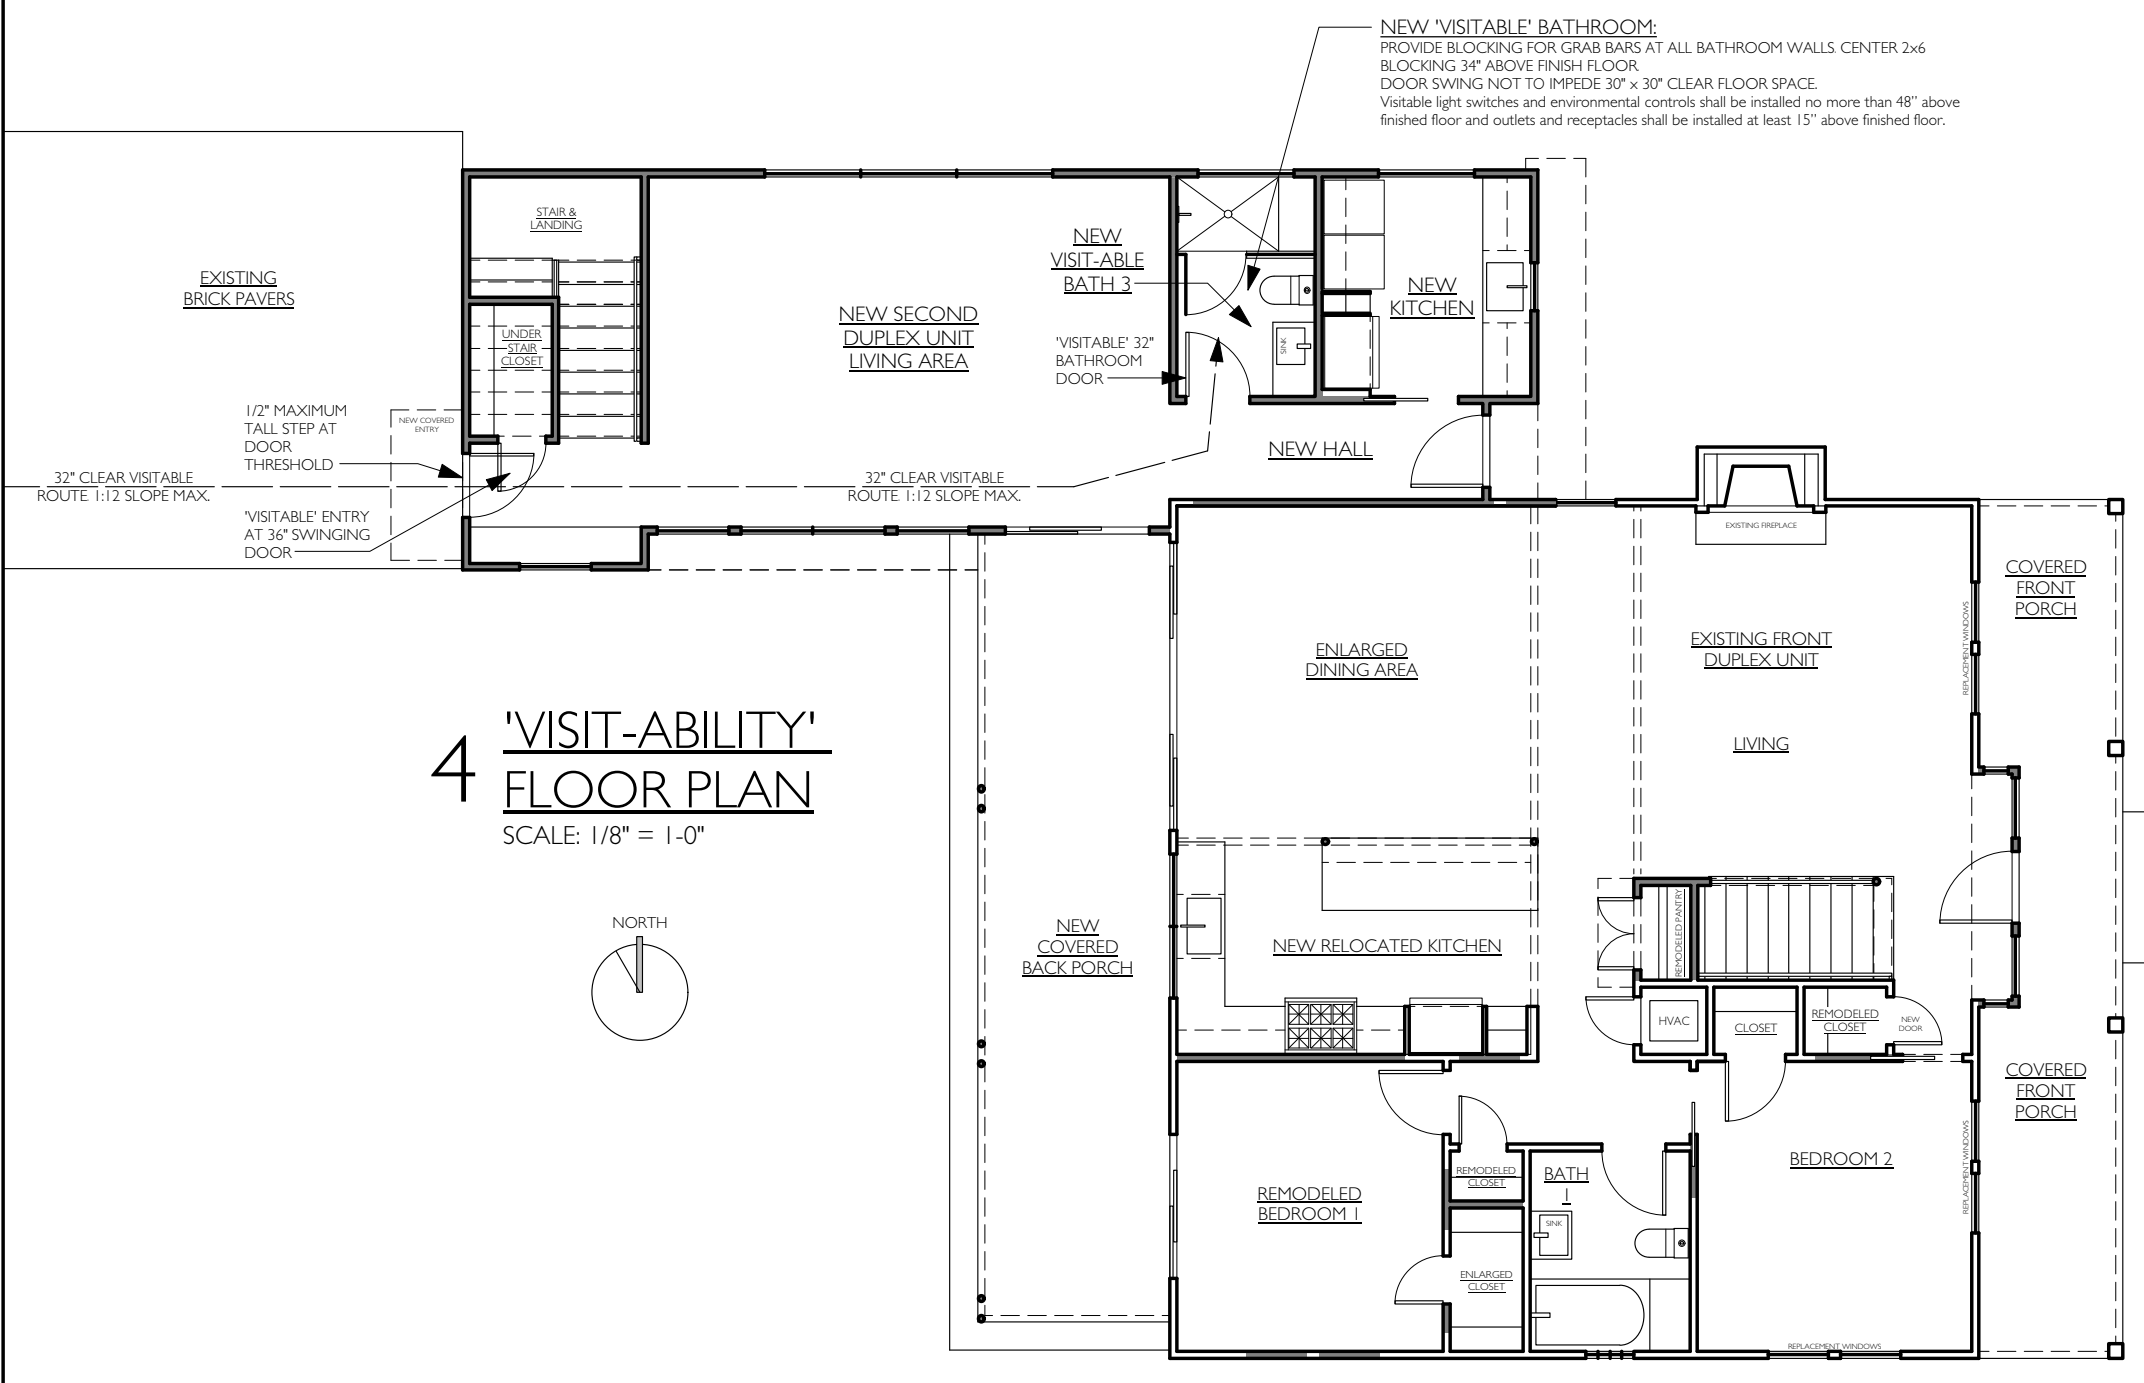

4 'VISIT-ABILITY' FLOOR PLAN
SCALE: 1/8" = 1'-0"