GENERAL NOTES ARE INTENDED TO SUPPLEMENT THE DRAWINGS AND SPECIFICATIONS. NOT ALL NOTES APPLY TO THIS PROJECT. SPECIFIC TRADE NOTES TAKE PRECEDENCE OVER THESE GENERAL NOTES.

1. DESIGN LOADS:

A. BUILDING CODE - 2015 IBC
B. ROOF LIVE LOAD - 20 PSF
C. GROUND SNOW LOAD - 20 PSF
D. WIND SPEED BASIC - 115 MPH

2. FOUNDATIONS:

A. FOOTINGS ARE DESIGNED TO BEAR ON EXISTING NATURALLY OCCURRING SOILS OR ENGINEERED FILL CAPABLE OF SAFELY SUSTAINING 1,500 PSF.

B. BACKFILL AGAINST ANY WALLS OR CONSTRUCTION SHALL NOT BE PLACED UNLESS THE WALLS ARE ADEQUATELY BRACED TO WITHSTAND THE LOADS IMPOSED DUE TO BACKFILLING. FOOTING SIZES SHALL BE ADJUSTED IF REQUIRED BY SOILS ENGINEER. ALL COMPACTED FILL INSTALLATION SHALL BE INSPECTED AND APPROVED BY A REGISTERED SOILS ENGINEER.

C. UNDERCUT BUILDING AREA AND INSTALL A MINIMUM OF 18" OF SELECT, LOW VOLUME CHANGE FILL BELOW ALL FLOOR SLABS. SEE SOIL REPORT.

D. RE: SPECIFICATIONS FOR OTHER DETAILED REQUIREMENTS FOR PLACING CONCRETE FOR FOUNDATIONS.

3. CONCRETE

A. ALL CONCRETE USED FOR FOUNDATIONS SHALL DEVELOP A MINIMUM COMPRESSIVE STRENGTH OF 3000 PSI IN 28 DAYS. ALL CONCRETE USED FOR SLABS ON GRADE SHALL DEVELOP A MINIMUM COMPRESSIVE STRENGTH OF 4000 PSI IN 28 DAYS.

B. ALL CONCRETE EXPOSED TO FREEZING SHALL BE AIR ENTRAINED. NO ALUMINUM ITEMS SHALL BE EMBEDDED IN ANY CONCRETE. CHLORIDES IN ANY FORM OR CONCENTRATION SHALL NOT BE ADDED TO ANY CONCRETE.

C. CONSTRUCTION JOINTS IN BEAMS, SLABS, AND GRADE BEAMS SHALL OCCUR AT MIDSPAN (MIDDLE THIRD). PROVIDE 2X4 HORIZONTAL KEYS AT CONSTRUCTION JOINTS.

D. ALL CONCRETE OPERATIONS, INCLUDING BUT NOT LIMITED TO MIX DESIGN, MIXING, TRANSPORTING, PLACING, REINFORCING DETAILING AND PLACING, CURING, AND TESTING SHALL BE DONE IN ACCORDANCE WITH THE PROVISIONS OF THE LATEST APPLICABLE RECOMMENDATION OF THE ACI MANUAL OF CONCRETE PRACTICE.

4. REINFORCING STEEL:

A. ALL REINFORCING STEEL SHALL BE A-615, GRADE 60 STEEL.

B. ALL WELDED WIRE FABRIC SHALL BE ASTM A185.

C. UNLESS OTHERWISE NOTED, STANDARD COVERAGE OF BARS SHALL BE:
WHERE EARTH FORMED - 3 INCHES
SLABS OR JOISTS - 3/4 INCH
BEAMS OR COLUMNS - 1-1/2 INCHES
OTHER - 2 INCHES

D. BARS MARKED CONTINUOUS AND ALL VERTICAL STEEL SHALL BE LAPPED OR EMBEDDED TO DEVELOP THE FULL TENSILE CAPABILITY OF THE BAR LAPS SHALL BE CLASS B. UNLESS SHOWN OTHERWISE SPLICE TOP BARS NEAR MIDSPAN AND SPLICE BOTTOM BARS OVER SUPPORTS.

E. AT CORNERS OF ALL WALLS AND GRADE BEAMS, SUPPLY CORNER BARS 4'-0" LONG MIN. (2'-0" IN EACH DIRECTION OR 50 BAR DIAMETERS) IN OUTSIDE FACE OF WALL MATCHING SIZE AND SPACING OF HORIZONTAL BARS. WHERE THERE ARE NO VERTICAL BARS IN OUTSIDE FACE OF WALL, SUPPLY THREE # 4 VERTICAL SUPPORT BARS FOR CORNER BARS.

F. ALL CONCRETE IS REINFORCED CONCRETE UNLESS SPECIFICALLY CALLED OUT AS UNREINFORCED. REINFORCE ALL CONCRETE NOT OTHERWISE SHOWN WITH THE SAME STEEL AS IN SIMILAR SECTIONS OR AREAS. REFER TO EITHER ACI 318 OR ACI 318-08 FOR ANY DETAILS NOT SHOWN.

G. ALL SLABS AND STAIRS NOT SHOWN OTHERWISE SHALL BE 8" THICK WITH #4 BARS AT 6' OC. EACH WAY. ALL EXTERIOR PORCHES AND STOOPS NOT OTHERWISE DETAILED MAY BE CONSTRUCTED IN ANY STANDARD MANNER, SOLID OR HOLLOW, BUT MUST BE REINFORCED WITH #4 BARS @ 12" OC. EACH WAY MIN. PORCHES SHALL BE DOWELED TO ADJACENT WALLS OR GRADE BEAMS WITH #4 BARS AT 12" OC. HOOKED OR EMBEDDED 30 DIAMETERS INTO BOTH MEMBERS. SLOPE PORCHES 1/8" PER FOOT FOR DRAINAGE UNLESS NOTED OTHERWISE.

H. CONTROL JOINTS IN EARTH FORMED SLABS TO BE AS SHOWN ON PLANS. WHERE NOT SHOWN, CONTROLLED AREAS SHALL NOT BE MORE THAN 300 SQUARE FEET, NOR SHALL THEY BE GREATER THAN 15 FEET ON ANY SIDE.

I. ACCESSORIES SHALL BE AS SPECIFIED IN LATEST EDITION OF CRSI DESIGN HANDBOOK. MAXIMUM ACCESSORY SPACING SHALL BE 4'-0" OC.

J. AT ALL HOLES IN CONCRETE WALLS AND SLABS, ADD TWO #5 BARS (OPENING DIMENSION PLUS 60 DIAMETERS LONG) AT EACH OF FOUR SIDES AND ADD TWO #5 X 5'-0" DIAGONALLY AT EACH OF THE FOUR CORNERS OF THE HOLE. IN 8" WALL OPENINGS REINFORCE SAME, BUT ONE #5 INSTEAD OF TWO # 5'S RESPECTIVELY.

5. STRUCTURAL STEEL:

A. ALL STRUCTURAL STEEL USED FOR WIDE FLANGE SHAPES SHALL BE ASTM A992. PLATES, ANGLES AND CHANNELS SHALL BE ASTM A36, UNLESS NOTED OTHERWISE ON PLAN. PIPE SHALL BE ASTM A53. TUBE SHALL BE A500, GRADE B. FABRICATION AND ERECTION SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE AISC MANUAL OF STEEL CONSTRUCTION.

B. ALL BEAM CONNECTIONS SHALL BE WELDED OR BOLTED PER LATEST EDITION OF AISC HANDBOOK, FRAMED BEAM CONNECTIONS. BOLTS SHALL BE A-325N, EXCEPT AS NOTED. WELDS SHALL BE PERFORMED BY A CERTIFIED WELDER CONFORMING TO THE REQUIREMENTS OF ANS USING E-70 ELECTRODES.

C. LINTELS OVER ALL OPENINGS IN WALLS NOT OTHERWISE COVERED SHALL BE 6" X 3-1/2" X 5/16" ANGLE FOR EACH 4" OF MASONRY.

6. MASONRY:

A. CONCRETE BLOCK USED IN EXTERIOR WALLS OR LOAD BEARING WALLS SHALL BE A MINIMUM COMPRESSIVE STRENGTH, FM, OF 1,350 PSI. MASONRY SHALL BE LAID UP USING TYPE N MORTAR ONLY.

B. ALL BOND BEAMS AND ANY BLOCK CELLS CONTAINING EMBEDMENTS, REINFORCING STEEL, ANCHORS, ETC., SHALL BE FILLED WITH 3,000 PSI CONCRETE.

C. ALL VERTICAL WALL REINFORCING SHALL EXTEND TO THE TOP OF THE WALL AND BE TERMINATED WITH A #4 HOOKED DOWEL AT THE TOP OF THE WALL UNLESS THE TOP OF THE WALL IS 16" OR HIGHER ABOVE JOIST BEARING OR ROOF DECK CONNECTION ELEVATION.

D. ALL CONCRETE MASONRY OPERATIONS SHALL BE DONE IN ACCORDANCE WITH THE PROVISIONS OF THE LATEST APPLICABLE RECOMMENDATIONS OF THE ACI MANUAL OF CONCRETE PRACTICE.

E. PROVIDE ADDITIONAL VERTICAL REINFORCING, MATCHING WALL REINFORCING, FULL HEIGHT AT EACH DOOR JAMB, WINDOW JAMB, MECHANICAL OPENING, CONTROL JOINT, OR OTHER MASONRY DISCONTINUITY. LOCATE REINFORCING SO AS TO BE CONTINUOUS WITHOUT INTERFERING WITH LINTEL BEARING.

F. LAP ALL BARS 48 BAR DIAMETERS.

7. WOOD

WALLS

A. EXTERIOR WALLS AND LOAD BEARING WALLS: 5/8" EXTERIOR GYPSUM SHEATHING ON OUTSIDE PLUS 5/8" GYPSUM WALLBOARD ON INSIDE. ALL GYPBOARD JOINTS TO OCCUR OVER STUDS, PLATES, OR SOLID BLOCKING. FASTEN GYPBOARD WITH 6D COOLER OR PARKER NAILS AT 7" O.C. AT ALL SHEET ENDS AND EDGES AND AT ALL INTERMEDIATE SUPPORTS.

B. OSB SHEAR WALLS: OSB THICKNESS, LOCATION AND NAILING PER PLAN. BLOCK ALL EDGES.

C. INTERIOR PARTITIONS NOT OTHERWISE DETAILED: 5/8" GYPSUM BOARD NAILED WITH 5D COOLER OR PARKER NAILS AT 7" O.C. TO ALL STUDS AND PLATES. BLOCKING IS NOT REQUIRED.

D. NAILING OF WALL MATERIALS SHALL BE AS REQUIRED FOR "EDGE CONDITION" TO ANY STUD WHICH IS ANCHORED TO RESIST UPLIFT, REGARDLESS OF WHERE THE STUD OCCURS WITHIN THE SHEAR PANEL.

MINIMUM NAILING SCHEDULE

A. CONTRACTOR SHALL THOROUGHLY FAMILIARIZED HIMSELF WITH THE NAILING SCHEDULES FOUND IN THE BUILDING CODE. WHERE NOT SHOWN OTHERWISE ON PLANS OR IN SCHEDULE BELOW, ALL NAILING SHALL BE AS INDICATED IN THE BUILDING CODE.

B. COMMON NAILS SHALL BE USED UNLESS NOTED OTHERWISE.

C. OSB ROOF SHEATHING: NAIL WITH 10D COMMON NAILS AT 6" O.C. ALONG ALL EAVES, RIDGES, AND SUPPORTED EDGES OF PLYWOOD SHEETS. NAIL WITH 10D COMMON NAILS AT 12" O.C. TO INTERMEDIATE SUPPORTS, UNLESS NOTED OTHERWISE.

D. EAVE MEMBERS TO ENDS OF ROOF TRUSSES, FACE NAIL 2-16D
TOP PLATE SPLICE, EACH SIDE OF BUTT JOINT 8-16D
SOLE PLATE TO JOIST AND SQUASH BLOCKS, FACE NAIL 2-16D
SOLE PLATE TO RIM OR BAND JOIST, FACE NAIL 16D AT 8" O.C.
RIM OR BAND JOIST TO TOP PLATE, TOENAILS 16D AT 8" O.C.
JOIST TO TOP PLATE, TOENAIL 3-12D
DOUBLE STUDS, FACE NAIL 16D AT 12" O.C.
BUILT-UP CORNER STUDS, FACE NAIL 16D AT 12" O.C.
PLYWOOD SUBFLOOR-EDGE NAIL WITH 8D COMMON NAILS AT 6" O.C.
ALONG ALL SUPPORTED EDGES OF PLYWOOD SHEETS AND AT 12" O.C. TO INTERMEDIATE SUPPORTS.

WOOD CONSTRUCTION

A. FLOOR JOISTS, HEADERS, ROOF RAFTERS, CEILING JOISTS, BLOCKING BETWEEN PLATES, AND ALL OTHER FRAMING LUMBER NOT OTHERWISE DESIGNATED SHALL BE NO. 2 SOUTHERN PINE S.D., 19% M.C. OR NO. 2 DOUGLAS FIR-LARCH.

B. MICROLAM BEAMS TO BE TRUSS JOIST CORPORATIONS "MICROLAM" LUMBER BEAMS WITH MINIMUM E - 2000 KSI, MINIMUM FB - 2800 PSI, AND MINIMUM FX - 285 PSI.

C. STUDS IN EXTERIOR BEARING WALLS SHALL BE 2X6 STUDS @ 16" O.C. EXCEPT WHERE NOTED OTHERWISE. STUDS IN BEARING WALLS TO BE SPRUCE-PINE-FIR NO.1 / NO.2 19% MC. OR SOUTHERN PINE SELECT STRUCTURAL STUDS IN INTERIOR SHALL BE 2X4'S @ 16" O.C.

D. JAMBS: EXCEPT WHERE NOTED OTHERWISE, JAMBS TO BE TRIPLE STUDS (2 FULL + 1 TRIMMER). WRAP ALL SLEEPING ROOM DOOR OPENINGS WITH CLOSED CELL FOAM POLYETHYLENE (SILL SEALER) PRIOR TO FRAME INSTALLATION FOR NOISE REDUCTION.

E. TOP PLATES SUPPORTING ROOF TRUSSES OR FLOOR JOISTS ON INTERIOR AND BEARING WALL SHALL BE SPRUCE-PINE-FIR NO.1 / NO.2 OR SO. PINE SELECT STRUCTURAL, 19% M.C. ALL OTHER PLATES MAY BE STUD GRADE DOUGLAS FIR-LARCH OR STUD GRADE SOUTHERN PINE, S.D. 19% M.C.

F. TOP PLATES IN BEARING WALLS SHALL BE DOUBLE. END JOINTS IN DOUBLE TOP PLATES SHALL BE OFFSET AT LEAST 48" AT SPLICES. USE 16-16D COMMON NAILS EACH TOP PLATE SPLICE, 1/2 EACH SIDE OF SPLICE, UNLESS NOTED OTHERWISE.

G. SILL PLATES ON CONCRETE IN DIRECT CONTACT WITH EARTH SHALL BE TREATED. UNLESS SHOWN OTHERWISE IN THE SPECIFICATIONS, TREATED LUMBER SHALL BE TREATED WITH ZINC CHLORIDE OR NOLMAN SALTS WITH ARSENIC CONTENT, APPLIED IN ACCORDANCE WITH STANDARD SPECIFICATIONS OF AMERICAN WOOD PRESERVERS ASSOCIATION.

H. SILL ANCHORS: INSTALL PER IBC 2308.3, BOLTS TO BE 1/2" DIAMETER F1554 GRADE 36 STANDARD J-BOLTS, STEEL BOLTS, OR APPROVED ANCHORS W/ AT LEAST 7" EMBEDMENT IN CONCRETE SLAB @ 6'-0" O.C.. INSTALL SILL WITH STANDARD CUT WASHER UNDER NUT.

I. ROOF SHEATHING TO BE 5/8" OSB SHEATHING OR BETTER.

J. PLYWOOD SUBFLOORING TO BE 3/4" T&G.

K. METAL HANGERS, TIEDOWNS, FRAMING CLIPS, BASES, CAPS, STRAPS, AND SIMILAR HARDWARE TO BE SIMPSON STRONG TIE, OR AN APPROVED EQUAL. WHERE EXPOSED TO WEATHER OR USED WITH TREATED WOOD, USE CORROSION RESISTANT TYPE.

L. ROOF TRUSSES SHALL BE AS SHOWN ON DRAWINGS AND SHALL BE SPACED ON 24" MAXIMUM CENTERS. TRUSSES SHALL BE DESIGNED BY THE SUPPLIER IN ACCORDANCE WITH THE REQUIREMENTS OF THE TRUSS PLATE INSTITUTE, AMERICAN INSTITUTE OF TIMBER CONSTRUCTION, AND THE INTERNATIONAL BUILDING CODE. WHERE REQUIREMENTS OF THESE AGENCIES DIFFER, THE STRICTER RULES SHALL GOVERN.

M. TRUSS MANUFACTURER TO PROVED CERTIFICATION FROM AN APPROVED QUALITY CONTROL AGENCY RETAINED BY THE MANUFACTURER, THAT ALL IN-PLANT OPERATIONS AND METHODS USED IN THE MANUFACTURING, HANDLING, AND DELIVERY OF THESE TRUSSES ARE IN COMPLIANCE WITH THE APPLICABLE REQUIREMENTS OF IBC.

N. WOOD TRUSS SUPPLIER SHALL SUPPLY COMPLETE DESIGN CALCULATIONS AND ERECTION DRAWINGS TO THE ARCHITECT. ALL DESIGN CALCULATIONS AND ERECTION DRAWINGS SHALL BE DONE BY OR UNDER THE DIRECT SUPERVISION OR, AND ALL DOCUMENTS SHALL BE SEALED BY A STRUCTURAL ENGINEER LICENSED TO PRACTICE IN THE STATE WHERE THE PROJECT IS LOCATED. CALCULATIONS AND DETAILS SHALL REFLECT ALL EFFECTS OF UPLIFT PRESCRIBED IN THE BUILDING CODE. ERECTION DRAWINGS SHALL BE COMPLETE WITH ALL BRACING BRIDGING, AND ANCHORAGE DETAILS FOR ALL BRACING, TEMPORARY OR PERMANENT. ALL TRUSS TO TRUSS OR JOIST OR HEADER TO TRUSS CONNECTIONS SHALL BE DESIGNED, DETAILED, AND HARDWARE SHALL BE SPECIFIED BY THE TRUSS MANUFACTURER. TRUSSES SHALL BE DESIGNED SPECIFICALLY FOR THE HARDWARE SUPPLIED.

O. REQUIRED TRUSS OR GIRDER BEARING LENGTH SHALL NOT EXCEED WIDTH OF STUD WALL AND TRUSSES SHALL NOT EXCEED THOSE ALLOWED FOR THE SPECIES AND GRADE OF LUMBER USED FOR THE WALL CONSTRUCTION. GIRDER REACTIONS AND ANY SPECIAL BEARING DETAILS REQUIRED SHALL BE CLEARLY SHOWN ON THE ERECTION DRAWINGS.

P. BLOCK WITH SOLID BLOCKING BETWEEN TRUSSES AND RAFTERS OVER BEARING WALLS. SHAPE TOP OF BLOCKING TO FIT SLOPE OF OSB. NAIL OSB TO BLOCKING WITH 10D COMMON NAILS AT 6" O.C. NAIL BLOCKING TO PLATE WITH 12D NAILS @ 8" O.C. EACH SIDE, STAGGERED.

Q. BLOCK ALL VALLEYS, RIDGES, AND HIPS. NAIL OSB TO BLOCKING WITH 10D COMMON NAILS AT 6" O.C. WHERE DORMERS OR ROOF INTERSECTIONS OCCUR, CONTINUE OSB SHEATHING TO EDGE OF LOWER ROOF AND BUILD DORMER OR UPPER ROOF OVER A COMPLETE SHEATHED DIAPHRAGM.

R. ROOF TIEDOWNS: TRUSS MANUFACTURER TO SPECIFY. OVER OPENINGS NAIL TOP PLATES TO HEADERS WITH 16D COMMON NAILS AT 8" O.C. TIE HEADERS TO SUPPORT WITH 16 GAGE GALVANIZED STRAP TIE EACH SIDE. USE 8 16D COMMON NAILS, 1/2 EACH END, EACH STRAP TIE.


NOTE: THESE DRAWINGS ARE FOR THIS SPECIFIC BUILDING AND NO OTHER USE IS AUTHORIZED. SEE ARCHITECTURAL AND MECHANICAL DRAWINGS FOR EMBEDDED ITEMS NOT SHOWN HEREIN AND TO VERIFY SIZE AND LOCATION OF ALL OPENINGS. BEFORE EXECUTING ANYTHING HEREIN SHOWN, THE CONTRACTOR SHALL EXAMINE ACTUAL JOB CONDITIONS AND REPORT TO THE ARCHITECT ANY ERROR, OMISSION, OR DIFFICULTY AFFECTING THE WORK.

COMPLY WITH REQUIREMENTS OF THE LOCAL GOVERNING AUTHORITY FOR ENTRANCE APRON FROM STREET. PROVIDE SMOOTH TRANSITION BETWEEN NEW PAVEMENT AND EXISTING.

NOTE:

THESE DRAWINGS, ALONG WITH THE PROJECT SPECIFICATIONS, REPRESENT A UNIFIED SET OF CONSTRUCTION DOCUMENTS. ALL BIDDERS SHALL BE RESPONSIBLE FOR FAMILIARIZING THEMSELVES WITH ALL DRAWINGS IN THIS SET, REGARDLESS OF SHEET NUMBER AND DISCIPLINE, AND SHALL BE RESPONSIBLE FOR COORDINATING THEIR WORK WITH THE WORK OF OTHER TRADES. ANY APPARENT DISCREPANCIES BETWEEN DRAWINGS OR BETWEEN THE DRAWINGS AND SPECIFICATIONS SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT PRIOR TO BIDDING.

DO NOT BID FROM PARTIAL SETS OF BID DOCUMENTS

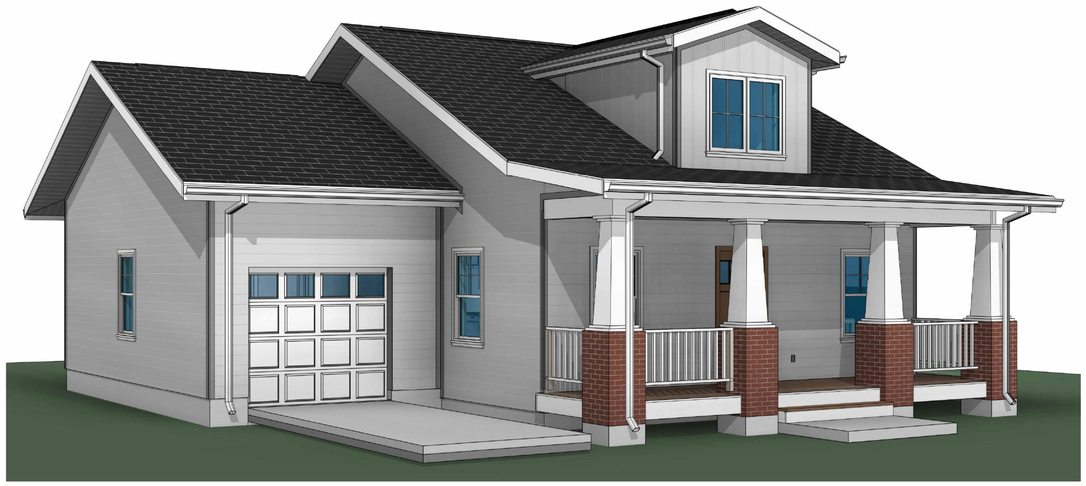

CITY OF SEDALIA HOUSING
HOUSE B
SEDALIA, MISSOURI

CODE INFORMATION	2015 INTERNATIONAL RESIDENTIAL CODE (IRC)
ONE FAMILY DWELLING	

DESIGN TEAM:

ARCHITECT:

ROBERT ROLLINGS ARCHITECTS LLC
1806 WEST BROADWAY
SEDALIA, MO 65301
660.829.9751 FAX: 660.829.9752

PROJECT LOCATION	PROJECT OWNER
SEDALIA, MISSOURI	CITY OF SEDALIA

DRAWING NUMBER: 4 / A1.01 — SHEET NAME WHERE DRAWING IS FOUND

EXTERIOR ELEVATION: 1 / A2.01

INTERIOR ELEVATION: 1 / A3.01

BUILDING SECTION OR DETAIL SECTION: 1 / A3.01

DETAILED SECTION OR PLAN CALL-OUT: 1 / A4.01

OFFICE 101 — ROOM/SPACE NAME AND REF. NUMBER

101 — DOOR NUMBER

B — WINDOW TYPE

G — KEYED NOTE

6 — EQUIPMENT NUMBER

SPOT ELEVATION OR FLOOR ELEVATION

PLAN NORTH

A 1.00 — A: DISCIPLINE; 1.00: SERIES; SHEET IN SERIES

G GENERAL	0 GENERAL INFORMATION
C CIVIL	1 PLANS
D DEMOLITION	2 EXTERIOR ELEVATIONS
S STRUCTURAL	3 BUILDING SECTIONS
A ARCHITECTURAL	4 WALL SECTIONS
Q EQUIPMENT	5 DETAILS
M MECHANICAL	6 ENLARGED PLANS
FG FUEL GAS	7 INTERIOR ELEVATIONS
P PLUMBING	8 STAIRS AND ELEVATORS
E ELECTRICAL	9 SCHEDULES

SHEET ORDER	SHEET NUMBER	SHEET NAME
1	G0.0	COVER SHEET
2	S1.01	FOUNDATION PLAN & DETAILS
3	S1.02	FRAMING PLANS
4	S1.03	ROOF FRAMING PLAN
5	A1.01	FLOOR PLANS & NOTES
6	A1.02	DIMENSION PLANS
7	A1.03	REFERENCE PLANS & WALL TYPES
8	A1.04	HOUSE B OPTIONS
9	A1.21	REFLECTED CEILING PLANS & ROOF PLAN
10	A2.01	EXTERIOR ELEVATIONS & AREA PLANS
11	A3.01	BUILDING SECTIONS
12	A4.01	WALL SECTIONS
13	A4.02	WALL SECTIONS
14	A5.01	TYPICAL DETAILS
15	A7.01	INTERIOR ELEVATIONS & SCHEDULES
16	M1.01	SCHEMATIC HVAC PLANS
17	E1.01	SCHEMATIC ELECTRICAL PLANS
18	P1.01	SCHEMATIC WATER PLANS
19	P1.02	SCHEMATIC SEWER PLANS

CITY OF SEDALIA HOUSING - HOUSE B

COPYRIGHT © 2021

Robert Rollings Architects LLC
1806 West Broadway
Sedalia, MO 65301
Phone: 660.829.9751
Fax: 660.829.9752

CROCKETT
ENGINEERING CONSULTANTS
1000 W. Nifong Blvd., Bldg. 1
Columbia, Missouri 65202
(573) 447-0292
www.crockettengineering.com
Crockett Engineering Consultants, LLC
Missouri Certificate of Authority
#2000151304

PRELIMINARY, NOT FOR CONSTRUCTION

ROBERT D. ROLLINGS 2009001308
CERTIFICATE OF AUTHORITY
TO OFFER ARCHITECTURAL
SERVICES.
ROBERT ROLLINGS ARCHITECTS, LLC
SERIAL # A-2009009370-D

ISSUE/REVISION	DATE	NO.
CONSTRUCTION SET	2/9/2023	