

WICHITA STATE UNIVERSITY CAMPUS OF APPLIED SCIENCES AND TECHNOLOGY

EAST HIGH SNAP ON LAB

301 S. Grove, Wichita, KS 67211

CERTIFIED FINAL

PROJECT DIRECTORY

OWNER:
WICHITA STATE UNIVERSITY CAMPUS OF APPLIED SCIENCES
AND TECHNOLOGY
4024 N. WEBB RD
WICHITA, KS 67226
P: (316) 677-9461
CONTACT: KIRK PETERSON
E: KPETERSON@WSUTECH.EDU

ARCHITECT:
GLMV ARCHITECTURE, INC.
1525 E. DOUGLAS
WICHITA, KS 67211
P: (316) 265-9367
CONTACT: PROJECT MANAGER
E: MONICA.ABBOTT@GLMV.COM
CONTACT: PROJECT ARCHITECT/DESIGNER
HANNAH LAUE@GLMV.COM

STRUCTURAL:
PROFESSIONAL ENGINEERING CONSULTANTS
303 S TOPEKA
WICHITA, KS 67202
P: (316) 206-1427
CONTACT: ENGINEER OF RECORD
E:

MECHANICAL / PLUMBING:
PROFESSIONAL ENGINEERING CONSULTANTS
303 S TOPEKA
WICHITA, KS 67202
P: (316) 206-1427
CONTACT: ENGINEER OF RECORD
E: BRANDON.CLAASSEN@PECI.COM


ELECTRICAL:
PROFESSIONAL ENGINEERING CONSULTANTS
303 S TOPEKA
WICHITA, KS 67202
P: (316) 206-1427
CONTACT: ENGINEER OF RECORD
E: BRANDON.CLAASSEN@PECI.COM



GENERAL NOTES

- DRAWINGS AND SPECIFICATIONS SHALL REMAIN THE PROPERTY OF THE ARCHITECT AND MAY NOT BE REPRODUCED IN ANY MANNER WITHOUT EXPRESSED WRITTEN CONSENT.
- ALL SUBSTITUTIONS AND CHANGES TO THESE DRAWINGS MUST BE SUBMITTED TO THE ARCHITECT FOR APPROVAL.
- THE GENERAL CONTRACTOR SHALL INVESTIGATE ALL FIELD CONDITIONS RELEVANT TO THE PROJECT, INCLUDING BUT NOT LIMITED TO DIMENSIONS, ELEVATIONS, GENERAL CONDITIONS, AND OTHER MISCELLANEOUS EXISTING CONDITIONS AND SHALL PROMPTLY NOTIFY THE ARCHITECT OF ANY WHICH DO NOT AGREE WITH THOSE IN THESE DRAWINGS.
- THE GENERAL CONTRACTOR IS RESPONSIBLE FOR SUPPLYING AND INSTALLING ALL COMPONENTS AND ACCESSORIES, EQUIPMENT, MATERIALS, HARDWARE, AND OTHER ITEMS NECESSARY (UNLESS NOTED OTHERWISE) FOR A COMPLETE AND FINISHED JOB CONSISTENT WITH THE DESIGN INTENT PRESENTED IN THESE DRAWINGS.
- THE GENERAL CONTRACTOR IS RESPONSIBLE FOR OBTAINING ALL THE APPLICABLE BUILDING PERMITS.
- THE GENERAL CONTRACTOR IS RESPONSIBLE FOR COMPLIANCE WITH ALL CODES AND REGULATIONS ADOPTED BY THE AUTHORITIES HAVING JURISDICTION OVER THE LOCATION OF THE PROJECT, WHICH ARE APPLICABLE AT THE TIME OF ISSUANCE OF THE BUILDING PERMITS.
- THE GENERAL CONTRACTOR SHALL NOT REPRODUCE ANY PORTION OF THE CONTRACT DRAWINGS FOR USE IN ANY PORTION OF A SUBMITTAL.
- ALL ABBREVIATIONS INCLUDED FOLLOW INDUSTRY STANDARDS. CONTACT ARCHITECT IF ANY ABBREVIATIONS ARE NOT CLEAR.
- GRAPHIC AND WRITTEN INFORMATION ON DRAWINGS SHALL BE COORDINATED WITH ALL TRADES PRIOR TO INSTALLATION.
- REFERENCE SPECIFICATION FOR ALL MATERIALS NOTED ON DRAWINGS.
- THE GENERAL CONTRACTOR SHALL COORDINATE ACCESS TO/AND STORAGE ON SITE WITH THE OWNER. THE GENERAL CONTRACTOR SHALL ALSO REPAIR DAMAGE TO ALL ADJACENT AREAS OCCURRING DURING CONSTRUCTION. THE GENERAL CONTRACTOR WILL BE RESPONSIBLE FOR THE REMOVAL OF ALL EXCESS TRASH AND OTHER MISCELLANEOUS MATERIALS FROM THE SITE DAILY.
- PATCH ALL FLOORS, WALLS AND CEILINGS ALTERED DURING CONSTRUCTION AS REQUIRED TO MATCH EXISTING. PATCH ANCHOR HOLES IN MASONRY WALL WHERE ACCESSORIES HAVE BEEN MOVED AND/OR OMITTED.
- IN ALL EXISTING AREAS, RENOVATION WORK SHALL BE ACCOMPLISHED WITH MINIMAL DISRUPTION TO OPERATIONS. IF REQUIRED, THE OWNER RESERVES THE RIGHT TO TEMPORARILY STOP WORK OF SPECIFIC CONSTRUCTION OPERATIONS SHOULD THE OWNER IDENTIFY AN EMERGENCY OR DANGER EXISTS TO THE WELFARE OF THE OCCUPANTS ON ACCOUNT OF SUCH WORK OR OPERATIONS.
- ERECT AND MAINTAIN DUST PARTITIONS AS REQUIRED FOR ALL PHASES OF CONSTRUCTION TO PREVENT DIRT, DUST OR WET SURFACES/FINISHES FROM ENTERING ADJACENT OCCUPIED SPACES.
- SCHEDULE ALL WORK PRODUCING EXCESS NOISE OR VIBRATIONS WITH OWNER TO MINIMIZE DISRUPTION TO BUILDING TENANTS. ALL WORK FOUND TO BE DISRUPTIVE SHALL BE SUSPENDED IMMEDIATELY UPON NOTICE FROM OWNER AND RESCHEDULED IN ADVANCE TO ALLOW ADVANCE NOTICE AND ALTERNATE ACCOMMODATIONS FOR TENANTS. THE CONTRACTOR IS RESPONSIBLE FOR SCHEDULING THE WORK IN ADVANCE SO AS NOT TO DELAY THE PROGRESS OF THE WORK.
- MAINTAIN ALL EXIT PATHS FOR THE DURATION OF THE CONSTRUCTION.
- SCHEDULE WITH OWNER ALL WORK REQUIRING THE DISABLING OF ALL BUILDING SAFETY SYSTEMS, INCLUDING BUT NOT LIMITED TO, STANDBY SPRINKLERS, FIRE ALARMS, AND SECURITY SYSTEMS. THE WORK SHALL BE SCHEDULED IN ADVANCE TO ALLOW ADVANCE NOTICE AND ALTERNATE ACCOMMODATIONS FOR TENANTS. THE CONTRACTOR IS RESPONSIBLE FOR SCHEDULING THE WORK IN ADVANCE SO AS NOT TO DELAY THE PROGRESS OF THE WORK.
- SCHEDULE WITH OWNER ALL UTILITY SHUTDOWNS AFFECTING AREAS OF THE BUILDING BEYOND THE PROJECT LIMITS OF WORK. THE WORK SHALL BE SCHEDULED IN ADVANCE TO ALLOW ADVANCE NOTICE AND ALTERNATE ACCOMMODATIONS FOR TENANTS. THE CONTRACTOR IS RESPONSIBLE FOR SCHEDULING THE WORK IN ADVANCE SO AS NOT TO DELAY THE PROGRESS OF THE WORK.
- ERECT AND MAINTAIN APPROPRIATE SAFETY BARRIERS AND PATHWAYS TO PROTECT AND SEPARATE PUBLIC/TENANTS FROM HAZARDOUS CONDITIONS. BARRIERS SHALL BE MAINTAINED THROUGHOUT DURATION OF THE PROJECT TO PROHIBIT UNAUTHORIZED PERSONNEL FROM ENTERING THE CONSTRUCTION AREA/SITE.
- OWNER SHALL BE RESPONSIBLE FOR RELOCATION, INSTALLATION AND STORAGE OF EXISTING FURNITURE.
- CONTRACTOR SHALL NOT REPRODUCE ANY PORTION OF A CONTRACT DRAWING FOR USE IN ANY PORTION OF A SUBMITTAL.
- ALL DIMENSIONS ARE FROM THE FACE OF STUD FRAMING, FACE OF MASONRY, FACE OF CONCRETE, OR CENTER LINE OF STRUCTURAL STEEL, U.N.O..
- ALL DOORS ARE LOCATED 4 INCHES FROM THE ADJACENT PERPENDICULAR STUD WALL FRAMING AND 4 INCHES FROM THE ADJACENT PERPENDICULAR CMU WALL FRAMING TO THE HINGE SIDE OF THE DOOR OPENING, U.N.O..
- COORDINATE THE LOCATION AND INSTALLATION OF ALL MECHANICAL AND ELECTRICAL DEVICES, REGISTERS, FIXTURES, ETC. PRIOR TO INSTALLATION OF FINISH MATERIAL.
- ALL A.D.A. ACCESSIBLE WATER CLOSETS MUST BE LOCATED 18 INCHES MINIMUM FROM THE FINISHED FACE OF THE NEAREST ADJACENT WALL TO THE CENTER LINE OF THE FIXTURE, U.N.O..
- PROVIDE CONTROL JOINTS ON CONTINUOUS GYPSUM BOARD SURFACES IN EXCESS OF 30'-0" AT A MAXIMUM INCREMENT OF 30'-0" ON CENTER, U.N.O..
- PROVIDE SEALANT IN FLOOR JOINTS OF EXPOSED FINISHES PER FLOOR COATING MANUFACTURER'S RECOMMENDATIONS.
- SEE SHEET A-601 FOR PARTITION TYPES. SEE ARCHITECTURAL FLOOR PLANS FOR ADDITIONAL PARTITION IDENTIFICATION.
- REFER TO STRUCTURAL NOTES FOR ALL CAST-IN-PLACE CONCRETE AND MASONRY CONTROL JOINTS.

RENDERING

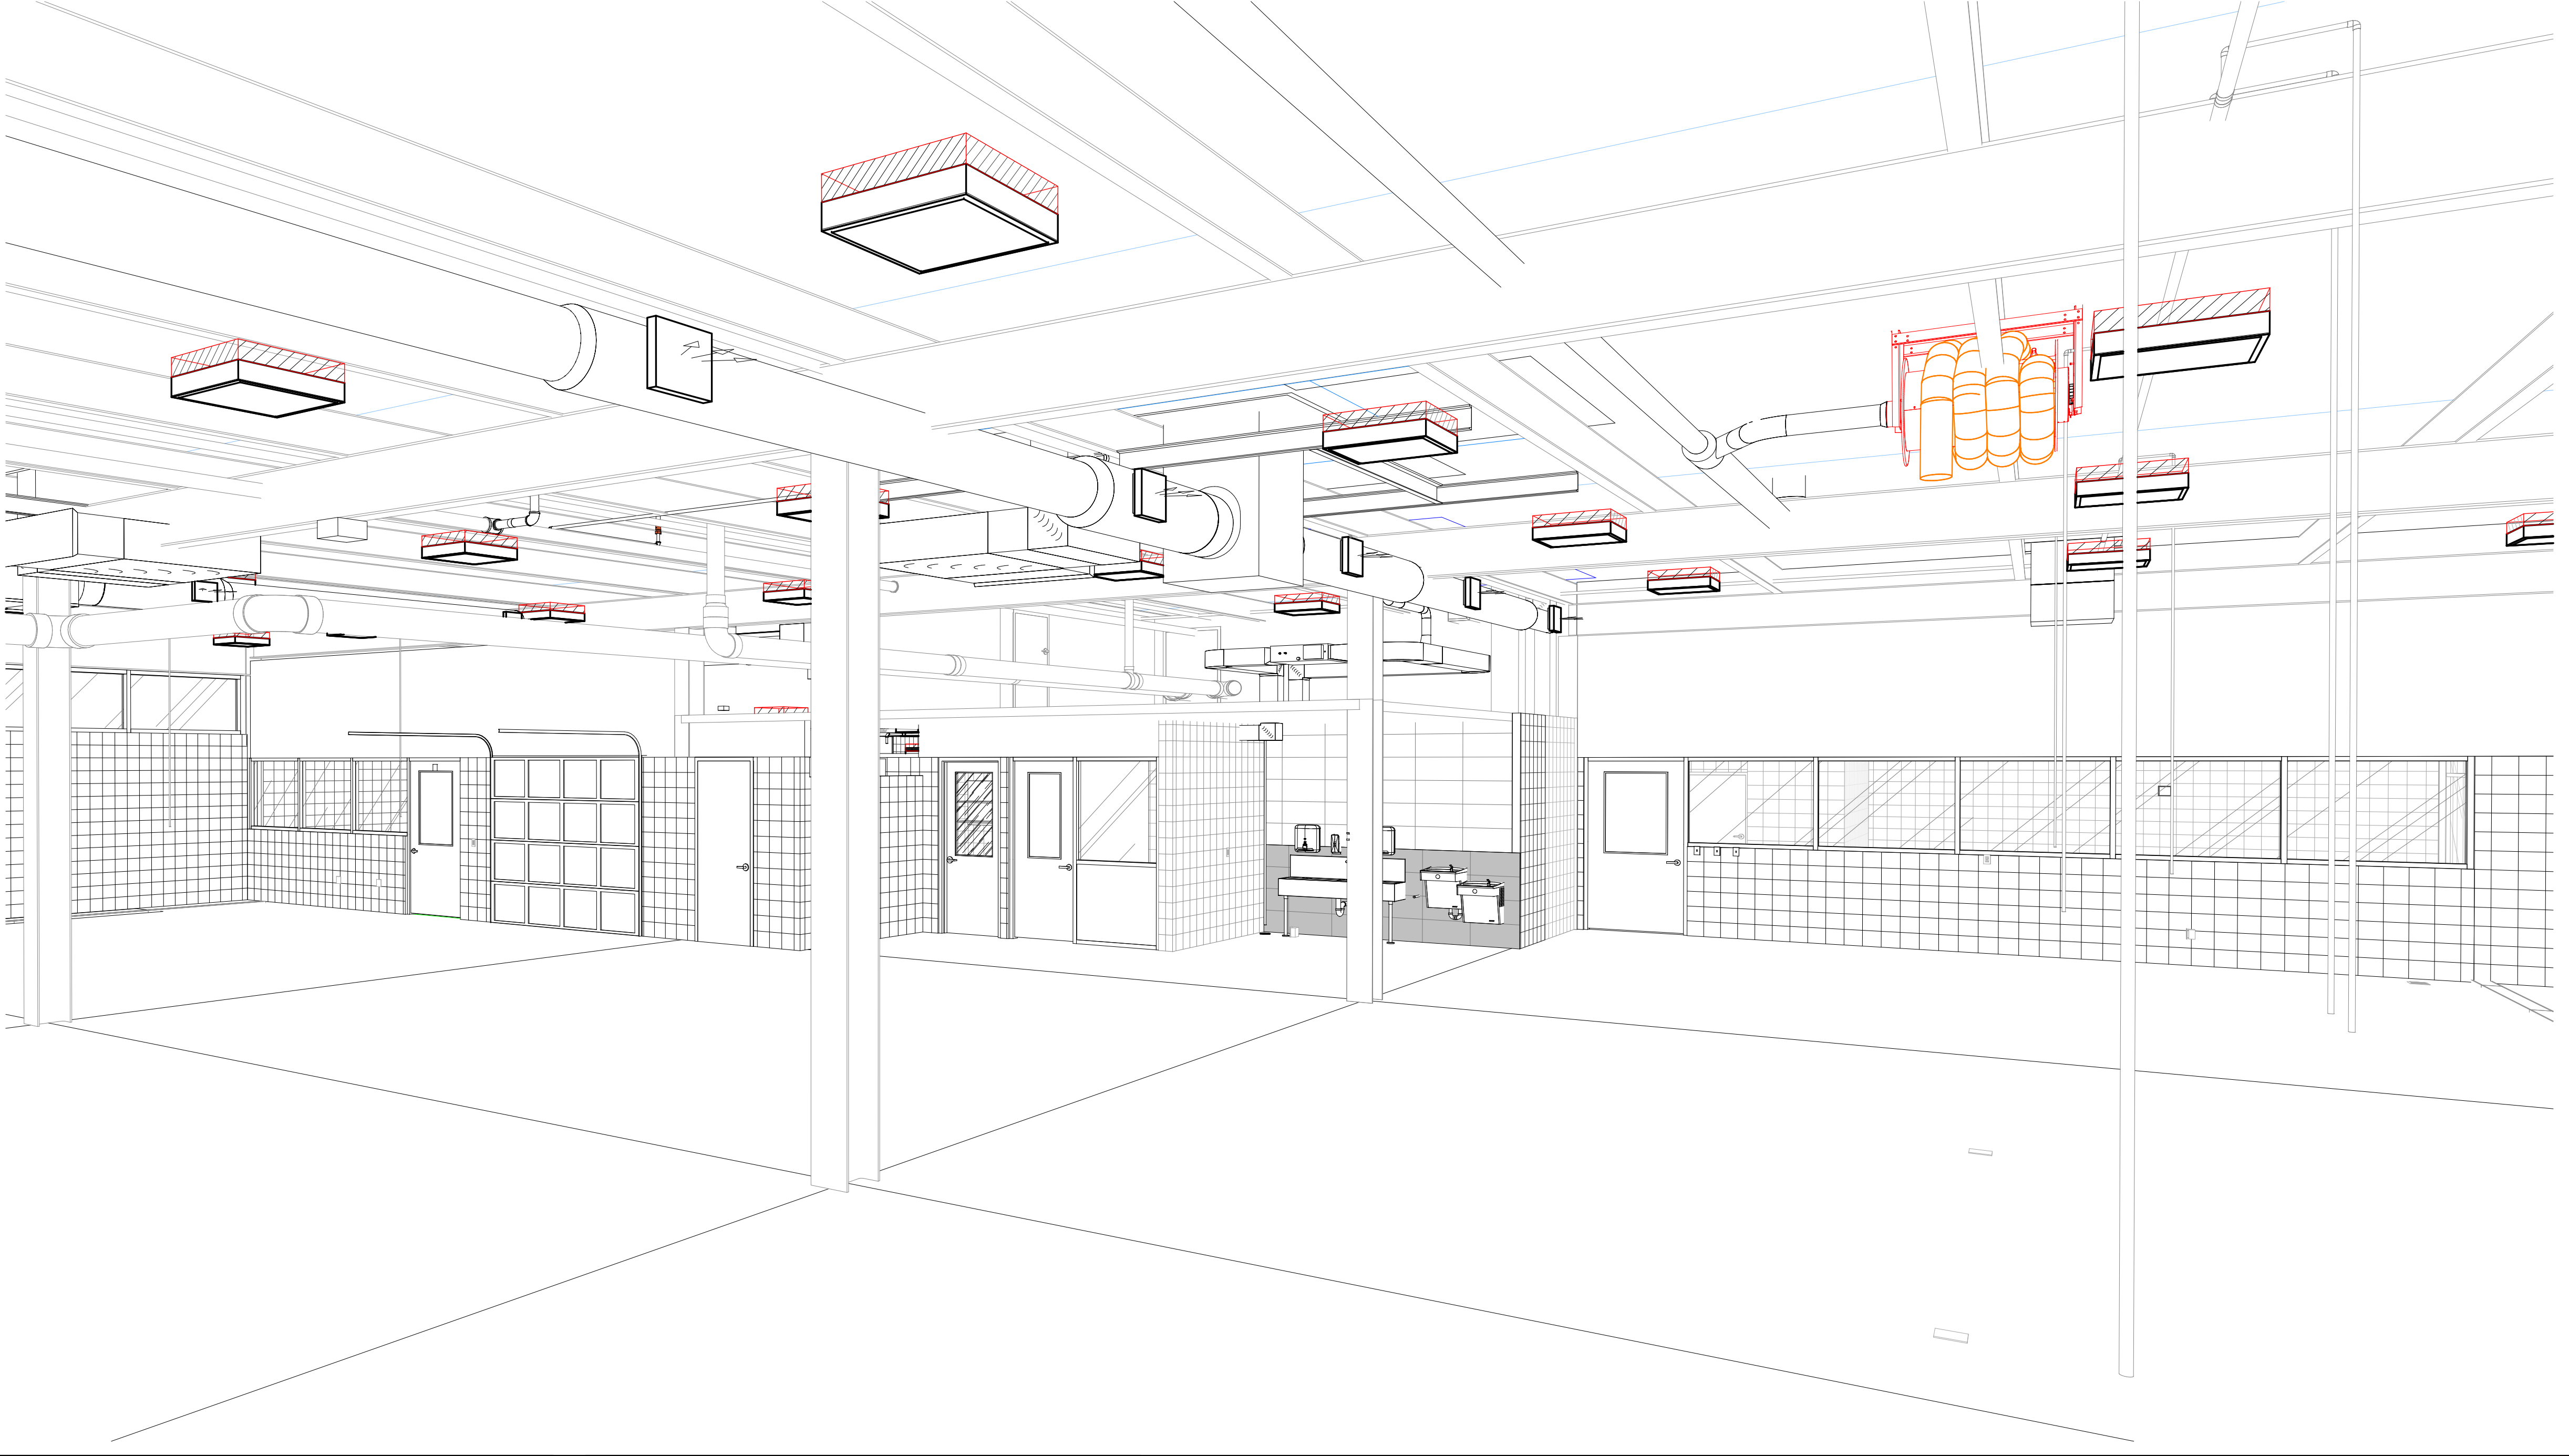

SHEET INDEX

SHEET NUMBER	SHEET NAME	REVISION NO.
01 [G] GENERAL		
G-001	COVER SHEET	
G-101	CODE SUMMARY	
G-102	CODE FLOOR PLAN	
G-111	TYPICAL MOUNTING HEIGHTS AND CLEARANCES	
07 [S] STRUCTURAL		
S-000	STRUCTURAL COVER SHEET	
S-001	STRUCTURAL GENERAL NOTES	
S-101	FOUNDATION PLAN	
S-102	ROOF FRAMING PLAN	
S-501	DETAILS	
S-502	DETAILS	
08 [A] ARCHITECTURAL		
A-001	LEGENDS, SYMBOLS, & ABBREVIATIONS	
A-D01	DEMOLITION PLAN	
A-101	ARCHITECTURAL FLOOR PLAN	
A-111	REFLECTED CEILING PLAN	
A-121	ROOF PLAN	
A-201	EXTERIOR ELEVATIONS	
A-311	WALL SECTIONS	
A-401	ENLARGED PLANS AND ELEVATIONS	
A-541	DETAILS	
A-601	PARTITION/EXTERIOR WALL TYPES	
A-611	DOOR SCHEDULE	
A-621	GLAZING/WINDOW SCHEDULE	
A-801	EQUIPMENT PLAN	
09 [I] INTERIORS		
I-101	FLOOR FINISH PLAN	
I-201	INTERIOR ELEVATIONS	
I-202	INTERIOR ELEVATIONS	
I-601	FINISH SCHEDULE AND CODES	
IF101	FURNITURE REFERENCE PLAN	

SHEET INDEX

SHEET NUMBER	SHEET NAME	REVISION NO.
14 [MP] MECHANICAL/PLUMBING		
MP001	MECHANICAL COVER SHEET	
F101	FIRE PROTECTION PLAN	
PD101	PLUMBING DEMOLITION PLAN	
P-101	PLUMBING PLAN	
P-401	ENLARGED PLUMBING PLAN	
P-501	PLUMBING DETAILS	
P-601	PLUMBING SCHEDULES	
MD101	HVAC DEMOLITION PLAN	
MD120	ROOF DEMOLITION PLAN	
M-101	HVAC PLAN	
M-120	ROOF MECHANICAL PLAN	
M-601	HVAC DETAILS	
M-601	MECHANICAL SCHEDULES	
M-701	CONTROL DETAILS	
15 [E] ELECTRICAL		
E-001	ELECTRICAL GENERAL NOTES AND SYMBOLS	
E-101	ELECTRICAL DEMOLITION PLAN - 1ST FLOOR	
E-102	ELECTRICAL DEMOLITION PLAN - MEZZANINE	
E-103	ELECTRICAL DEMOLITION PLAN - ROOF	
E-131	POWER & SYSTEMS PLAN - 1ST FLOOR	
E-132	POWER & SYSTEMS PLAN - MEZZANINE	
E-141	LIGHTING PLAN	
E-501	ELECTRICAL DETAILS	
E-601	ELECTRICAL ONE-LINE DIAGRAM - DEMOLITION	
E-602	ELECTRICAL SCHEDULES	
E-611	ELECTRICAL SCHEDULES	

LOCATION MAP



ALTERNATE SCHEDULE:

- HVAC REPLACEMENT FOR NEW RTUS 1, 2, 4 AND ASSOCIATED WORK, INCLUDING DUCTWORK, PIPING, SUPPORT, AND POWER CONNECTIONS TO THESE RTUS AS SHOWN ON THE DRAWINGS.
- MODERNFOLD OPERABLE PARTITIONS AT CLASSROOMS. HEADER (REF. 11A-541) TO REMAIN AS PART OF BASE BID.



All work herein is the exclusive property of GLMV Architecture, Inc. and is not to be copied or used in any way without the express written consent of GLMV Architecture, Inc. All drawings, specifications, ideas, designs, and arrangements appearing herein constitute the original and unpublished Work of:

© 2023 GLMV Architecture, Inc.



DATE	DESCRIPTION

PROJECT NUMBER: 22804042
PROJECT TYPE: Renovation

WICHITA STATE UNIVERSITY
CAMPUS OF APPLIED
SCIENCES AND TECHNOLOGY
4024 N. Webb Rd
Wichita, KS 67226
Tel: (316) 978-5444
www.wichita.edu

WICHITA STATE UNIVERSITY CAMPUS OF APPLIED SCIENCES AND TECHNOLOGY
EAST HIGH SNAP ON LAB
301 S. Grove, Wichita, KS 67211
DATE: 11/17/2023
DRAWN BY: HL
CHECKED BY: MFC

COVER SHEET

G-001

CERTIFIED FINAL