

CITY OF DADE CITY
NEW RESTROOMS

37800 CHURCH AVE.
DADE CITY, FL 33525


ROOFING COLOR
Weathered Wood



PAINT COLORS



BRICK COLOR



Front View from McGinn



CITY OF DADE CITY - NEW PARK RESTROOMS
FINAL COLOR SCHEME



GENERAL PROJECT NOTES

These documents, together with concepts and designs presented herein, as an instrument of service, are intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on these documents without construction administration or written authorization and adaptation by Boggs Design Partners, LLC, shall be without liability to Boggs Design Partners, LLC.

DO NOT scale drawings. The contractor shall use dimensions shown on the drawings and/or actual field conditions. If conflicts occur, notify the Architect.

These documents are intended to be used as a COMPLETE SET in the construction of the specific intended project. It is recommended that the ENTIRE construction document package be reviewed by ALL construction personnel prior to and during the construction of the project. the discipline indicators of the drawings are not intended to, and should not be meant to, imply separate bidding or scope of work for subcontractors and trades. Utilization of incomplete and/or partial sets of these documents may result in conflicts among trades and out of sequence construction.

Questions regarding the content and design intent of these drawings made during any phases of the project will NOT be accepted in verbal communication format. All questions must be directed through the General Contractor. Questions will only be answered after the General Contractor has submitted the question in writing (or electronic mail) in the format of a Request for Information (RFI, AIA document number G530).

The General Contractor shall be responsible for occupational safety (according to all local, state, and federal regulations conditions on the jobsite and during construction until completion of the project. The General Contractor shall indemnify the Owner and Architect, and Architect's Consultants harmless for the injury or death of persons or the damage or loss of property caused by the negligence of the General Contractor, his agents, personnel, employees, or sub-contractors/

Each Contractor and or sub-contractor shall be responsible for damages to adjacent work and shall repair and or replace damages at his own expense and not at the expense of the Owner.

SYMBOL LEGEND

A-101

DRAWING NUMBER
GROUP NUMBER
DISCIPLINE

01

DOOR NUMBER

01

WINDOW TYPE

SPACE

101

ROOM MARK
ROOM NAME
ROOM NUMBER

1

A-201

ENLARGED DETAIL MARK
DETAIL NUMBER
SHEET NUMBER

1


A-201

INTERIOR ELEVATION MARK
ELEVATION NUMBER
SHEET NUMBER


1

A-201


INTERIOR ELEVATION MARK
ELEVATION NUMBER
SHEET NUMBER

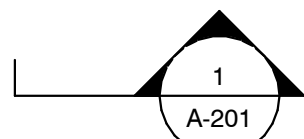


SECTION MARK
SECTION NUMBER
SHEET NUMBER



SECTION MARK
SECTION NUMBER
SHEET NUMBER




REVISION CLOUD
AND RELATED NUMBER




DIMENSION LINE




CENTER LINE



SHEET NOTE



PARTITION TYPE MARK




ELEVATION DATUM

SHEET INDEX		
SHEET #	SHEET NAME	PERMIT SET 10/19/23
ARCHITECTURAL		
G-001	COVER SHEET	•
G-002	CODE ANALYSIS, LIFE SAFETY PLAN, & ACCESSIBILITY	•
G-003	ARCHITECTURAL SPECIFICATIONS	•
G-004	ARCHITECTURAL SPECIFICATIONS	•
G-005	ARCHITECTURAL SPECIFICATIONS	•
G-006	ARCHITECTURAL SPECIFICATIONS	•
G-007	ARCHITECTURAL SPECIFICATIONS	•
G-008	ARCHITECTURAL SPECIFICATIONS	•
G-009	ARCHITECTURAL SPECIFICATIONS	•
G-010	ARCHITECTURAL SPECIFICATIONS	•
G-011	ARCHITECTURAL SPECIFICATIONS	•
G-012	ARCHITECTURAL SPECIFICATIONS	•
G-013	ARCHITECTURAL SPECIFICATIONS	•
G-014	ARCHITECTURAL SPECIFICATIONS	•
A-101	FLOOR PLAN, REFLECTED CEILING PLAN	•
AR-101	ROOF PLAN AND DETAILS	•
A-201	EXTERIOR ELEVATION	•
A-202	EXTERIOR ELEVATION - CONTINUED	•
A-301	BUILDING SECTIONS	•
A-401	INTERIOR ELEVATIONS	•
A-501	WALL SECTION, HEAD, JAMB AND SILL DETAILS	•
A-601	DOOR, WINDOW, AND ROOM FINISH SCHEDULES	•
STRUCTURAL		
S0.00	COVER SHEET	•
S0.10	GENERAL NOTES	•
S0.11	GENERAL NOTES	•
S0.12	GENERAL NOTES	•
S1.00	FOUNDATION PLAN	•
S1.10	FRAMING PLAN	•
S5.00	TYPICAL FOUNDATION DETAILS	•
S5.40	MASONRY TYPICAL DETAILS	•
S5.70	ROOF FRAMING DETAILS	•
S6.50	HSS - STEEL COLUMN SCHEDULE AND DETAILS	•
MECHANICAL		
M-1	MECHANICAL FLOOR PLANS	•
M-2	SCHEDULES, LEGENDS, AND DETAILS	•
ELECTRICAL		
E-001	SPECIFICATION AND LEGEND	•
E-002	SITE PLAN, POWER, DATA, LIGHTING	•
E-003	SCHEDULES - LUMINAIRES & PANELS AND POWER DISTRIBUTION RISER DIAGRAM	•
E-101	FLOOR PLAN - LIGHTING AND POWER	•
PLUMBING		
P-1	SANITARY PLAN	•
P-2	WATER FLOOR PLAN	•
P-3	PLUMBING RISER DIAGRAM	•
P-4	PLUMBING NOTES, SCHEDULES & DETAILS	•


BDP
BOGGS DESIGN PARTNERS
Architecture + Interiors
607 S. ALEXANDER ST.
SUITE 101
PLANT CITY, FL 33563
813 . 946 . 8444
www.bdparchitects.com

DATE: 10/19/2023
ERICA AZORIN CRAIG
FL REG. NO. AR101635
THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED ON THE DATE ADJACENT TO THE SEAL. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED FINISHED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

CITY OF DADE CITY
PARK RESTROOMS
37800 CHURCH AVENUE
DADE CITY, FL 33525

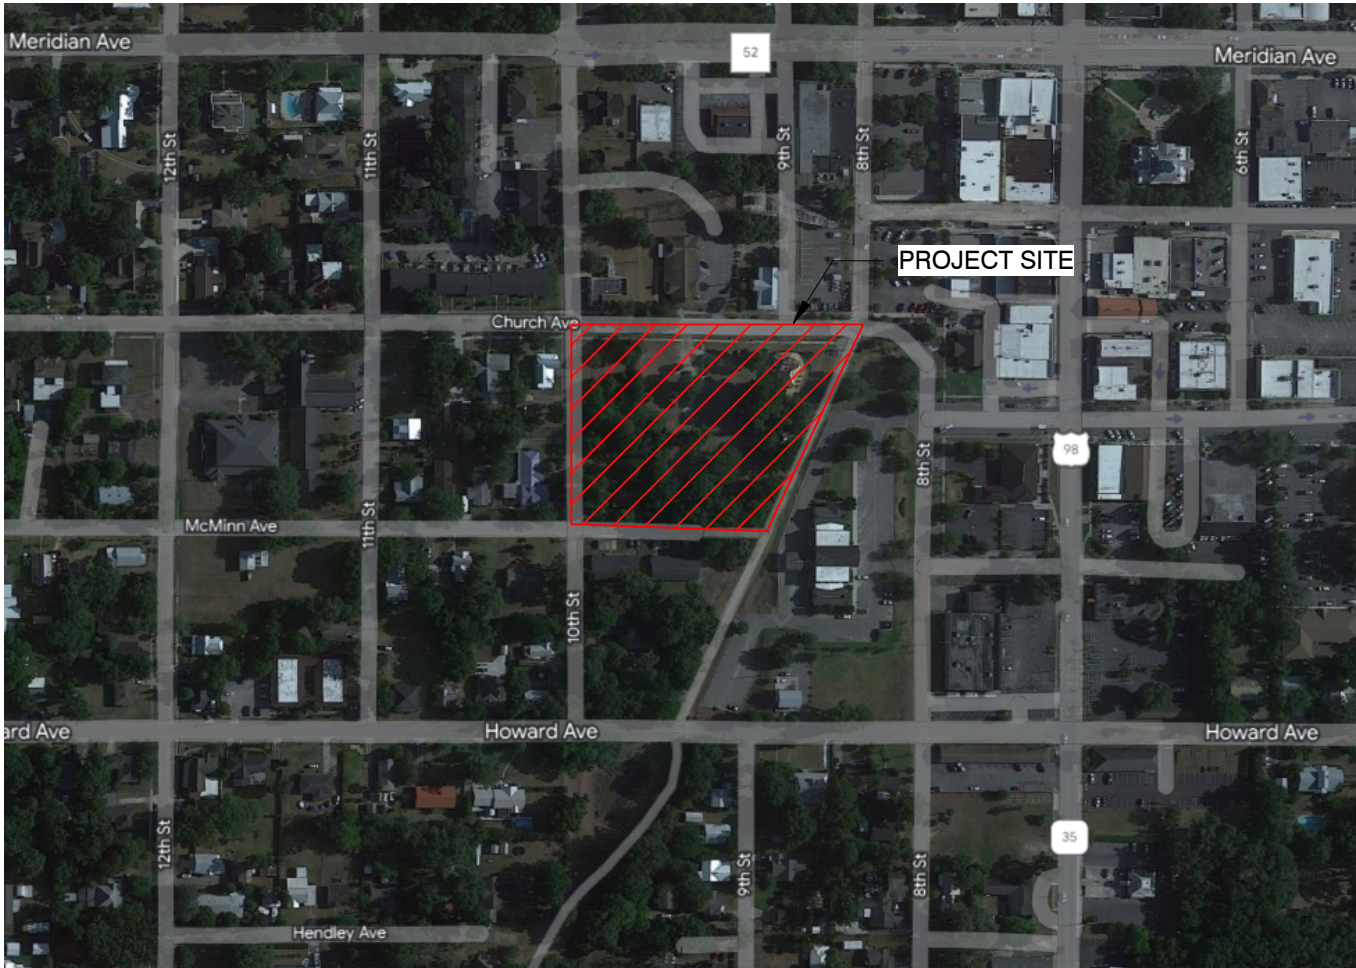

BDP - AREA LOCATION MAP



1

NO SCALE

MECHANICAL & PLUMBING
ENGINEERING:




ENGINEERING PROFESSIONALS :
912 W. DR. MARTIN LUTHER KING JR BLVD.
TAMPA, FLORIDA 33603
813 . 251 . 6848



PMD ENGINEERING :
6117 SCHOOL HOUSE CT
WESLEY CHAPEL, FLORIDA 33545
813 . 322 . 4373



WGI TAMPA:
3111 W DR. MARTIN LUTHER KING JR BLVD.
SUITE 375
TAMPA, FLORIDA 33607
813 . 574 . 3190

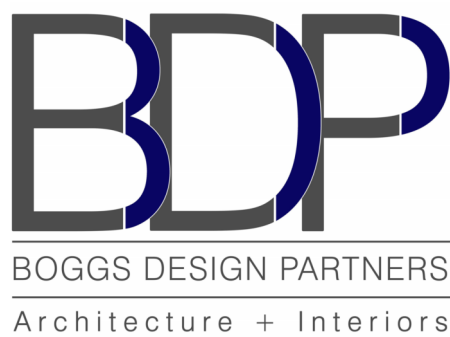

607 S. ALEXANDER ST.
SUITE 101
PLANT CITY, FL 33563
813 . 946 . 8444



BORREGARD CONSTRUCTION:
PO BOX 1869
DADE CITY, FLORIDA 33526
352 . 523 . 5050



CITY OF DADE CITY:
38020 MERIDIAN AVE
DADE CITY, FLORIDA 33525
352 . 523 . 5050

TEAM DIRECTORY

OWNER:

DESIGN - BUILDER /
CONTRACTOR

ARCHITECT:

STRUCTURAL ENGINEERING:

ELECTRICAL ENGINEERING:

PROJECT NO:

23005.001

DATE: 10/19/2023

DESIGNED BY:

DRAWN BY:

CHECKED BY:

DRAWING TITLE:

COVER SHEET


SHEET NO:

G-001

PERMIT BID SET 10-19-2023

©2022 Boggs Design Partners, LLC. All rights reserved. This document, together with the concepts and designs presented herein, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document, without consultation or written authorization and adaptation by Boggs Design Partners, LLC, shall be without liability to Boggs Design Partners, LLC.

GOVERNING REGULATIONS SUMMARY								
JURISDICTION		LOCAL			STATE	REMARKS		
CODE ENFORCEMENT JURISDICTION		PASCO COUNTY,FL			FLORIDA			
ZONING JURISDICTION		PASCO COUNTY,FL			FLORIDA			
CODE	TITLE				EDITION			
BUILDING CODE	FLORIDA BUILDING CODE (FBC)				2020			
ACCESSIBILITY CODE	FLORIDA ACCESSIBILITY CODE (FAC)				2020			
MECHANICAL CODE	FLORIDA MECHANICAL CODE (FBC-M)				2020			
ELECTRICAL CODE	NATIONAL ELECTRICAL CODE (NEC)				2017			
PLUMBING CODE	FLORIDA PLUMBING CODE (FBC-P)				2020			
FIRE PROTECTION CODE	FLORIDA FIRE PREVENTION CODE (FFPC)				2020			
ENERGY CONSERVATION CODE	FLORIDA BUILDING CODE (FBC-EC)				2020			
FEDERAL ACCESSIBILITY CODE	AMERICANS WITH DISABILITIES ACT				2010			
POOL AND SPA CODE	INTERNATIONAL SWIMMING POOL & SPA CODE (ISPS)				2021			
GENERAL BUILDING SUMMARY								
HEIGHT AND AREA								
OCCUPANCY GROUP(S)	CONST. TYPE	SPRINKLER SYSTEM(S)	ACTUAL AREA	ALLOWED AREA PER STORY	ACTUAL HEIGHT / STORY	ALLOWED HEIGHT / STORY	REMARKS	
B - BUSINESS	VB	N	1209 SF	9,00 SF	20'-0" / 1	40'-0" / 2	1, 3	
OCCUPANCY LOAD								
SPACE USE	SPACE AREA	AREA PER OCCUPANT	OCCUPANT LOAD		TOTAL OCCUPANT LOAD		REMARKS	
B - RESTROOMS	900 SF	150 GROSS SF	7		9		1, 4	
S - ACCESSORY MECH. STORAGE / JANITOR	300 SF	300 GROSS SF	1				1, 4	
GENERAL BUILDING SUMMARY								
ELEMENT	RATING		DESIGN NUMBER(S)		REMARKS			
FIRE WALLS	NA		NA					
EXTERIOR BEARING WALL	0		NA		2			
EXTERIOR NON-BEARING WALL	0		NA		2			
FIRE BARRIERS	NA		NA					
FIRE PARTITIONS	NA		NA					
SMOKE BARRIERS	NA		NA					
COLUMNS	0		NA		2			
FLOORS	0		NA		2			
ROOFS	0		NA		2			
DRAFT BARRIERS	NA		NA					
MEANS OF EGRESS								
EGRESS WIDTH		NUMBER OF EXITS		ARRANGEMENTS OF EXITS		TRAVEL DISTANCE		REMARKS
REQUIRED	PROVIDED	REQUIRED	PROVIDED	DIAGONAL	PROVIDED	MAXIMUM	PROVIDED (MENS / WOMENS)	
32"	36"	1	1	NA	NA	200'	20'-9"	5, 6, 8
PLUMBING FIXTURE TABULATIONS								
FIXTURE	NUMBER REQUIRED		NUMBER PROVIDED		REMARKS			
	FEMALE	MALE	FEMALE	MALE				
WATER CLOSET	1	1	3	2	7			
URINALS		1		1	7			
LAVATORIES	1	1	3	3	7			
DRINKING FOUNTAINS	1		1		7			
SERVICE SINKS	1		1		7			
RINSE SHOWER	1		1		7			
FLORIDA PRODUCT APPROVAL NUMBERS								
ELEMENT	MANUFACTURE		APPROVAL NUMBER		REMARKS			
EXTERIOR DOOR	CECO DOOR		FL 10723.1					
LOUVER	GREENHECK		FL 19277.1					
ROOFING	GAF		FL 3443.1					
SOFFITS	JAMES HARDIE BUILDING PRODUCTS		FL 13265.1					
SIDING - LAP/PLANKS	JAMES HARDIE BUILDING PRODUCTS		FL 13192.2					
SIDING - PANEL	JAMES HARDIE BUILDING PRODUCTS		FL 13192.4					
WINDOWS	PGT		FL 2329.2					
INTERIOR WALL & CEILING FINISH REQUIREMENTS								
ELEMENT	OCCUPANCY GROUP	SPRINKLERS (Y / N)		FBC CLASS		NFPA 101 CLASS		
ROOMS & ENCLOSED SPACES	B - BUSINESS	N		C		A, B, C		
REMARKS								
1. BUILDING IS NEW, 1 STORY RESTROOM WITHIN AN EXISTING PUBLIC PARK. 2. RATING NOT REQUIRED PER FBC T 601. 3. ALLOWABLE BUILDING HEIGHTS AND AREAS PER FBC T 504.3A, 504.4, 506.2. 4. MAXIMUM FLOOR AREA ALLOWANCE PER OCCUPANT PER FBC T 1004.5. 5. ONLY 1 EXIT REQUIRED PER FBC T 1006.2.1 AND NFPA 101 38.2.4.3. ONE EXIT IS PROVIDED FOR EACH RESTROOM (1 FOR MENS & 1 FOR WOMENS). 6. EXIT ACCESS TRAVEL DISTANCE PER FBC TABLE 1006.2.1 AND NFPA 38.2.4.3. 7. MINIMUM REQUIRED PLUMBING FIXTURES CALCULATED PER FBC-P TABLE 403.1. 8. MEANS OF EGRESS WIDTH PER FBC 1005.								
WIND DESIGN CRITERIA								
ULTIMATE DESIGN WIND SPEED = 137 MPH NOMINAL DESIGN WIND SPEED = 108 MPH (SEE STRUCTURAL FOR ADDITIONAL INFORMATION)			BUILDING RISK CATEGORY = II EXPOSURE CATEGORY = C			GLAZING TO COMPLY WITH FBC 2403.2404.2406 FOR GLASS IDENTIFICATION, SUPPORTS / FRAMING, WIND LOADS, AND SAFETY REQUIREMENTS		

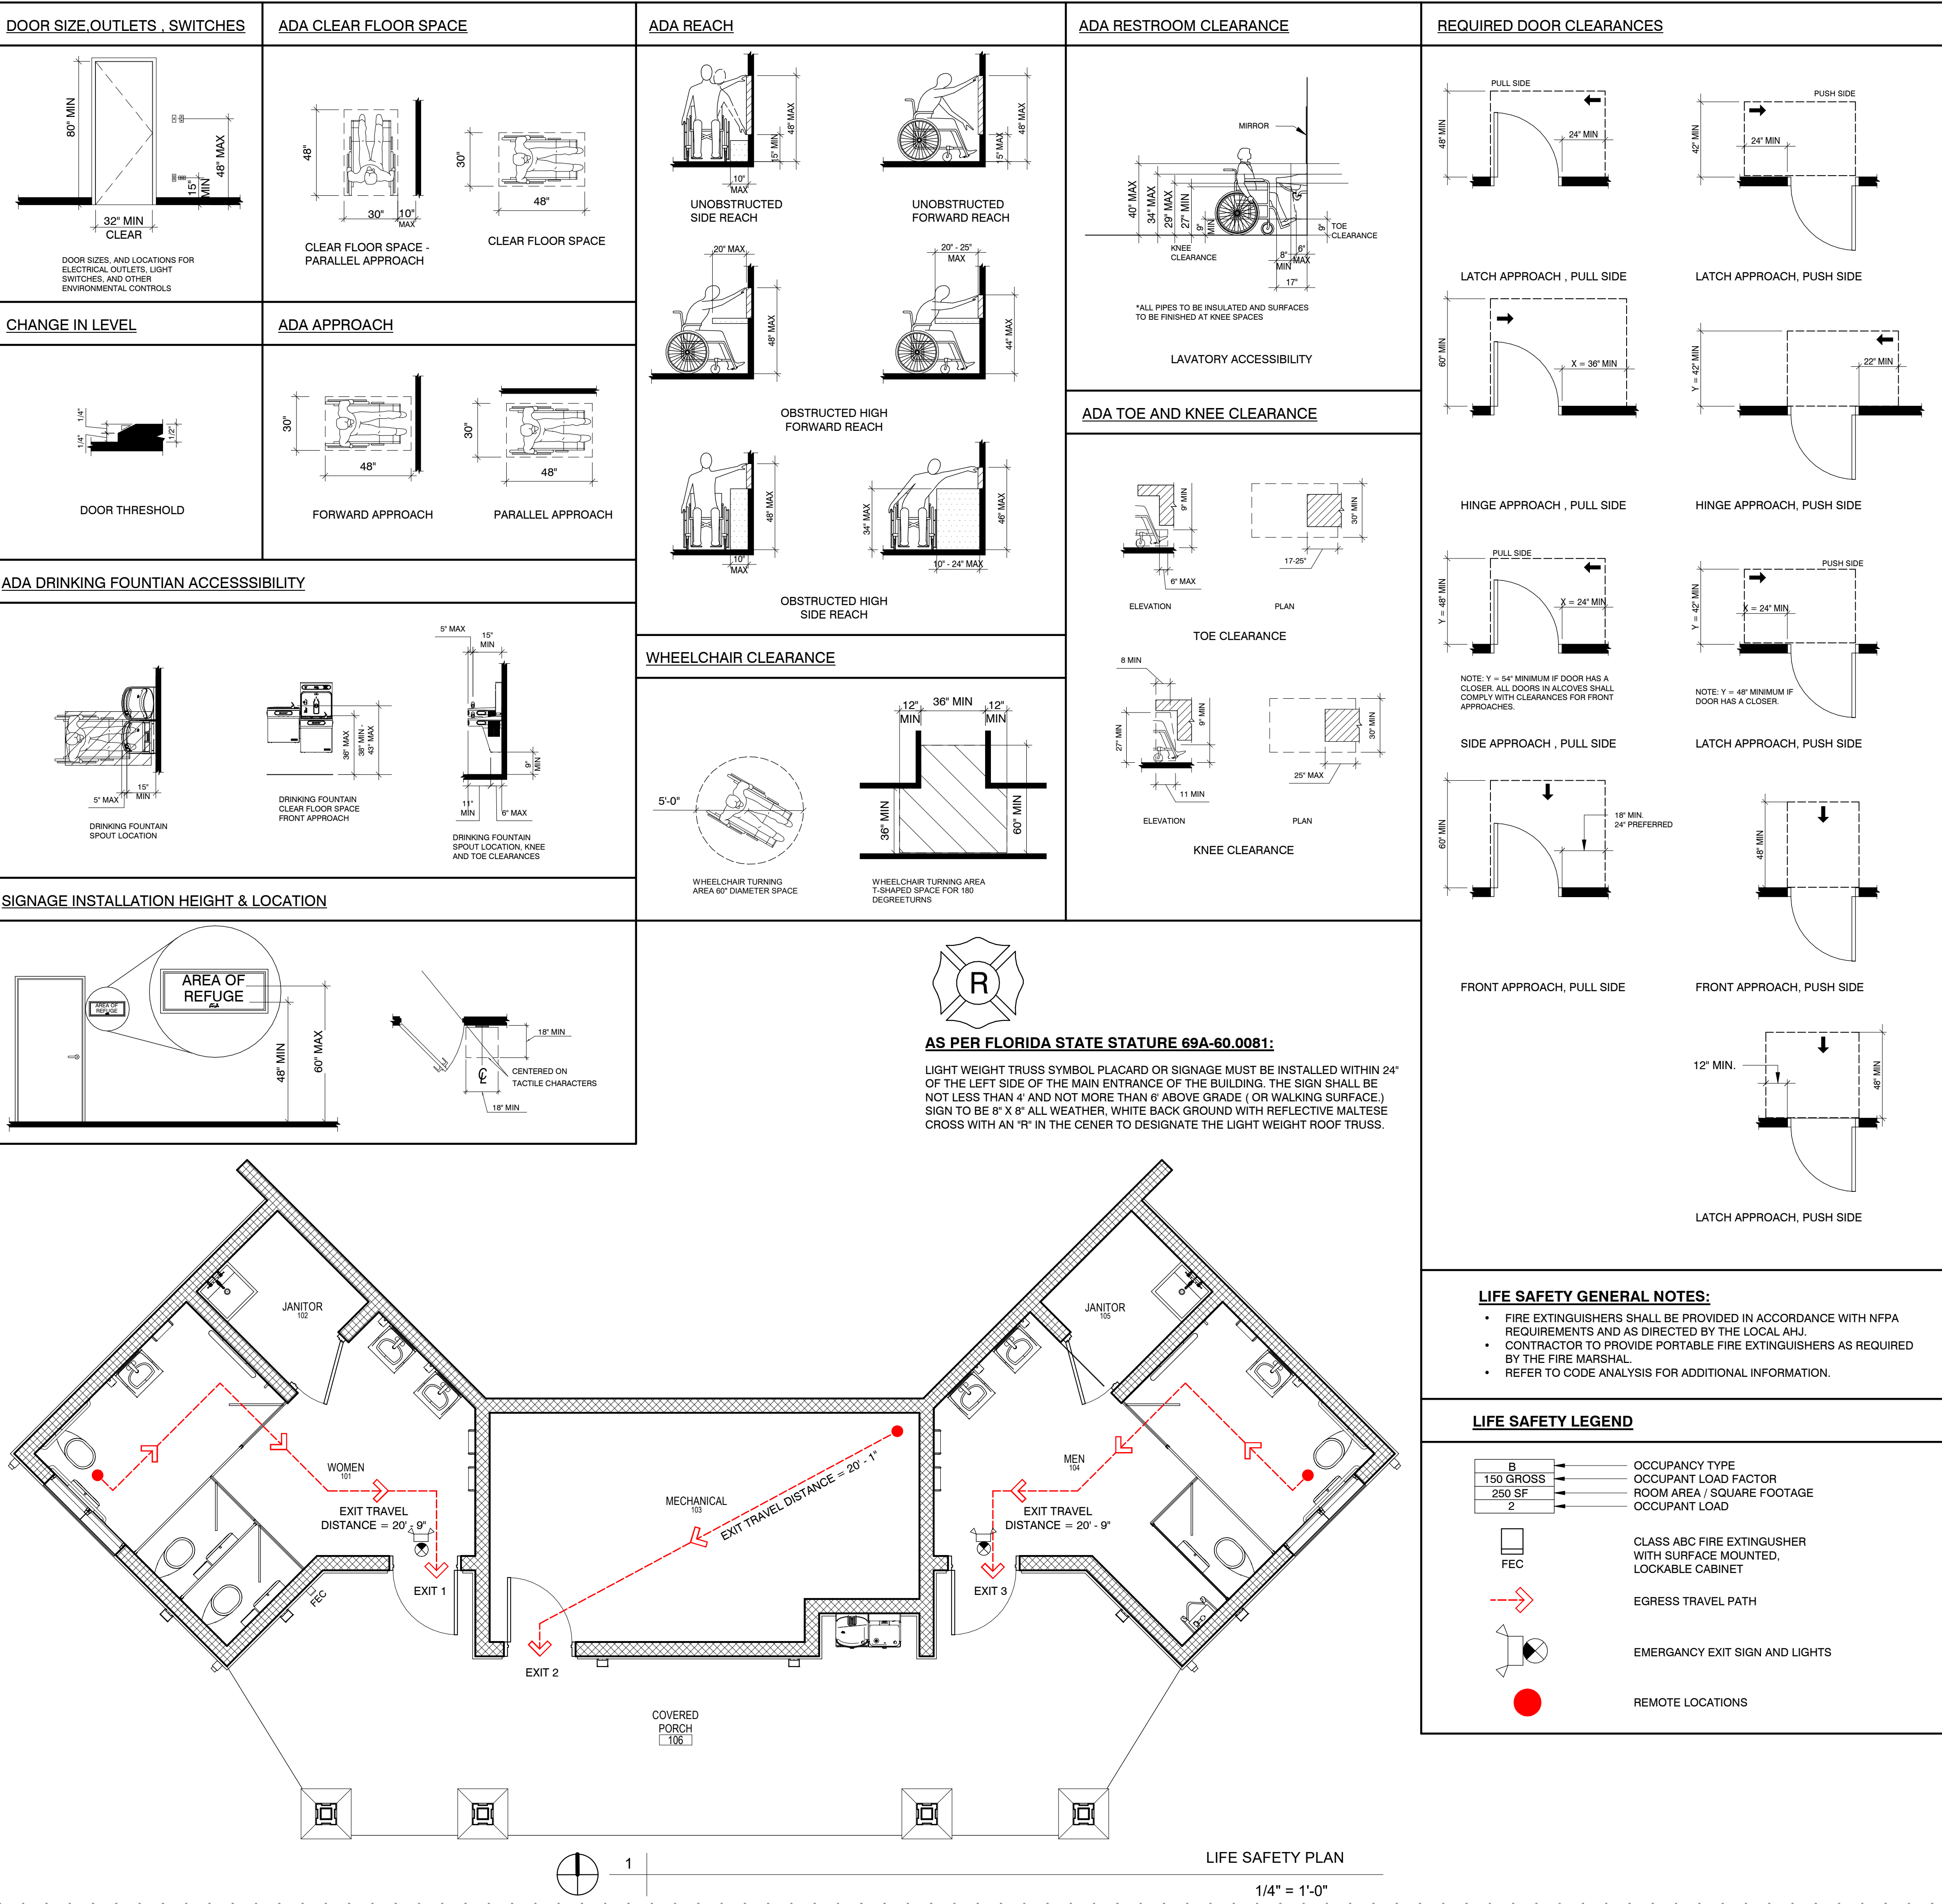

SECTION 01 31 00
PROJECT MANAGEMENT AND COORDINATION - CONT'D

4. Name of Contractor.
5. Name of Architect.
6. RFI number, numbered sequentially.
7. RFI subject.
8. Specification Section number and title and related paragraphs, as appropriate.
9. Drawing number and detail references, as appropriate.
10. Field dimensions and conditions, as appropriate.
11. Contractor's suggested resolution. If Contractor's suggested resolution impacts the Contract Time or the Contract Sum, Contractor shall state impact in the RFI.
12. Contractor's signature.
13. Attachments: Include sketches, descriptions, measurements, photos, Product Data, Shop Drawings, coordination drawings, and other information necessary to fully describe items needing interpretation.
- a. Include dimensions, thicknesses, structural grid references, and details of affected materials, assemblies, and attachments on attached sketches.
- C. RFI Forms: AIA Document G716 or Software-generated form with substantially the same content as indicated above, acceptable to Architect.
1. Attachments shall be electronic files in Adobe Acrobat PDF format.
- D. Architect's Action: Architect will review each RFI, determine action required, and respond. Allow (5) five working days for Architect's response for each RFI. RFIs that require response from more than 2 parties may require longer response times. RFIs received by Architect after 1:00 p.m. will be considered as received the following working day.
1. The following Contractor-generated RFIs will be returned without action:
- a. Requests for approval of submittals.
- b. Requests for approval of substitutions.
- c. Requests for approval of Contractor's means and methods.
- d. Requests for coordination information already indicated in the Contract Documents.
- e. Requests for adjustments in the Contract Time or the Contract Sum.
- f. Requests for interpretation of Architect's actions on submittals.
- g. Incomplete RFIs or inaccurately prepared RFIs.
2. Architect's action may include a request for additional information, in which case Architect's time for response will date from time of receipt of additional information.
3. Architect's action on RFIs that may result in a change to the Contract Time or the Contract Sum may be eligible for Contractor to submit Change Proposal according to Division 01 Section "Contract Modification Procedures."
- a. If Contractor believes the RFI response warrants change in the Contract Time or the Contract Sum, notify Architect in writing within 10 days of receipt of the RFI response.
- E. RFI Log: Prepare, maintain, and submit a tabular log of RFIs organized by the RFI number. Submit log weekly. Use software log that is part of Project Web site. Include the following:
1. Project name.
2. Name and address of Contractor.
3. Name and address of Architect.
4. RFI number including RFIs that were returned without action or withdrawn.
5. RFI description.
6. Date the RFI was submitted.
7. Date Architect's response was received.
- F. On receipt of Architect's action, update the RFI log and immediately distribute the RFI response to affected parties. Review response and notify Architect within seven days if Contractor disagrees with response.
1. Identification of related Minor Change in the Work, Construction Change Directive, and Proposal Request, as appropriate.

1.6 PROJECT MEETINGS

- A. General: Schedule and conduct meetings and conferences at Project site unless otherwise indicated.
1. Attendees: Inform participants and others involved, and individuals whose presence is required, of date and time of each meeting. Notify Owner and Architect of scheduled meeting dates and times.
2. Agenda: Prepare the meeting agenda. Distribute the agenda to all invited attendees.
3. Minutes: Entity responsible for conducting meeting will record significant discussions and agreements achieved. Distribute the meeting minutes to everyone concerned, including Owner and Architect, within three days of the meeting.
- B. Preconstruction Conference: Schedule and conduct a preconstruction conference before starting construction, at a time convenient to Owner and Architect, but no later than 15 days after Notice to Proceed.
1. Conduct the conference to review responsibilities and personnel assignments.
2. Attendees: Authorized representatives of Owner, Architect, and their consultants; Contractor and its superintendent; major subcontractors; suppliers; and other concerned parties shall attend the conference. Participants at the conference shall be familiar with Project and authorized to conclude matters relating to the Work.
3. Agenda: Discuss items of significance that could affect progress, including the following:
- a. Tentative construction schedule.
- b. Phasing.
- c. Critical work sequencing and long-lead items.
- d. Designation of key personnel and their duties.
- e. Lines of communications.
- f. Procedures for processing field decisions and Change Orders.
- g. Procedures for RFIs.
- h. Procedures for testing and inspecting.
- i. Procedures for processing Applications for Payment.
- j. Distribution of the Contract Documents.
- k. Submittal procedures.
- l. Preparation of record documents.
- m. Use of the premises and existing building.
- n. Work restrictions.
- o. Working hours.
- p. Owner's occupancy requirements.
- q. Responsibility for temporary facilities and controls.
- r. Procedures for moisture and mold control.
- s. Procedures for disruptions and shutdowns.
- t. Construction waste management and recycling.
- u. Parking availability.
- v. Office, work, and storage areas.
- w. Equipment deliveries and priorities.
- x. First aid.
- y. Security.
- z. Progress cleaning.
4. Minutes: Entity responsible for conducting meeting will record and distribute meeting minutes.
- C. Preinstallation Conferences: Conduct a preinstallation conference at Project site before each construction activity that requires coordination with other construction.
1. Attendees: Installer and representatives of manufacturers and fabricators involved in or affected by the installation and its coordination or integration with other materials and installations that have preceded or will follow, shall attend the meeting. Advise Architect of scheduled meeting dates.
2. Agenda: Review progress of other construction activities and preparations for the particular activity under consideration, including requirements for the following:
- a. Contract Documents.
- b. Options.
- c. Related RFIs.

- d. Related Change Orders.
- e. Purchases.
- f. Deliveries.
- g. Submittals.
- h. Review of mockups.
- i. Possible conflicts.
- j. Compatibility requirements.
- k. Time schedules.
- l. Weather limitations.
- m. Manufacturer's written instructions.
- n. Warranty requirements.
- o. Compatibility of materials.
- p. Acceptability of substrates.
- q. Temporary facilities and controls.
- r. Space and access limitations.
- s. Regulations of authorities having jurisdiction.
- t. Testing and inspecting requirements.
- u. Installation procedures.
- v. Coordination with other work.
- w. Required performance results.
- x. Protection of adjacent work.
- y. Protection of construction and personnel.
3. Record significant conference discussions, agreements, and disagreements, including required corrective measures and actions.
4. Reporting: Distribute minutes of the meeting to each party present and to other parties requiring information.
5. Do not proceed with installation if the conference cannot be successfully concluded. Initiate whatever actions are necessary to resolve impediments to performance of the Work and reconvene the conference at earliest feasible date.
- D. Progress Meetings: Conduct progress meetings at regular intervals as agreed upon with Owner and Architect.
1. Coordinate dates of meetings with preparation of payment requests.
2. Attendees: In addition to representatives of Owner and Architect, each contractor, subcontractor, supplier, and other entity concerned with current progress or involved in planning, coordination, or performance of future activities shall be represented at these meetings. All participants at the meeting shall be familiar with Project and authorized to conclude matters relating to the Work.
3. Agenda: Review and correct or approve minutes of previous progress meeting. Review other items of significance that could affect progress. Include topics for discussion as appropriate to status of Project.
- a. Contractor's Construction Schedule: Review progress since the last meeting. Determine whether each activity is on time, ahead of schedule, or behind schedule, in relation to Contractor's construction schedule. Determine how construction behind schedule will be expedited: secure commitments from parties involved to do so. Discuss whether schedule revisions are required to ensure that current and subsequent activities will be completed within the Contract Time.
1. Review schedule for next period.
- b. Review present and future needs of each entity present, including the following:
1. Interface requirements.
2. Sequence of operations.
3. Resolution of BIM component conflicts.
4. Status of submittals.
5. Deliveries.
6. Off-site fabrication.
7. Access.
8. Site utilization.
9. Temporary facilities and controls.
10. Progress cleaning.
11. Quality and work standards.
12. Status of correction of deficient items.
13. Field observations.
14. Status of RFIs.
15. Status of proposal requests.
16. Pending changes.
17. Status of Change Orders.
18. Pending claims and disputes.
19. Documentation of information for payment requests.
4. Minutes: Entity responsible for conducting the meeting will record and distribute the meeting minutes to each party present and to parties requiring information.
- a. Schedule Updating: Revise Contractor's construction schedule after each progress meeting where revisions to the schedule have been made or recognized. Issue revised schedule concurrently with the report of each meeting.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

SECTION 01 33 00
SUBMITTAL PROCEDURES

PART 1 GENERAL

- 1.1 RELATED DOCUMENTS
- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.
- 1.2 SUMMARY
- A. Section includes requirements for the submittal schedule and administrative and procedural requirements for submitting Shop Drawings, Product Data, Samples, and other submittals.
- 1.3 DEFINITIONS
- A. Action Submittals: Written and graphic information and physical samples that require Architect's and Contractor's responsive action. Action submittals are those submittals indicated in individual Specification Sections as "action submittals."
- B. Informational Submittals: Written and graphic information and physical samples that do not require Architect's and Contractor's responsive action. Submittals may be rejected for not complying with requirements. Informational submittals are those submittals indicated in individual Specification Sections as "informational submittals."
- C. File Transfer Protocol (FTP): Communications protocol that enables transfer of files to and from another computer over a network and that serves as the basis for standard Internet protocols. An FTP site is a portion of a network located outside of network firewalls within which internal and external users are able to access files.
- D. Portable Document Format (PDF): An open standard file format licensed by Adobe Systems used for representing documents in a device-independent and display resolution-independent fixed-layout document format.
- 1.4 ACTION SUBMITTALS
- A. Submittal Schedule: Submit a schedule of submittals, arranged in chronological order by dates required by construction schedule. Include time required for review, ordering, manufacturing, fabrication, and delivery when establishing dates. Include additional time required for making corrections or revisions to submittals noted by Architect and additional time for handling and reviewing submittals required by those corrections.
1. Coordinate submittal schedule with list of subcontracts, the schedule of values, and

- Contractor's construction schedule.
2. Final Submittal: Submit concurrently with the first complete submittal of Contractor's construction schedule.
- a. Submit revised submittal schedule to reflect changes in current status and timing for submittals.
3. Format: Arrange the following information in a tabular format:
- a. Scheduled date for first submittal.
- b. Specification Section number and title.
- c. Submittal category: Action; informational.
- d. Name of subcontractor.
- e. Description of the Work covered.
- f. Scheduled date for Architect's final release or approval.
- g. Scheduled date of fabrication.
4. Failure to deliver a submittal schedule with delivery dates to the architect voids the required response time.

1.5 SUBMITTAL ADMINISTRATIVE REQUIREMENTS

- A. Architect's Digital Data Files: Electronic digital data files of the Contract Drawings may be provided by Architect for Contractor's use in preparing submittals at the discretion of the Architect.
1. Architect may furnish Contractor one set of digital data drawing files of the Contract Drawings for use in preparing Shop Drawings and Project record drawings only.
- a. Architect makes no representations as to the accuracy or completeness of digital data drawing files as they relate to the Contract Drawings.
- b. Digital Drawing Software Program: The Contract Drawings are available in ACA 2010.
- c. Contractor shall execute a data licensing agreement in the form of AIA Document C106, Digital Data Licensing Agreement.
- d. The following digital data files may be furnished for each appropriate discipline for use to create backgrounds:
1. Floor plans.
2. Reflected ceiling plans.
- B. Coordination: Coordinate preparation and processing of submittals with performance of construction activities.
1. Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals, and related activities that require sequential activity.
2. Submit all submittal items required for each Specification Section concurrently unless partial submittals for portions of the Work are indicated on approved submittal schedule.
3. Submit action submittals and informational submittals required by the same Specification Section as separate packages under separate transmittals.
4. Coordinate transmittal of different types of submittals for related parts of the Work so processing will not be delayed because of need to review submittals concurrently for coordination.
- a. Architect reserves the right to withhold action on a submittal requiring coordination with other submittals until related submittals are received.
- C. Processing Time: Allow time for submittal review, including time for resubmittals, as follows. Time for review shall commence on Architect's receipt of submittal. No extension of the Contract Time will be authorized because of failure to transmit submittals enough in advance of the Work to permit processing, including resubmittals.
1. Initial Review: Allow 10 working days for initial review of each submittal. Allow additional time if coordination with subsequent submittals or multiple reviewers is required. Architect will advise Contractor when a submittal being processed must be delayed for coordination.
2. Intermediate Review: If intermediate submittal is necessary, process it in same manner as initial submittal.
3. Resubmittal Review: Allow 10 working days for review of each resubmittal.
4. Sequential Review: Where sequential review of submittals by Architect's consultants, Owner, or other parties is indicated, allow 15 working days for initial review of each submittal.
5. Concurrent Consultant Review: Where the Contract Documents indicate that submittals may be transmitted simultaneously to Architect and to Architect's consultants, allow 10 working days for review of each submittal. Submittal will be returned to Architect before being returned to Contractor.
- D. Paper Submittals: Paper submittals shall only be accepted where a raised seal is required. Otherwise, all submittal must be in Electronic format (PDF). Place a permanent label or title block on each submittal item for identification.
1. Indicate name of firm or entity that prepared each submittal on label or title block.
2. Provide a space approximately 6 by 8 inches (150 by 200 mm) on label or beside title block to record Contractor's review and approval markings and action taken by Architect.
3. Include the following information for processing and recording action taken:
- a. Project name.
- b. Date.
- c. Name of Architect.
- d. Name of Contractor.
- e. Name of subcontractor.
- f. Name of supplier.
- g. Name of manufacturer.
- h. Submittal number or other unique identifier, including revision identifier.
1. Submittal number shall use Specification Section number followed by a decimal point and then a sequential number (e.g., 061000.01). Resubmittals shall include an alphabetic suffix after another decimal point (e.g., 061000.01.A).
- i. Number and title of applicable Specification Section.
- j. Drawing number and detail references, as appropriate.
- k. Location(s) where product is to be installed, as appropriate.
4. Additional Paper Copies: Unless additional copies are required for final submittal, and unless Architect observes noncompliance with provisions in the Contract Documents, initial submittal may serve as final submittal.
- a. Submit one copy of submittal to concurrent reviewer in addition to specified number of copies to Architect.
5. Transmittal for Paper Submittals: Assemble each submittal individually and appropriately for transmittal and handling. Transmit each submittal using a transmittal form. Architect will discard submittals received from sources other than Contractor.
- a. Transmittal Form for Paper Submittals: Provide locations on form for the following information:
1. Project name.
2. Date.
3. Destination (To:).
4. Source (From:).
5. Name and address of Architect.
6. Name of Contractor.
7. Name of firm or entity that prepared submittal.
8. Names of subcontractor, manufacturer, and supplier.
9. Category and type of submittal.
10. Submittal purpose and description.
11. Specification Section number and title.
12. Specification paragraph number or drawing designation and generic name for each of multiple items.
13. Drawing number and detail references, as appropriate.
14. Indication of full or partial submittal.
15. Transmittal number, numbered consecutively.
16. Submittal and transmittal distribution record.
17. Remarks.
18. Signature of transmitter.
- E. Electronic Submittals: Identify and incorporate information in each electronic submittal file as follows:

1. Assemble complete submittal package into a single indexed file incorporating submittal requirements of a single Specification Section and transmittal form with links enabling navigation to each item.
2. Name file with submittal number or other unique identifier, including revision identifier.
- a. File name shall use project identifier and Specification Section number followed by a decimal point and then a sequential number (e.g., LNHS-061000.01). Resubmittals shall include an alphabetic suffix after another decimal point (e.g., LNHS-061000.01.A).
3. Provide means for insertion to permanently record Contractor's review and approval markings and action taken by Architect.
4. Transmittal Form for Electronic Submittals: Use electronic form acceptable to Owner and Architect, containing the following information:
- a. Project name.
- b. Date.
- c. Name and address of Architect.
- d. Name of Contractor.
- e. Name of firm or entity that prepared submittal.
- f. Names of subcontractor, manufacturer, and supplier.
- g. Category and type of submittal.
- h. Submittal purpose and description.
- i. Specification Section number and title.
- j. Specification paragraph number or drawing designation and generic name for each of multiple items.
- k. Drawing number and detail references, as appropriate.
- l. Location(s) where product is to be installed, as appropriate.
- m. Related physical samples submitted directly.
- n. Indication of full or partial submittal.
- o. Transmittal number, numbered consecutively.
- p. Submittal and transmittal distribution record.
- q. Other necessary identification.
- r. Remarks.
5. Metadata: Include the following information as keywords in the electronic submittal file metadata:
- a. Project name.
- b. Number and title of appropriate Specification Section.
- c. Manufacturer name.
- d. Product name.
- F. Options: Identify options requiring selection by Architect.
- G. Deviations and Additional Information: On an attached separate sheet, prepared on Contractor's letterhead, record relevant information, requests for data, revisions other than those requested by Architect on previous submittals, and deviations from requirements in the Contract Documents, including minor variations and limitations. Include same identification information as related submittal.
- H. Resubmittals: Make resubmittals in same form and number of copies as initial submittal.
1. Note date and content of previous submittal.
2. Note date and content of revision in label or title block and clearly indicate extent of revision.
3. Resubmit submittals until they are marked with approval notation from Architect's and Contractor's action stamp.
- I. Distribution: Furnish copies of final submittals to manufacturers, subcontractors, suppliers, fabricators, installers, authorities having jurisdiction, and others as necessary for performance of construction activities. Show distribution on transmittal forms.
- J. Use for Construction: Retain complete copies of submittals on Project site. Use only final action submittals that are marked with the reviewed notation from Architects and Contractor's action stamp.

PART 2 PRODUCTS

2.1 SUBMITTAL PROCEDURES

- A. General Submittal Procedure Requirements: Prepare and submit submittals required by individual Specification Sections. Types of submittals are indicated in individual Specification Sections.
1. Action Submittals: Submit two paper copies of each submittal unless otherwise indicated. Architect will return a pdf file electronically via email or to architects FTP site, or to project website if created.
2. Informational Submittals: Submit two paper copies of each submittal unless otherwise indicated. Architect will not return copies.
3. Certificates and Certifications Submittals: Provide a statement that includes signature of entity responsible for preparing certification. Certificates and certifications shall be signed by an officer or other individual authorized to sign documents on behalf of that entity.
- a. Provide a digital signature with digital certificate on electronically submitted certificates and certifications where indicated.
- b. Provide a notarized statement on original paper copy certificates and certifications where indicated.
- B. Product Data: Collect information into a single submittal for each element of construction and type of product or equipment.
1. If information must be specially prepared for submittal because standard published data are not suitable for use, submit as Shop Drawings, not as Product Data.
2. Mark each copy of each submittal to show which products and options are applicable.
3. Include the following information, as applicable:
- a. Manufacturer's catalog cuts.
- b. Manufacturer's product specifications.
- c. Standard color charts.
- d. Statement of compliance with specified referenced standards.
- e. Testing by recognized testing agency.
- f. Application of testing agency labels and seals.
- g. Notation of coordination requirements.
- h. Availability and delivery time information.
4. For equipment, include the following in addition to the above, as applicable:
- a. Wiring diagrams showing factory-installed wiring.
- b. Printed performance curves.
- c. Operational range diagrams.
- d. Clearances required to other construction, if not indicated on accompanying Shop Drawings.
5. Submit Product Data before or concurrent with Samples.
6. Submittal Product Data in the following format:
- a. Two paper copies of Product Data unless otherwise indicated.
- C. Architect will return a pdf electronic file.
- D. Shop Drawings: Prepare Project-specific information, drawn accurately to scale. Do not base Shop Drawings on reproductions of the Contract Documents or standard printed data, unless submittal based on Architect's digital data drawing files is otherwise permitted.
1. Preparation: Fully illustrate requirements in the Contract Documents. Include the following information, as applicable:
- a. Identification of products.
- b. Schedules.
- c. Compliance with specified standards.
- d. Notation of coordination requirements.
- e. Notation of dimensions established by field measurement.
- f. Relationship and attachment to adjoining construction clearly indicated.
- g. Seal and signature of professional engineer if specified.
2. Sheet Size: Except for templates, patterns, and similar full-size drawings, submit Shop Drawings on sheets at least 8-1/2 by 11 inches (215 by 280 mm), but no larger than 30 by 42 inches (750 by 1067 mm).
3. Submit Shop Drawings in the following format:
- a. Two opaque copies of each submittal. Architect will retain both copies; a pdf electronic file will be returned.

- E. Samples: Submit physical Samples for review of kind, color, pattern, and texture for a check of these characteristics with other elements and for a comparison of these characteristics between submittal and actual component as delivered and installed.
1. Transmit Samples that contain multiple, related components such as accessories together in one submittal package.
2. Identification: Attach label on unexposed side of Samples that includes the following:
- a. Generic description of Sample.
- b. Product name and name of manufacturer.
- c. Sample source.
- d. Number and title of applicable Specification Section.
- e. Specification paragraph number and generic name of each item.
3. Disposition: Maintain sets of approved Samples at Project site, available for quality-control comparisons throughout the course of construction activity. Sample sets may be used to determine final acceptance of construction associated with each set.
- a. Samples that may be incorporated into the Work are indicated in individual Specification Sections. Such Samples must be in an undamaged condition at time of use.
- b. Samples not incorporated into the Work, or otherwise designated as Owner's property, are the property of Contractor.
4. Samples for Initial Selection: Submit manufacturer's color charts consisting of units or sections of units showing the full range of colors, textures, and patterns available.
- a. Number of Samples: Submit two full set(s) of available choices where color, pattern, texture, or similar characteristics are required to be selected from manufacturer's product line. Architect will return submittal with options selected.
5. Samples for Verification: Submit full-size units or Samples of size indicated, prepared from same material to be used for the Work, cured and finished in manner specified, and physically identical with material or product proposed for use, and that show full range of color and texture variations expected. Samples include, but are not limited to, the following: partial sections of manufactured or fabricated components; small cuts or containers of materials; complete units of repetitively used materials; swatches showing color, texture, and pattern; color range sets; and components used for independent testing and inspection.
- a. Number of Samples: Submit three sets of Samples. Architect will retain two Sample sets; remainder will be returned. Contractor shall retain one returned Sample set as a project record sample.
1. Submit a single Sample where assembly details, workmanship, fabrication techniques, connections, operation, and other similar characteristics are to be demonstrated.
2. If variation in color, pattern, texture, or other characteristic is inherent in material or product represented by a Sample, submit at least three sets of paired units that show approximate limits of variations.
- F. Product Schedule: As required in individual Specification Sections, prepare a written summary indicating types of products required for the Work and their intended location. Include the following information in tabular form:
1. Type of product. Include unique identifier for each product indicated in the Contract Documents or assigned by Contractor if none is indicated.
2. Manufacturer and product name, and model number if applicable.
3. Number and name of room or space.
4. Location within room or space.
5. Submit product schedule in the following format:
- a. Two paper copies of product schedule or list unless otherwise indicated. Architect will return a pdf electronic file.
- G. Coordination Drawing Submittals: Comply with requirements specified in Division 01 Section "Project Management and Coordination."
- H. Contractor's Construction Schedule: Comply with requirements specified in Division 01 Section "Construction Progress Documentation."
- I. Application for Payment and Schedule of Values: Comply with requirements specified in Division 01 Section "Payment Procedures."
- J. Test and Inspection Reports and Schedule of Tests and Inspections Submittals: Comply with requirements specified in Division 01 Section "Quality Requirements."
- K. Closeout Submittals and Maintenance Material Submittals: Comply with requirements specified in Division 01 Section "Closeout Procedures."
- L. Maintenance Data: Comply with requirements specified in Division 01 Section "Operation and Maintenance Data."
- M. Sustainable Protocol Submittals (Green Globes, LEED): Comply with requirements specified in Division 01 sustainable design requirements Section.
- N. Qualification Data: Prepare written information that demonstrates capabilities and experience of firm or person. Include lists of completed projects with project names and addresses, contact information of architects and owners, and other information specified.
- O. Welding Certificates: Prepare written certification that welding procedures and personnel comply with requirements in the Contract Documents. Submit record of Welding Procedure Specification and Procedure Qualification Record on AWS forms. Include names of firms and personnel certified.
- P. Installer Certificates: Submit written statements on manufacturer's letterhead certifying that Installer complies with requirements in the Contract Documents and, where required, is authorized by manufacturer for this specific Project.
- Q. Manufacturer Certificates: Submit written statements on manufacturer's letterhead certifying that manufacturer complies with requirements in the Contract Documents. Include evidence of manufacturing experience where required.
- R. Product Certificates: Submit written statements on manufacturer's letterhead certifying that product complies with requirements in the Contract Documents.
- S. Material Certificates: Submit written statements on manufacturer's letterhead certifying that material complies with requirements in the Contract Documents.
- T. Material Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting test results of material for compliance with requirements in the Contract Documents.
- U. Product Test Reports: Submit written reports indicating that current product produced by manufacturer complies with requirements in the Contract Documents. Base reports on evaluation of tests performed by manufacturer and witnessed by a qualified testing agency, or on comprehensive tests performed by a qualified testing agency.
- V. Research Reports: Submit written evidence, from a model code organization acceptable to authorities having jurisdiction, that product complies with building code in effect for Project. Include the following information:
1. Name of evaluation organization.
2. Date of evaluation.
3. Time period when report is in effect.
4. Product and manufacturers' names.
5. Description of product.
6. Test procedures and results.
7. Limitations of use.
- W. Preconstruction Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of tests performed before installation of product, for compliance with performance requirements in the Contract Documents.
- X. Compatibility Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of compatibility tests performed before installation of product. Include written recommendations for primers and substrate preparation needed for adhesion.
- Y. Field Test Reports: Submit written reports indicating and interpreting results of field tests performed either during installation of product or after product is installed in its final location, for compliance with requirements in the Contract Documents.
- Z. Design Data: Prepare and submit written and graphic information, including, but not limited to, performance and design criteria, list of applicable codes and regulations, and calculations. Include list of assumptions and other performance and design criteria and a summary of loads. Include load diagrams if applicable. Provide name and version of software, if any, used for calculations. Include page numbers.

BDP

BOGGS DESIGN PARTNERS

Architecture + Interiors

607 S. ALEXANDER ST.

SUITE 101

PLANT CITY, FL 33563

813.946.8444

www.bdparchitects.com

DATE: 10/19/2023

ERICA AZORIN CRAIG

FL REG. NO. AR101635

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED ON THE DATE ADJACENT TO THE SEAL. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

CITY OF DADE CITY

PARK RESTROOMS

37800 CHURCH AVENUE

DADE CITY, FL 33525

PERMIT BID SET 10-19-2023

REVISION DESCRIPTION

NO.

DATE

PROJECT NO:

23005.001

DATE: 10/19/2023

DESIGNED BY:

DRAWN BY:

CHECKED BY:

DRAWING TITLE:

ARCHITECTURAL SPECIFICATIONS

SHEET NO:

G-004

SECTION 01 78 00

CLOSEOUT SUBMITTALS - CONT'D

3.5 OPERATION AND MAINTENANCE MANUALS

- A. Prepare instructions and data by personnel experienced in maintenance and operation of described products.
- B. Prepare data in the form of an instructional manual.
- C. Cover: Identify each binder with typed or printed title OPERATION AND MAINTENANCE INSTRUCTIONS; identify title of Project; identify subject matter of contents.
- D. Provide tabbed dividers for each separate product and system, with typed description of product and major component parts of equipment.
- E. Arrange content by systems under section numbers and sequence of Table of Contents of the Project Manual.
- F. Contents: Prepare a Table of Contents for each volume, with each product or system description identified, in three parts as follows:
- Part 1: Directory, listing names addresses, and telephone numbers of Architect, Contractor, Subcontractors, and major equipment suppliers.
 - Part 2: Operation and maintenance instructions, arranged by system and subdivided by specification section. For each category, identify names and addresses, and telephone numbers of Subcontractors and suppliers. Identify the following:
 - Significant design criteria
 - List of equipment.
 - Parts list for each component.
 - Operating instructions.
 - Maintenance instructions for equipment and systems.
 - Maintenance instructions for special finishes, including recommended cleaning methods and materials, and special precautions identifying detrimental agents.
 - Part 3: Project documents and certificates, including the following:
 - Shop drawings and product data.
 - Air and water balance reports.
 - Certificates
 - Photocopies of warranties and bonds.
- G. Table of Contents: Provide title of Project; names, addresses, and telephone numbers of Architect, Consultants, and Contractor with name of responsible parties; schedule of products and systems, indexed to content of the volume.

3.6 WARRANTIES AND BONDS

- A. Obtain warranties and bonds, executed in duplicate by responsible Subcontractors, suppliers, and manufacturers, within 10 days after completion of the applicable item of work. Except for items put into use with Owner's permission, leave date of beginning of time of warranty until the Date of Substantial completion is determined.
- B. Verify that documents are in proper form, contain full information, and are notarized.
- C. Co-execute submittals when required.
- D. Retain warranties and bonds until time specified for submittal.
- E. Include originals of each in operation and maintenance manuals, indexed separately on Table of Contents.

END OF SECTION

SECTION 03 35 11

CONCRETE FLOOR FINISHES

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Surface treatments for concrete floors and slabs.

1.2 RELATED REQUIREMENTS

- A. Section 03 30 00 - Cast-in-Place Concrete: Finishing of concrete surface to tolerance; floating, troweling, and similar operations; curing.

1.3 ADMINISTRATIVE REQUIREMENTS

- A. Coordinate the work with concrete floor placement and concrete floor curing.

1.4 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Manufacturer's published data on each finishing product, including information on compatibility of different products and limitations.
- C. Maintenance Data: Provide data on maintenance and renewal of applied finishes.

1.5 MOCK-UP

- A. For coatings, construct mock-up area under conditions similar to those that will exist during application, with coatings applied.
- B. Mock-Up Size: 10 feet (3 m) square.
- C. Locate where directed.
- D. Mock-up may remain as part of the work.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Deliver materials in manufacturer's sealed packaging, including application instructions.
- B. Colored Admixture: Comply with manufacturer's instructions. Deliver colored admixtures in original, unopened packaging. Store in dry conditions.

1.7 FIELD CONDITIONS

- A. Maintain light level equivalent to a minimum 200 W light source at 8 feet (2.5 m) above the floor surface over each 20 foot (6 m) square area of floor being finished.
- B. Maintain ambient temperature of 50 degrees F (10 degrees C) minimum.

PART 2 PRODUCTS

2.1 CONCRETE FLOOR FINISH APPLICATIONS

- A. Unless otherwise indicated, all concrete floors are to be finished using polished concrete finish.

2.2 COATINGS

- A. Clear Sealer: Transparent, non-yellowing, water-based coating.
- Composition: Acrylic polymer-based.
 - Nonvolatile Content: 40 percent, minimum, when measured by volume.
 - Products:
 - W.R. Meadows, Inc; Deck-O-Grip W/B (slip-resistant): www.wmeadows.com
 - Approved equal. Substitutions: See Section 01 60 00 - Product Requirements.

2.3 POLISHED CONCRETE SYSTEM

- A. Polished Concrete System: Materials, equipment, and procedures designed and furnished by a single manufacturer to produce dense polished concrete of the specified sheen.
- Acceptable Systems:
 - ARDEX Engineered Cements; ULTRAFLO Polished Concrete System with ARDEX
 - PC Finish sealer: www.ardexamericas.com.
 - Approved equal. Substitutions: See Section 01 60 00 - Product Requirements.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify that floor surfaces are acceptable to receive the work for this section.
- B. Verify that flaws in concrete have been patched and joints filled with methods and materials suitable for further finishes.

3.2 GENERAL

- A. Apply materials in accordance with manufacturer's instructions.

3.3 COATING APPLICATION

- A. Verify that surface is free of previous coatings, sealers, curing compounds, water repellents, lantance, efflorescence, fats, oils, grease, wax, soluble salts, residues from cleaning agents, and other impediments to adhesion.
- B. Verify that water vapor emission from concrete and relative humidity in concrete are within limits established by coating manufacturer.
- C. Protect adjacent non-coated areas from drips, overflow, and overspray; immediately remove excess material.
- D. Apply coatings in accordance with manufacturer's instructions, matching approved mock-ups for color, special effects, sealing and workmanship.

3.4 CONCRETE POLISHING

- A. Execute using materials, equipment, and procedures specified by manufacturer, using manufacturer approved installer.
- Final Polished Sheen: High-gloss finish; other sheens are included as comparison to illustrate required sheen; final sheen is before addition of any sealer or coating, regardless of whether that is also specified or not.
 - Semi-Gloss Finish: Reflecting overhead and side images from 35 to 45 feet (10 to 14 meters) away.
- B. Protect finished surface as required and recommended by manufacturer of polishing system.

END OF SECTION

SECTION 06 10 00

ROUGH CARPENTRY

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Rough opening framing for doors, windows, and roof openings.
- B. Sheathing.
- C. Concealed wood blocking, nailers, and supports.

1.2 REFERENCE STANDARDS

- A. ASTM A153/A153M - Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware; 2009.
- B. PS1-Structural Plywood; 2007.
- C. PS2 -Performance Standard for Wood-Based Structural-Use Panels; National Institute of Standards and Technology, U.S. Department of Commerce; 2010.
- D. PS 20 - American Softwood Lumber Standard; National Institute of Standards and Technology (Department of Commerce); 2005.

1.3 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

1.4 DELIVERY, STORAGE, AND HANDLING

- A. General: Cover wood products to protect against moisture. Support stacked products to prevent deformation and to allow air circulation.

PART 2 PRODUCTS

2.1 GENERAL REQUIREMENTS

- A. Dimension Lumber: Comply with PS 20 and requirements of specified grading agencies.
- If no species is specified, provide any species graded by the agency specified; if no grading agency is specified, provide lumber graded by any grading agency meeting the specified requirements.
 - Grading Agency: Any grading whose rules are approved by the Board of Review, American Lumber Standard Committee (www.alsc.org) and who provides grading service for the species and grade specified; provide lumber stamped with grade mark unless otherwise indicated.
- B. Lumber fabricated from old growth timber is not permitted

2.2 DIMENSION LUMBER CONCEALED APPLICATIONS

- A. Sizes: Nominal sizes as indicated on drawings, SFS.
- B. Moist Content: S-dry or Mc19.
- C. Miscellaneous Framing, Blocking, Nailers, Grounds, and Furring:
- Lumber: SAS, No 2 or Standard Grade.
 - Boards: Standard or No 3.

2.3 ACCESSORIES

- A. Fasteners and Anchors:
- Metal and Finish: Hot-dipped galvanized steel per ASTM A 153/A 153M for high humidity and preservative-treated wood locations, unfinished elsewhere.
 - Drywall Screws: Bugle head, hardened steel, power drive type, length three times thickness and sheathing.
 - Anchors: Toggle bolt type for anchorage to hollow masonry.

PART 3 EXECUTION

3.1 INSTALLATION GENERAL

- A. Select material sizes to minimize waste.
- B. Reuse scrap to the greatest extent possible; clearly separate scrap for use on site as accessory components, including shims, bracing, and blocking.
- C. Where treated wood is used on interior, provide temporary ventilation during and immediately after installation sufficient to remove indoor air contaminants.

3.2 LOCKING, NAILERS AND SUPPORTS

- A. Provide framing and blocking members as indicated or as required to support finishes, fixtures, specialty items, and trim.
- B. In metal stud walls, provide continuous blocking around door and window openings for anchorage of frames, securely attached to stud framing.
- C. In walls, provide blocking attached to studs as backing and support for wall mounted items, unless item can be securely fastened to two or more studs or other method of support explicitly indicated.

END OF SECTION

SECTION 07 21 00

THERMAL INSULATION

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Thermal/acoustic insulation.

1.2 REFERENCE STANDARDS

- A. ASTM C578 - Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation ; 2011b01.
- B. ASTM C665 - Standard Specification for Mineral-Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing ; 2012.
- C. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials ; 2012.

1.3 SUBMITTALS

- A. Product Data: Provide data on product characteristics, performance criteria, and product limitations.

1.4 FIELD CONDITIONS

- A. Do not install insulation adhesives when temperature or weather conditions are detrimental to successful installation.

PART 2 PRODUCTS

2.1 MANUFACTURERS

- A. Insulation:
- Owens-Corning Corp. ; www.owenscorning.com
 - Johns Manville Corp ; www.jm.com
 - Certainteed Corp ; www.certainteed.com
 - Substitutions: See Section 01 60 00 - Product Requirements.

2.2 ACOUSTIC BATT INSULATION MATERIALS

- A. Glass Fiber Batt Insulation: Flexible preformed batt or blanket, complying with ASTM C665; friction fit.
- Flame Spread Index: 25 or less, when tested in accordance with ASTM E84.
 - Smoke Developed Index: 450 or less, when tested in accordance with ASTM E84.
 - Combustibility: Non-combustible, when tested in accordance with ASTM E136 , except for facing, if any.
 - Thermal Resistance: Varies per thickness, refer to drawings.
 - Thickness: Varies, refer to drawings.
 - Facing: Unfaced.
 - Basis of Design: Owens Corning EcoTouch PINK FIBERGLAS
- B. Acoustic Glass Fiber Batt Insulation: Flexible preformed batt or blanket, complying with ASTM C665; friction fit.
- Flame Spread Index: 25 or less, when tested in accordance with ASTM E84.
 - Smoke Developed Index: 450 or less, when tested in accordance with ASTM E84.
 - Thickness: 3-1/2"
 - Noise Reduction Coefficient (NRC): 1.00 minimum.
 - Sound Transmission Class (STC): 4 - 10 dBs, when tested in accordance with ASTM E90.
 - Basis of Design: Owens Corning Sound Attenuation Batts, Fiberglass

2.3 POLYURETHANE SPRAY FOAM INSULATION

- A. General: Provide insulating materials that comply with requirements and with referenced standards.
- B. Basis of Design: Icyenne ProSeal™ Closed Cell Spray Foam Insulation: High density, waterdown, conforming to the following:
- Thermal Resistance (R-Value/inch @75 deg F): ASTM C 518; 7.1 hr/sq ft/degree F/BTU
 - Air Permeance (for 2 inches of material): ASTM E 2178; < 0.019 L/s.m2 75 Pa
 - Water Vapor Transmission (for 2 inches of material): ASTM E 96; 20.7 perms [1180 ng /Pa.s.m2]
 - Flame Spread and Smoke Developed Rating: ASTM E 84
 - Flame Spread: 20
 - Smoke Development: 450
 - Fungal Growth: ASTM C1338; no growth.

C. Product Description:

- ICC Evaluation Service (ICC/ES) Report No. ESR-1826
- High density, closed celled, 100% water-blown polyurethane foam.
- Vapor permeable, insulation and air barrier material.

2.4 ACCESSORIES

- A. Tape: Bright aluminum self-adhering type, mesh reinforced, 2 inch (50 mm) wide.
- B. Insulation Fasteners: As required to suit application, capable of securely fastening insulation in place.
- C. Adhesive: Type recommended by insulation manufacturer for application.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify that substrate, adjacent materials, and insulation materials are dry and that substrates are ready to receive insulation and adhesive.
- B. Verify substrate surfaces are flat, free of honeycomb, fins, irregularities, or materials or substances that may impede adhesive bond.

3.2 INSTALLATION

- A. Install insulation in accordance with manufacturer's instructions.
- B. Install in wall spaces without gaps or voids. Do not compress insulation.
- C. Trim insulation neatly to fit spaces. Insulate miscellaneous gaps and voids.
- D. Fit insulation tightly in cavities and tightly to exterior side of mechanical and electrical services within the plane of the insulation.

3.3 PROTECTION

- A. Do not permit installed insulation to be damaged prior to its concealment.

END OF SECTION

SECTION 07 25 00

WEATHER BARRIERS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Weather barrier membrane.
- B. Seam Tape.
- C. Flashing.
- D. Fasteners.

1.2 REFERENCES

- A. ASTM C920 - Standard Specification for Elastomeric Joint Sealants

- B. ASTM C1193; Standard Guide for Use of Joint Sealants
- C. ASTM D682; Test Method for Tensile Properties of Thin Plastic Sheeting
- D. ASTM D1117; Standard Guide for Evaluating Non-woven Fabrics
- E. ASTM E84; Test Method for Surface Burning Characteristics of Building Materials
- F. ASTM E96; Test Method for Water Vapor Transmission of Materials
- G. ASTM E1677; Specification for Air Retarder Material or System for Framed Building Walls
- H. ASTM E2178; Test Method for Air Permeance of Building Materials
- I. ASTM E2357; Standard Test Method for Determining Air Leakage of Air Barrier Assemblies
- J. AATCC - American Association of Textile Chemists and Colorists
- Test Method 127 Water Resistance: Hydrostatic Pressure Test
- K. TAPPI
- Test Method T-410; Grams of Paper and Paperboard (Weight per Unit Area)
 - Test Method T-460; Air Resistance (Gurley Hill Method)

1.3 SUBMITTALS

- A. Product Data: Submit manufacturer current technical literature for each component.
- B. Quality Assurance Submittals
- Design Data, Test Reports: Provide manufacturer test reports indicating product compliance with indicated requirements.
 - Manufacturer Instructions: Provide manufacturer's written installation instructions.
 - Manufacturer's Field Service Reports: Provide site reports from authorized field service representative, indicating observation of weather barrier assembly installation.
- C. Closeout Submittals
1. Weather Barrier Warranty: Manufacturer's executed warranty form with authorized signatures and endorsements indicating date of Substantial Completion.

1.4 QUALITY ASSURANCE

- A. Qualifications
- Installer shall have experience with installation of weather barrier assemblies under similar conditions.
 - Installation shall be in accordance with weather barrier manufacturer's installation guidelines and recommendations.
 - Source Limitations: Provide weather barrier and accessory materials produced by single manufacturer.
- B. Mock-up
- Install mock-up using approved weather barrier assembly including fasteners, flashing, tape and related accessories per manufacturer's current printed instructions and recommendations.
 - Mock-up size: 10 feet by 10 feet.
 - Mock-up Substrate: Match wall assembly construction, including window opening.
 - Mock-up may remain as part of the work.
 - Contact manufacturer's designated representative prior to weather barrier assembly installation, to perform required mock-up visual inspection and analysis as required for warranty.
- C. Pre-installation Meeting
- Hold a pre-installation conference, two weeks prior to start of weather barrier installation. Attendees shall include Contractor, Architect, Engineer, Consultant, Installer, Owner's Representative, and Weather Barrier Manufacturer's Designated Representative.
 - Review all related project requirements and submittals, status of substrate work and preparation, areas of potential conflict and interface, availability of weather barrier assembly materials and components, installer's training requirements, equipment, facilities and scaffolding, and coordinate methods, procedures and sequencing requirements for full and proper installation, integration, and protection.

1.5 DELIVERY, STORAGE AND HANDLING

- A. Deliver weather barrier materials and components in manufacturer's original, unopened, undamaged containers with identification labels intact.
- B. Store weather barrier materials as recommended by weather barrier manufacturer.

1.6 SCHEDULING

- A. Review requirements for sequencing of installation of weather barrier assembly with installation of windows, doors, louvers, and flashings to provide a weather-tight barrier assembly.
- B. Schedule installation of weather barrier materials and exterior cladding within nine months of weather barrier assembly installation.
- 1.7 WARRANTY
- A. Special Warranty
- Special weather-barrier manufacturer's warranty for weather barrier for a period of ten (10) years from date of final weather barrier installation.
 - Pre-installation meetings and jobsite observations by weather barrier manufacturer for warranty is required prior to assembly installation.

PART 2 PRODUCTS

2.1 MANUFACTURER

- A. DuPont ; <http://www.construction.tyvek.com>

2.2 MATERIALS

- A. Basis of Design: spunbonded polyolefin, non-woven, non-perforated, weather barrier is based upon DuPont™ Tyvek® CommercialWrap® and related assembly components.
- B. Performance Characteristics:
- Air Penetration: 0.001 cfm/ft2 at 75 Pa, when tested in accordance with ASTM E2178. Type I per ASTM E1677. ≤0.04 cfm/ft2 at 75 Pa, when tested in accordance with ASTM E2357.
 - Water Vapor Transmission: 28 perms, when tested in accordance with ASTM E96, Method B.
 - Water Penetration Resistance: Minimum 280 cm when tested in accordance with AATCC Test Method 127.
 - Basis Weight: Minimum 2.7 oz/yd2, when tested in accordance with TAPPI Test Method T-410.
 - Air Resistance: Air infiltration at >1500 seconds, when tested in accordance with TAPPI Test Method T-460.
 - Tensile Strength: Minimum 38/35 lbs/in, when tested in accordance with ASTM D882, Method A.
 - Tear Resistance: 12/10 lbs., when tested in accordance with ASTM D1117.
 - Surface Burning Characteristics: Class A, when tested in accordance with ASTM E84, Flame Spread: 10, Smoke Developed: 10.

2.3 ACCESSORIES

- A. Seam Tape: As recommended by the weather barrier manufacturer.
- B. Fasteners:
- Nail Caps: #4 nails with large 1-inch plastic cap fasteners, or 1-inch plastic cap staples with leg length sufficient to achieve a minimum penetration of 5/8-inch into the wood stud.
- A. Sealants
- Provide sealants that comply with ASTM C920, elastomeric polymer sealant to maintain watertight conditions.
 - Products: Sealants recommended by the weather barrier manufacturer.
- B. Adhesives:
- Provide adhesive recommended by weather barrier manufacturer.
- C. Primers:
- Provide flashing manufacturer recommended primer to assist in adhesion between substrate and flashing.
- D. Flashing
- Flexible membrane flashing materials for window openings and penetrations recommended by manufacturer.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify substrate and surface conditions are in accordance with weather barrier manufacturer recommended tolerances prior to installation of weather barrier and accessories.

3.2 INSTALLATION - WEATHER BARRIER

- A. Install weather barrier over exterior face of exterior wall substrate in accordance with manufacturer recommendations.
- B. Install weather barrier prior to installation of windows and doors.
- C. Start weather barrier installation at a building corner, leaving 6-12 inches of weather barrier extended beyond corner to overlap.
- D. Install weather barrier in a horizontal manner starting at the lower portion of the wall surface with subsequent layers installed in a shingling manner to overlap lower layers. Maintain weather barrier plumb and level.
- E. Sill Plate Interface: Extend lower edge of weather barrier over sill plate interface 3-6 inches. Secure to foundation with elastomeric sealant as recommended by weather barrier manufacturer.
- F. Window and Door Openings: Extend weather barrier completely over openings.
- G. Overlap weather barrier
- Exterior corners: minimum 12 inches.
 - Seams: minimum 6 inches.
- H. Weather Barrier Attachment:
- Attach weather barrier to studs through exterior sheathing. Secure using weather barrier manufacturer recommend fasteners, space 12-18 inches vertically on center along stud line, and 24 inches on center, maximum horizontally.
- I. Apply flashing to weather barrier membrane prior to installing cladding anchors.

3.3 SEAMING

- A. Seal seams of weather barrier with seam tape at all vertical and horizontal overlapping seams.
- B. Seal any tears or cuts as recommended by weather barrier manufacturer.

3.4 OPENING PREPARATION (for use with flanged windows)

- A. Cut weather barrier in an "cut" pattern. A modified cut is also acceptable.
- Cut weather barrier horizontally along the bottom and top of the window opening.
 - From the top center of the window opening, cut weather barrier vertically down to the sill.
 - Fold side and bottom weather barrier flaps into window opening and fasten.
 - Cut a head flap at 45-degree angle in the weather barrier at window head to expose 8 inches of sheathing.

- Temporarily secure weather barrier flap away from sheathing with tape.

3.5 FLASHING (for use with flanged windows)

- A. Cut flexible flashing a minimum of 12 inches longer than width of sill rough opening.
- B. Cover horizontal sill by aligning flexible flashing edge with inside edge of sill. Adhere to rough opening across sill and up jambs a minimum of 6 inches. Secure flashing tightly into corners by working in along the sill before adhering up the jambs.
- C. Fan flexible flashing at bottom corners onto face of wall. Firmly press in place. Mechanically fasten fanned edges if necessary.
- D. On exterior, apply continuous bead of sealant to wall or backside of window mounting flange across jambs and head. Do not apply sealant across sill.
- E. Install window according to manufacturer's instructions.
- F. Apply strips of flashing at jambs overlapping entire mounting flange. Extend jamb flashing 1-inch above top of rough opening and below bottom edge of sill flashing.
- G. Apply strip of flashing as head flashing overlapping the mounting flange. Head flashing should extend beyond outside edges of both jamb flashings.
- H. Position weather barrier head flap across head flashing. Adhere flashing over the 45-degree seams.
- I. Tape head flap in accordance with manufacturer recommendations.
- J. On interior, install backer rod in joint between frame of window and flashed rough framing. Apply sealant around entire window to create air seal. Apply sealant in accordance with sealant manufacturer's instructions and ASTM C 1193.

3.6 THRU-WALL FLASHING INSTALLATION

- A. Apply primer per manufacturer's written instructions.
- B. Install preformed corners and end dams bedded in sealant in appropriate locations along wall.
- C. Starting at a corner, remove release sheet and apply membrane to primed surfaces in lengths of 8 to 10 feet.
- D. Extend membrane through wall and leave 1/4 inch minimum exposed to form drip edge.
- E. Roll flashing into place. Ensure continuous and direct contact with substrate.
- F. Lap ends and overlap preformed corners 4 inches minimum. Seal all laps with sealant.
- G. Trim exterior edge of membrane 1-inch and secure metal drip edge per manufacturer's written instructions.
- H. Terminate membrane on vertical wall. Terminate into reglet, counterflashing or with termination bar.
- I. Apply sealant bead at each termination.

3.7 FIELD QUALITY CONTROL

- A. Notify manufacturer's designated representative to obtain [required] periodic observations of weather barrier assembly installation.

3.8 PROTECTION

- A. Protect installed weather barrier from damage.

END OF SECTION

SECTION 07 26 00

VAPOR RETARDERS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Vapor barrier and installation accessories for installation under concrete slabs.

1.2 REFERENCES

- A. American Society for Testing and Materials (ASTM):
- ASTM E1745- 11Standard Specification for Plastic Water Vapor Retarders Used in Contact with Soil or Granular Fill Under Concrete Slabs.
 - ASTM E1643- 11Selection, Design, Installation, and Inspection of Water Vapor Retarders Used in Contact with Earth or Granular Fill Under Concrete Slabs.
- B. Technical Reference - American Concrete Institute (ACI):
- ACI 302.2R-06 Guide for Concrete Slabs that Receive Moisture-Sensitive Flooring Materials.

1.3 SUBMITTALS

- A. Quality control/assurance:
- Summary of test results per paragraph 9.3 of ASTM E 1745.
 - Manufacturer's samples and literature.
 - Manufacturer's installation instructions for placement, seaming and penetration repair instructions.
 - All mandatory ASTM E1745 testing must be performed on a single production roll per ASTM E1745 Section 8.1

PART 2 PRODUCTS

2.1 MATERIALS

- A. Vapor Retarder must have all of the following qualities:
- Permeance: 0.03 Perms [grains/(ft2 *hr * in.Hg)] or less per ASTM F1249 or ASTM E 96
 - ASTM E 1745 Class A.
 - Minimum of 10 mils thickness.
- B. Vapor Retarder Products:
- Stego Wrap Class A Vapor Retarder (10-mil), Stego Industries, LLC; www.stegoindustries.com.
 - Substitutions: See Section 01 60 00 - Product Requirements.

2.2 ACCESSORIES

- A. Seams :
- Stego Tape by Stego Industries LLC ; www.stegoindustries.com.
- B. Penetrations of Vapor barrier:
- Stego Mastic by Stego Industries LLC ; www.stegoindustries.com.
 - Stego Tape by Stego Industries LLC ; www.stegoindustries.com.
- C. Perimeter/edge seal:
- Stego Crete Claw by Stego Industries LLC ; www.stegoindustries.com.
 - StegoTack Tape (double sided) by Stego Industries LLC ; www.stegoindustries.com.
 - Stego Term Bar by Stego Industries LLC ; www.stegoindustries.com.

PART 3 EXECUTION

3.1 PREPARATION

- A. Ensure that subsoil is approved by Structural or Geotechnical Engineer.

SECTION 07 31 00

ASPHALT SHINGLE ROOFING

PART 1

GENERAL

1.1

SECTION INCLUDES

A.

Asphalt roofing shingles.

B.

Leak barrier and roof deck protection.

C.

Metal flashing associated with shingle roofing.

D.

Attic ventilation.

1.2

RELATED SECTIONS

A.

Section 06100 - Rough Carpentry: Framing, wood decking, and roof sheathing.

B.

Section 07620 - Flashing and Sheet Metal: Sheet metal flashing not associated with shingle roofing; gutters and downspouts.

1.3

REFERENCES

A.

American Society for Testing and Materials (ASTM) - Annual Book of ASTM Standards

1.

ASTM A 653/A 653M - Standard Specification for Steel Sheet, Zinc Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.

2.

ASTM B 209 - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate.

3.

ASTM B 370 - Standard Specification for Copper Sheet and Strip for Building Construction.

4.

ASTM D 3018 - Standard Specification for Class A Asphalt Shingles Surfaced with Mineral Granules.

5.

ASTM D 3161 - Standard Test Method for Wind-Resistance of Asphalt Shingles (Fan-Induced Method).

6.

ASTM D 3462 - Standard Specification for Asphalt Shingles Made From Glass Felt and Surfaced with Mineral Granules.

7.

ASTM D 4586 - Standard Specification for Asphalt Roof Cement, Asbestos-Free.

8.

ASTM D 7158 - Standard Test Method for Wind-Resistance of Sealed Asphalt Shingles (Uplift Force/Uplift Resistance Method).

9.

AC438-1011-R1 - New Acceptance Criteria for Alternative Asphalt Roofing Shingles

B.

Underwriters Laboratories (UL) - Roofing Systems and Materials Guide (TFWZ.R21)

1.

UL 790 - Tests for Fire Resistance of Roof Covering Materials.

2.

UL 997 - Wind Resistance of Prepared Roof Covering Materials.

C.

Asphalt Roofing Manufacturers Association (ARMA)

D.

Sheet Metal and Air Conditioning Contractors National Association, 1nc. (SMACNA) - Architectural Sheet Metal Manual.

E.

National Roofing Contractors Association (NRCA)

F.

American Society of Civil Engineers (ASCE).

1.

ASCE 7 - Minimum Design Loads for Buildings and Other Structures.

1.4

DEFINITIONS

A.

Roofing Terminology: Refer to ASTM D1079 and the glossary of the National Roofing Contractors Association (NRCA) Roofing and Waterproofing Manual for definitions of roofing terms related to this section.

1.5

SUBMITTALS

A.

Submit copies of GAF® product data sheets, detail drawings and samples for each type of roofing product.

1.6

QUALITY ASSURANCE

A.

Manufacturer Qualifications: Provide all primary roofing products, including shingles, underlayment, leak barrier, and ventilation, by a single manufacturer.

B.

Installer Qualifications: Installer must be approved for installation of all roofing products to be installed under this section.

1.7

REGULATORY REQUIREMENTS

A.

Provide a roofing system achieving an Underwriters Laboratories (UL) Class A fire classification.

B.

Install all roofing products in accordance with all federal, state and local building codes.

C.

All work shall be performed in a manner consistent with current OSHA guidelines.

1.8

REINSTALLATION MEETING

A.

General: For all projects in excess of 250 squares of roofing, a pre-installation meeting is strongly recommended.

B.

Timing: The meeting shall take place at the start of the roofing installation, no more than 2 weeks into the roofing project.

C.

Attendees: Meeting to be called for by manufacturer's certified contractor. Meeting's mandatory attendees shall include the certified contractor and the manufacturer's representative. Non-mandatory attendees shall include the owner's representative, architect or engineer's representative, and the general contractor's representative.

D.

Topics: Certified contractor and manufacturer's representative shall review all pertinent requirements for the project, including but not limited to, scheduling, weather considerations, project duration, and requirements for the specified warranty.

1.9

DELIVERY, STORAGE, AND HANDLING

A.

Store all products in manufacturer's unopened, labeled packaging until they are ready for installation.

B.

Store products in a covered, ventilated area, at temperature not more than 110 degrees F (43 degrees C); do not store near steam pipes, radiators, or in direct sunlight.

C.

Store bundles on a flat, properly drained surface. Maximum stacking height shall not exceed GAF®'s recommendations. Store all rolls on end.

D.

Store and dispose of solvent-based materials in accordance with all federal, state and local regulations.

1.10

WEATHER CONDITIONS

A.

Proceed with work only when existing and forecasted weather conditions will permit work to be performed in accordance with GAF®'s recommendations

1.11

WARRANTY

A.

Provide to the owner a GAF® Shingle & Accessory Ltd. Warranty for:

1.

GAF® Lifetime Shingles covering

a.

Manufacturing defects: 100% coverage for materials for:

1)

10 years non-prorated, then 20% thereafter for all GAF Lifetime Shingles.

2)

5 years non-prorated, then 20% thereafter for GAF Royal Sovereign and Marquis Weathermax Shingles.

b.

Any other type of owner or building - 40 years with the first 5 years non - prorated.

c.

With the use of three or more GAF Accessory Products (GAF Ridge Cap Shingles, GAF Starter Strip Shingle, GAF Leak Barrier, GAF Roof Deck Protection, GAF Cobra

2.

Against algae discoloration for 10 years

2.1

SHINGLES

A.

Granule surfaced, high reflectance, self-sealing asphalt shingle with a strong fiberglass reinforced Micro Weave core and a mineral granule surfacing. Architectural laminate styling provides a wood shake appearance with a 5 5/8in. exposure. Features highly reflective roofing granules that bounce back the sun's rays and more effectively release absorbed heat. Rated by the Cool Roof Rating Council (CRRC), Title 24 compliant and meets initial Energy Star performance levels. UL 790 Class A rated with UL 997 Wind Resistance Label; ASTM D 7158, Class H; ASTM D 3161, Type 1; ASTM D 3018, Type 1; ASTM D 3462; AC438 compliant; CSA 123.5-98; Dade County Approved, Florida Building Code Approved, Texas Dept of Insurance Approved, ICC Report Approval. Timberline® Cool Series Energy-Saving Architectural Shingles, by GAF®.

1.

Color: As selected from manufacturers' full range.

2.2

HIP AND RIDGE SHINGLES

A.

High profile self sealing hip and ridge cap shingle matching the color of selected roof shingle. Each bundle covers approx. 20 lineal feet (6.10m). Timbertek® Premium Ridge Cap Shingles, by GAF®.

B.

Distinctive self sealing hip and ridge cap shingle complementing the color of selected roof shingle. Each bundle covers approx. 31 lineal feet (9.45m) with an 8 inch (203mm) exposure. Ridglass™ 10" Ridge Cap Shingles by GAF®.

C.

Distinctive self sealing hip and ridge cap shingle complementing the color of selected roof shingle. Each bundle covers approx. 31 lineal feet (9.45m) with an 8 inch (203mm) exposure Ridglass™ 8" Ridge Cap Shingles by GAF®.

D.

Distinctive self sealing hip and ridge cap shingle complementing the color of selected roof shingle. Each bundle covers approx. 25 lineal feet (7.62mm) with a 6 2/3 inch (169mm) exposure. Seal-A-Ridge® Ridge Cap Shingles by GAF®.

E.

Distinctive hip and ridge cap shingle complementing the color of selected roof shingle. Each bundle covers approx. 33.3 lineal feet (10.15m) with a 5 5/8 inch (147mm) exposure. Z® Ridge Shingles by GAF®.

F.

UL 2218, Class 4, self sealing hip and ridge cap shingle complementing the color of selected roof shingle. Each bundle covers approx. 25 lineal feet (7.62mm) with a 6 2/3 inch (169mm) exposure. Seal-A-Ridge® ArmorShield™ II Ridge Cap Shingles by GAF®.

2.3

STARTER STRIP

A.

Self sealing starter shingle designed for premium roof shingles. Each bundle covers approx. 100 lineal feet (30.48m) for English and metric shingles or 50 lineal feet (15.24m) for oversized shingles. WeatherBlocker™ Eave/Rake Starter Strip by GAF®.

B.

Self sealing starter shingle designed for all roof shingles. Each bundle covers approx. 120 lineal feet (36.58m). ProStart™ Starter Strip by GAF®.

2.4

LEAK BARRIER

A.

Self-adhering, self-sealing, bituminous leak barrier surfaced with fine, skid-resistant granules. Approved by UL, Dade County, ICC, State of Florida and Texas Department of Insurance. Each roll contains approx. 150 sq ft (13.9 sq.m.), 36" X 50' (0.9m x 20.3m) or 200 sq ft (18.6 sq.m.), 36" X 66.7' (0.9m x 20.3m). WeatherWatch® Leak Barrier, by GAF®.

B.

Self-adhering, self-sealing, bituminous leak barrier surfaced with a smooth polyethylene film. Approved by UL, Dade County, ICC, State of Florida and Texas Department of Insurance. Each Roll contains approx. 200 sq ft. (18.6 sq.m.), 36" X 66.7' (0.9m x 20.3m), and 60 mils thick. StormGuard® Leak Barrier, by GAF®.

2.5

SHINGLE UNDERLAYMENT

A.

Premium, water repellent, breather type non-asphaltic underlayment. UV stabilized polypropylene construction. Meets or exceeds ASTM D226 and D4869. Approved by Dade County, Florida Building Code, and ICC. Each roll contains approximately 10 squares (1003 sq. ft.) of material and is 54 in. x 223 ft. Deck-Armor™ Premium Breathable Roof Deck Protection, by GAF®.

B.

Synthetic, non-asphaltic, non-woven, anti-skid back coated, polypropylene constructed non breathable underlayment. Meets or exceeds ASTM D226 and D4869 approved by UL, Florida Building Code, ICC and CSA A220.1. Each roll contains approximately 10 squares (1000 gross sq. ft.) of material and is 48 in. x 250 ft. (14.6 m x 76.2 m), Tiger-Paw™ Roof Deck Protection by GAF®.

C.

Water repellent, breather type cellulose/glass fiber composite roofing underlayment. Meets or exceed ASTM D226 and D4869 and approved by UL and the Florida Building Code. Each roll contains approximately 4 squares (432 sq. ft.) of material and is 36" x 144" Shingle-Mate® Roof Deck Protection, by GAF®.

D.

#30 Roofing Underlayment - By Others: Water repellent breather type cellulose fiber building paper. Meets or exceeds the requirements of ASTM D-4869 Type II.

2.6

ROOFING CEMENT

A.

Asphalt Plastic Roofing Cement meeting the requirements of ASTM D 4586, Type I or II.

2.7

ROOF ACCESSORIES

A.

Exterior acrylic rust resistant aerosol roof accessory paint. Each 6 oz can is available in boxes of 6 and in a wide variety of colors to compliment the roof. Shingle-Match™ Roof Accessory Paint by GAF®.

B.

UV stable solid molded PVC compression collar, Kynar PVDF coated 24 gauge galvanized flange, Ultimate Pipe Flashing by Lifetime Tool.

2.8

ATTIC VENTILATION

A.

Off-Ridge Vents

1.

Low profile sheet metal off-ridge vent with baffle as shown in drawings - By Others: Meets of exceeds requirements of warranty. Approved by UL, Dade County, ICC, State of Florida. Color to match selected shingle color.

B.

Soffit Vents

2.

Vented soffit panels - By Others: Meets of exceeds requirements of warranty. See drawings for widths. Approved by UL, Dade County, ICC, State of Florida.

2.9

WARRANTY

A.

Comply with all warranty procedures required by manufacturer, including notifications, scheduling, and inspections

B.

Provide minimum 20 year warranty covering roof materials and installation.

2.10

NAILS

A.

Standard round wire, zinc-coated steel or aluminum; 10 to 12 gauge, smooth, barbed or deformed shank, with heads 3/8 inch (9mm) to 7/16 inch (11mm) in diameter. Length must be sufficient to penetrate into solid wood at least 3/4 inch (19mm) or through plywood or oriented strand board by at least 1/8 inch (3.18mm).

2.11

METAL FLASHING

A.

24 gauge hot-dip galvanized steel sheet, complying with ASTM A 653/A 653M, G90/Z275.

B.

16-oz/sq ft (0.56mm) copper sheet, complying with ASTM B 370.

C.

0.032-inch (0.8mm) aluminum sheet, complying with ASTM B 209.

3.1

EXECUTION

3.1

EXAMINATION

A.

Do not begin installation until the roof deck has been properly prepared.

B.

If roof deck preparation is the responsibility of another installer, notify the architect or building owner of unsatisfactory preparation before proceeding.

3.2

PREPARATION

A.

Clean deck surfaces thoroughly prior to installation of eaves protection membrane and underlayment.

B.

At areas that receive eaves protection membrane, fill knotholes and cracks with latex filler.

C.

Install crickets on the upslope side of all chimneys in the north, any chimney wider than 24" (610mm), and on all roofs steeper than 6/12.

3.3

INSTALLATION OF UNDERLAYMENTS

A.

General:

1.

Install using methods recommended by GAF®, in accordance with local building codes. When local codes and application instructions are in conflict, the more stringent requirements shall take precedence.

B.

Eaves:

1.

Install eaves edge metal flashing tight with fascia boards; lap joints 2 inches (51mm) and seal with plastic cement or high quality urethane sealant; nail at the top of the flange.

2.

In the north, and on all roofs between 2/12 and 4/12 (low slopes) install GAF® leak barrier up the slope from eaves edge a full 36 inches (914mm) or to at least 24 inches (610 mm) beyond the interior "warm wall". Lap ends 6 inches (152mm) and bond.

C.

Valleys:

1.

Install eaves protection membrane at least 36 (914mm) inches wide and centered on the valley. Lap ends 6 inches (152mm) and seal.

2.

Where valleys are indicated to be "open valleys," install metal flashing over GAF® leak barrier before GAF® roof deck protection is installed; DO NOT nail through the flashing. Secure the flashing by nailing at 18 inches (457 mm) on center just beyond edge of flashing so that nail heads hold down the edge.

D.

Hips and Ridges:

1.

Install GAF® leak barrier along entire lengths. If ridge vents are to be installed, position the GAF® leak barrier so that the ridge slots will not be covered.

E.

Roof Deck Protection:

1.

Install one layer of GAF® roof deck protection over the entire area not protected by GAF® leak barrier at the eaves or valley. Install sheets horizontally so water sheds and nail in place.

2.

On roofs sloped at more than 4:12, lap horizontal edges at least 2 inches (51mm) and at least 2 inches (51mm) over eaves protection membrane.

3.

On roofs sloped between 2:12 and 4:12, lap horizontal edges at least 19 inches (482 mm) and at least 19 inches (482mm) over eaves protection membrane.

4.

Lap ends at least 4 inches (102 mm). Stagger end laps of each layer at least 36 inches (914 mm).

5.

Lap GAF® roof deck protection over GAF® leak barrier in valley at least 6 inches (152mm).

F.

Deck-Armor™ Application

1.

Deck-Armor shall be installed over a clean, dry deck.

2.

Install Weather Watch® or StormGuard® Leak Barrier at eaves, valleys, rakes, skylights, dormers and other vulnerable leak areas.

3.

Lay Deck-Armor™ over deck and overlap 3" (76mm) at side laps and 6" (152mm) at end laps.

4.

For exposure to rain or snow, overlap 12" (305mm) at end laps.

5.

For side and end laps: fasten Deck-Armor 12" (305mm) o.c. (6" (152mm)o.c. for high wind areas).

6.

For middle of the roll: fasten Deck-Armor 24" (610mm) o.c. (12" (305mm) o.c. for high wind areas).

7.

For exposure to rail or snow, completely cover all side laps, end laps and fasteners with tape.

8.

For long term exposure see complete Deck-Armor installation instructions for side lap detail.

9.

If roof may be exposed to high winds, apply tape over all fasteners at the center of the roll to prevent rain or snow from entering at the fasteners.

10.

For slopes less than 2:12, a double application of Deck-Armor™ is required. See complete Deck-Armor installation instructions for more information.

G.

Penetrations:

1.

Vent pipes: Install a 24 inch (610 mm) square piece of eaves protection membrane lapping over roof deck underlayment; seal tightly to pipe.

2.

Vertical walls: Install eaves protection membrane extending at least 6 inches (152mm) up the wall and 12 inches (305mm) on to the roof surface. Lap the membrane over the roof deck underlayment.

3.

Skylights and roof hatches: Install eaves protection membrane from under the built-in counterflashing and 12 inches (305mm) on to the roof surface lapping over roof deck underlayment.

4.

Chimneys: Install eaves protection membrane around entire chimney extending at least 6 inches (152mm) up the wall and 12 inches (305mm) on to the roof surface. Lap the membrane over the roof deck underlayment.

5.

Rake Edges: Install metal edge flashing over eaves protection membrane and roof deck underlayment; set tight to rake boards; lap joints at least 2 inches (51mm) and seal with plastic cement; secure with nails.

3.4

INSTALLATION OF STARTER SHINGLES

A.

General:

1.

Install in accordance with GAF®'s instructions and local building codes. When local codes and application instructions are in conflict, the more stringent requirements shall take precedence.

2.

Refer to application instructions for the selected starter strip shingles.

B.

Placement and Nailing:

1.

For maximum wind resistance along rakes & eaves, install any GAF® starter strip containing sealant or cement shingles to underlayment and each other in a 4" (102mm) width of asphalt plastic roof cement.

2.

Place starter strip shingles 1/4" - 3/4" (6 - 19mm) over eave and rake edges to provide drip edge.

3.

Nail approximately 1-1/2" - 3" (38 - 76mm) above the butt edge of the shingle.

4.

Rake starter course should overlap eave edge starter strip at least 3" (76mm).

3.5

INSTALLATION OF SHINGLES

A.

General:

1.

Install in accordance with GAF®'s instructions and local building codes. When local codes and application instructions are in conflict, the more stringent requirements shall take precedence.

2.

Minimize breakage of shingles by avoiding dropping bundles on edge, by separating shingles carefully (not by "breaking" over ridge or bundles), and by taking extra precautions in temperatures below 40 degrees F (4 degrees C).

3.

Handle carefully in hot weather to avoid scuffing the surfacing, or damaging the shingle edges.

B.

Placement and Nailing:

1.

Secure with 4, 5, or 6 nails per shingle per GAF®'s application instructions or local codes.

2.

Placement of nails varies based on the type of shingle specified. Consult the application instructions for the specified shingle for details.

3.

Nails must be driven flush with the shingle surface. Do not overdrive or under drive the nails.

4.

Shingle offset varies based on the type of shingle specified. Consult the application instructions for the specified shingle for details.

C.

Valleys

1.

Install valleys using the "closed cut valley" method:

a.

Run the first course of shingles from the higher roof slope across the valley at least 12 inches (305mm).

b.

Run succeeding courses of shingles from the lower roof slope across the valley at least 12 inches (305mm) and nail not closer than 6 inches (152mm) to center of valley.

c.

Run shingles from the upper roof slope into the valley and trim 2 inches (51mm) from the center line.

3.6

INSTALLATION OF ATTIC VENTILATION

A.

General

1.

Ventilation must meet or exceed current F.H.A., H.U.D. and local code requirements.

B.

Ridge / Soffit ventilation

1.

Install ridge vent along the entire length of ridges:

2.

Cut continuous vent slots through the sheathing, stopping 6 inches (152mm) from each end of the ridge.

3.

On roofs without ridge board, make a slot 1 inch (25mm) wide, on either side of the peak (2 inch (51mm) overall).

4.

On roofs with ridge board, make two slots 1-3/4 inches (44.5mm) wide, one on each side of the peak (3 ½ inch (89mm) overall).

5.

Install ridge vent material along the full length of the ridge, including uncult areas.

6.

Butt ends of ridge vent material and join using roofing cement.

7.

Install eaves vents in sufficient quantity to equal or exceed the ridge vent area.

C.

Roof and Gable Louvers:

1.

Cut vent hole through sheathing as specified by the manufacturer for the type of vent to be installed.

2.

Install a 24 inches (610mm) square of leak barrier, centered around the hole for roof louvers

3.

Install according to manufacturer's instructions for flashing vent penetrations

4.

Install eave vents in sufficient quantity to equal or exceed the exhaust vent area, calculated as specified by manufacturer.

3.7

PROTECTION

A.

Protect installed products from foot traffic until completion of the project.

B.

Any roof areas that are not completed by the end of the workday are to be protected from moisture and contaminants.

3.8

END OF SECTION

3.9

SECTION 07 46 46

3.10

FIBER CEMENT SIDING

3.11

PART 1 GENERAL

3.12

SECTION INCLUDES

A.

Fiber cement lap siding, panels, shingle, trim, fascia, moulding and accessories; James Hardie H210 Engineered for Climate Siding.

3.13

RELATED SECTIONS

A.

Section 06 10 00 - Rough Carpentry: Wood framing and bracing.

B.

Section 07 21 00 - Insulation: Exterior wall insulation.

3.14

REFERENCES

A.

AS D3359 - Standard Test Method for Measuring Adhesion by Tape Test, Tool and Tape.

B.

AS E136 - Standard Test Method for Behavior of Materials in a Vertical Tube Furnace at 750 degrees C.

3.15

SUBMITTALS

A.

Submit under provisions of Section 01300.

B.

Product Data: Manufacturer's data sheets on each product to be used, including: 1. Preparation instructions and recommendations. 2. Storage and handling requirements and recommendations. 3. Installation methods.

C.

Shop Drawings: Provide detailed drawings of atypical non-standard applications of cementitious siding materials which are outside the scope of the standard details and specifications provided by the manufacturer.

D.

Selection Samples:For each finish product specified, two complete sets of color chips representing manufacturer's full range of available colors and patterns.

3.16

QUALITY ASSURANCE

A.

Installer Qualifications: Minimum of 2 years experience with installation of similar products.

3.17

DELIVERY, STORAGE, AND HANDLING

A.

Store products in manufacturer's unopened packaging until ready for installation.

B.

Store siding on edge or lay flat on a smooth level surface. Protect edges and corners from chipping. Store sheets under cover and keep dry prior to installing.

C.

Store and dispose of solvent-based materials, and materials used with solvent-based materials, in accordance with requirements of local authorities having jurisdiction.

3.18

PROJECT CONDITIONS

A.

Maintain environmental conditions (temperature, humidity, and ventilation) within limits recommended by manufacturer for optimum results. Do not install products under environmental conditions outside manufacturer's outside installation instructions.

3.19

WARRANTY

A.

Product Warranty: Limited, non-pro-rated product warranty.

1.

HardiePlank H210 lap siding for 30 years.

2.

HardieSoffit H210 panels for 30 years.

3.

HardieTrim H210 boards for 15 years.

B.

Workmanship Warranty: Application limited warranty for 2 years.

3.20

PART 2 PRODUCTS

3.21

MANUFACTURERS

A.

Acceptable Manufacturer: James Hardie Building Products, Inc., which is located at: 26300 La Alameda Suite 400 ; Mission Viejo, CA 92691; Toll Free Tel: 866-274-3464; Tel: 949-367-4980; Fax: 949-367-4981; Email: request info (info@jameshardie.com); Web: www.jameshardiepros.com.

B.

Requests for approval of equal substitutions will be considered in accordance with provisions of Section 01600.

3.22

SIDING AND TRIM

A.

HardiePlank H210 lap siding and HardieSoffit H210 panels requirement for materials:

1.

Fiber-cement siding - complies with ASTM C 1186 Type A Grade II.

2.

Fiber-cement siding - complies with ASTM E 136 as a noncombustible material.

3.

Fiber-cement siding - complies with ASTM E 84 Flame Spread Index = 0, Smoke Developed Index = 5.

4.

ICC-ES evaluation reports ESR-2290, ESR-1844, and ESR-2273 (IBC, IRC, CBC, CRC)

5.

Florida State Product Approval -FL13192, FL13223, and FL13265

B.

Soffit Panels: HardieSoffit H210 soffit panel, factory sealed on 5 sides as manufactured by James Hardie Building Products, Inc.

1.

Type: Soffit vented, provides 5 square inches (32.3 sq.cm) of net free ventilation per linear foot, 24 inches (610 mm) by 8 feet (2438 mm).

2.

Thickness: 1/4 inch (6 mm).

C.

Trim:

1.

HardieTrim H210 boards as manufactured by James Hardie Building Products, Inc.

a.

Product: 5/4 NT3 Boards, 3-1/2 inch (89 mm) width.

b.

Product: 5/4 NT3 Boards, 5-1/2 inch (140 mm) width.

c.

Product: 5/4 NT3 Boards, 7-1/4 inch (184 mm) width.

d.

Product: 5/4 NT3 Boards, 11-1/4 inch (286 mm) width.

e.

Texture: Smooth.

f.

Length: 12 feet (3658 mm).

g.

Thickness: 1 inch (24 mm).

2.

HardieTrim H210 Fascia boards as manufactured by James Hardie Building Products, Inc.

3.

Fiber-cement trim - complies with ASTM C 1186 Type A Grade II.

4.

Fiber-cement trim - complies with ASTM E 136 as a noncombustible material.

5.

Fiber-cement trim - complies with ASTM E 84 Flame Spread Index = 0, Smoke Developed Index = 5.

6.

Intertek Product Listing.

3.23

FASTENERS

A.

Masonry Walls:

1.

Masonry Walls: Aerico Stud Nail, ET&F ASM No.-144-125, 0.14 inch (3.6 mm) shank by 0.30 inch (7.6 mm) head by 2 inches (51 mm) long corrosion resistant nails.

3.24

FINISHES

A.

Factory Primer: Provide factory applied universal primer.

1.

Primer: Factory primed by James Hardie.

3.25

PART 3 EXECUTION

3.26

3.1 EXAMINATION

A.

Do not begin installation until substrates have been properly prepared.

B.

If framing preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.

3.27

3.2 PREPARATION

A.

Clean surfaces thoroughly prior to installation.

B.

Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.

C.

Install a water-resistive barrier is required in accordance with local building code requirements.

D.

The water-resistive barrier must be appropriately installed with penetration and junction flashing in accordance with local building code requirements.

E.

Install Engineered for Climate HardieWrap weather barrier in accordance with local building code requirements.

F.

Use HardieWrap Seam Tape and joint and laps.

G.

Install and HardieWrap flashing, HardieWrap Flex Flashing.

3.28

3.3 INSTALLATION - HARDIEPLANK H210 LAP SIDING

A.

Install materials in strict accordance with manufacturer's installation instructions.

B.

Starting: Install a minimum 1/4 inch (6 mm) thick lath starter strip at the bottom course of the wall. Apply planks horizontally with minimum 1-1/4 inches (32 mm) wide laps at the top. The bottom edge of the first plank overlaps the starter strip.

C.

Allow minimum vertical clearance between the edge of siding and any other material in strict accordance with the manufacturer's installation instructions.

D.

Face nail to sheathing.

E.

Locate splices at least 12 inches (305 mm) away from window and door openings.

3.29

3.4 INSTALLATION - HARDIETRIM H210 BOARDS

A.

Install materials in strict accordance with manufacturer's installation instructions. Install flashing around all wall openings.

B.

Fasten through trim into structural framing or code complying sheathing. Fasteners must penetrate minimum 3/4 inch (19 mm) or full thickness of sheathing. Additional fasteners may be required to ensure adequate security.

C.

Place fasteners no closer than 3/4 inch (19 mm) and no further than 2 inches (51 mm) from side edge of trim board and no closer than 1 inch (25 mm) from end. Fasten maximum 16 inches (406 mm) on center.

D.

Maintain clearance between trim and adjacent finished grade.

E.

Trim inside corner with a single board trim both side of corner.

F.

Outside Corner Board Attach Trim on both sides of corner with 16 gage corrosion resistant finish nail 1/2 inch (13 mm) from edge spaced 16 inches (406 mm) apart, weather cut each end spaced minimum 12 inches (305 mm) apart.

G.

Allow 1/8 inch gap between trim and siding.

H.

Seal gap with high quality, paintable caulk.

I.

Shim freeze board as required to align with corner trim.

3.30

3.5 FINISHING

A.

Finish unpainted siding with a minimum one coat high quality, alkali resistant primer and one coat of either, 100 percent acrylic or latex or oil based, exterior grade topcoats or two coats high quality alkali resistant 100 percent acrylic or latex, exterior grade topcoat within 90 days of installation. Follow paint manufacturer's written product recommendation and install application instructions.

3.31

3.6 PROTECTION

A.

Protect installed products until completion of project.

B.

Touch-up, repair or replace damaged products before Substantial Completion.

3.32

END OF SECTION

3.33

PART 2 PRODUCTS

3.34

2.1 MANUFACTURERS

A.

Acceptable Manufacturer: James Hardie Building Products, Inc., which is located at: 26300 La Alameda Suite 400 ; Mission Viejo, CA 92691; Toll Free Tel: 866-274-3464; Tel: 949-367-4980; Fax: 949-367-4981; Email: request info (info@jameshardie.com); Web: www.jameshardiepros.com.

B.

Requests for approval of equal substitutions will be considered in accordance with provisions of Section 01600.

3.35

2.2 SIDING AND TRIM

A.

HardiePlank H210 lap siding and HardieSoffit H210 panels requirement for materials:

1.

Fiber-cement siding - complies with ASTM C 1186 Type A Grade II.

2.

Fiber-cement siding - complies with ASTM E 136 as a noncombustible material.

3.

Fiber-cement siding - complies with ASTM E 84 Flame Spread Index = 0, Smoke Developed Index = 5.

4.

ICC-ES evaluation reports ESR-2290, ESR-1844, and ESR-2273 (IBC, IRC, CBC, CRC)

5.

Florida State Product Approval -FL13192, FL13223, and FL13265

B.

Soffit Panels: HardieSoffit H210 soffit panel, factory sealed on 5 sides as manufactured by James Hardie Building Products, Inc.

1.

Type: Soffit vented, provides 5 square inches (32.3 sq.cm) of net free ventilation per linear foot, 24 inches (610 mm) by 8 feet (2438 mm).

2.


Thickness: 1/4 inch (6 mm).

C.


Trim:

1.

©2022 Boggs Design Partners, LLC. All rights reserved. This document, together with the concepts and designs presented herein, is intended only for the specific purpose and client for which it was prepared. Reuse of any information contained herein, in whole or in part, without the written consent of Boggs Design Partners, LLC, shall be without liability to Boggs Design Partners, LLC.

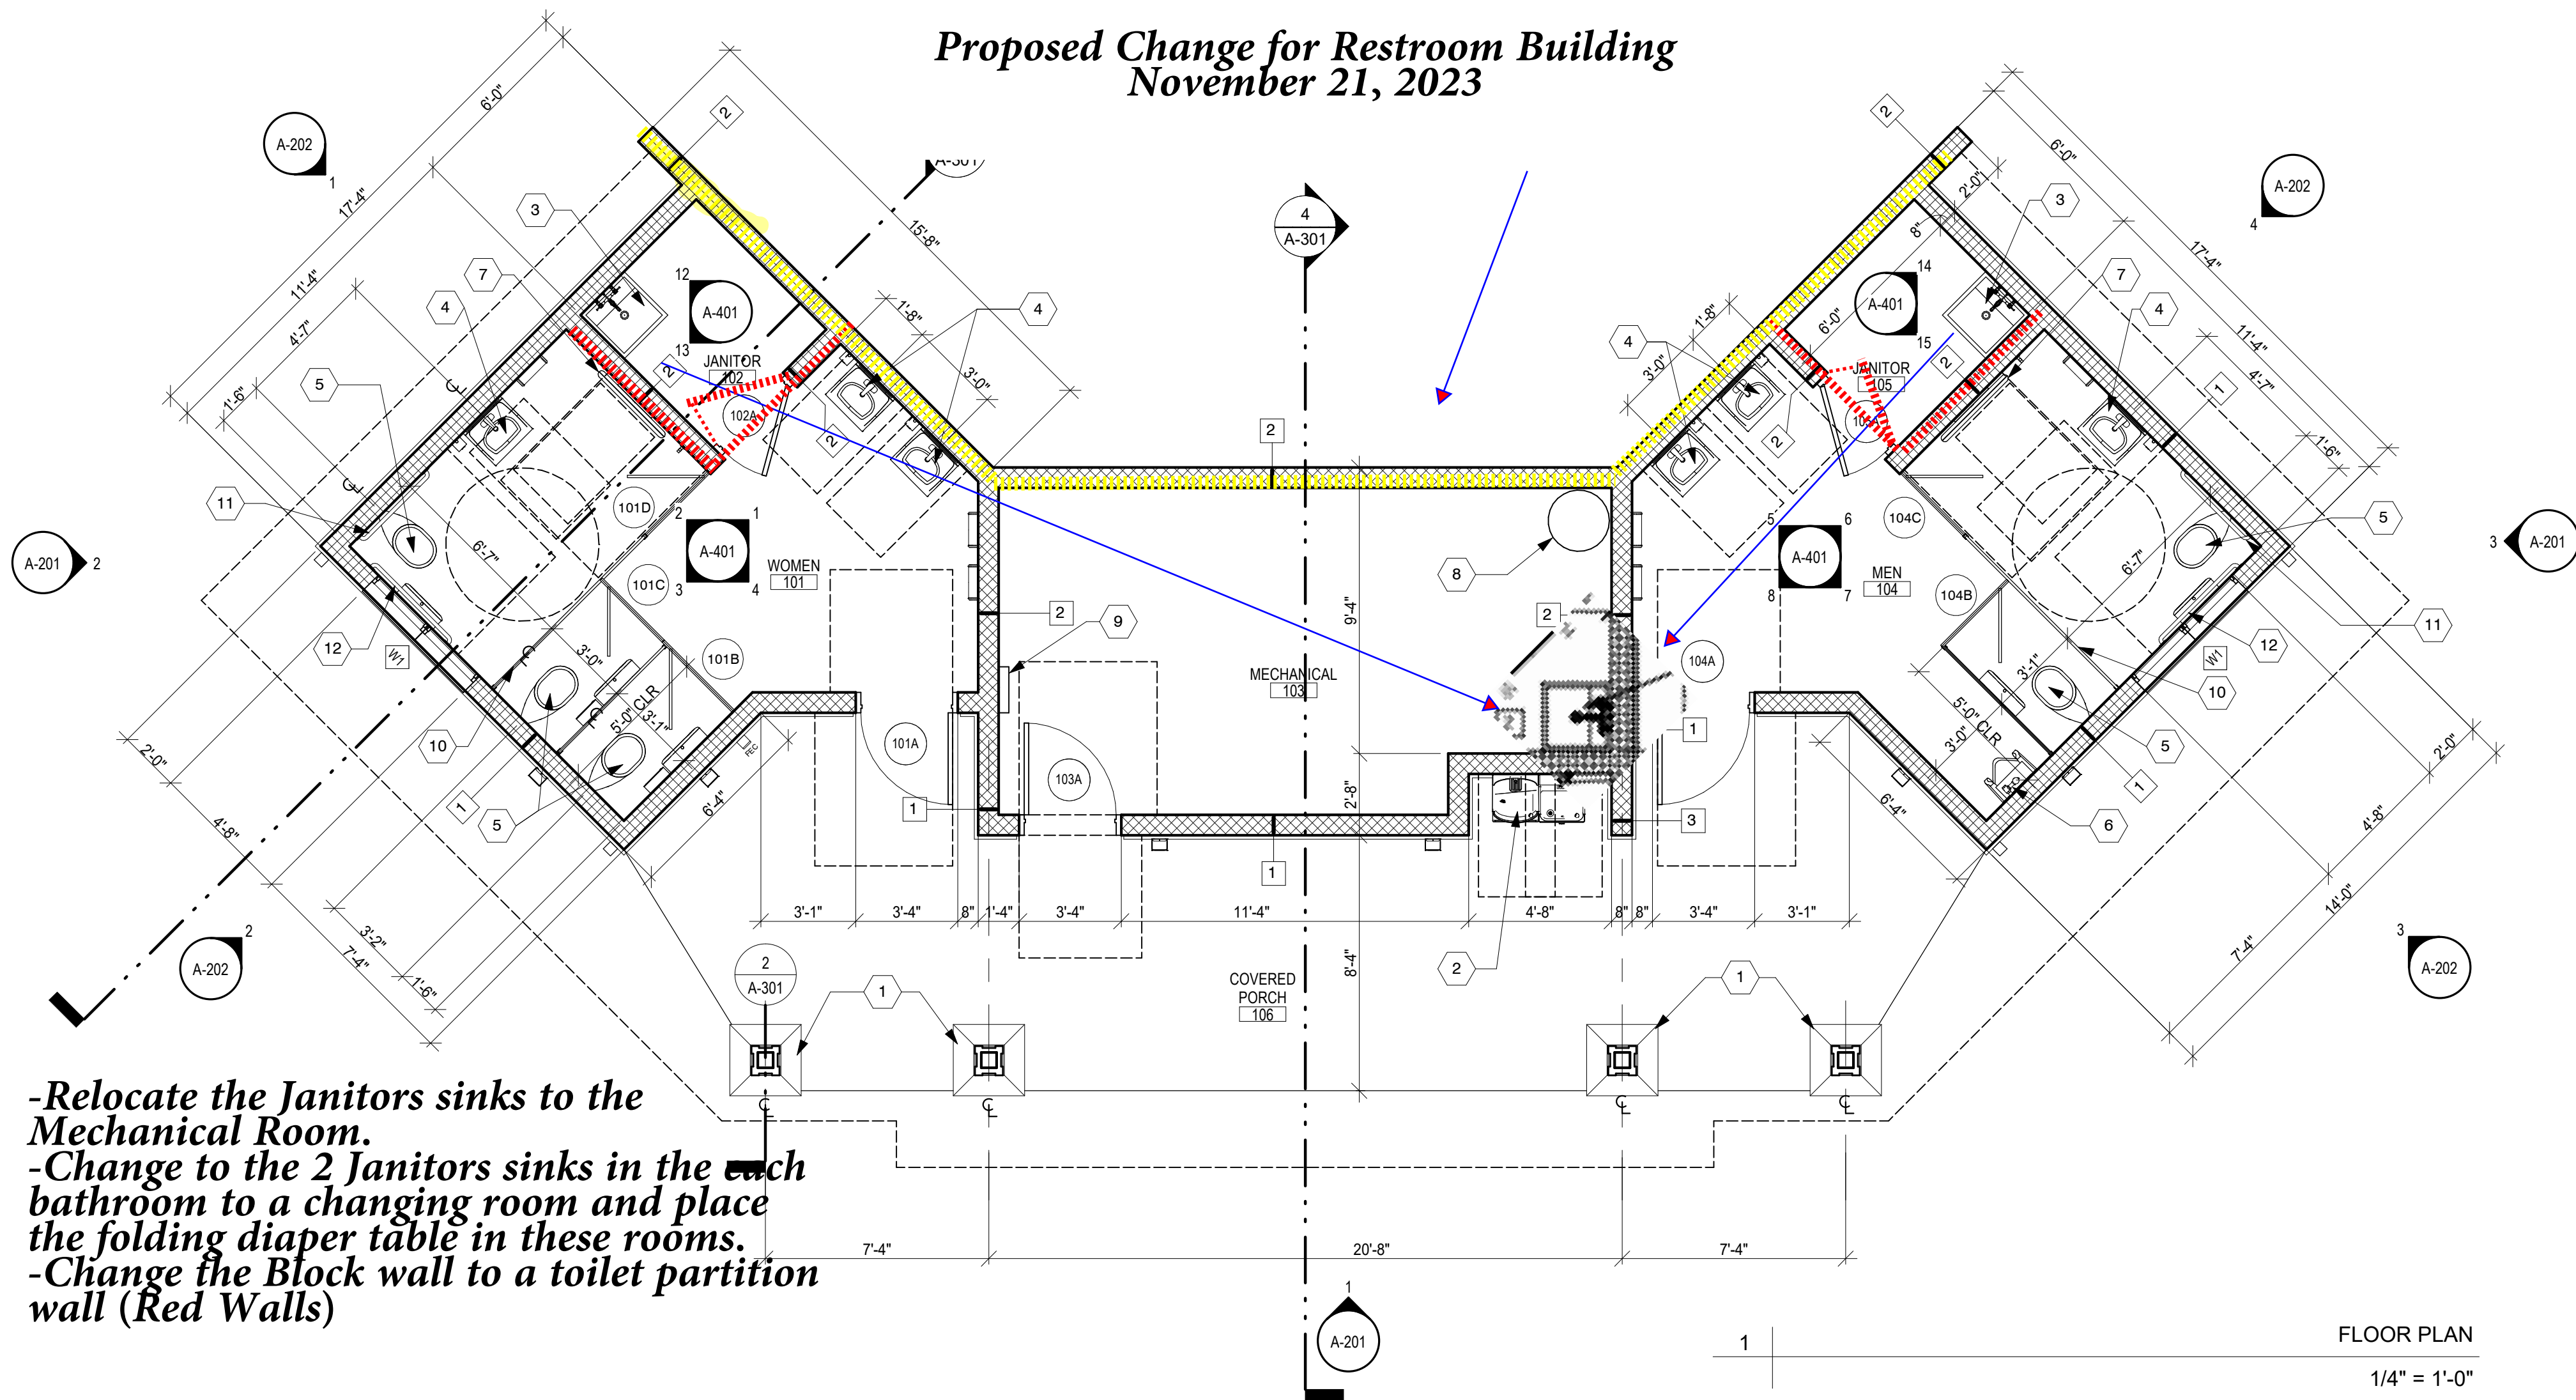

-Relocate the Janitors sinks to the Mechanical Room.
-Change to the 2 Janitors sinks in the each bathroom to a changing room and place the folding diaper table in these rooms.
-Change the Block wall to a toilet partition wall (Red Walls)

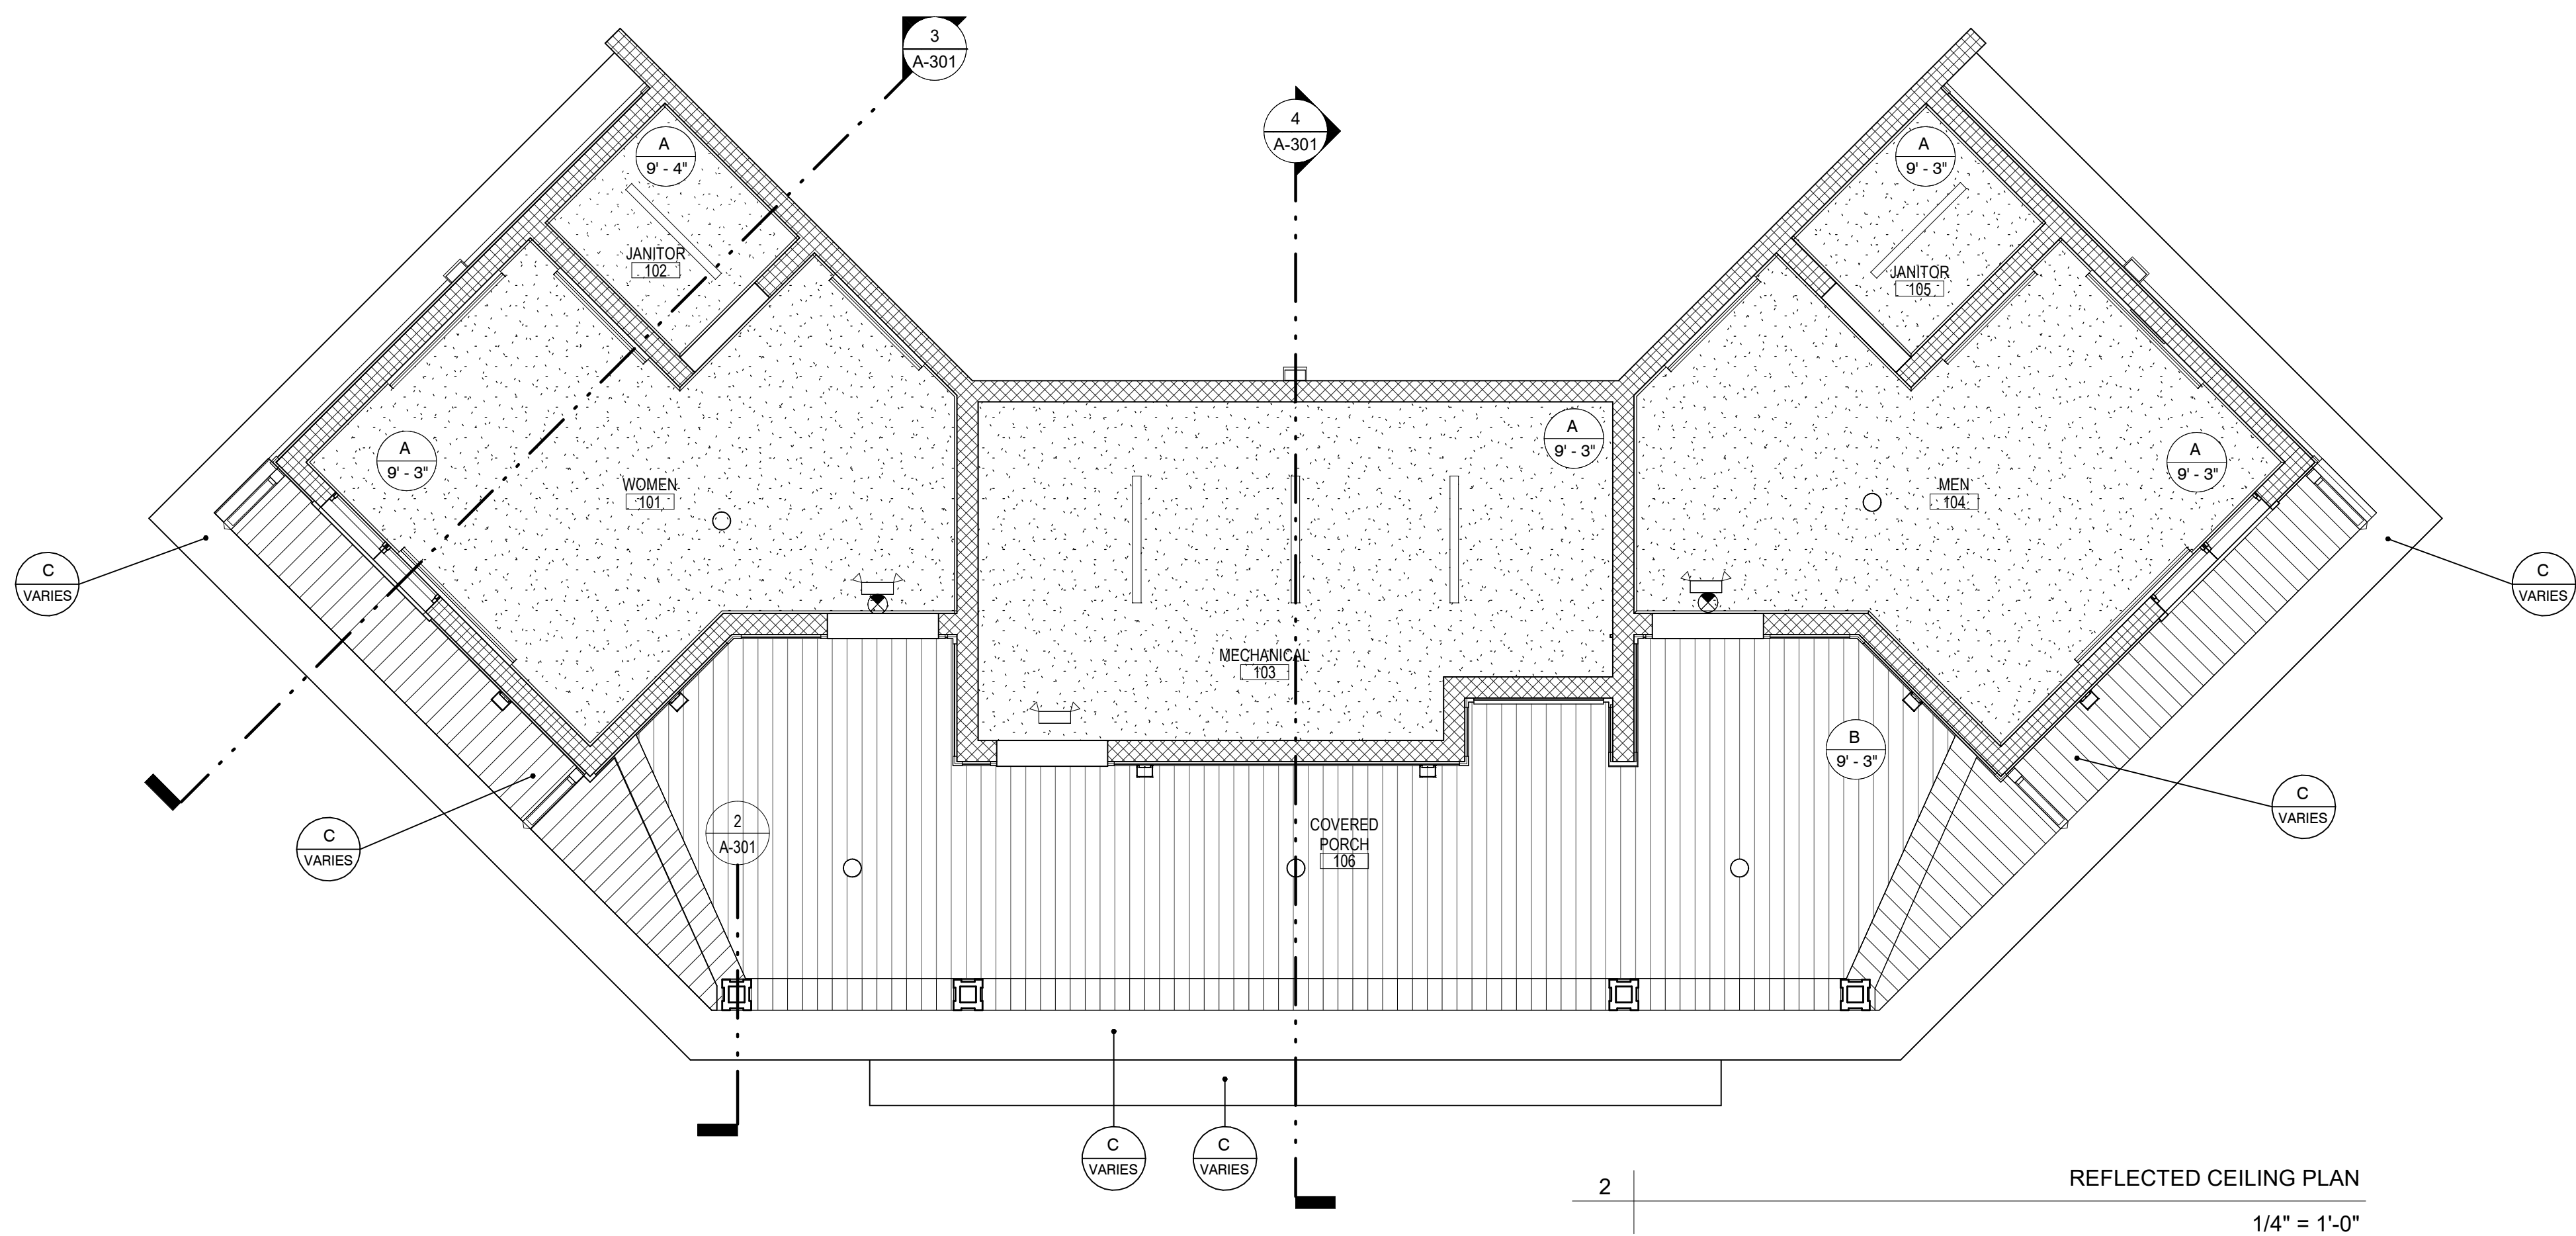

GENERAL NOTES

- SEE LIFE SAFETY PLANS FOR ADDITIONAL INFORMATION.
- SEE STRUCTURAL DRAWINGS FOR ADDITIONAL REQUIREMENTS.
- SEE MECHANICAL, ELECTRICAL, AND PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION.
- DIMENSIONS ARE TO FACE OF CMU OR STUD UNLESS NOTED OTHERWISE.
- SEE CIVIL SITE PLANS SUBMITTED SEPARATELY FOR MORE INFORMATION ON SITE AND ORIENTATION.

FLOOR PLAN LEGEND

- 1i DOOR TAG
- 1ii WALL TAG
- 1 WINDOW TAG

WALL TYPE LEGEND

SEE WALL TYPE DETAILS AND SECTIONS FOR ADDITIONAL REQUIREMENTS AND HEIGHTS.

SYMBOL	TYPE	DESCRIPTION
	1	CMU WALL WITH HARDIE BOARD (ONE SIDE)
	2	CMU WALL WITH PAINT (BOTH SIDES)
	3	CMU WALL WITH HARDIE BOARD (BOTH SIDES)

SHEET NOTES

1. COLUMN WRAPPED WITH HARDIE ON CMU BASE. SEE STRUCTURAL AND ARCHITECTURAL DETAILS FOR MORE INFORMATION.
2. ADA COMPLIANT HI-LOW DRINKING FOUNTAIN WITH BOTTLE FILLER. SEE PLUMBING.
3. FLOOR / MOP SINK. SEE PLUMBING.
4. ADA COMPLIANT WALL MOUNTED LAVATORY. SEE PLUMBING.
5. ADA COMPLIANT WATER CLOSET. SEE PLUMBING.
6. WALL MOUNTED URINAL. SEE PLUMBING.
7. WALL MOUNTED PULL DOWN BABY CHANGING STATION AND BAG HOOK. SEE ARCHITECTURAL SPECIFICATIONS AND INTERIOR ELEVATIONS.
8. ELECTRIC WATER HEATER. SEE PLUMBING.
9. ELECTRICAL PANEL. SEE ELECTRICAL.
10. SOLID PLASTIC TOILET PARTITIONS. TYP. SEE ARCHITECTURAL SPECIFICATIONS AND INTERIOR ELEVATIONS.
11. 42" L X 1 1/2" D.S.S. GRAB BAR WITH NON-SLIP GRIP. SEE ARCHITECTURAL SPECIFICATIONS AND INTERIOR ELEVATIONS.
12. 36" L X 1 1/2" D.S.S. GRAB BAR WITH NON-SLIP GRIP. SEE ARCHITECTURAL SPECIFICATIONS AND INTERIOR ELEVATIONS.

GENERAL NOTES


- SEE MECHANICAL, ELECTRICAL, AND PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION.

LIGHTING LEGEND

	4' LED WALL MOUNTED LINEAR LIGHT FIXTURE
	7' SURFACE MOUNTED LED DOWNLIGHT (WET LISTED)
	4' LED CEILING MOUNTED LINEAR LIGHT FIXTURE
	EMERGENCY SIGN AND EXIT LIGHT COMBINATION
	EXTERIOR LED WALL SCONCE FIXTURE
	EXTERIOR LED WALL PACK

CEILING LEGEND

A		MOISTURE RESISTANT GYPSUM BOARD
B		NON-VENTED HARDIE SOFFIT BOARD
C		VENTED HARDIE SOFFIT BOARD

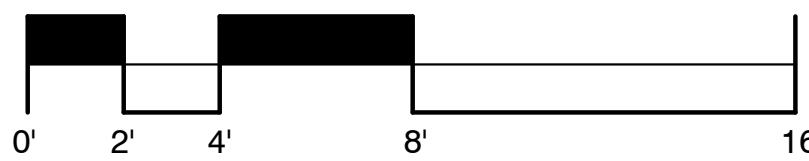

DATE: 10/19/2023
ERICA AZORIN CRAIG
FL REG. NO. AR101635

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED ON THE DATE ADJACENT TO THE SEAL. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

PROJECT NO:
23005.001

DATE: 10/19/2023
DESIGNED BY:
DRAWN BY:
CHECKED BY:

DRAWING TITLE:


FLOOR PLAN,
REFLECTED CEILING
PLAN

SHEET NO:


A-101

PERMIT BID SET 10-19-2023


©2022 Boggs Design Partners, LLC. All rights reserved. This document, together with the concepts and designs presented herein, is an instrument of service, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of any information or design presented herein, in whole or in part, without the written authorization and adaptation by Boggs Design Partners, LLC, shall be without liability to Boggs Design Partners, LLC.

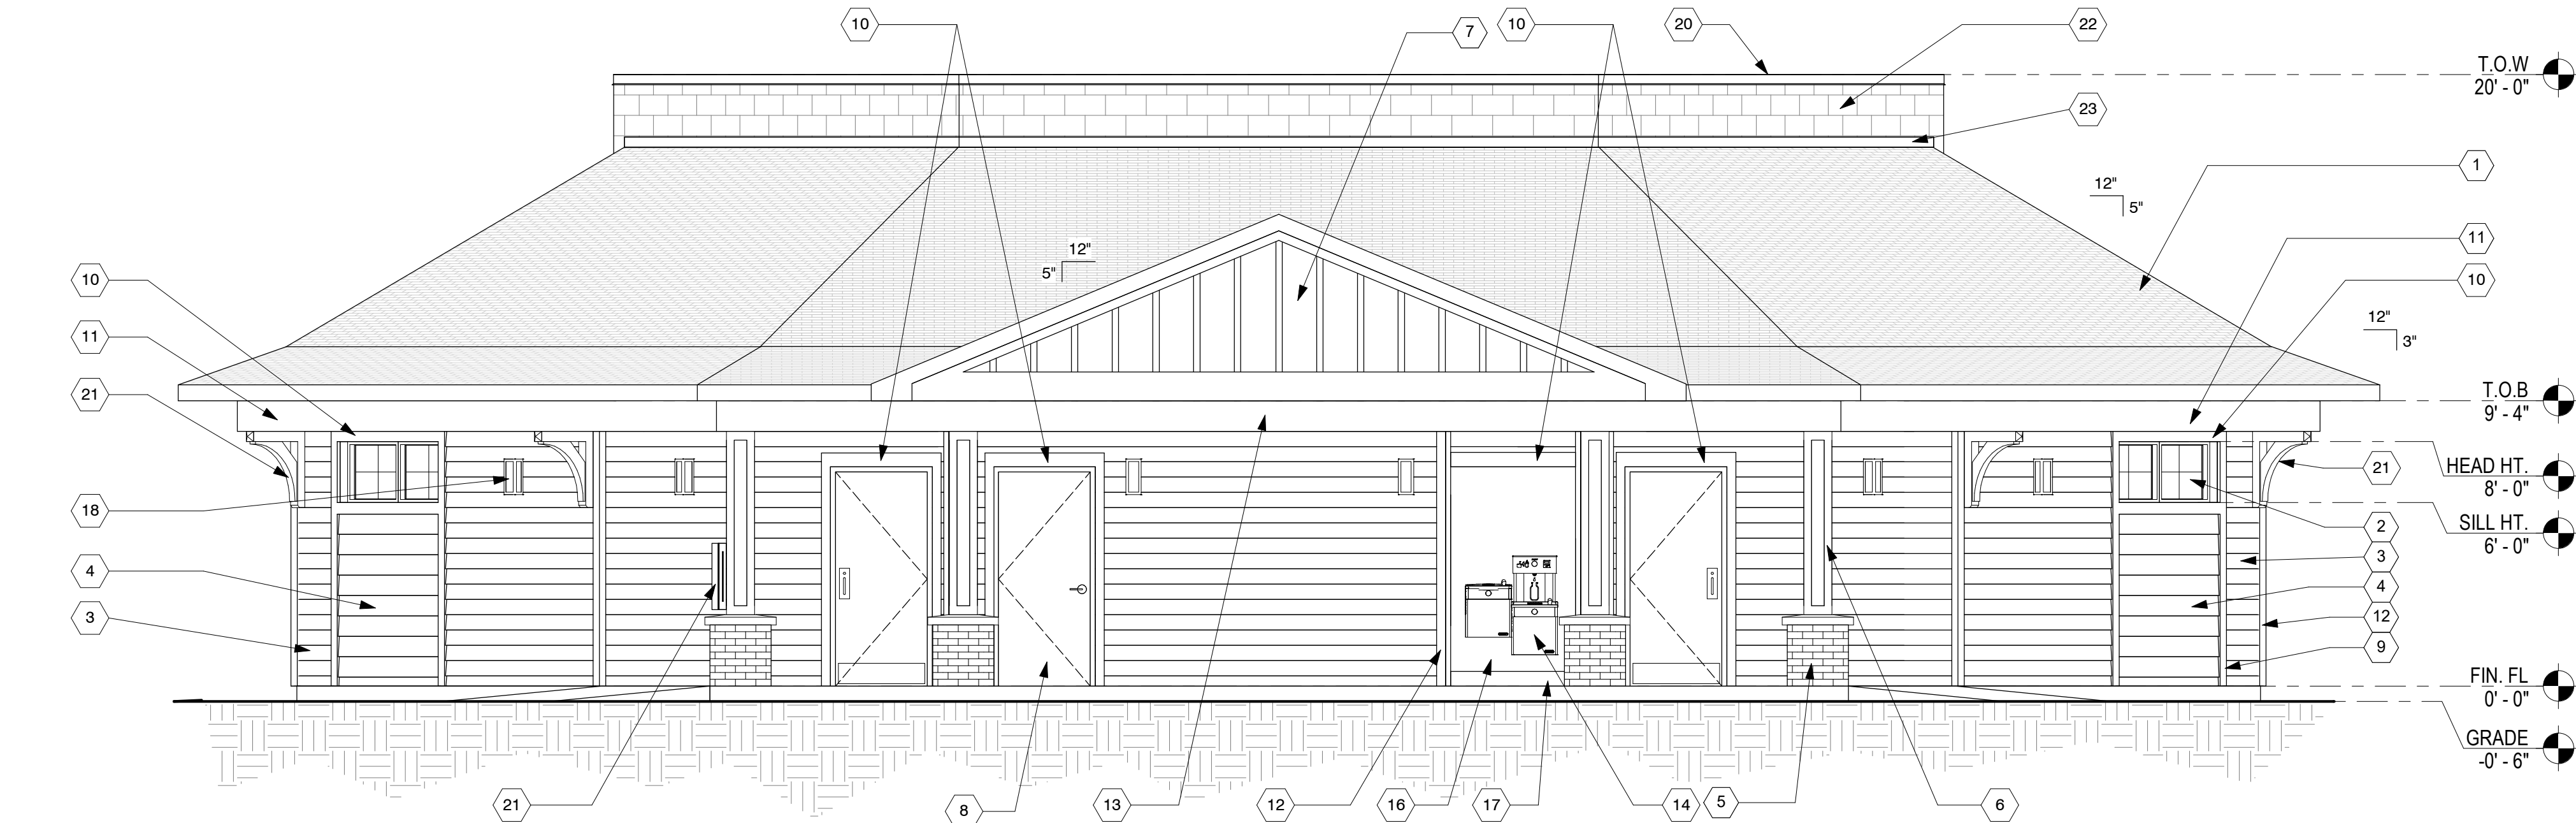


EAST ELEVATION

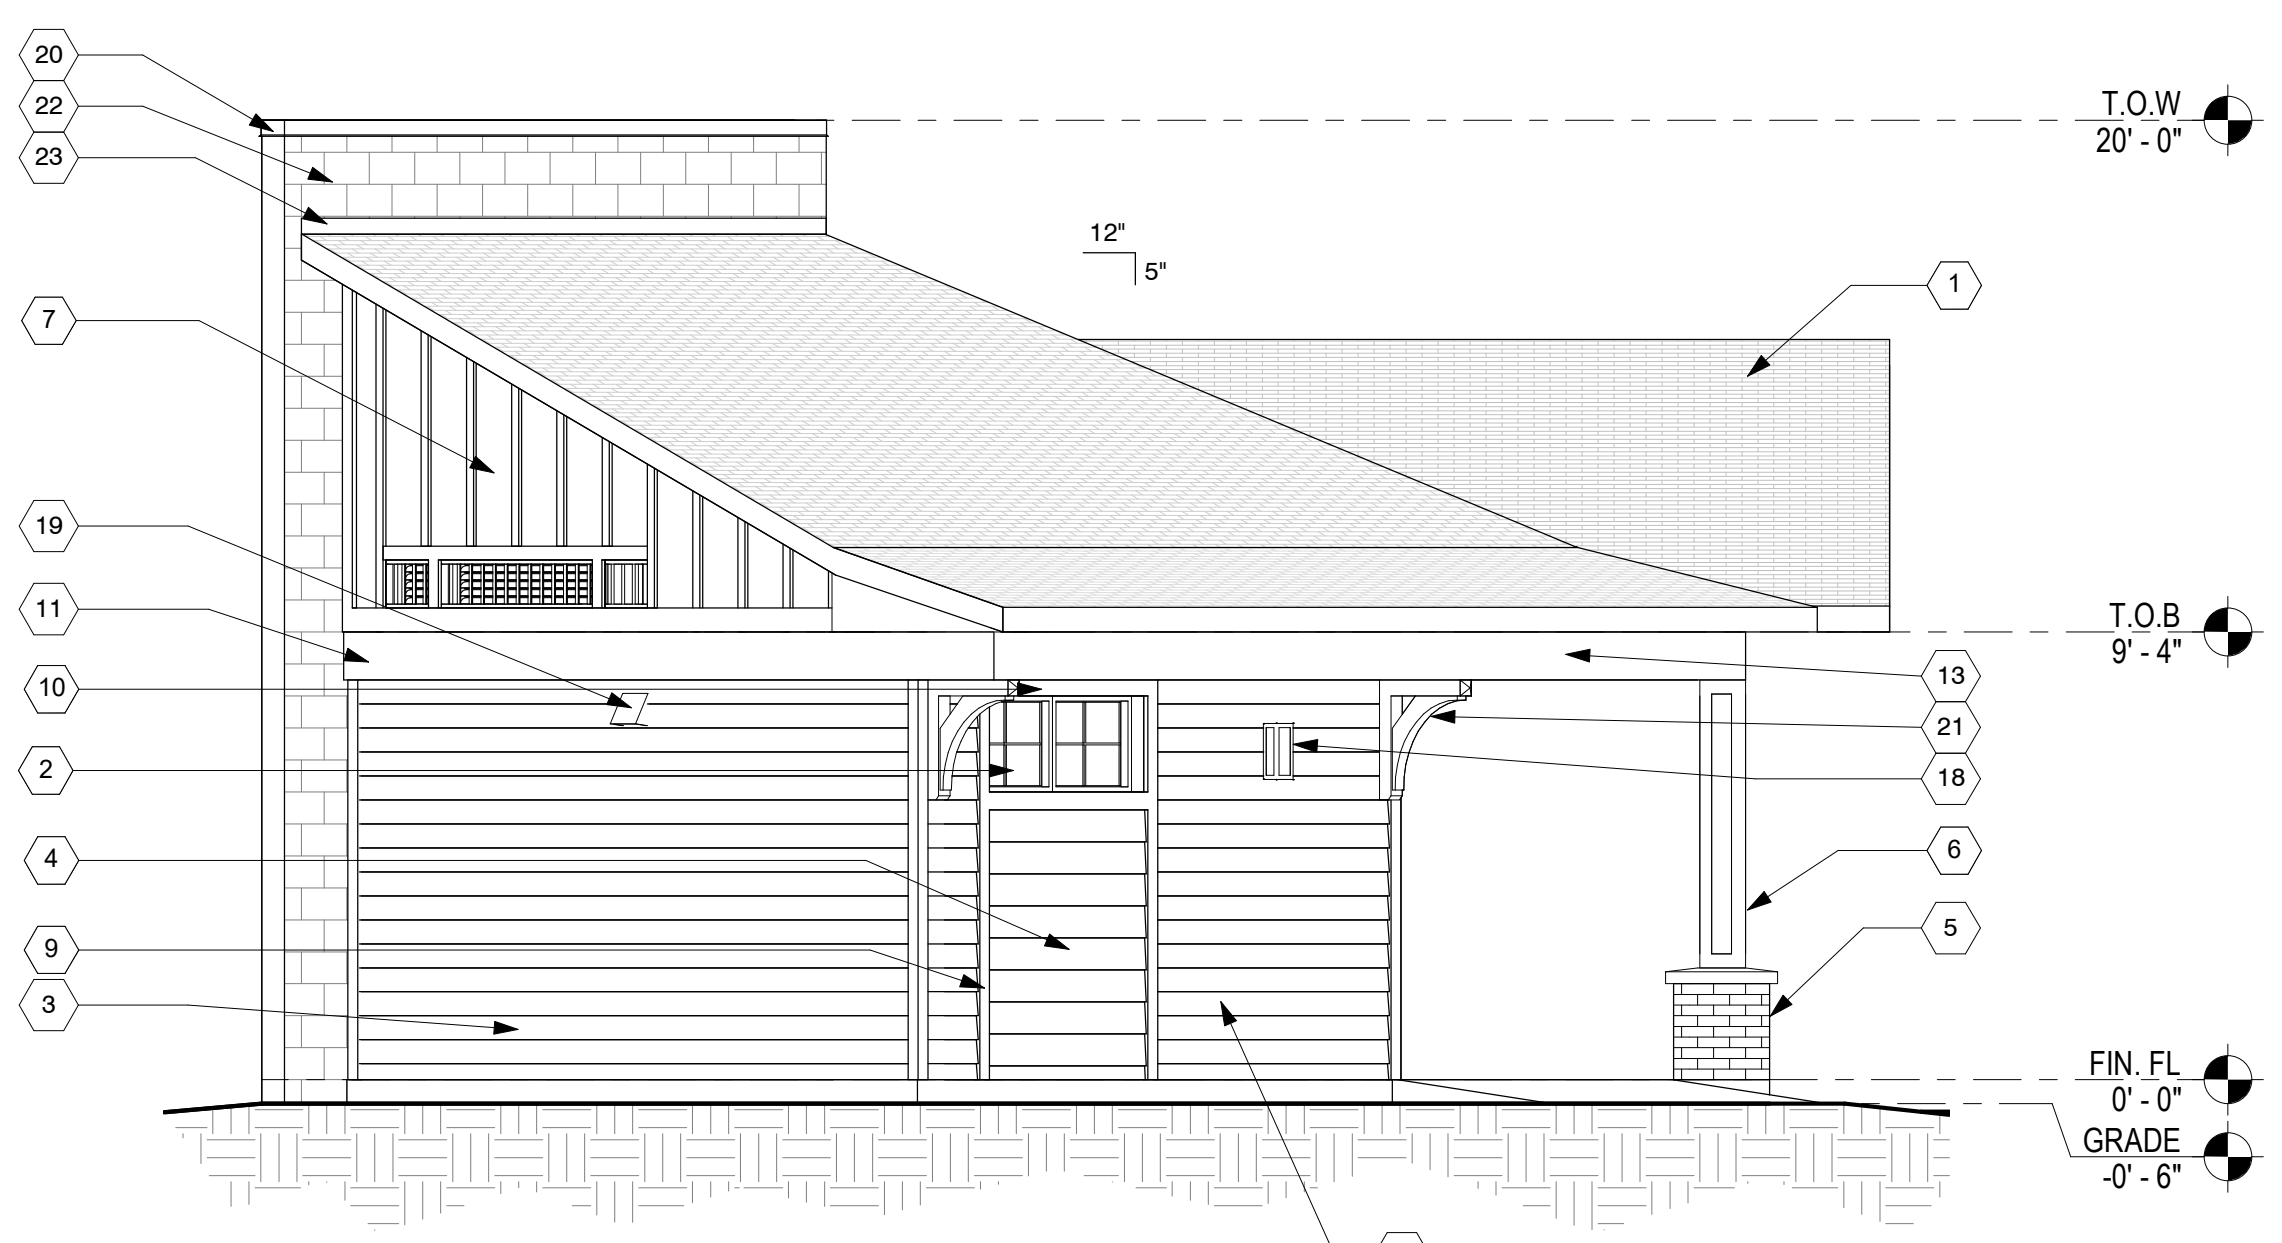

NORTH ELEVATION

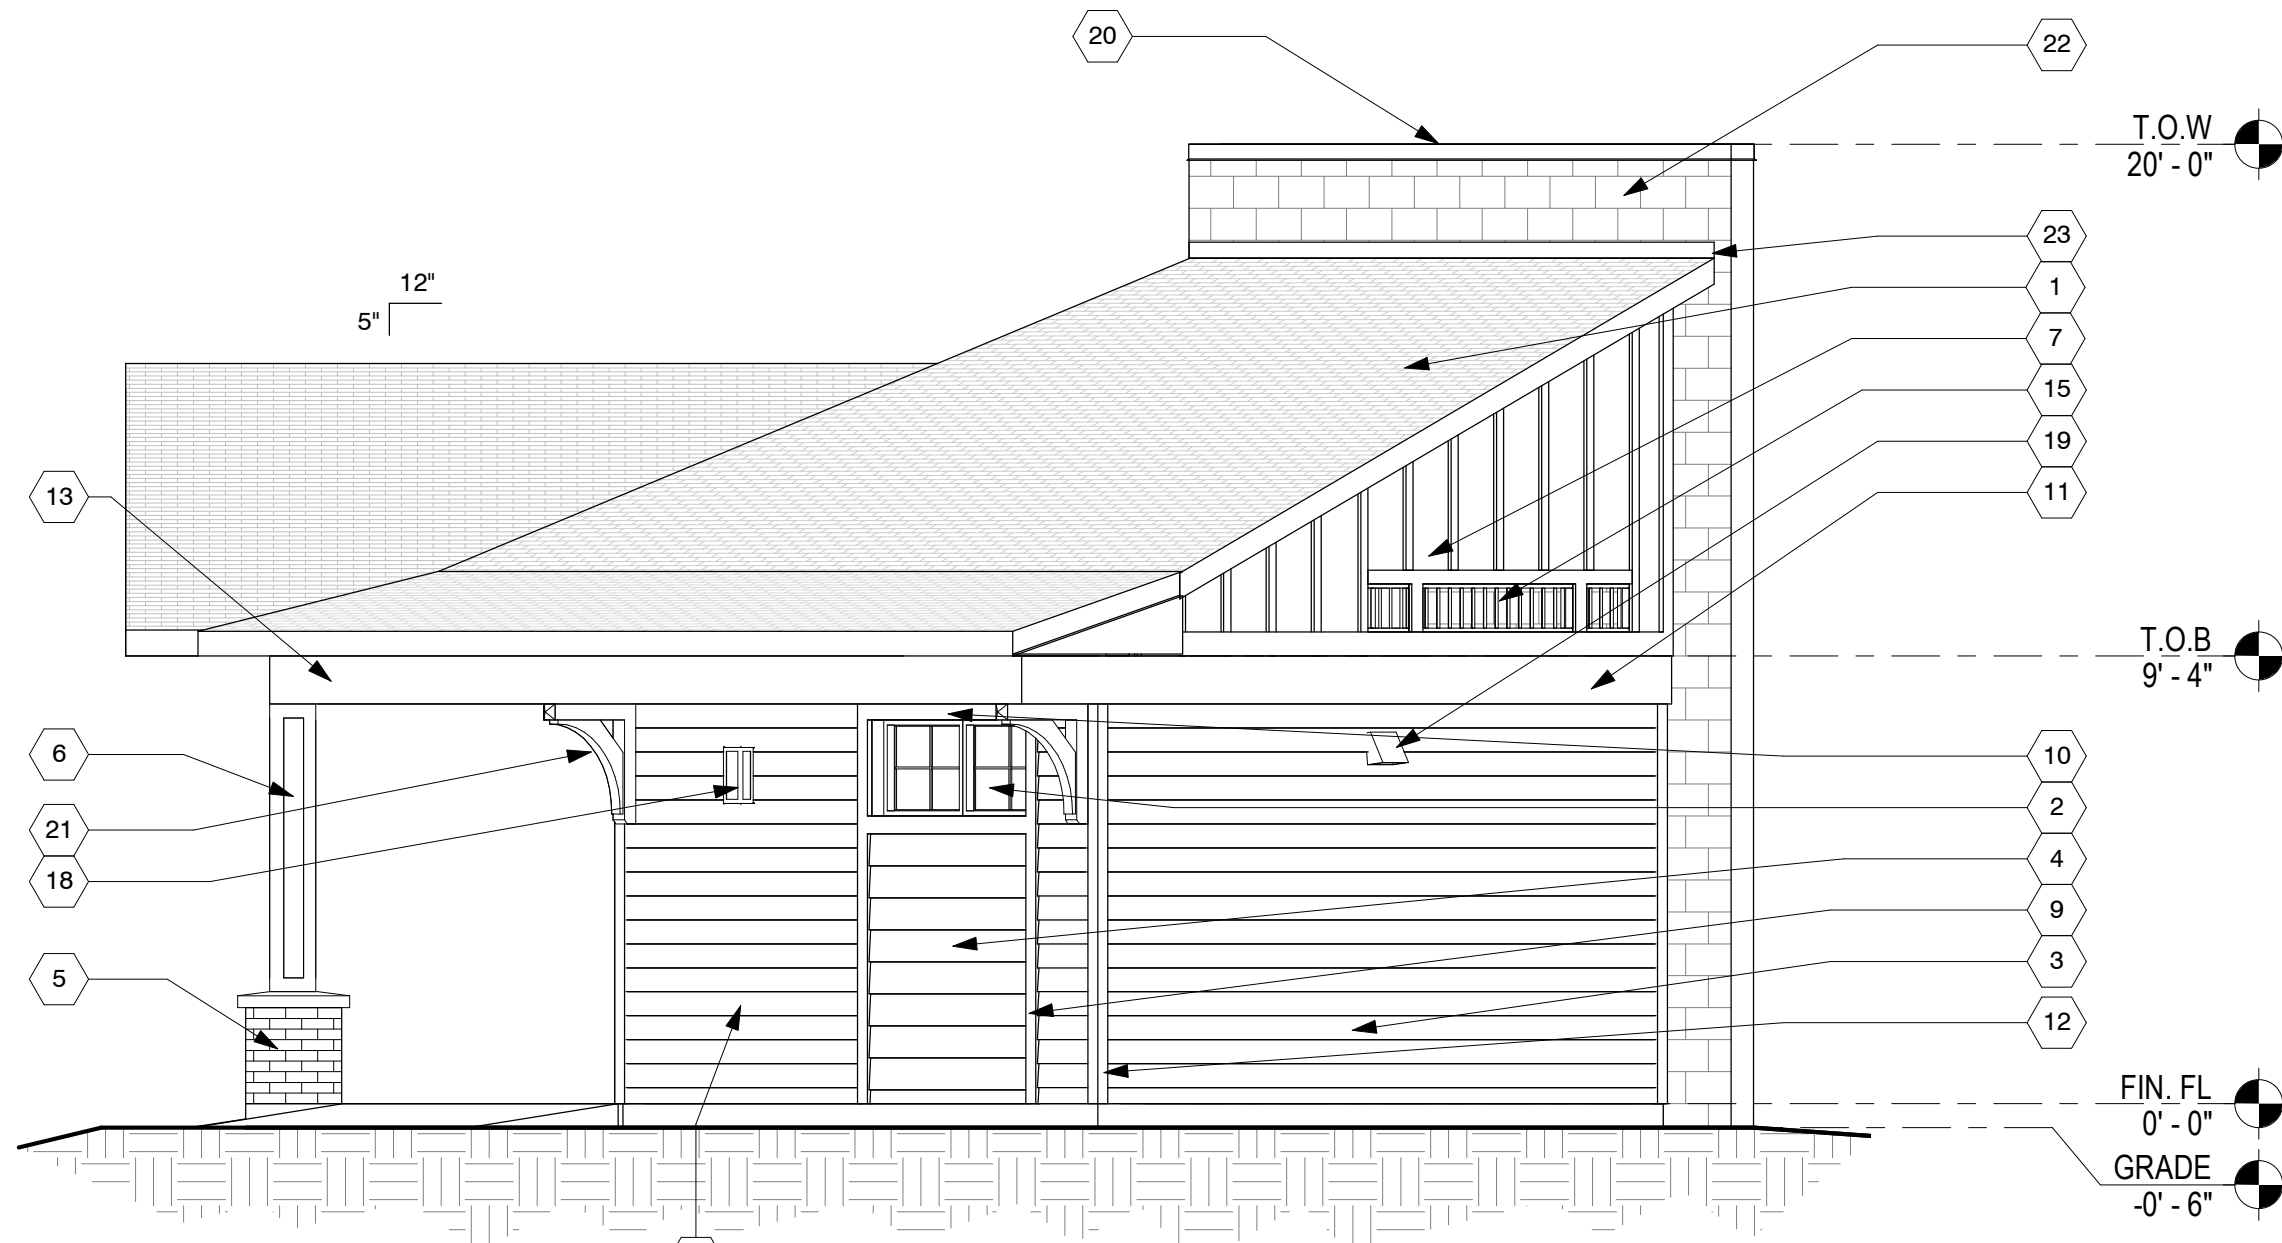

SOUTH ELEVATION

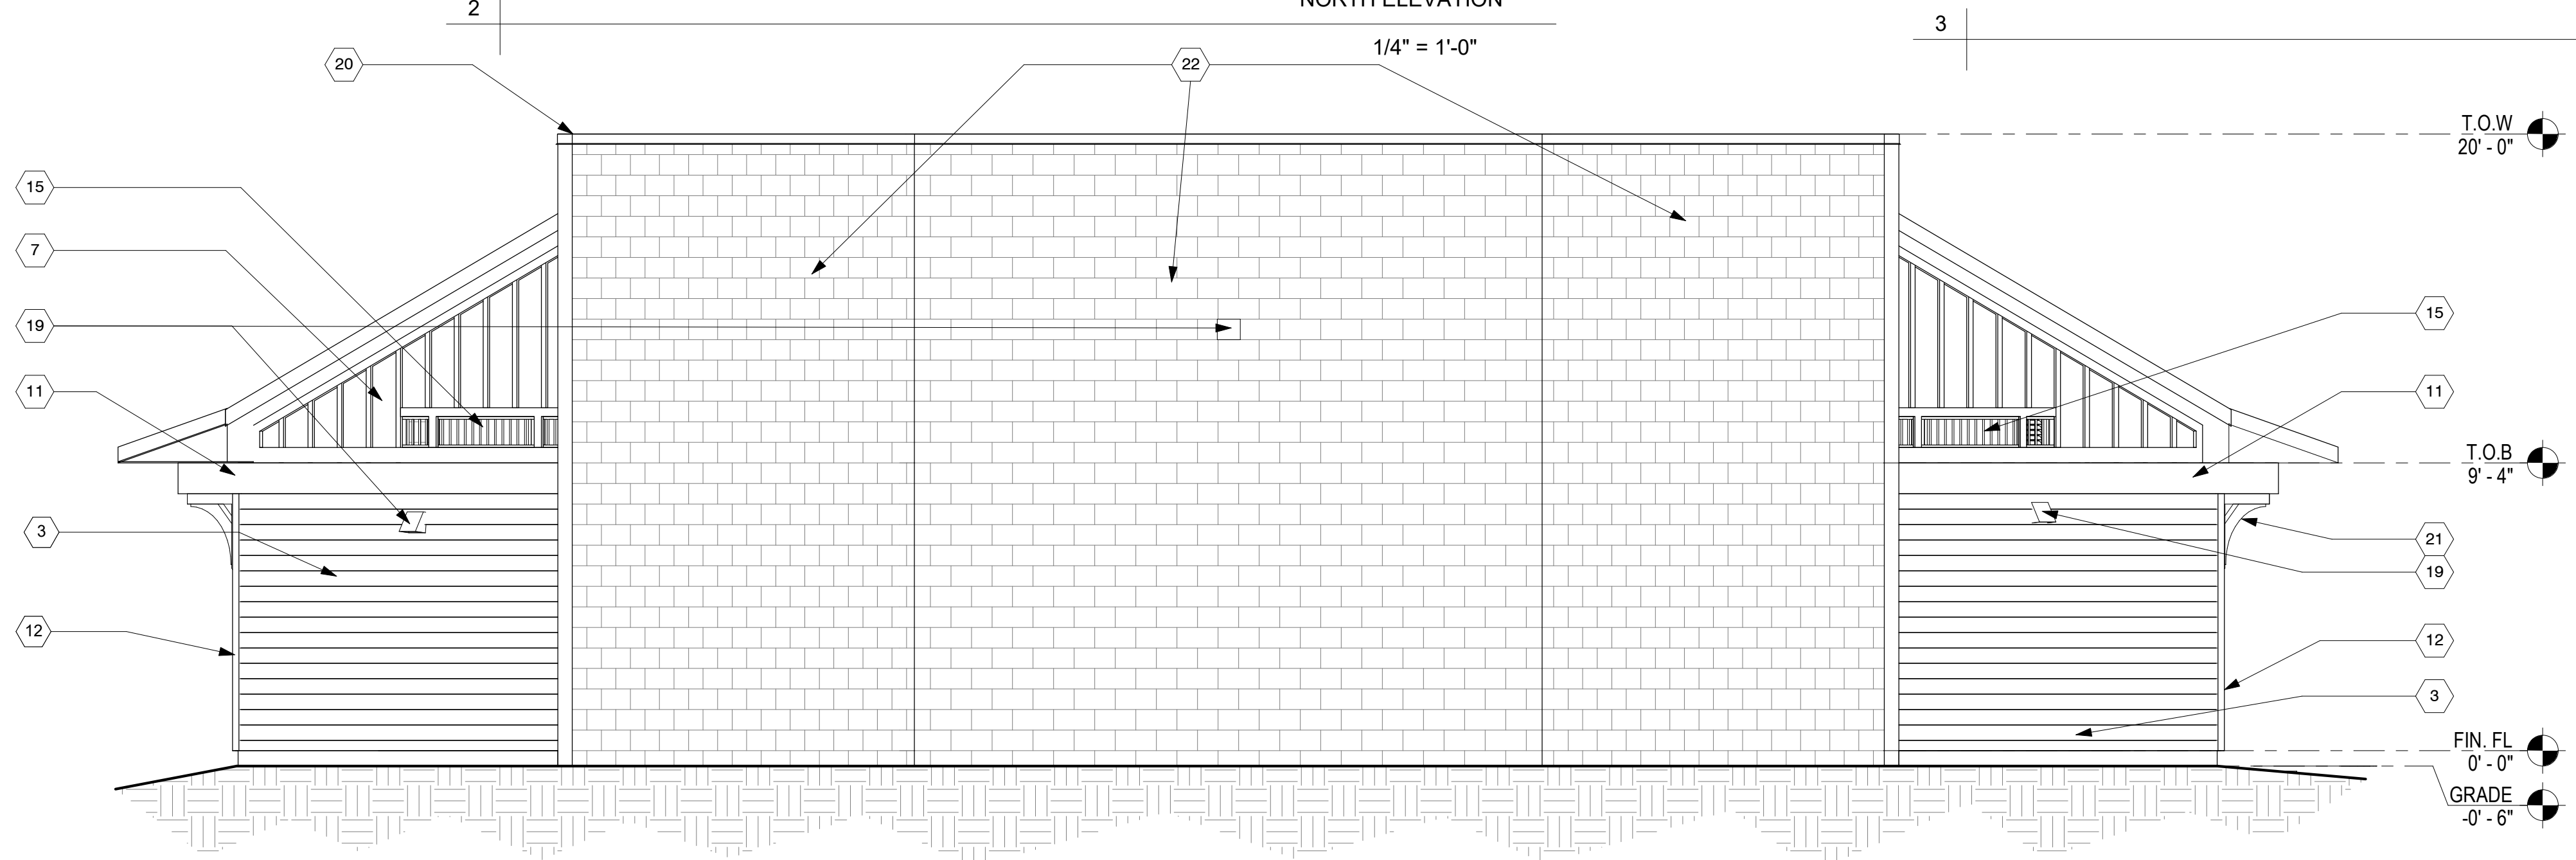

WEST ELEVATION

EXTERIOR FINISH LEGEND					
TYPE	DESCRIPTION	MANUFACTURER	STYLE / MODEL	COLOR / FINISH	NOTES
BV - 1	BRICK VENEER				
P - 5	EXTERIOR WALL PAINT	SHERWIN WILLIAMS	SEE ARCHITECTURAL SPECIFICATION	2857 PEACE YELLOW / FLAT	1
P - 6	EXTERIOR WALL PAINT	SHERWIN WILLIAMS	SEE ARCHITECTURAL SPECIFICATION	7551 GREEK VILLA / FLAT	2
P - 7	EXTERIOR WALL PAINT	SHERWIN WILLIAMS	SEE ARCHITECTURAL SPECIFICATION	7019 GAUNTLET GRAY / FLAT	3
GENERAL NOTES:					
GENERAL NOTES:			SCHEDULE NOTES:		
• SEE EXTERIOR ELEVATIONS FOR MORE INFORMATION			1. PAINTED 5" EXPOSURE HARDIE BOARD PLANK SIDING.		
			2. PAINTED HARDIE BOARD TRIM, HARDIE PANEL BOARD AND BATTENS, AND EXPOSED CMU.		
			3. PAINTED 8" EXPOSURE HARDIE BOARD PLANK SIDING AND EXTERIOR DOORS.		

GENERAL NOTES

- ALL DIMENSIONS ARE TO FACE OF STUD OR CMU, UNLESS NOTED OTHERWISE.
- SEE STRUCTURAL DRAWINGS FOR MORE INFORMATION.
- SEE ROOF PLAN FOR MORE INFORMATION.
- ALL EXTERIOR COLORS TO BE APPROVED BY OWNER PRIOR TO ORDERING

SHEET NOTES

- ARCHITECTURAL SHINGLE ROOFING. SEE ROOF PLAN.
- AWNING WINDOWS WITH COLONIAL MUNTINS. SEE WINDOW SCHEDULE AND ARCHITECTURAL SPECIFICATIONS
- PAINTED 5IN EXPOSURE SMOOTH HARDIE PLANK SIDING. PAINT COLOR: P-5. SEE EXTERIOR FINISH LEGEND.
- PAINTED 8" EXPOSURE SMOOTH HARDIE PLANK LAP SIDING. PAINT COLOR: P-7. SEE EXTERIOR FINISH LEGEND.
- MASONRY COLUMN BASE WITH FULL BRICK VENEER AND CONCRETE CAP. VENEER TO BE OWNER PROVIDED / CONTRACTOR INSTALLED. SEE DETAILS.
- STRUCTURAL COLUMN WRAPPED WITH PAINTED SMOOTH HARDIE PANEL AND TRIM. PAINT COLOR: P-6. SEE EXTERIOR FINISH LEGEND.
- PAINTED SMOOTH HARDIE PANEL BOARD WITH BATTENS AT 16" O.C. PAINT COLOR: P-6. SEE EXTERIOR FINISH LEGEND.
- PAINTED HOLLOW METAL DOOR AND FRAME. PAINT COLOR: P-7. SEE EXTERIOR FINISH LEGEND.
- 1" THICK X 3.5" WIDE PAINTED SMOOTH HARDIE TRIM. PAINT COLOR: P-6. SEE EXTERIOR FINISH LEGEND.
- 1" THICK X 5.5" WIDE PAINTED SMOOTH HARDIE TRIM. PAINT COLOR: P-6. SEE EXTERIOR FINISH LEGEND.
- 1" THICK X 11.25" WIDE PAINTED SMOOTH HARDIE TRIM. PAINT COLOR: P-6. SEE EXTERIOR FINISH LEGEND.
- 1" THICK X 3.5" WIDE PAINTED SMOOTH HARDIE TRIM. TYPICAL AT ALL CORNERS. PAINT COLOR: P-6. SEE EXTERIOR FINISH LEGEND.
- BEAM WRAPPED WITH PAINTED SMOOTH HARDIE PANEL. PAINT COLOR: P-6. SEE EXTERIOR FINISH LEGEND.
- ADA COMPLIANT OUTDOOR HI-LOW DRINKING FOUNTAIN WITH BOTTLE FILLER.
- PRE-FINISHED ALUMINUM ARCHITECTURAL GABLE LOUVER - BASIS OF DESIGN: GREENHECK; COLOR BONE WHITE. INSTALL PER FLORIDA PRODUCT APPROVAL DETAILS. SEE MECHANICAL DRAWINGS FOR ADDITIONAL REQUIREMENTS.
- PAINTED SMOOTH HARDIE PANEL BOARD SIDING BEHIND DRINKING FOUNTAINS AS REQUIRED. PAINT COLOR: P-7. SEE EXTERIOR FINISH SCHEDULE.
- 1" THICK X 3.5" WIDE PAINTED SMOOTH HARDIE TRIM. PAINT COLOR: P-7. SEE EXTERIOR FINISH SCHEDULE.
- DECORATIVE WALL SCIENCE. SEE ELECTRICAL DRAWINGS.
- LED WALL PACK. SEE ELECTRICAL DRAWINGS
- PRE-FINISHED, CONTINUOUS SHEET METAL PARAPET COPING.
- 4" X 30" X 30" DECORATIVE EXTERIOR BRACKET, TYPICAL. BASIS OF DESIGN: HB ELEMENTS BKT-3008-4-3.5M.
- PAINTED CMU
- CONTINUOUS HEADWALL FLASHING AT ROOF / WALL CONNECTION. SEE TYPICAL FLASHING DETAIL FOR MORE INFORMATION.

BDP
BOGGS DESIGN PARTNERS
Architecture + Interiors
607 S. ALEXANDER ST.
SUITE 101
PLANT CITY, FL 33563
813 . 946 . 8444
www.bdparchitects.com

DATE: 10/19/2023
ERICA AZORIN CRAIG
FL REG. NO. AR101635
THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED ON THE DATE ADJACENT TO THE SEAL. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED VALID UNLESS SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

CITY OF DADE CITY
PARK RESTROOMS
37800 CHURCH AVENUE
DADE CITY, FL 33525

NO.	DATE	REVISION DESCRIPTION

PROJECT NO:
23005.001
DATE: 10/19/2023
DESIGNED BY:
DRAWN BY:
CHECKED BY:
DRAWING TITLE:


EXTERIOR ELEVATION

SHEET NO:

A-201




PERMIT BID SET 10-19-2023

©2022 Boggs Design Partners, LLC. All rights reserved. This document, together with the concepts and designs presented herein, is an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of any improper reliance on this document, without consultation or written authorization and adaptation by Boggs Design Partners, LLC, shall be without liability to Boggs Design Partners, LLC.

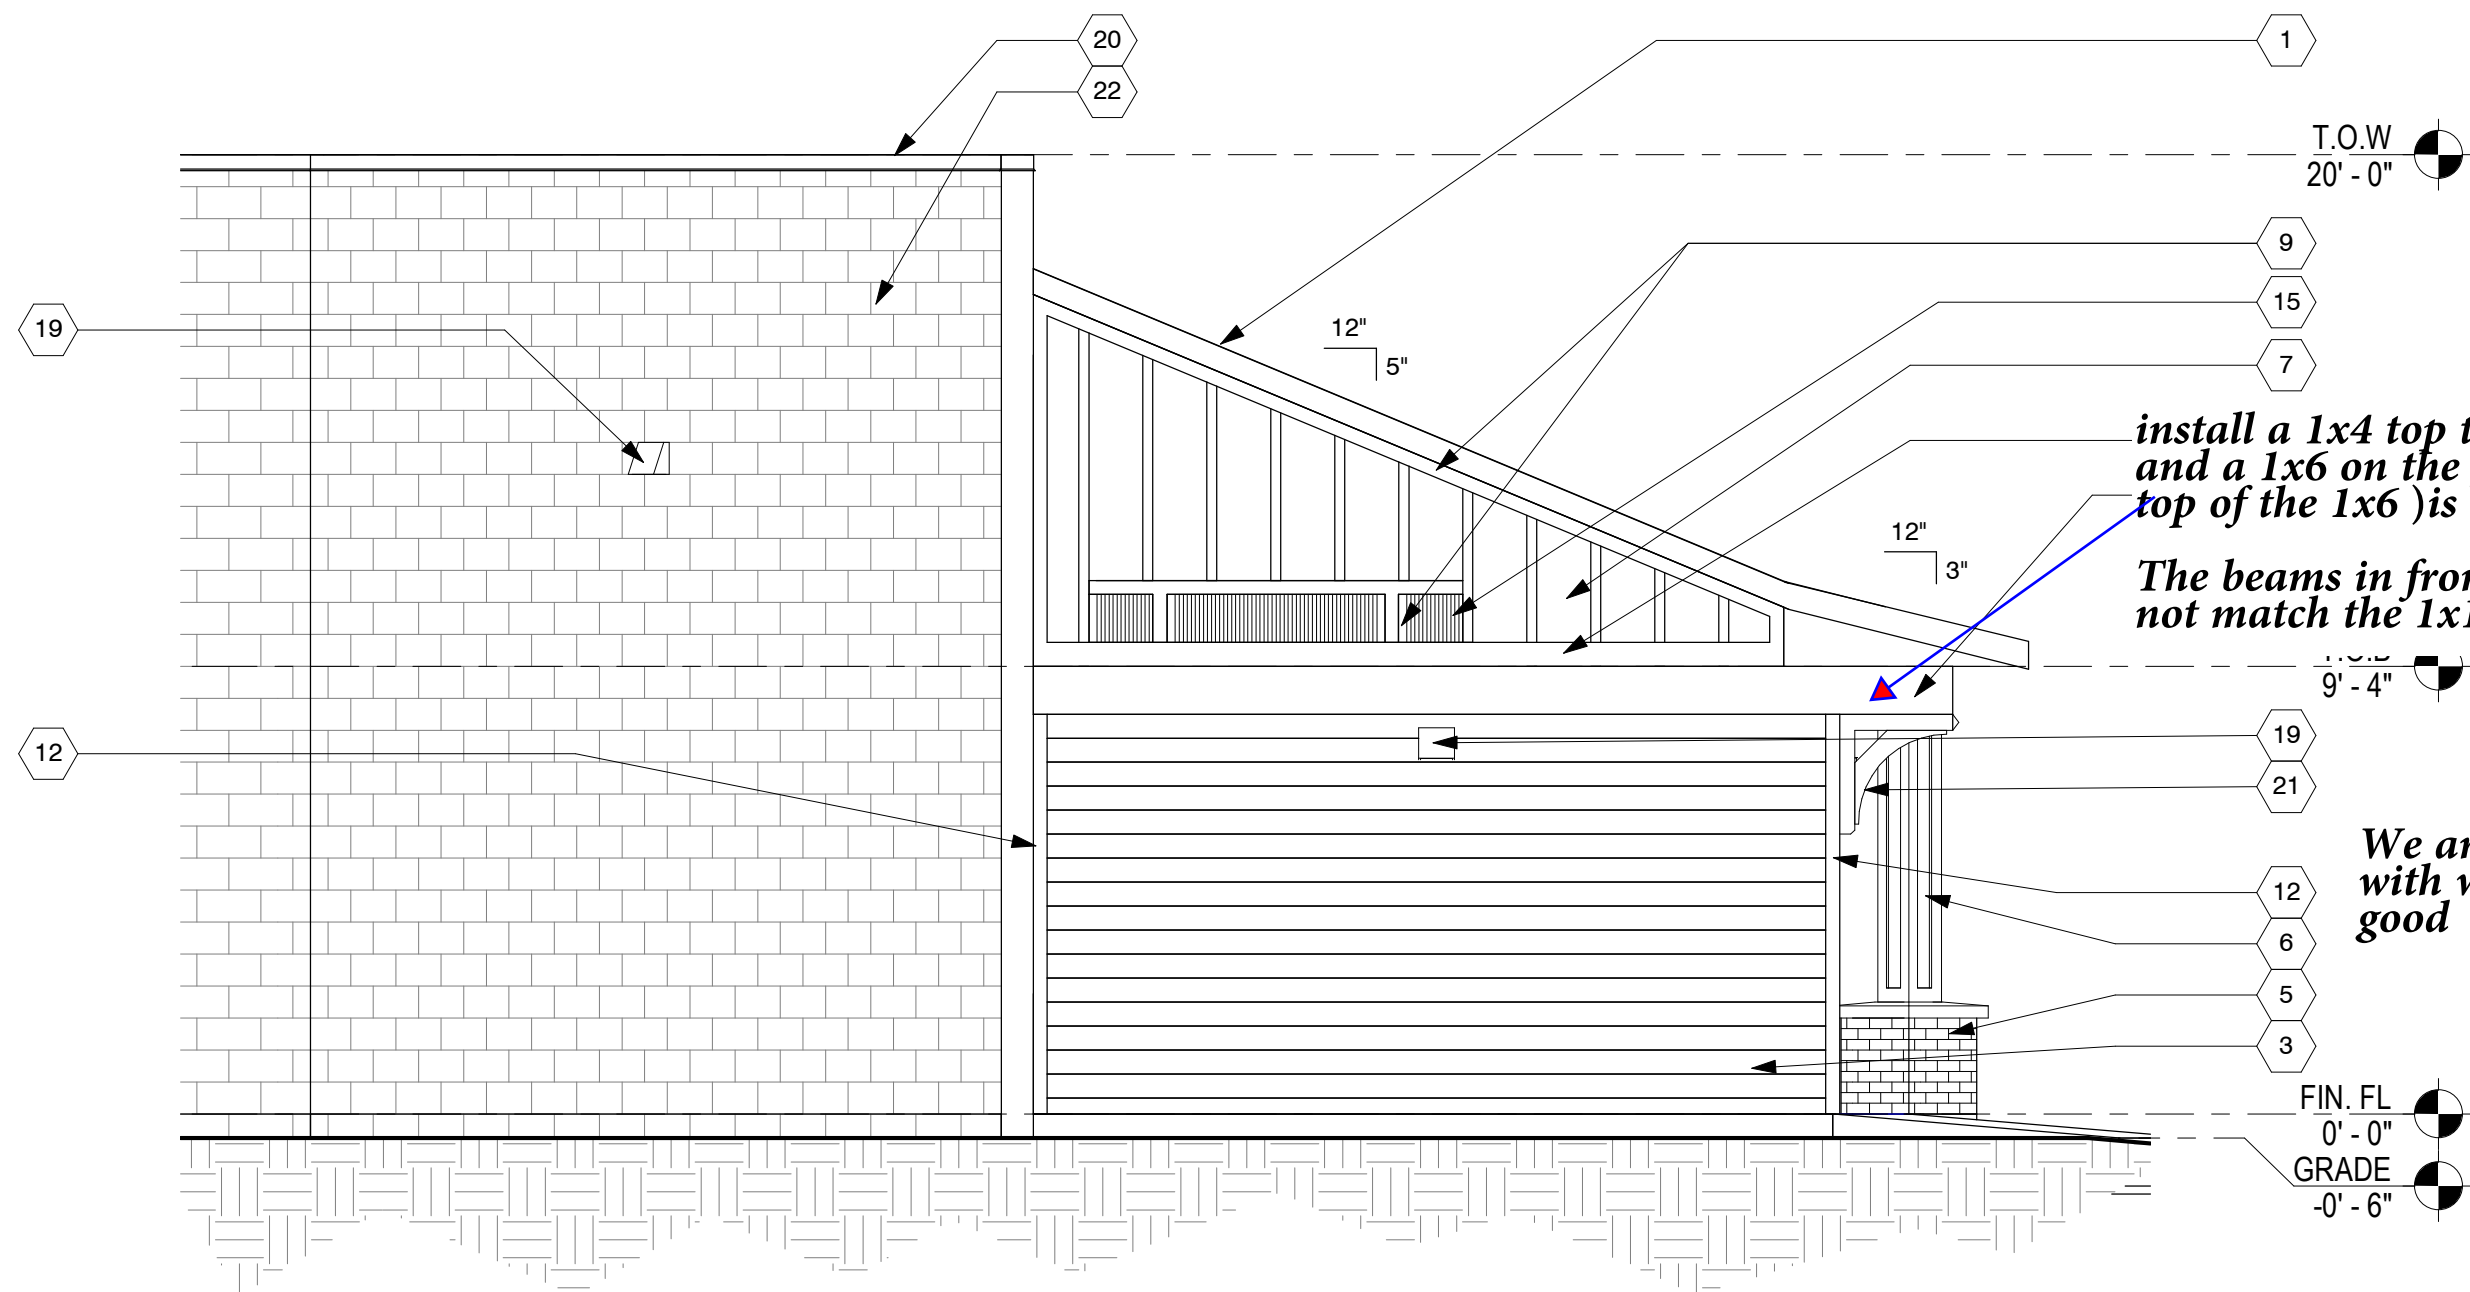

install a 1x4 top trim on the sides not 1x12 and a 1x6 on the gables. Back to back trim (1x12 on top of the 1x6) is challenging with Z flashing etc.
The beams in front PAD out to be +/- 13.5" so it does not match the 1x12

We are keeping this detail with wider exposure Looks good

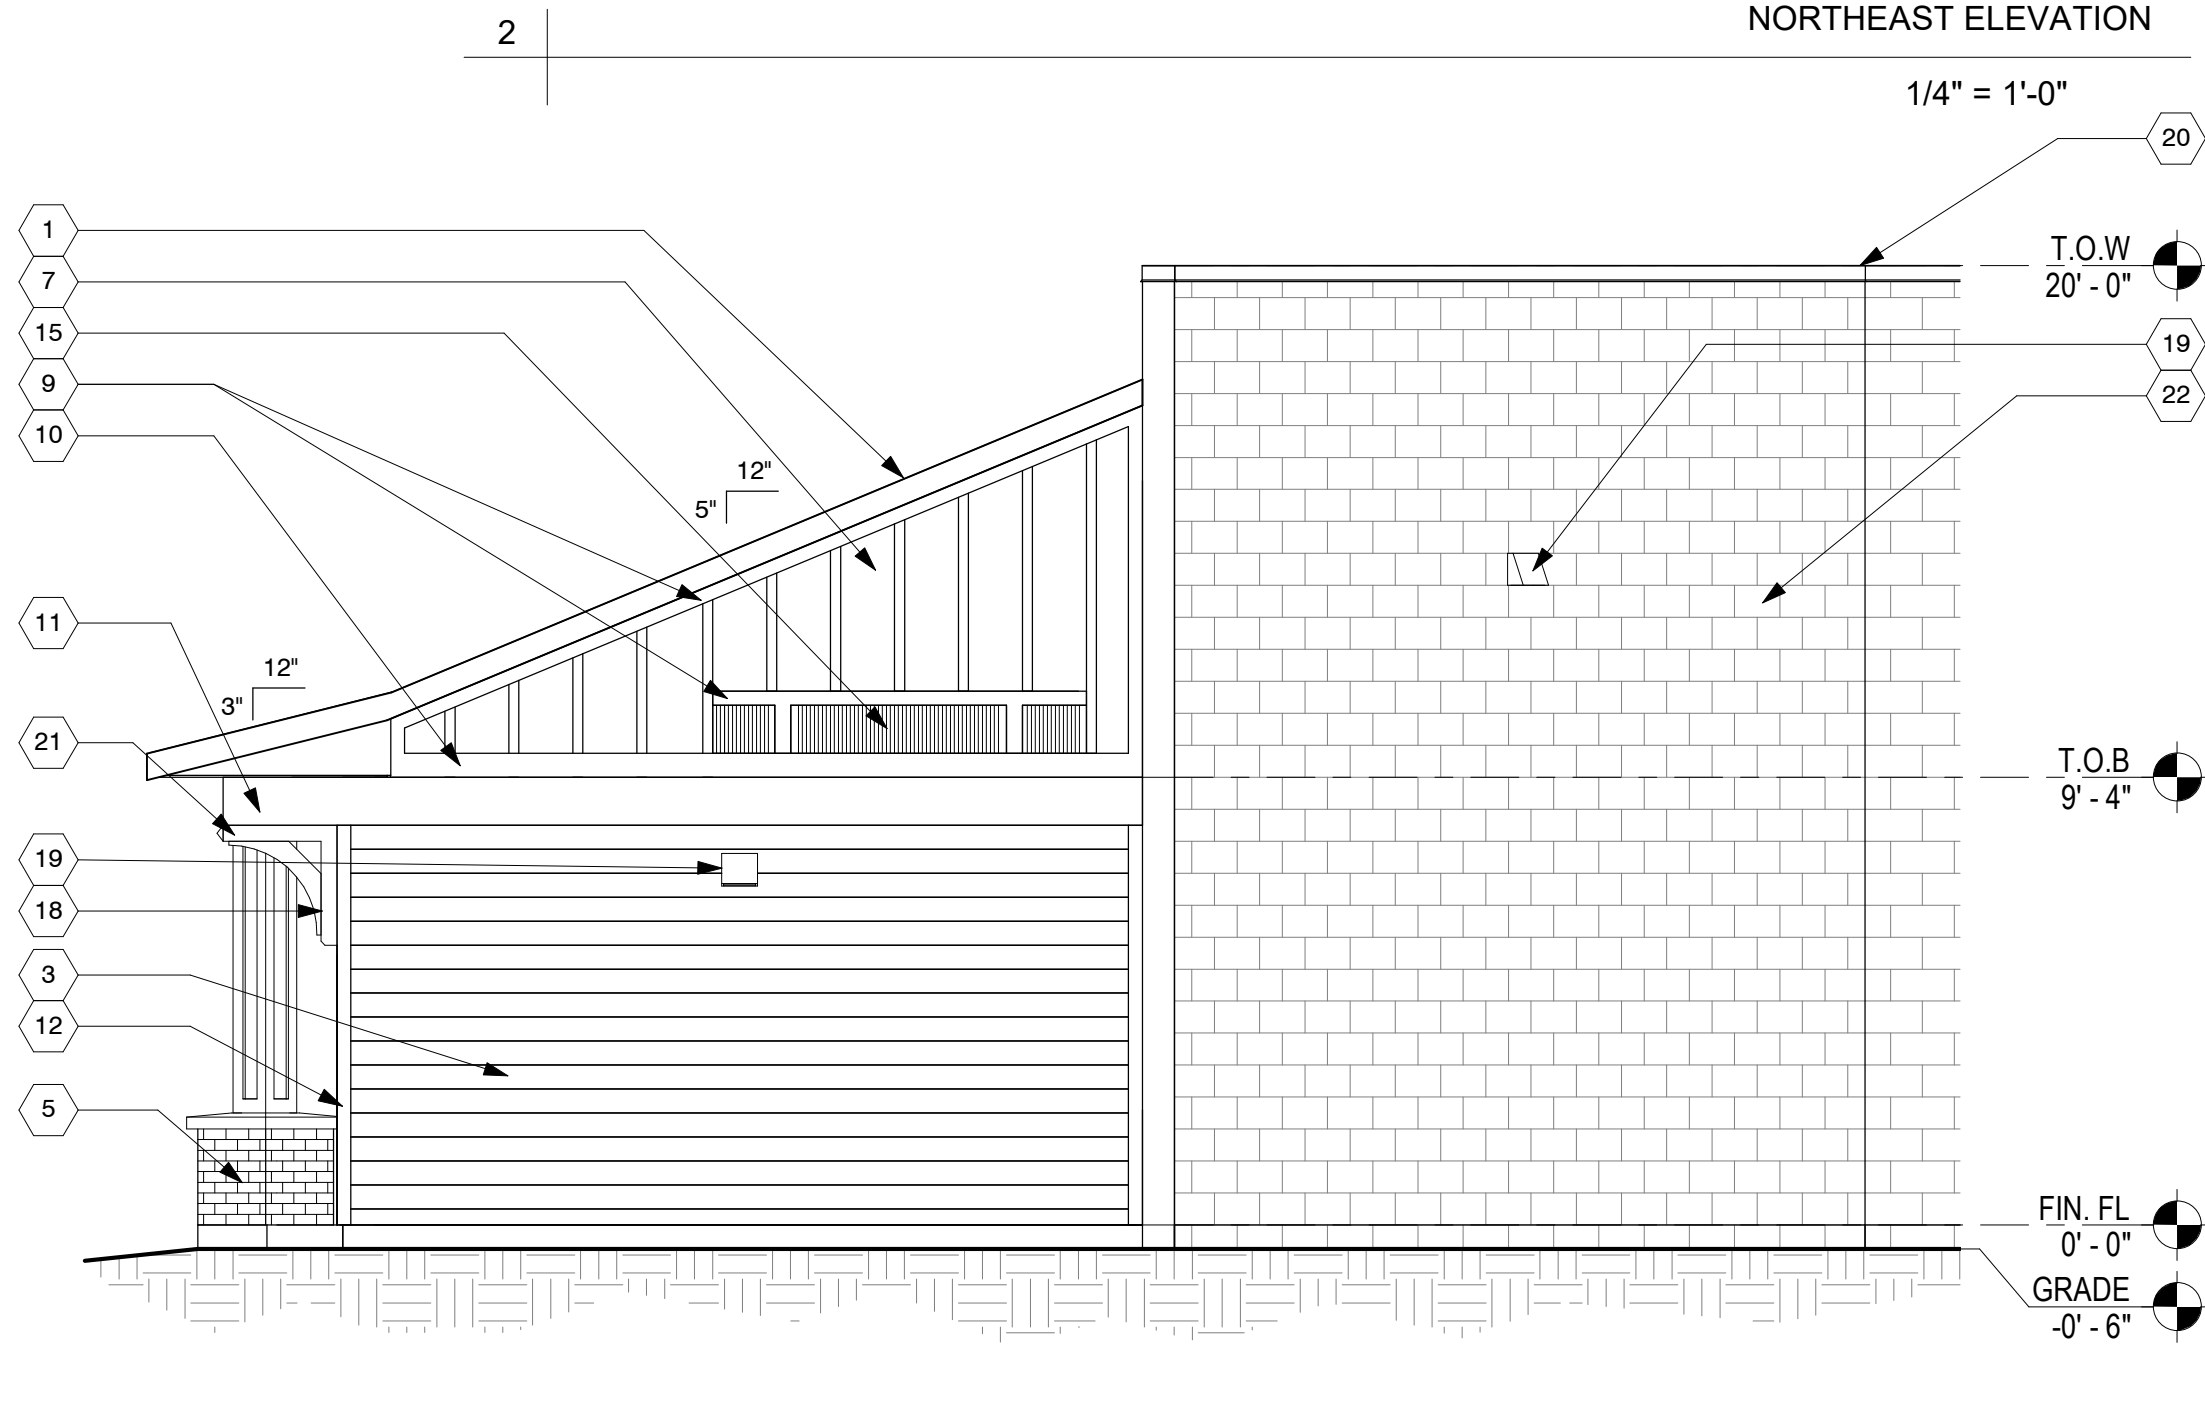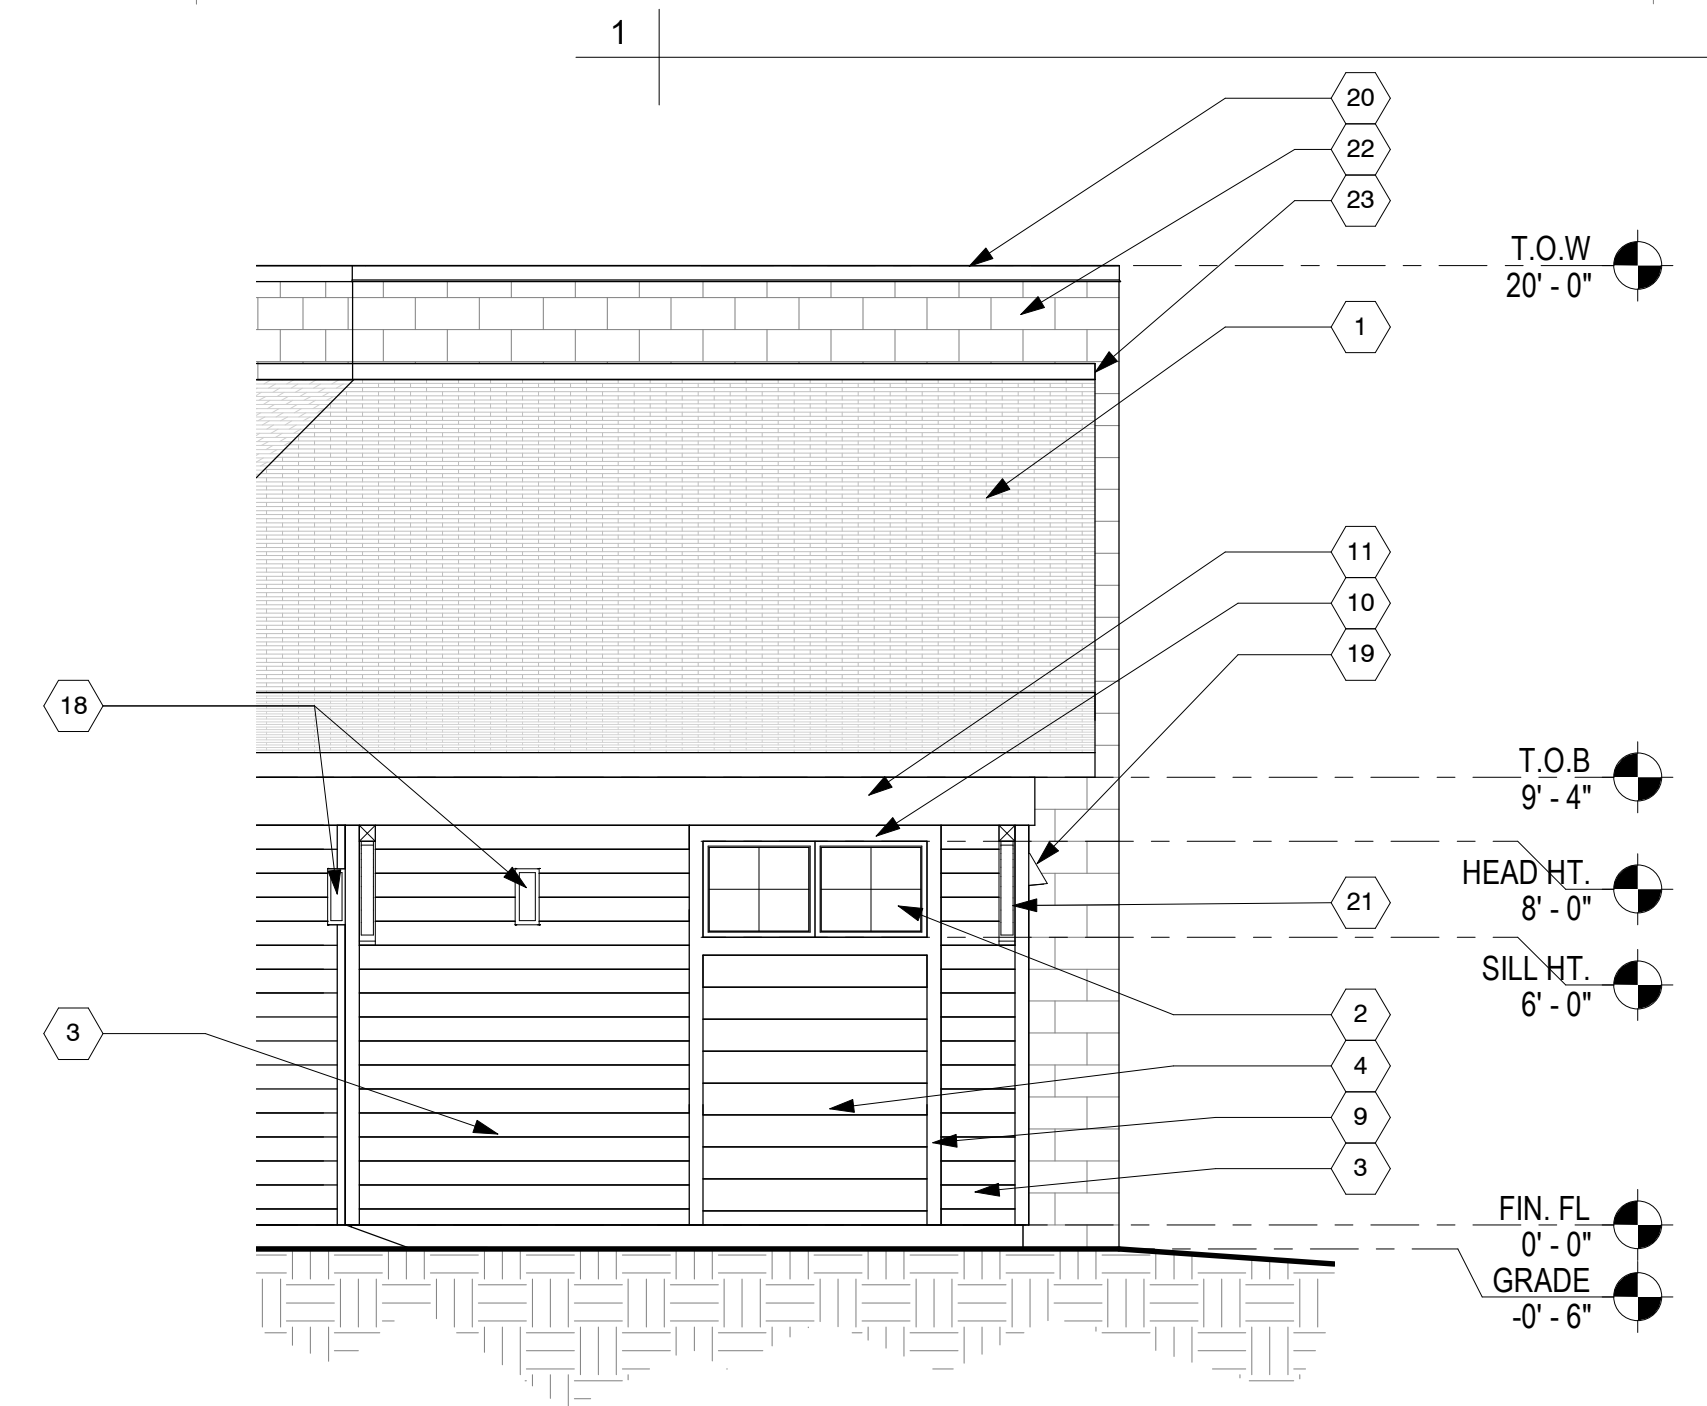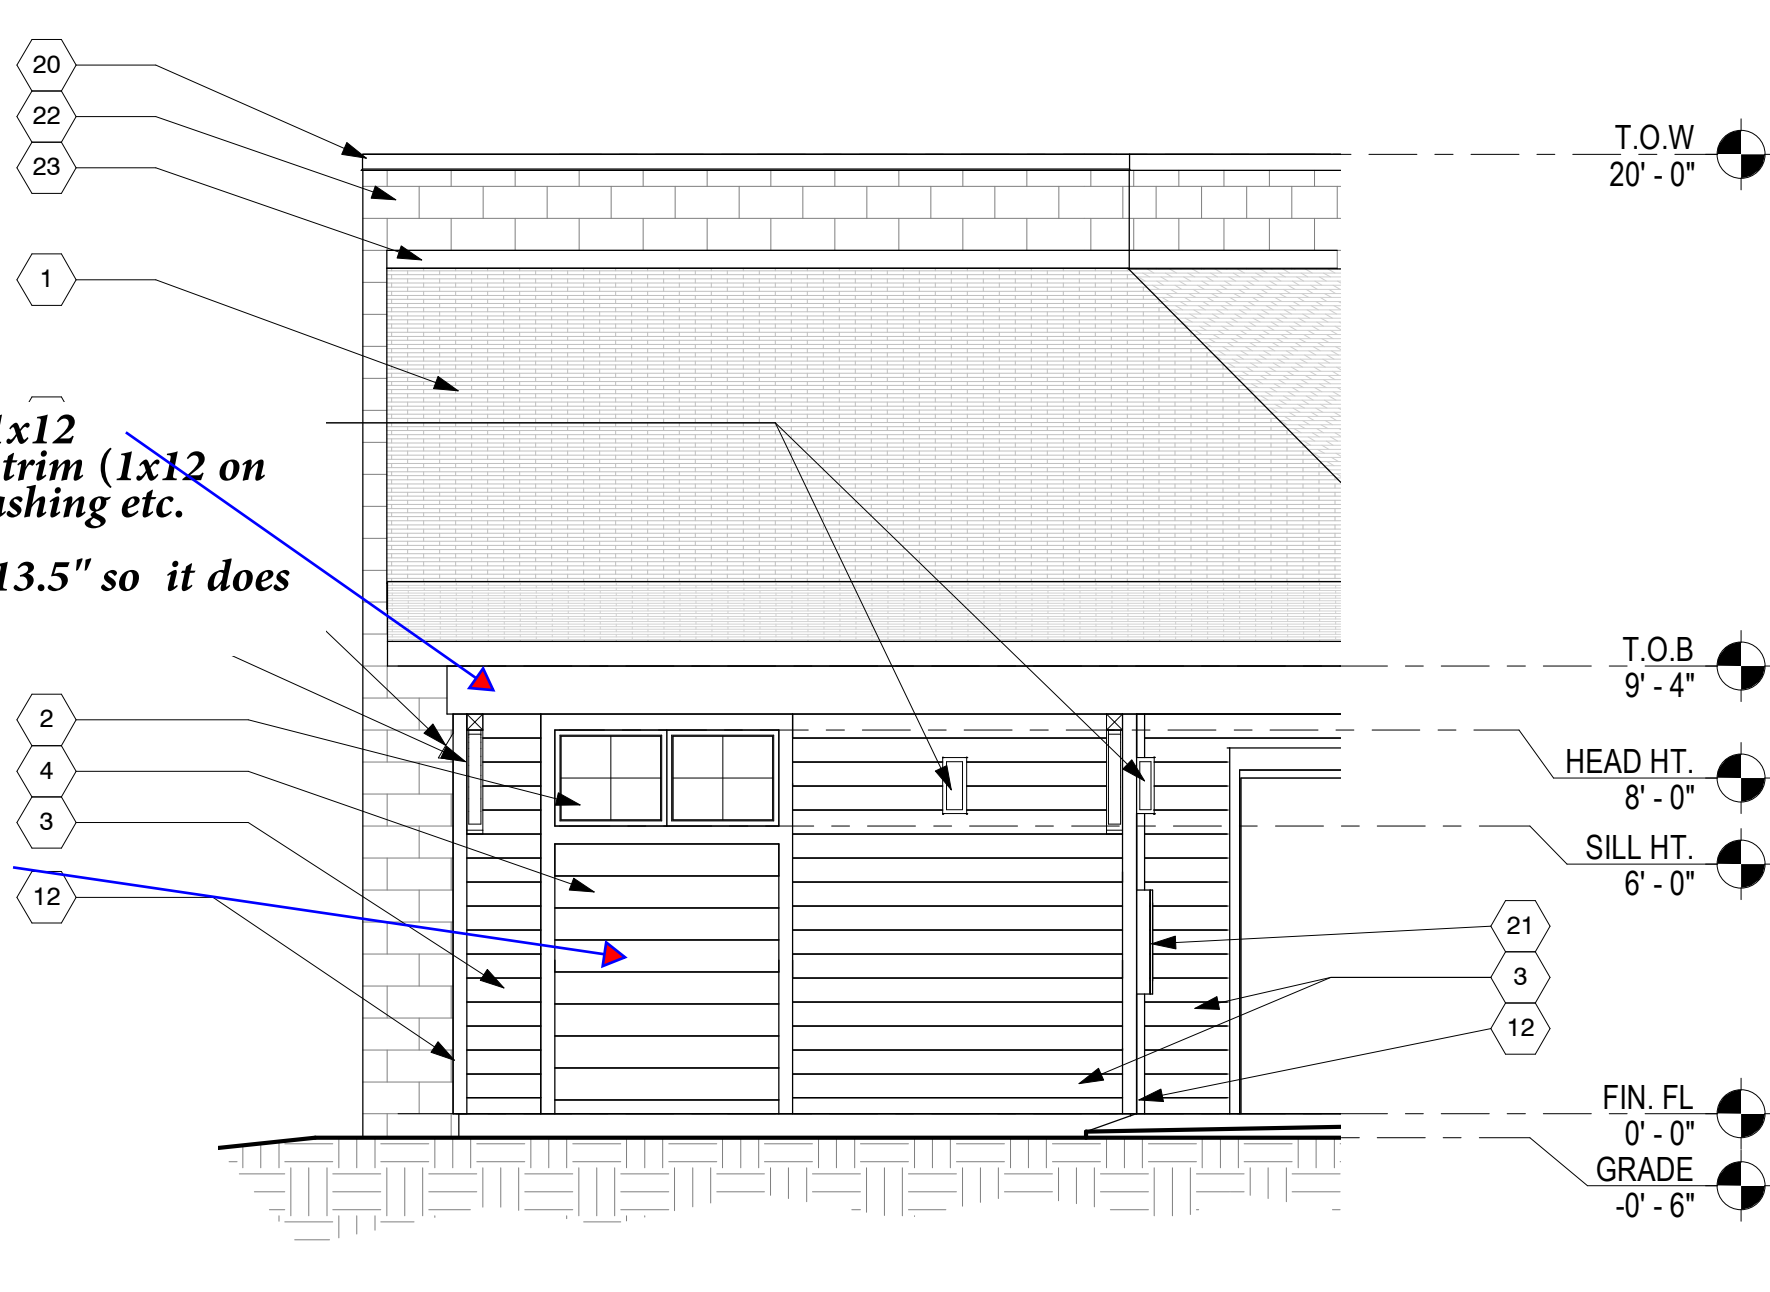

GENERAL NOTES

- ALL DIMENSIONS ARE TO FACE OF STUD OR CMU, UNLESS NOTED OTHERWISE.
- SEE STRUCTURAL DRAWINGS FOR MORE INFORMATION.
- SEE ROOF PLAN FOR MORE INFORMATION.
- ALL EXTERIOR COLORS TO BE APPROVED BY OWNER PRIOR TO ORDERING

SHEET NOTES

- ARCHITECTURAL SHINGLE ROOFING. SEE ROOF PLAN.
- AWNING WINDOWS WITH COLONIAL MUNTINS. SEE WINDOW SCHEDULE AND ARCHITECTURAL SPECIFICATIONS.
- PAINTED SIN EXPOSURE SMOOTH HARDIE PLANK SIDING PAINT COLOR: P-5. SEE EXTERIOR FINISH LEGEND.
- PAINTED 8" EXPOSURE SMOOTH HARDIE PLANK LAP SIDING. PAINT COLOR: P-7. SEE EXTERIOR FINISH LEGEND.
- MASONRY COLUMN BASE WITH FULL BRICK VENEER AND CONCRETE CAP. VENEER TO BE OWNER PROVIDED / CONTRACTOR INSTALLED. SEE DETAILS.
- STRUCTURAL COLUMN WRAPPED WITH PAINTED SMOOTH HARDIE PANEL AND TRIM. PAINT COLOR: P-6. SEE EXTERIOR FINISH LEGEND.
- PAINTED SMOOTH HARDIE PANEL BOARD WITH BATTENS AT 16" O.C. PAINT COLOR: P-6. SEE EXTERIOR FINISH LEGEND.
- PAINTED HOLLOW METAL DOOR AND FRAME. PAINT COLOR: P-7. SEE EXTERIOR FINISH LEGEND.
- 1" THICK X 3.5" WIDE PAINTED SMOOTH HARDIE TRIM PAINT COLOR: P-6. SEE EXTERIOR FINISH LEGEND.
- 1" THICK X 5.5" WIDE PAINTED SMOOTH HARDIE TRIM PAINT COLOR: P-6. SEE EXTERIOR FINISH LEGEND.
- 1" THICK X 11.25" WIDE PAINTED SMOOTH HARDIE TRIM. PAINT COLOR: P-6. SEE EXTERIOR FINISH LEGEND.
- 1" THICK X 3.5" WIDE PAINTED SMOOTH HARDIE TRIM. TYPICAL AT ALL CORNERS. PAINT COLOR: P-6. SEE EXTERIOR FINISH LEGEND.
- BEAM WRAPPED WITH PAINTED SMOOTH HARDIE PANEL. PAINT COLOR: P-6. SEE EXTERIOR FINISH LEGEND.
- ADA COMPLIANT OUTDOOR HI-LOW DRINKING FOUNTAIN WITH BOTTLE FILLER.
- PRE-FINISHED ALUMINUM ARCHITECTURAL GABLE LOUVER - BASIS OF DESIGN : GREEHECK, COLOR BONE WHITE. INSTALL PER FLORIDA PRODUCT APPROVAL DETAILS. SEE MECHANICAL DRAWINGS FOR ADDITIONAL REQUIREMENTS.
- PAINTED SMOOTH HARDIE PANEL BOARD SIDING BEHIND DRINKING FOUNTAINS AS REQUIRED. PAINT COLOR: P-7. SEE EXTERIOR FINISH SCHEDULE.
- 1" THICK X 3.5" WIDE PAINTED SMOOTH HARDIE TRIM. PAINT COLOR: P-7. SEE EXTERIOR FINISH SCHEDULE.
- DECORATIVE WALL SCONCE. SEE ELECTRICAL DRAWINGS.
- LED WALL PACK. SEE ELECTRICAL DRAWINGS
- PRE-FINISHED, CONTINUOUS STAINLESS STEEL PARAPET COPING.
- 4" X 30" X 30" DECORATIVE EXTERIOR BRACKET, TYPICAL. BASIS OF DESIGN: HB ELEMENTS BKT-3008-4-3.5M.
- PAINTED CMU
- CONTINUOUS HEADWALL FLASHING AT ROOF / WALL CONNECTION. SEE TYPICAL FLASHING DETAIL FOR MORE INFORMATION.

DATE: 10/19/2023
ERICA AZORIN CRAIG
FL REG. NO. AR101635

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED ON THE DATE ADJACENT TO THE SEAL. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED FORMS AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

NO.	DATE	REVISION DESCRIPTION

PROJECT NO:

23005.001

DATE: 10/19/2023

DESIGNED BY:

DRAWN BY:

CHECKED BY:

DRAWING TITLE:

EXTERIOR ELEVATION
- CONTINUED

SHEET NO:

A-202

EXTERIOR FINISH LEGEND

TYPE	DESCRIPTION	MANUFACTURER	STYLE / MODEL	COLOR / FINISH	NOTES
BV - 1	BRICK VENEER				
P - 5	EXTERIOR WALL PAINT	SHERWIN WILLIAMS	SEE ARCHITECTURAL SPECIFICATION	2857 PEACE YELLOW / FLAT	1
P - 6	EXTERIOR WALL PAINT	SHERWIN WILLIAMS	SEE ARCHITECTURAL SPECIFICATION	7551 GREEK VILLA / FLAT	2
P - 7	EXTERIOR WALL PAINT	SHERWIN WILLIAMS	SEE ARCHITECTURAL SPECIFICATION	7019 GAUNTLET GRAY / FLAT	3

GENERAL NOTES:

GENERAL NOTES:



- SEE EXTERIOR ELEVATIONS FOR MORE INFORMATION

SCHEDULE NOTES:

- PAINTED 5" EXPOSURE HARDIE BOARD PLANK SIDING.
- PAINTED HARDIE BOARD TRIM, HARDIE PANEL BOARD AND BATTENS, AND EXPOSED CMU.
- PAINTED 8" EXPOSURE HARDIE BOARD PLANK SIDING AND EXTERIOR DOORS.

PERMIT BID SET 10-19-2023

©2022 Boggs Design Partners, LLC. All rights reserved. This document, together with the concepts and designs presented herein, is an instrument of service, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of any information contained herein, without consultation or written authorization and adaptation by Boggs Design Partners, LLC, shall be without liability to Boggs Design Partners, LLC.


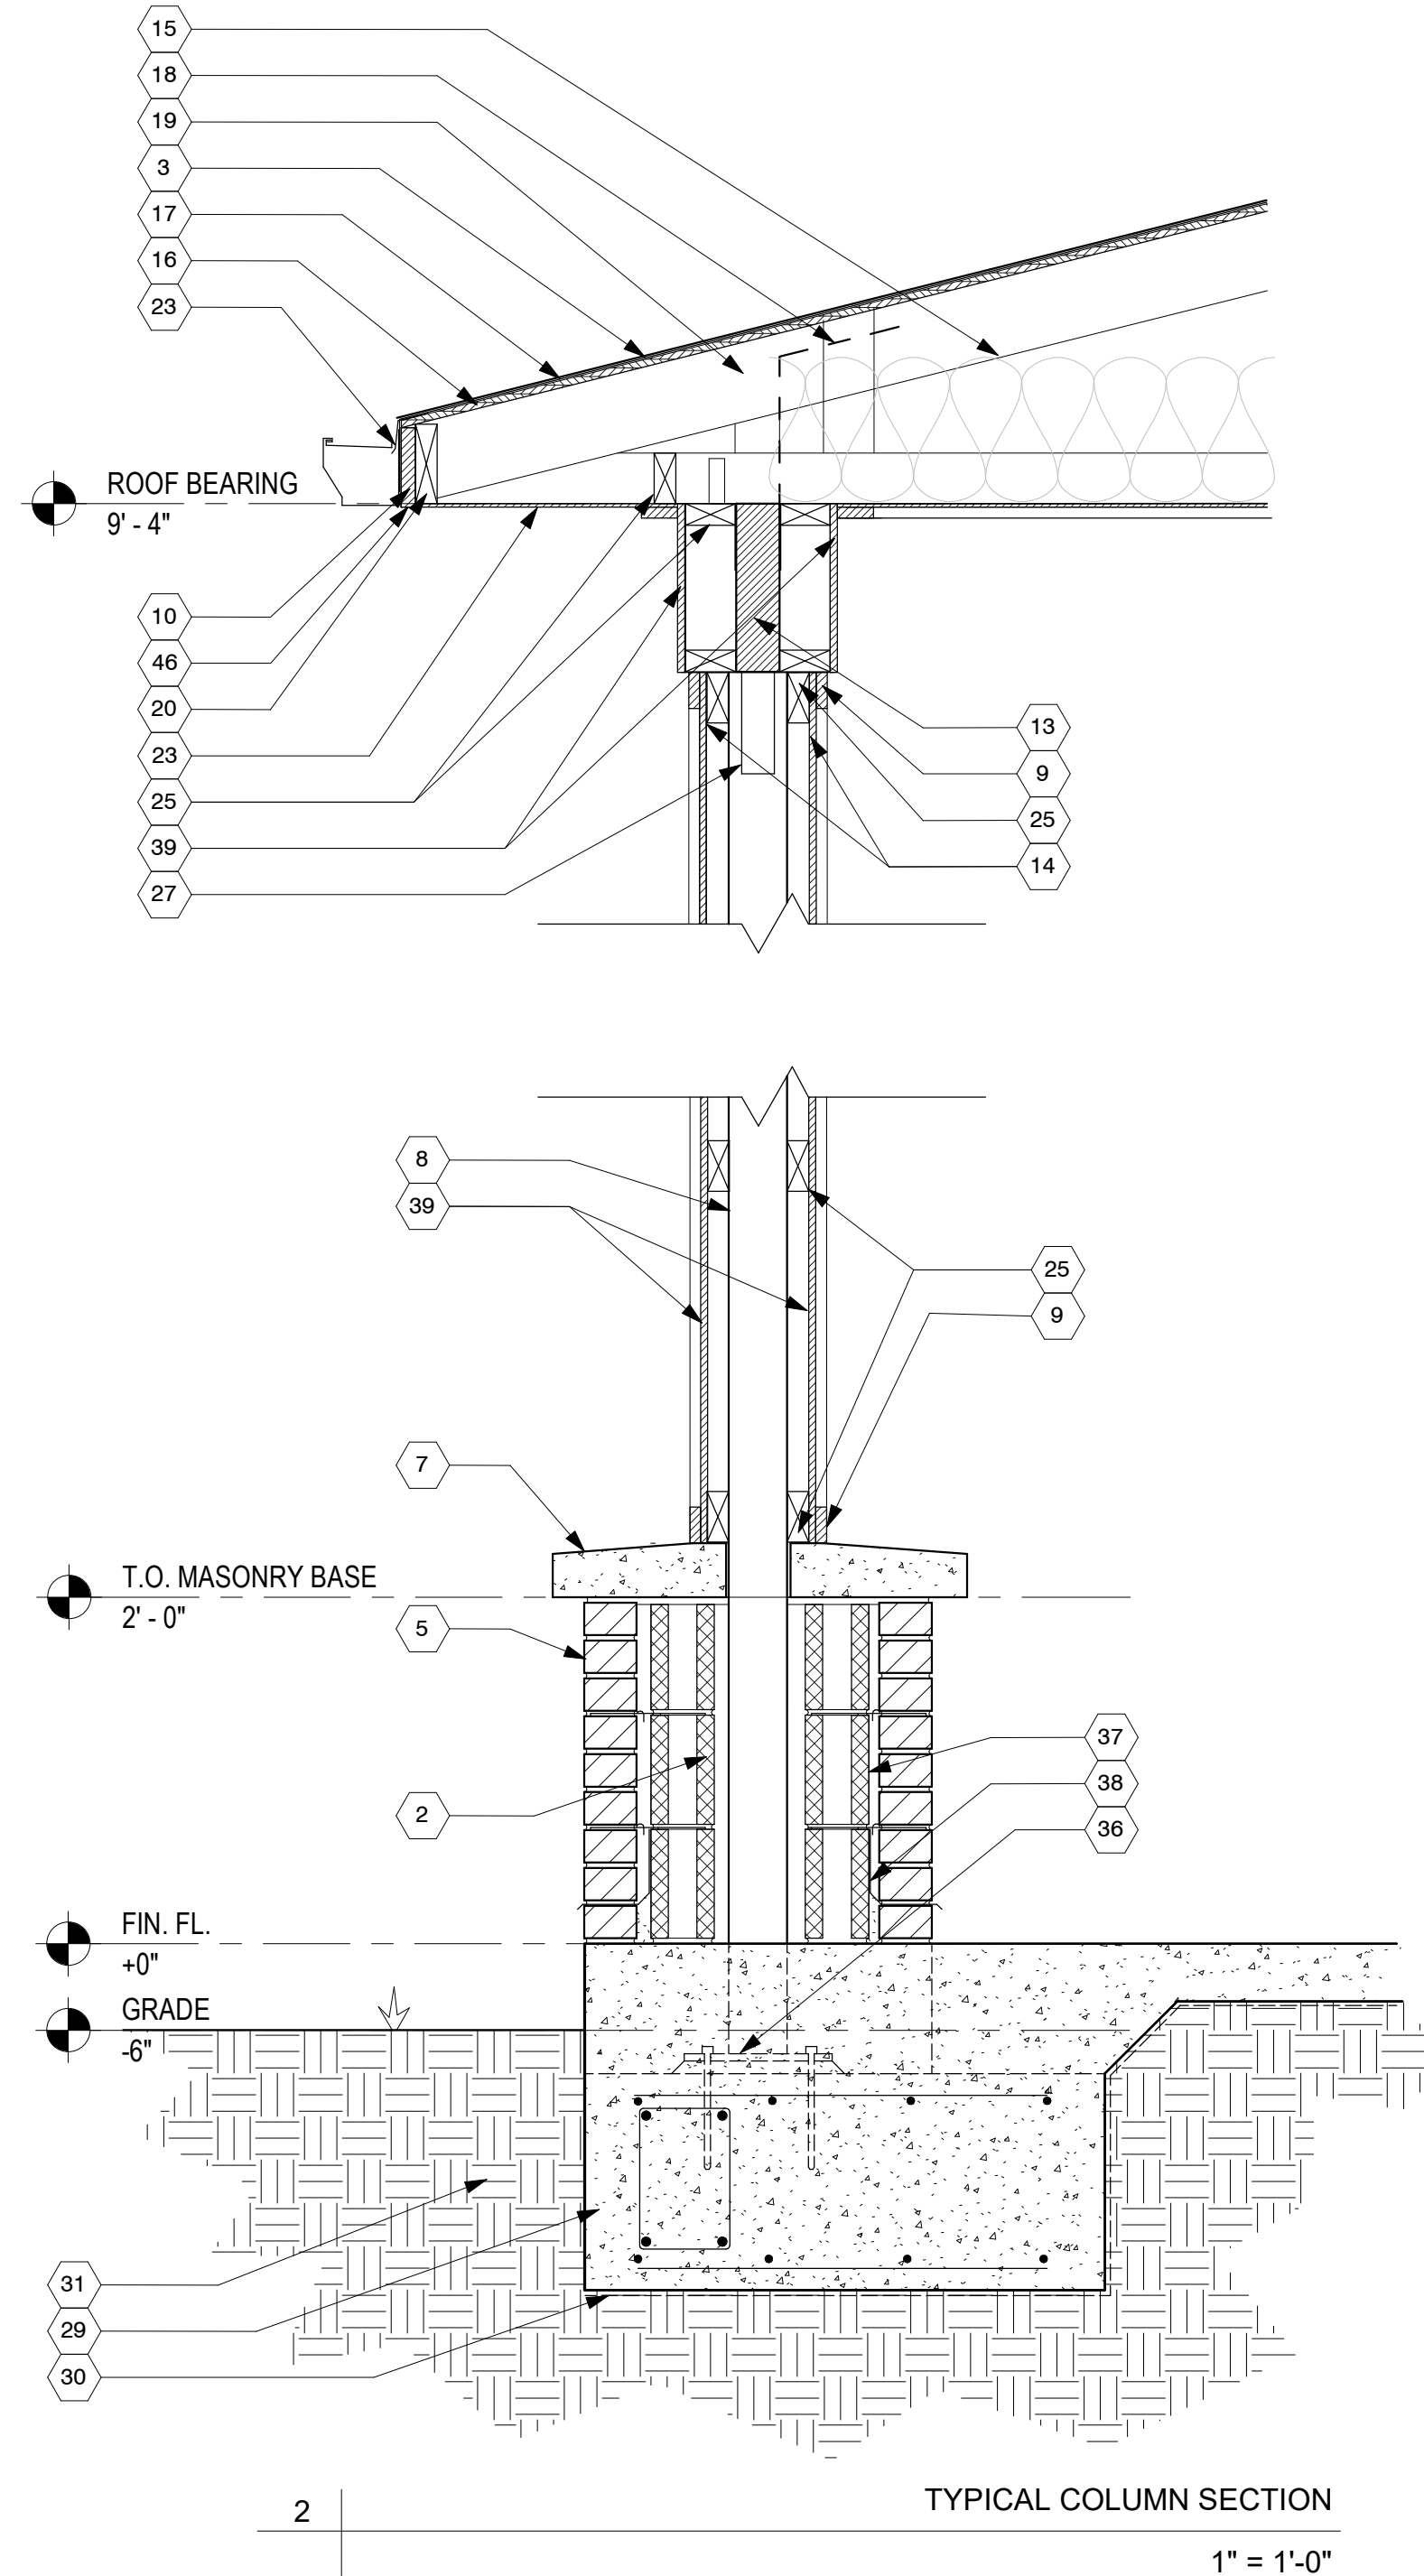
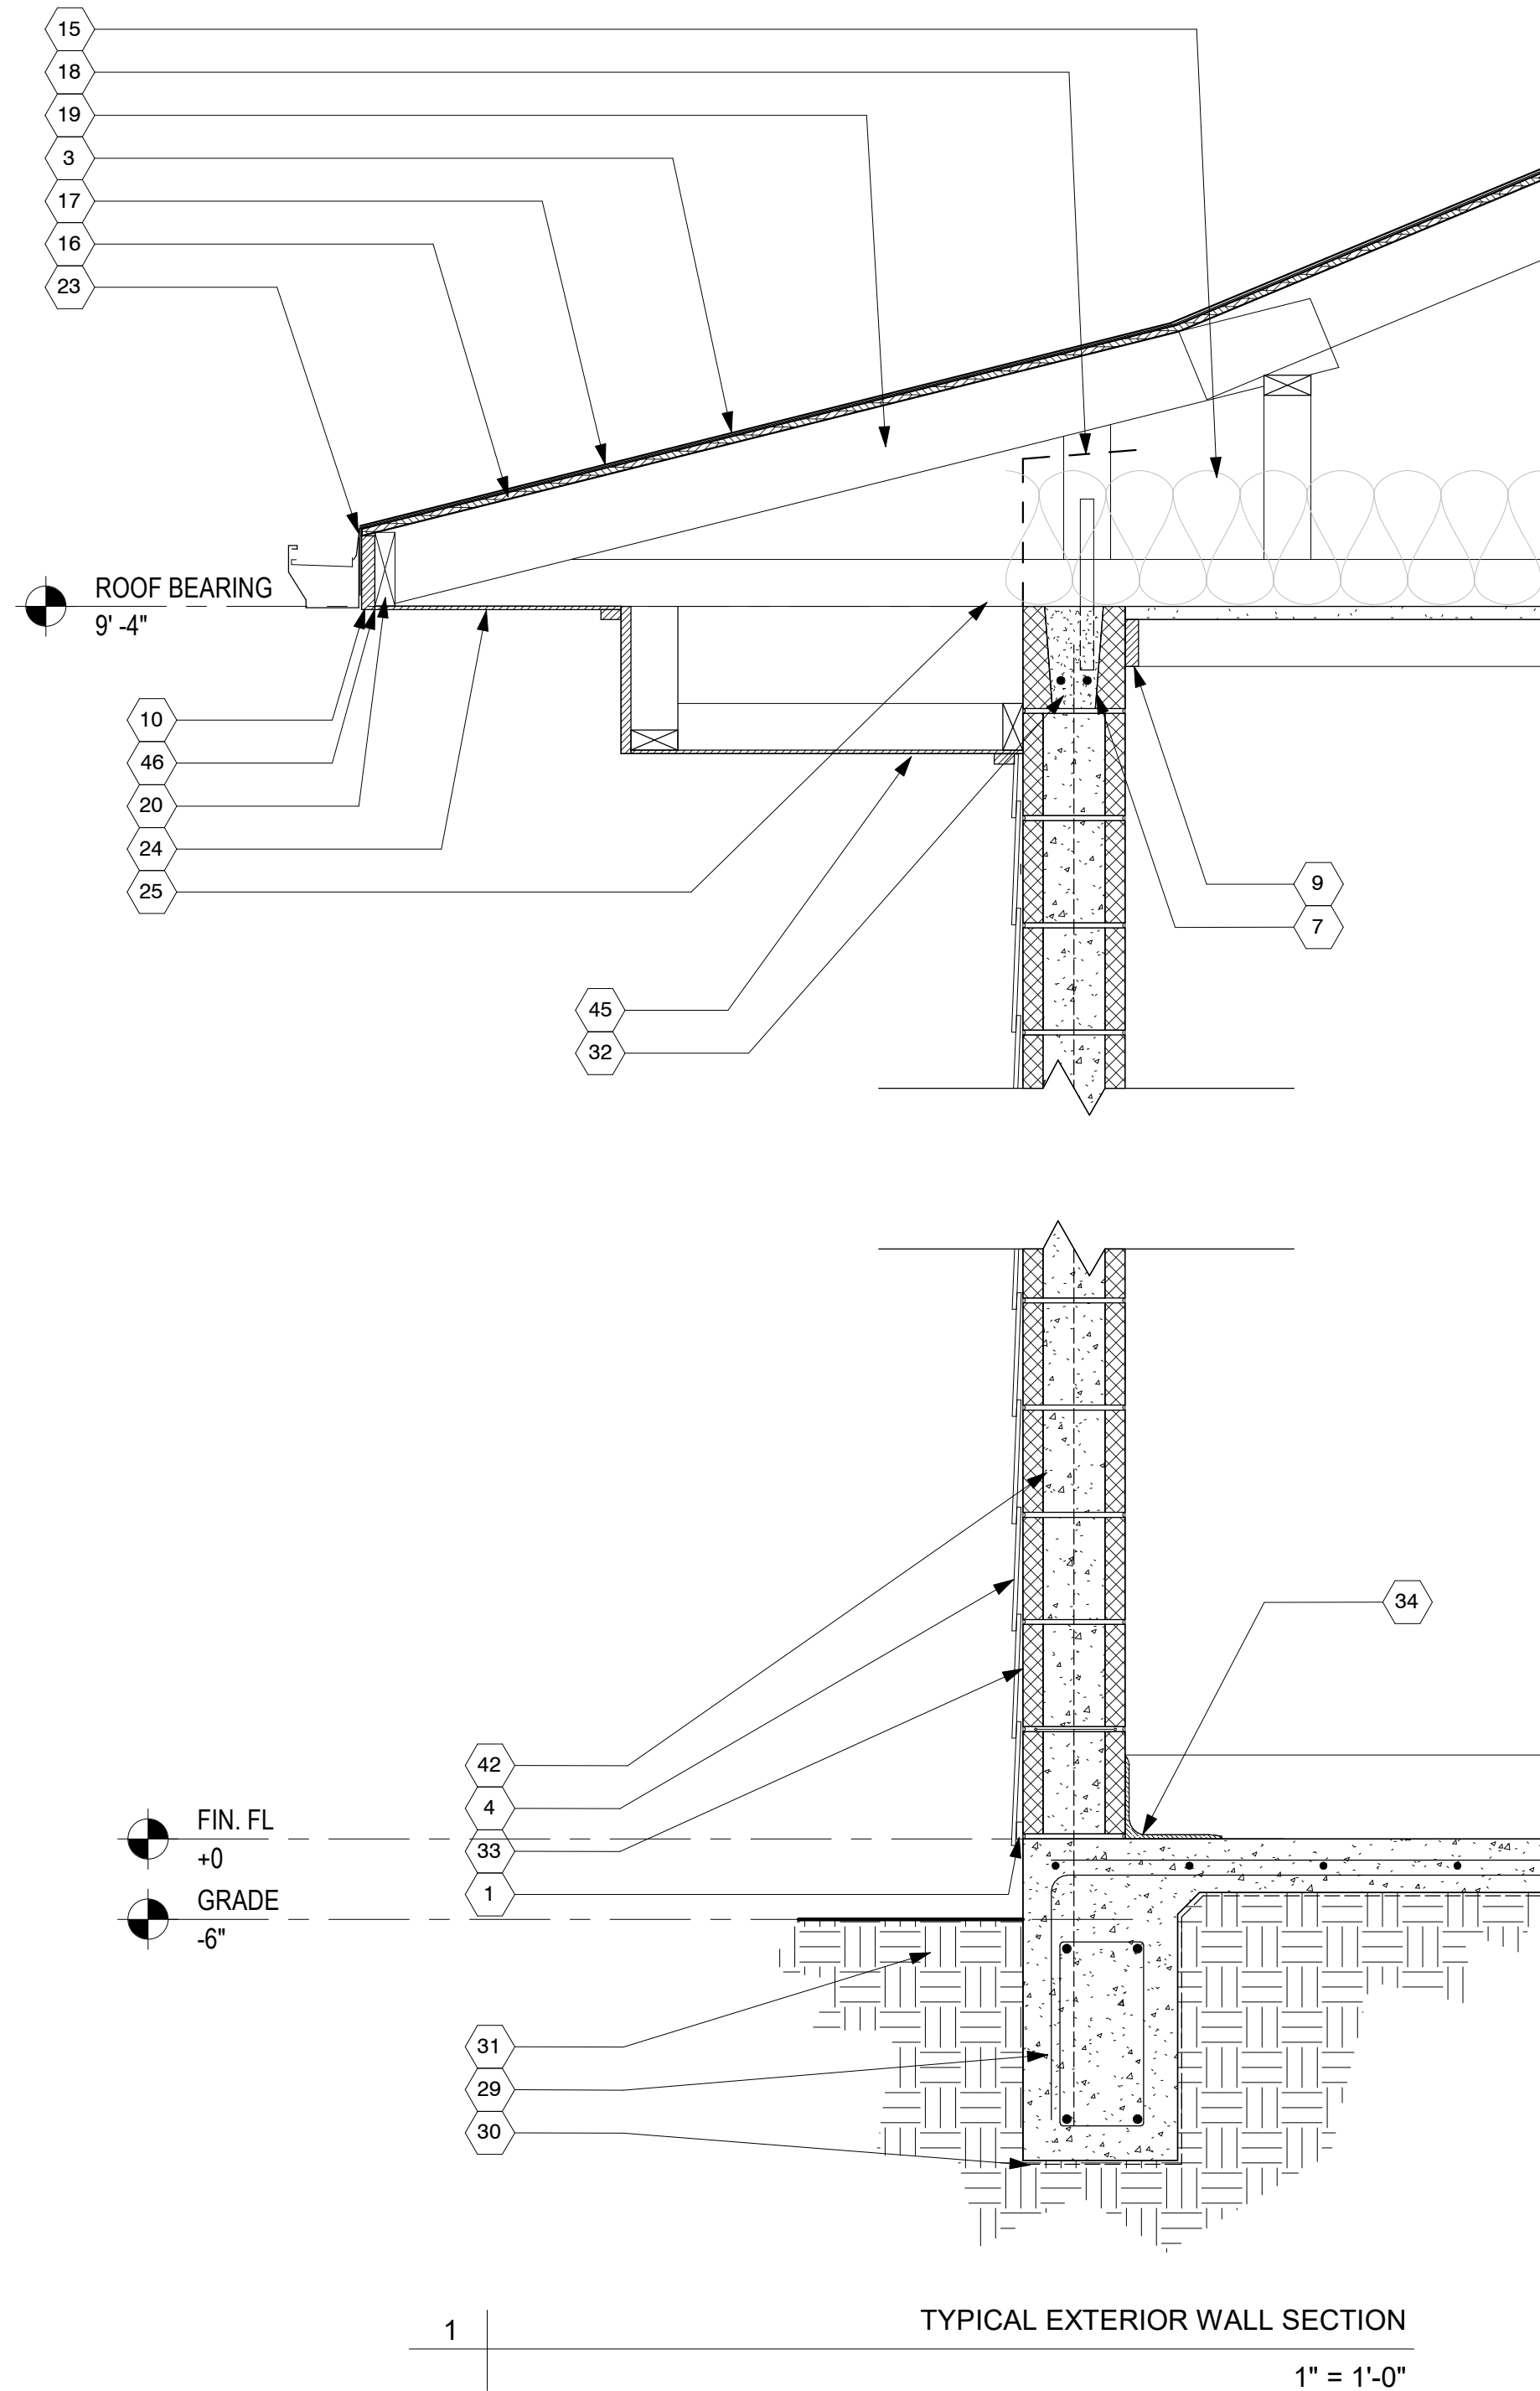


GENERAL NOTES:

- REFER TO FLOOR PLANS, ROOF PLAN, RCP, EXTERIOR ELEVATIONS, AND STRUCTURAL FOR ADDITIONAL INFORMATION

SHEET NOTES

- STARTER STRIP
- 4" X 8" X 16" NOMINAL CMU
- ASPHALT SHINGLE ROOFING, SEE ROOF PLAN.
- PAINTED SMOOTH, HARDIE PLANK SIDING, SEE EXTERIOR ELEVATIONS.
- BRICK VENEER WITH MASONRY TIES. VENEER TO BE OWNER PROVIDED / CONTRACTOR INSTALLED.
- MORTAR SCRATCH COAT.
- PRE-CAST GAP WITH SLOPED TOP, CONTRACTOR TO SUBMIT SHOP DRAWINGS FOR ARCHITECT'S REVIEW.
- STEEL COLUMN, SEE STRUCTURAL.
- PAINTED SMOOTH 3 1/2" X 1" HARDIE TRIM.
- PAINTED SMOOTH 5 1/2" X 1" HARDIE TRIM.
- PAINTED SMOOTH 11 1/4" X 1" HARDIE TRIM.
- PAINTED SMOOTH 7 1/4" X 1" HARDIE TRIM.
- WOOD BEAM, SEE STRUCTURAL DRAWINGS.
- PAINTED SMOOTH, HARDIE PANEL BOARD.
- R-38 BATT INSULATION.
- PLYWOOD ROOF SHEATHING, SEE STRUCTURAL.
- ROOF UNDERLAYMENT PER MANUFACTURER'S INSTALLATION INSTRUCTIONS, MUST BE COMPATIBLE WITH WARRANTY.
- INSULATION Baffle BETWEEN TRUSSES, TYPICAL.
- PRE-ENGINEERED WOOD ROOF TRUSSES, CONTRACTOR TO PROVIDE SHOP DRAWINGS FOR ARCHITECT'S REVIEW PRIOR TO ORDERING.
- 2X6 SUB FASCIA.
- PAINTED SMOOTH, 5 1/2" X 3/4" HARDIE TRIM FASCIA.
- PAINTED SMOOTH, 3 1/2" X 3/4" HARDIE TRIM.
- DROP EDGE FLASHING PER MANUFACTURER'S STANDARD DETAILS.
- PAINTED SMOOTH, VENTED HARDIE SOFFIT PANEL.
- 2 X BLOCKING AS REQUIRED.
- 1 X BLOCKING AS REQUIRED.
- POST TO BEAM CONNECTION SEE STRUCTURAL.
- MASONRY BASE, SEE STRUCTURAL.
- REINFORCED CONCRETE SLAB, SEE STRUCTURAL.
- 10 MIL VAPOR BARRIER.
- CLEAN, TERMITE TREATED, COMPACTED FILL.
- BOND BEAM, SEE STRUCTURAL.
- WEATHER RESISTANT BARRIER.
- FLOOR BASE, SEE FINISH SCHEDULE.
- PROVIDE CLEAR SPACE IN TRUSSES FOR MECHANICAL EQUIPMENT. COORDINATE WITH STRUCTURAL AND MECHANICAL.
- SEE STRUCTURAL FOR COLUMN BASE PLATES DETAILS.
- 1" AIR GAP.
- FLASHING WITH WEEP HOLES AT 2' - 0" O.C..
- 1/2" PLYWOOD.
- 4" X 30" X 30" DECORATIVE EXTERIOR BRACKET, BASIS OF DESIGN: HB ELEMENTS BKT - 3008 - 4 - 3.5M.
- SLOPED PRE-FINISHED, CONTINUOUS SHEET METAL PARAPET COPING.
- 8" X 8" X 16" NOMINAL CMU
- PROVIDE CONTINUOUS HEADWALL FLASHING AT WALL ROOF INTER SECTION PER MANUFACTURER'S INSTALLATION INSTRUCTIONS, MUST BE COMPATIBLE WITH WARRANTY.
- COPING BLOCKING.
- PAINTED SMOOTH, NON-VENTED HARDIE4 SOFFIT, PROVIDE BLOCKING.
- EXTENDED TRIM BOARD MIN 3/8" BEYOND HORIZONTAL SOFFIT BOARD TO CREATE DRIP CONDITION AND SEAL JOINT.

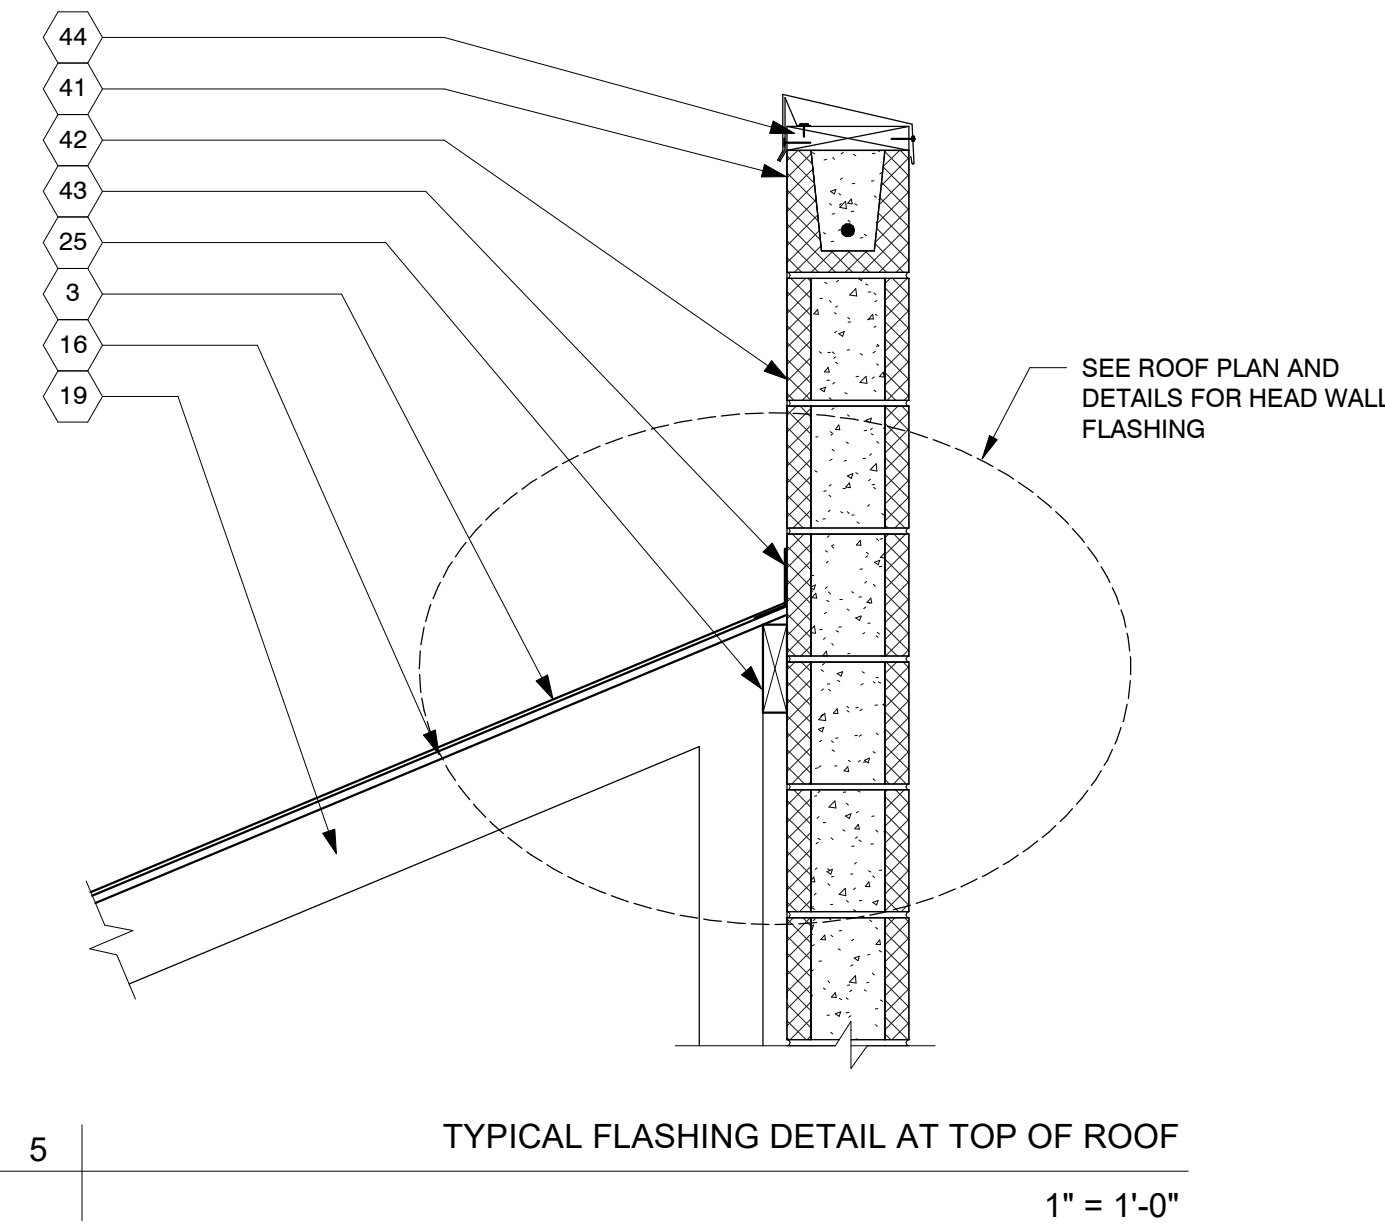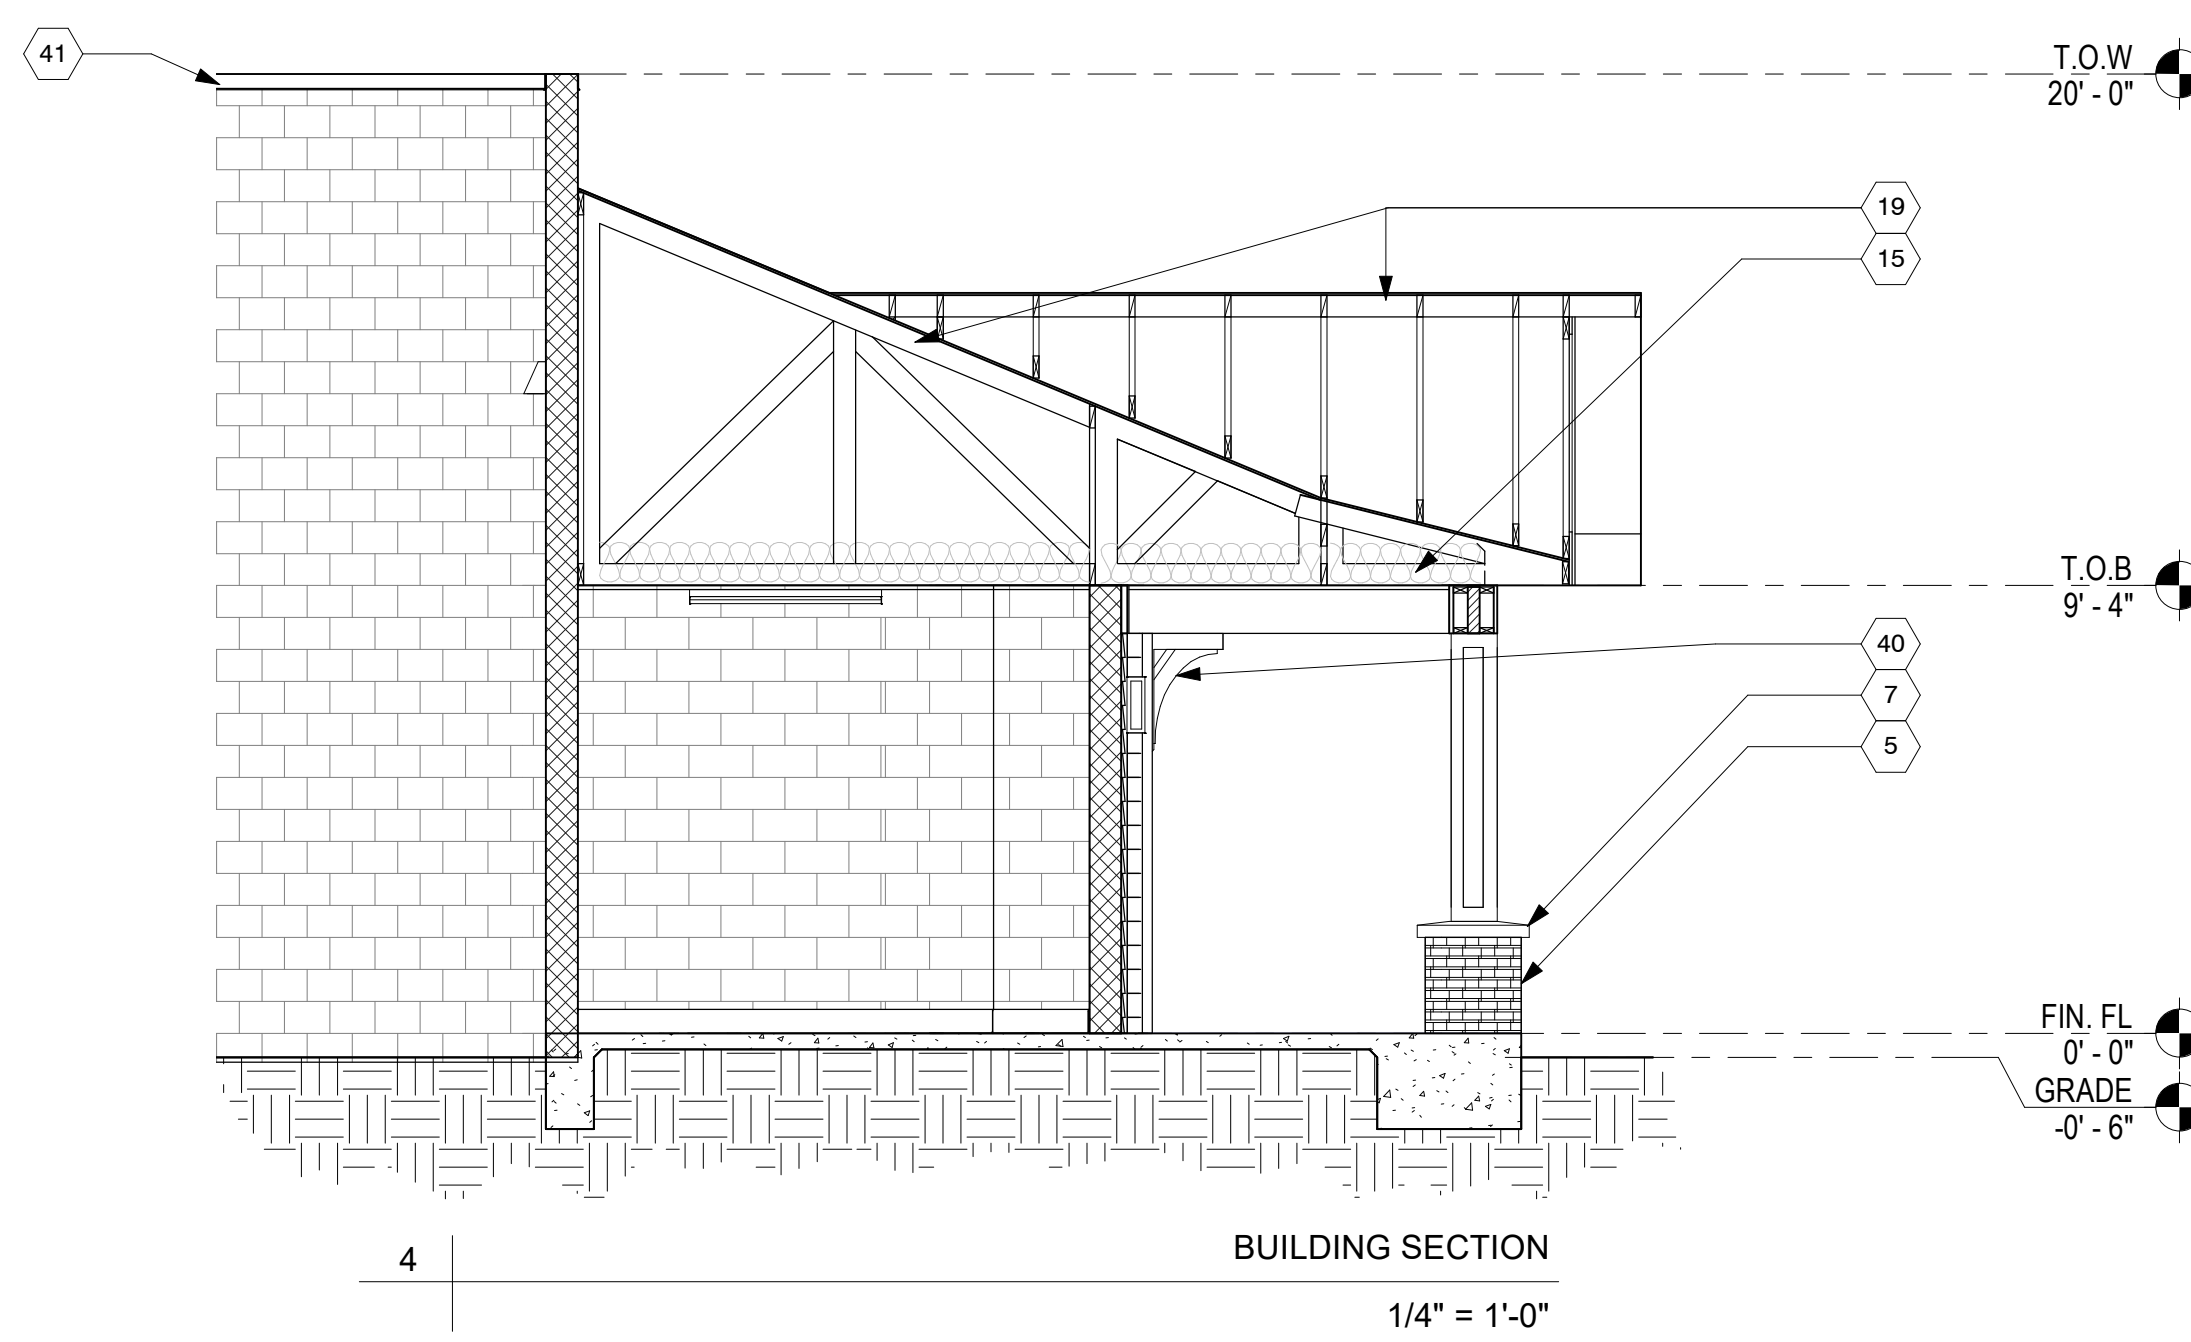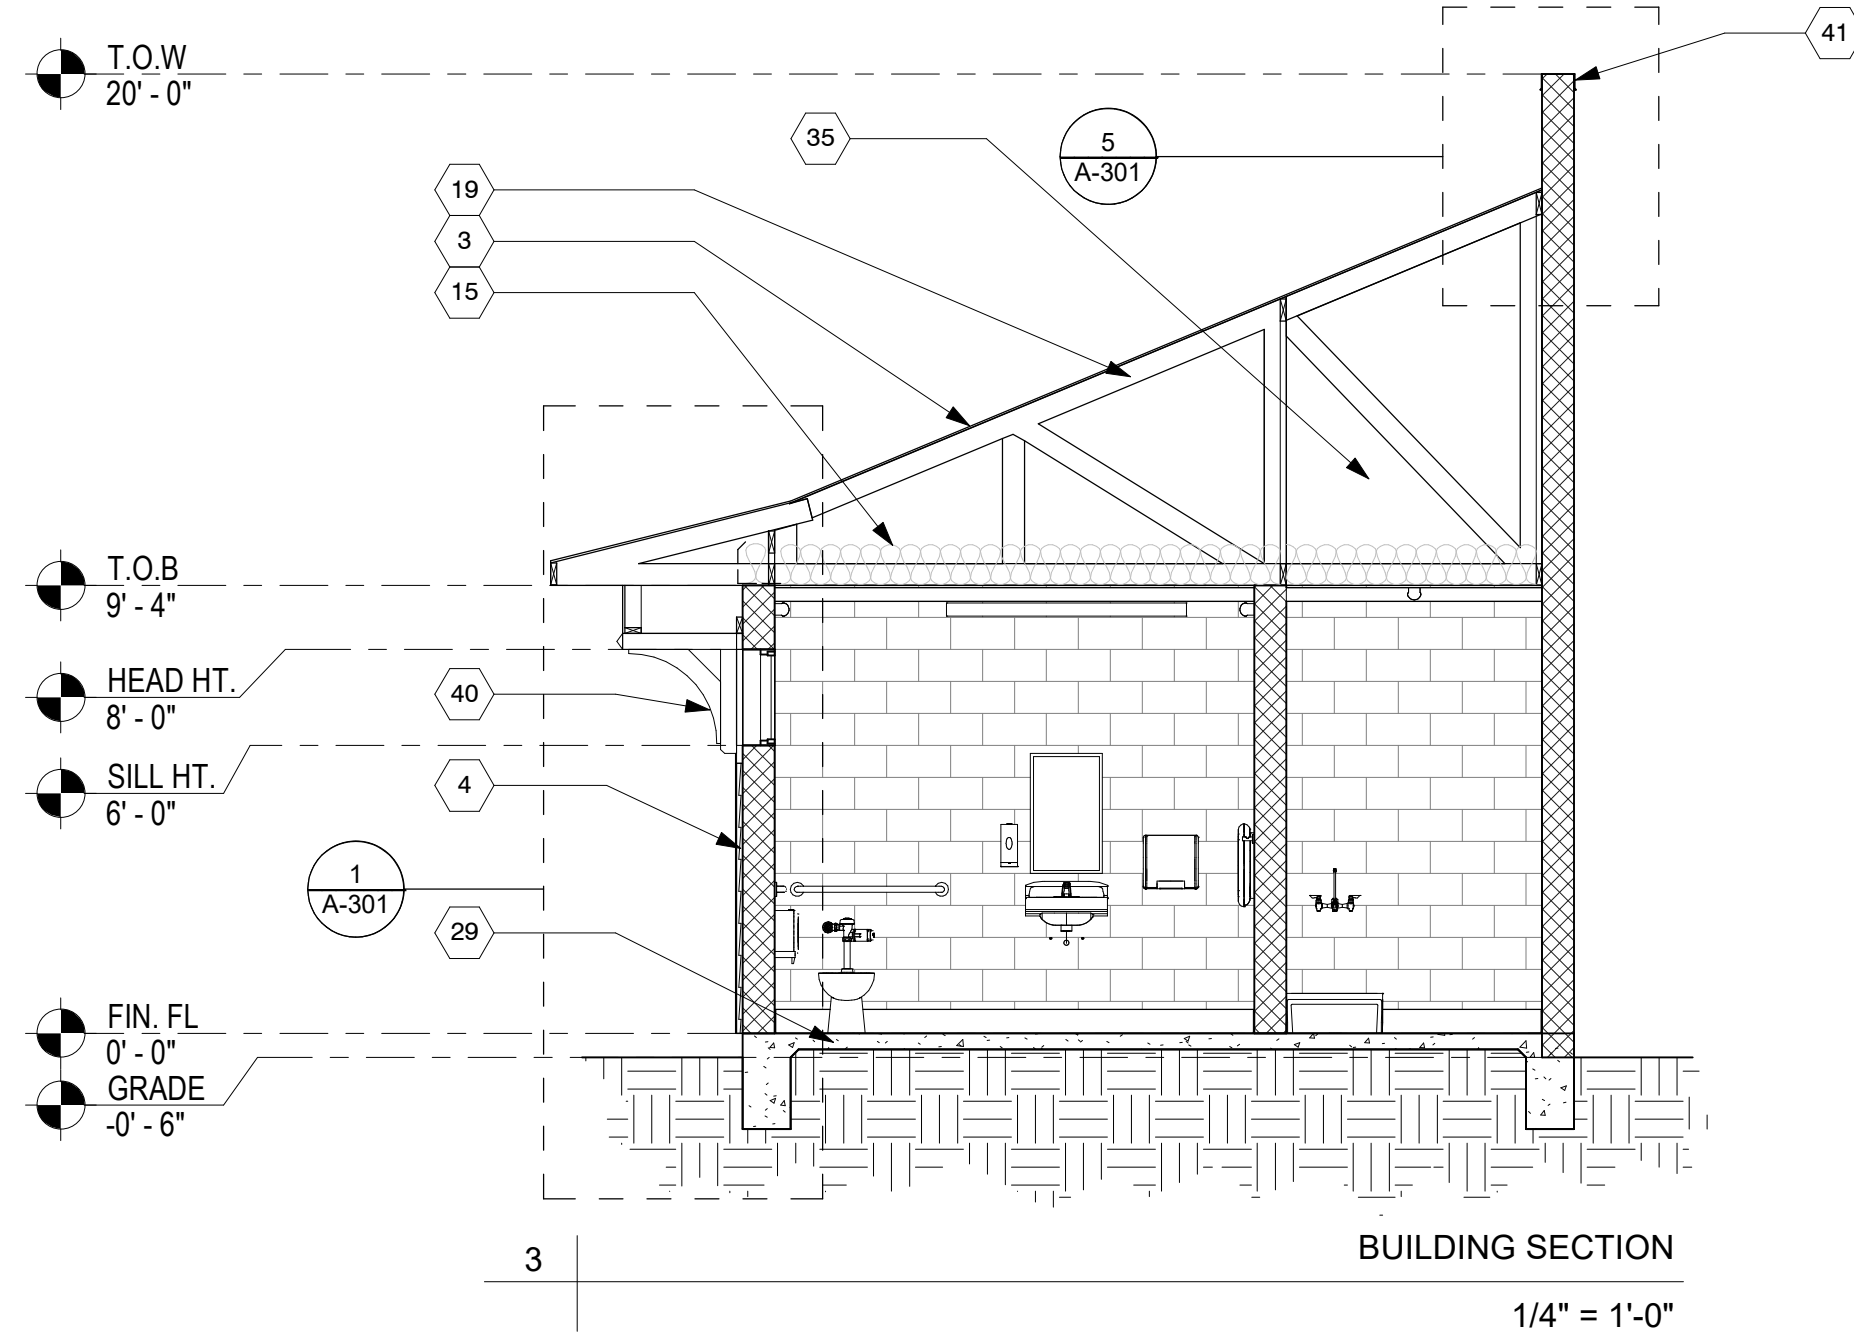

NO.	DATE	REVISION DESCRIPTION

PROJECT NO:
23005.001

DATE: 10/19/2023

DESIGNED BY:

DRAWN BY:

CHECKED BY:

DRAWING TITLE:


BUILDING SECTIONS

SHEET NO:

A-301


PERMIT BID SET 10-19-2023

©2022 Boggs Design Partners, LLC. All rights reserved. This document, together with the concepts and designs presented herein, is an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document, without consultation or written authorization and adaptation by Boggs Design Partners, LLC, shall be without liability to Boggs Design Partners, LLC.

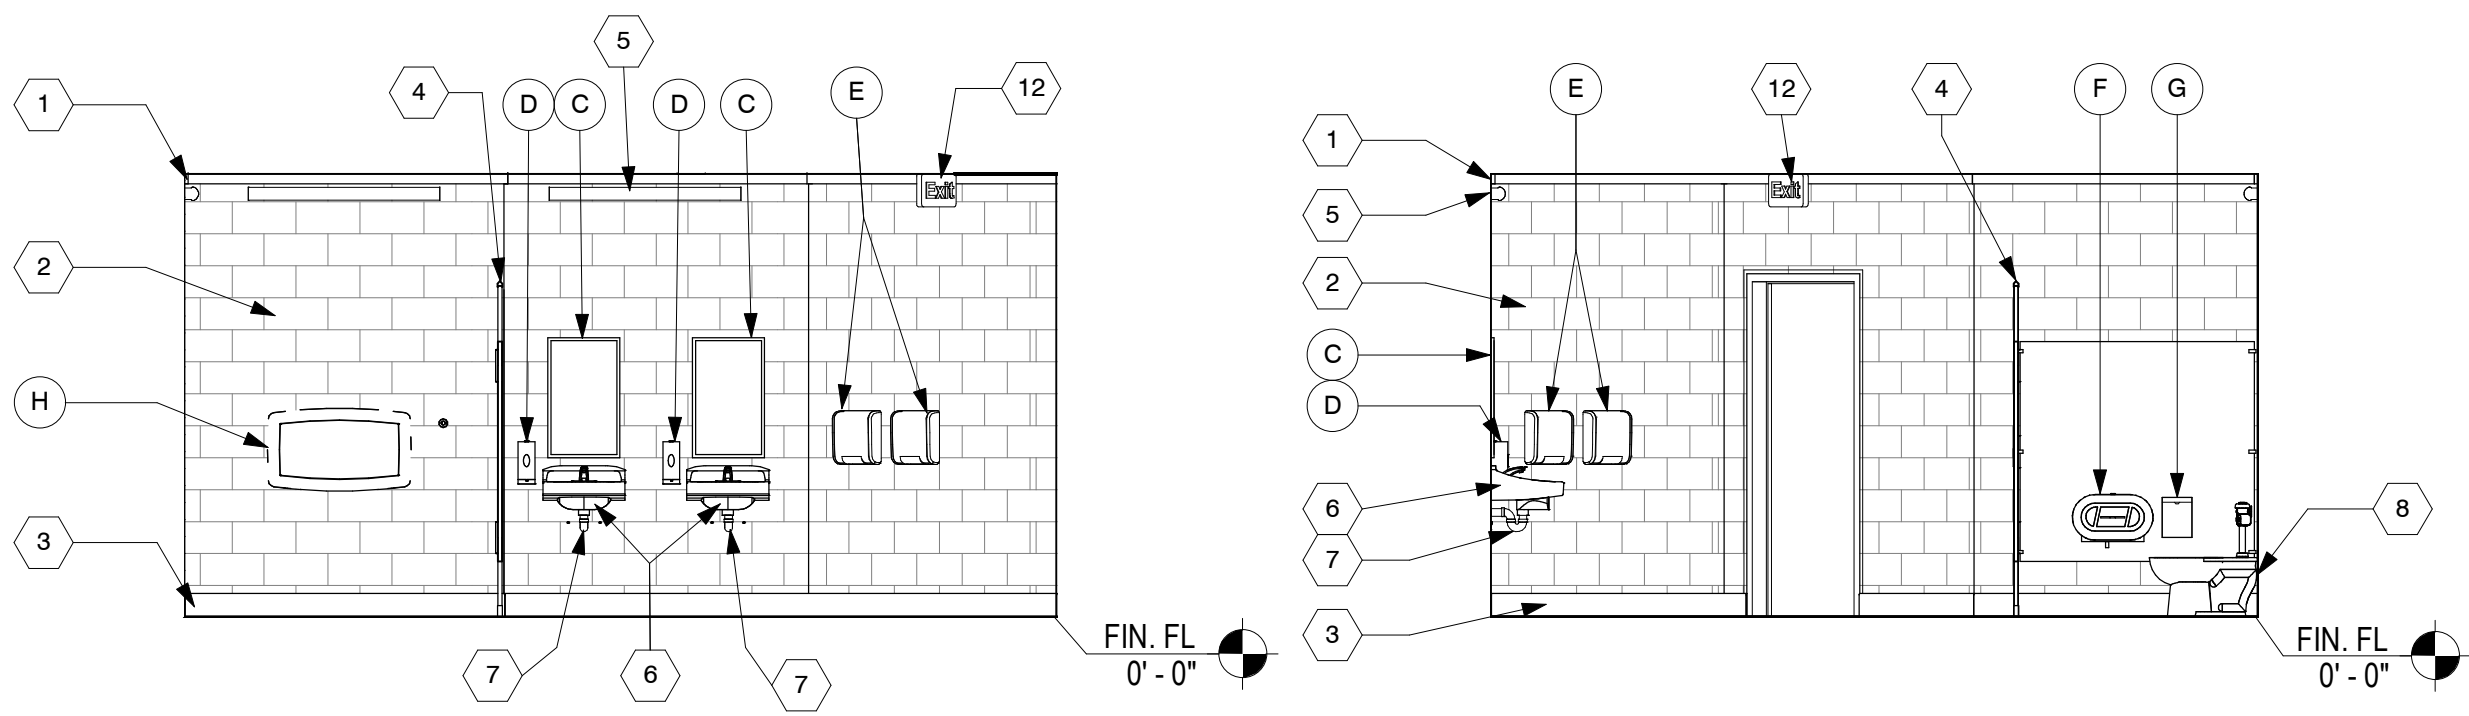


1 INTERIOR ELEVATION
1/4" = 1'-0"

4 INTERIOR ELEVATION
1/4" = 1'-0"

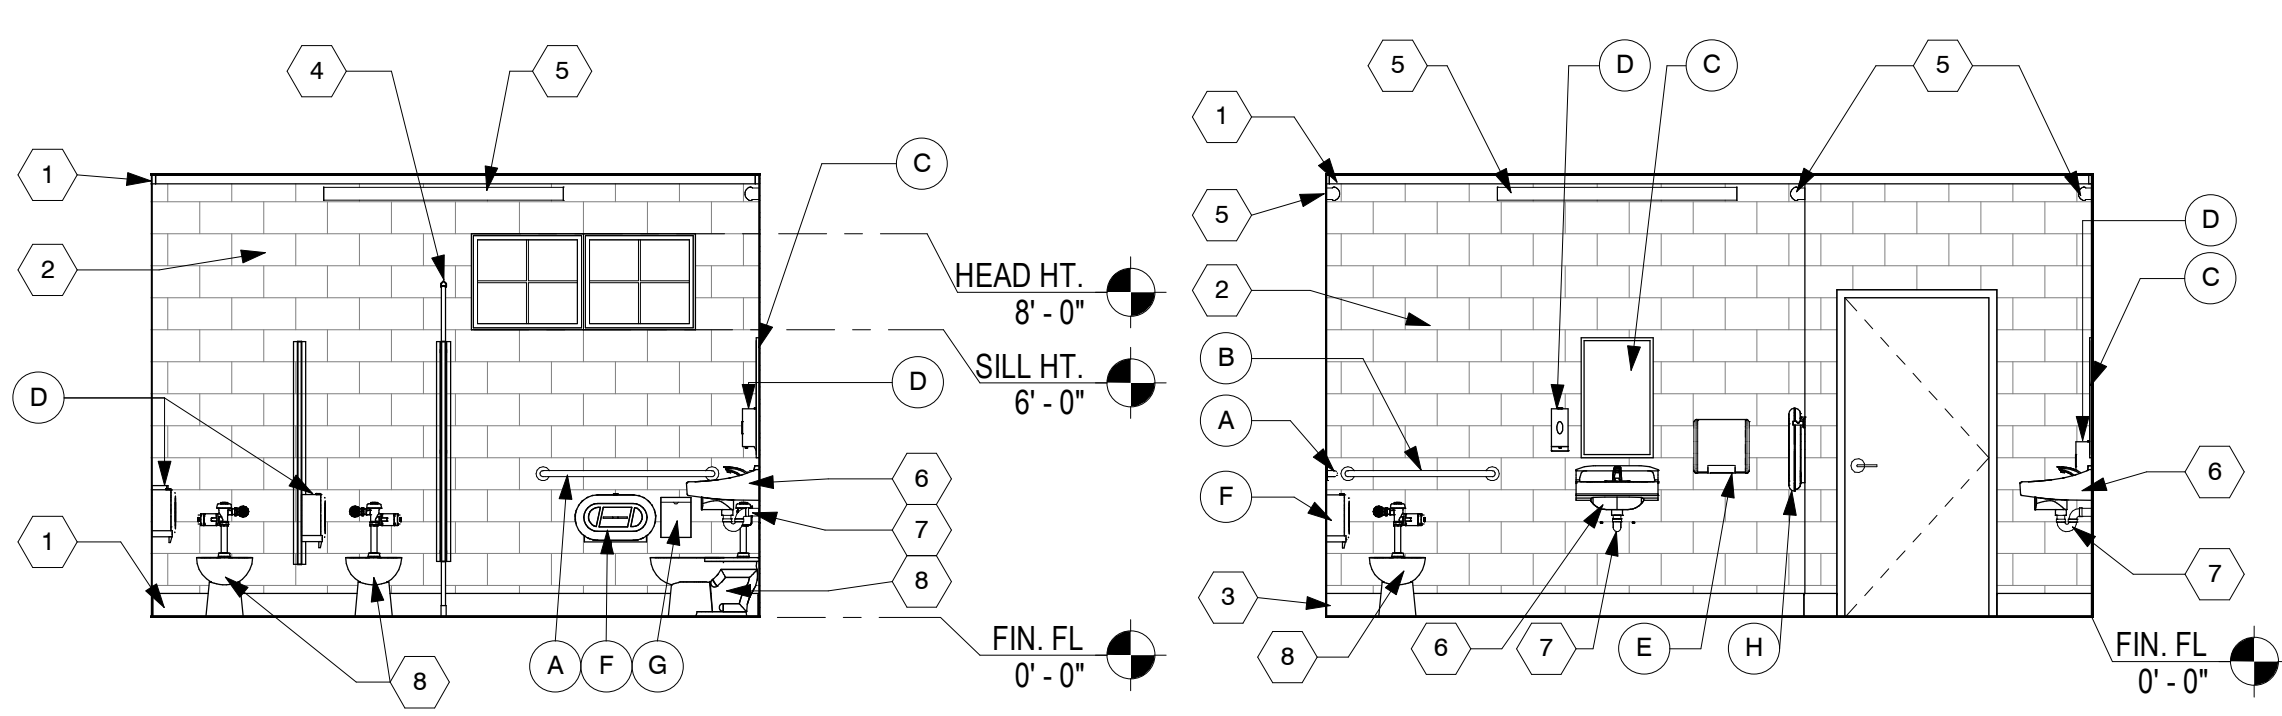


3 INTERIOR ELEVATION
1/4" = 1'-0"


2 INTERIOR ELEVATION
1/4" = 1'-0"

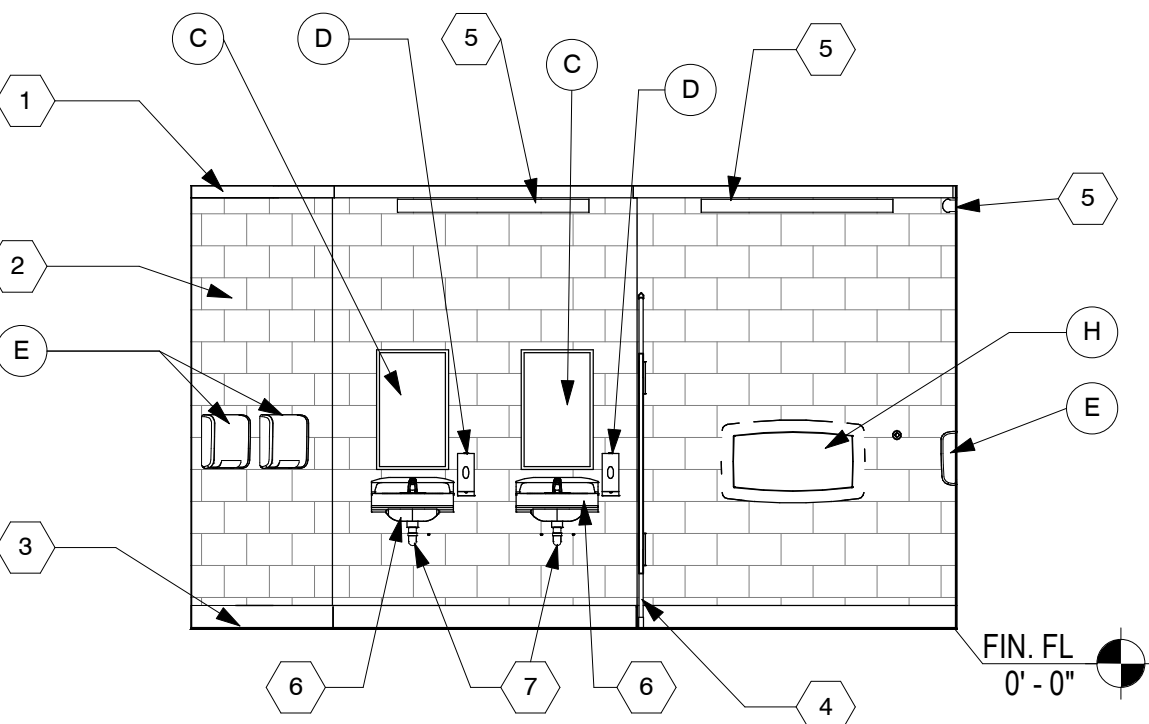


5 INTERIOR ELEVATION
1/4" = 1'-0"

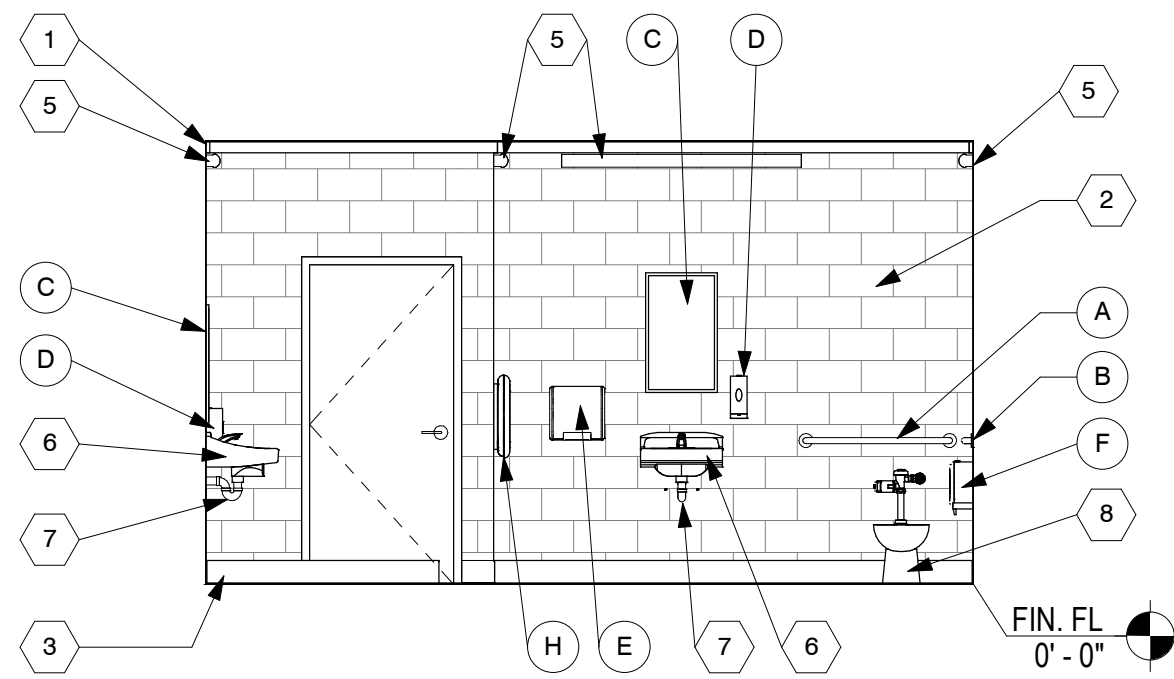


6 INTERIOR ELEVATION
1/4" = 1'-0"

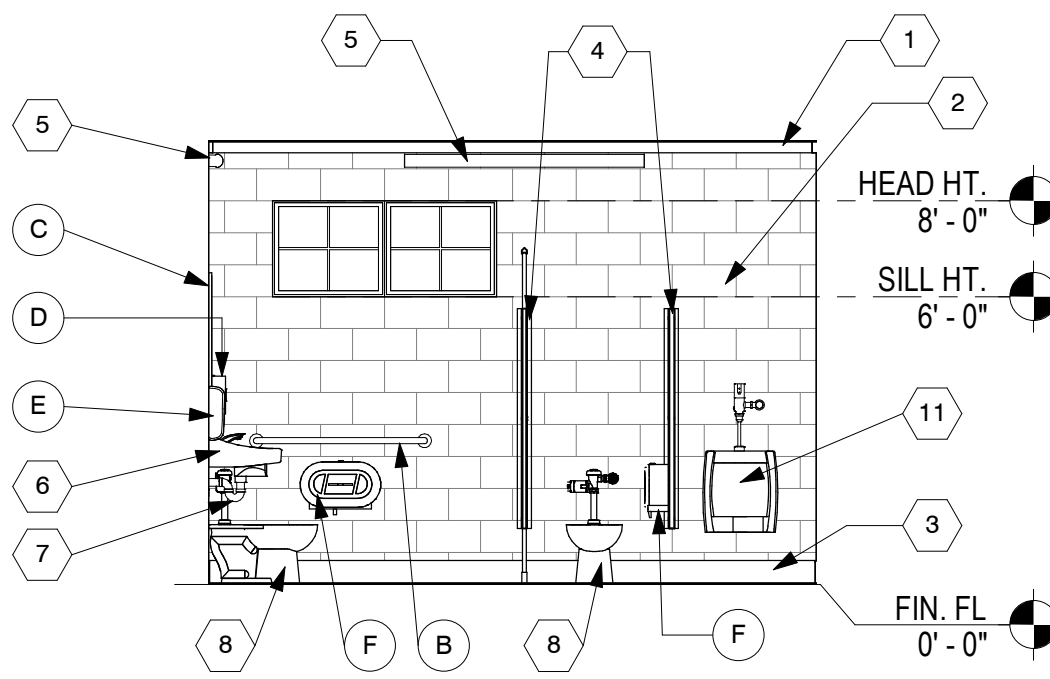


7 INTERIOR ELEVATION
1/4" = 1'-0"

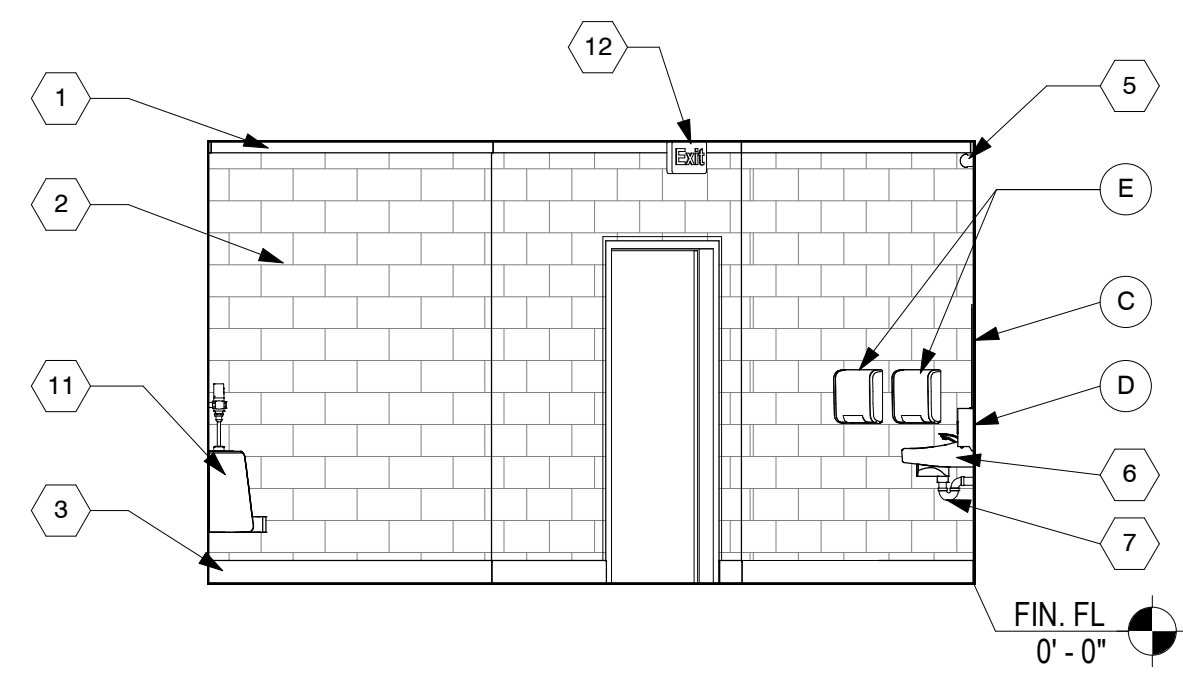


8 INTERIOR ELEVATION
1/4" = 1'-0"

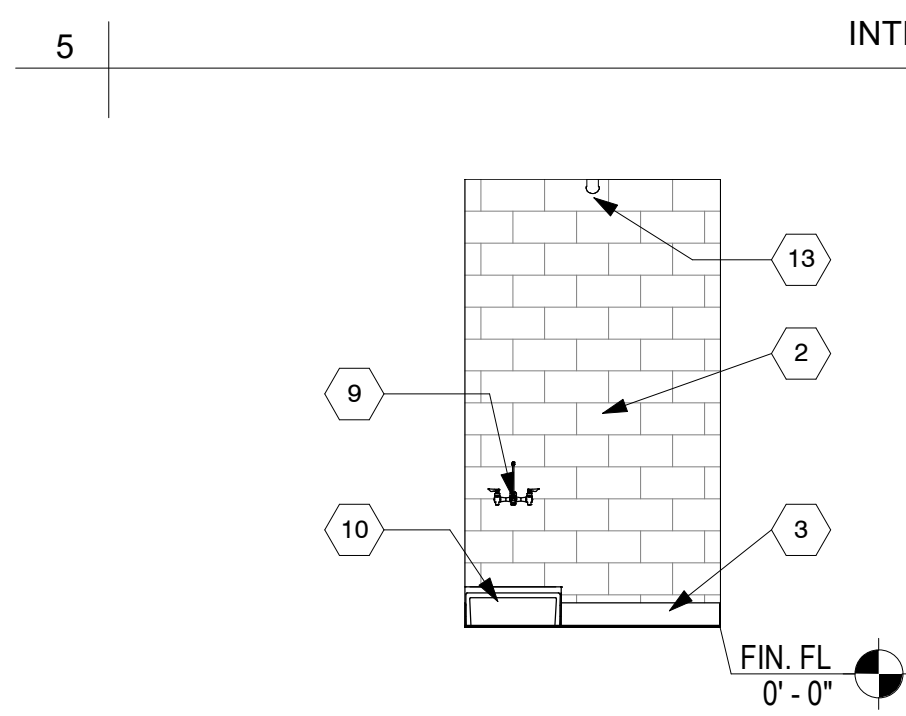


12 INTERIOR ELEVATION - JANITOR
1/4" = 1'-0"

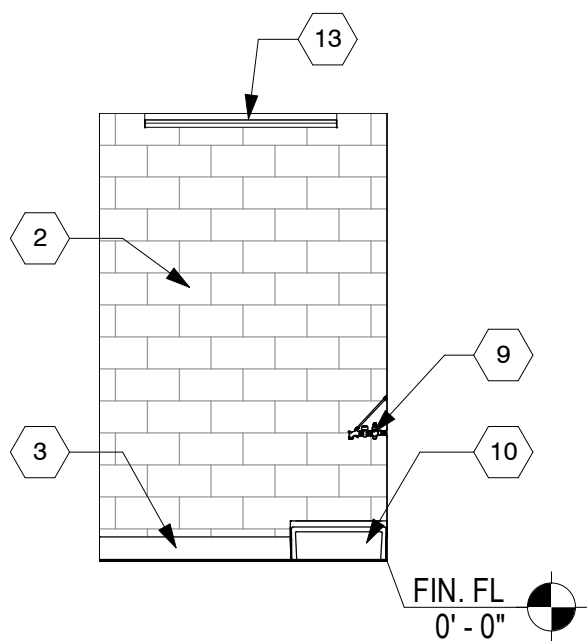

13 INTERIOR ELEVATION - JANITOR
1/4" = 1'-0"

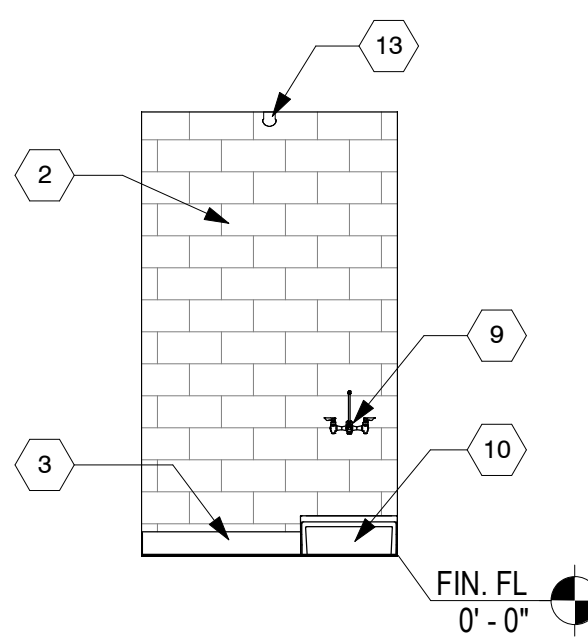

14 INTERIOR ELEVATION - JANITOR
1/4" = 1'-0"

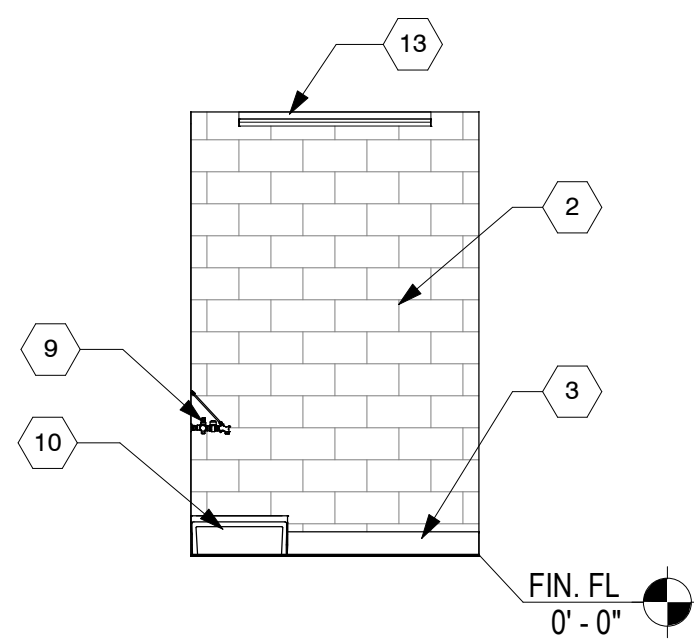

15 INTERIOR ELEVATION - JANITOR
1/4" = 1'-0"

GENERAL NOTES:

- ALL WALLS TO BE PAINTED P-1, UNLESS NOTED OTHERWISE. SEE ROOM FINISH SCHEDULE.
- ALL TOILET ROOM ACCESSORIES TO BE MOUNTED AT ADA COMPLIANT HEIGHTS AND REQUIRED CLEARANCES. REFER TO STANDARD TOILET ACCESSORY MOUNTING HEIGHT DIAGRAMS BELOW.
- PROVIDE BLOCKING IN WALL AS REQUIRED FOR TOILET PARTITIONS, GRAB BARS AND FIXTURES.
- SEE ROOM FINISH SCHEDULE FOR MORE INFORMATION.

SHEET NOTES




- PAINTED 3.5" HARDIE BOARD TRIM
- CMU BLOCK WALL WITH EPOXY PAINT
- BASE AS SCHEDULED
- FLOOR MOUNTED OVERHEAD BRACED SOLID PLASTIC TOILET PARTITIONS. SEE SPECIFICATIONS.
- WALL MOUNTED LIGHT FIXTURE MOUNTED BELOW 3.5" HARDIE BOARD TRIM. SEE ELECTRICAL DRAWINGS AND SPECIFICATIONS.
- ADA COMPLIANT WALL HUNG LAVATORY
- WRAP PLUMBING WITH TRUEBRO LAV GUARD UNDERSINK PIPING COVER
- ADA COMPLIANT TOILET
- MOP SINK FAUCET
- MOP SINK
- ADA COMPLIANT WALL HUNG URINAL
- EMERGENCY EXIT SIGN AND LIGHTS
- CEILING MOUNTED LIGHT FIXTURE. SEE ELECTRICAL DRAWINGS AND SPECIFICATIONS.

TOILET ACCESSORY LEGEND

- | | |
|---|---|
| A | 42" GRAB BAR |
| B | 36" GRAB BAR |
| C | WALL MOUNTED MIRROR |
| D | WALL MOUNTED SOAP DISPENSER |
| E | WALL MOUNTED AUTOMATIC HAND DRYER |
| F | TOILET PAPER DISPENSER |
| G | WALL MOUNTED SANITARY NAPKIN DISPOSAL |
| H | WALL MOUNTED DIAPER CHANGING STATION AND BAG HOOK |

DATE: 10/19/2023
ERICA AZORIN CRAIG
FL REG. NO. AR101635
THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED ON THE DATE ADJACENT TO THE SEAL. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED BOUND AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

STANDARD TOILET ACCESSORY MOUNTING HEIGHTS

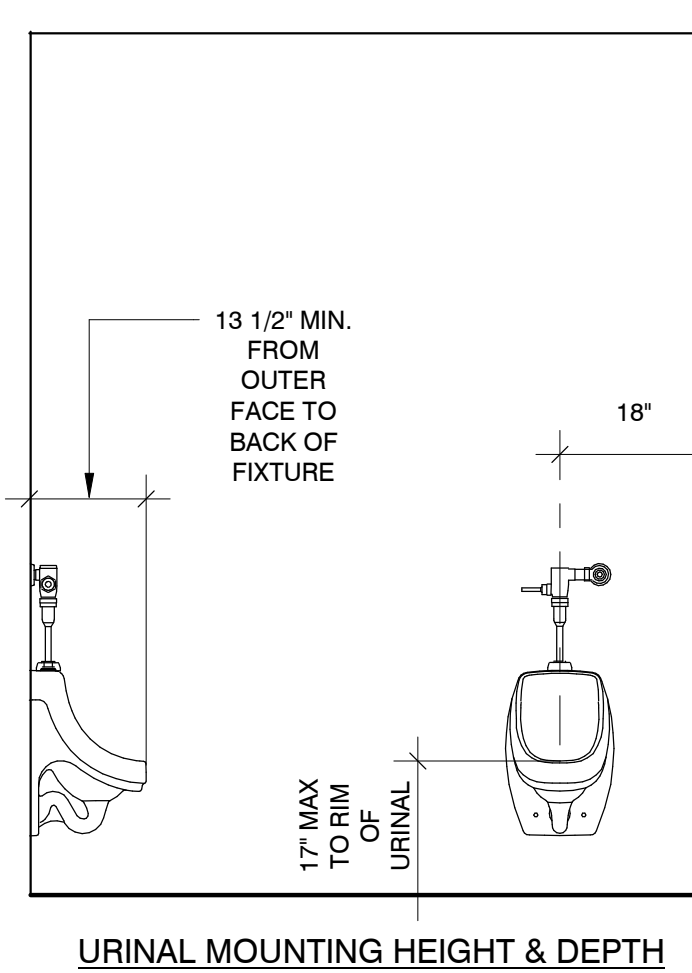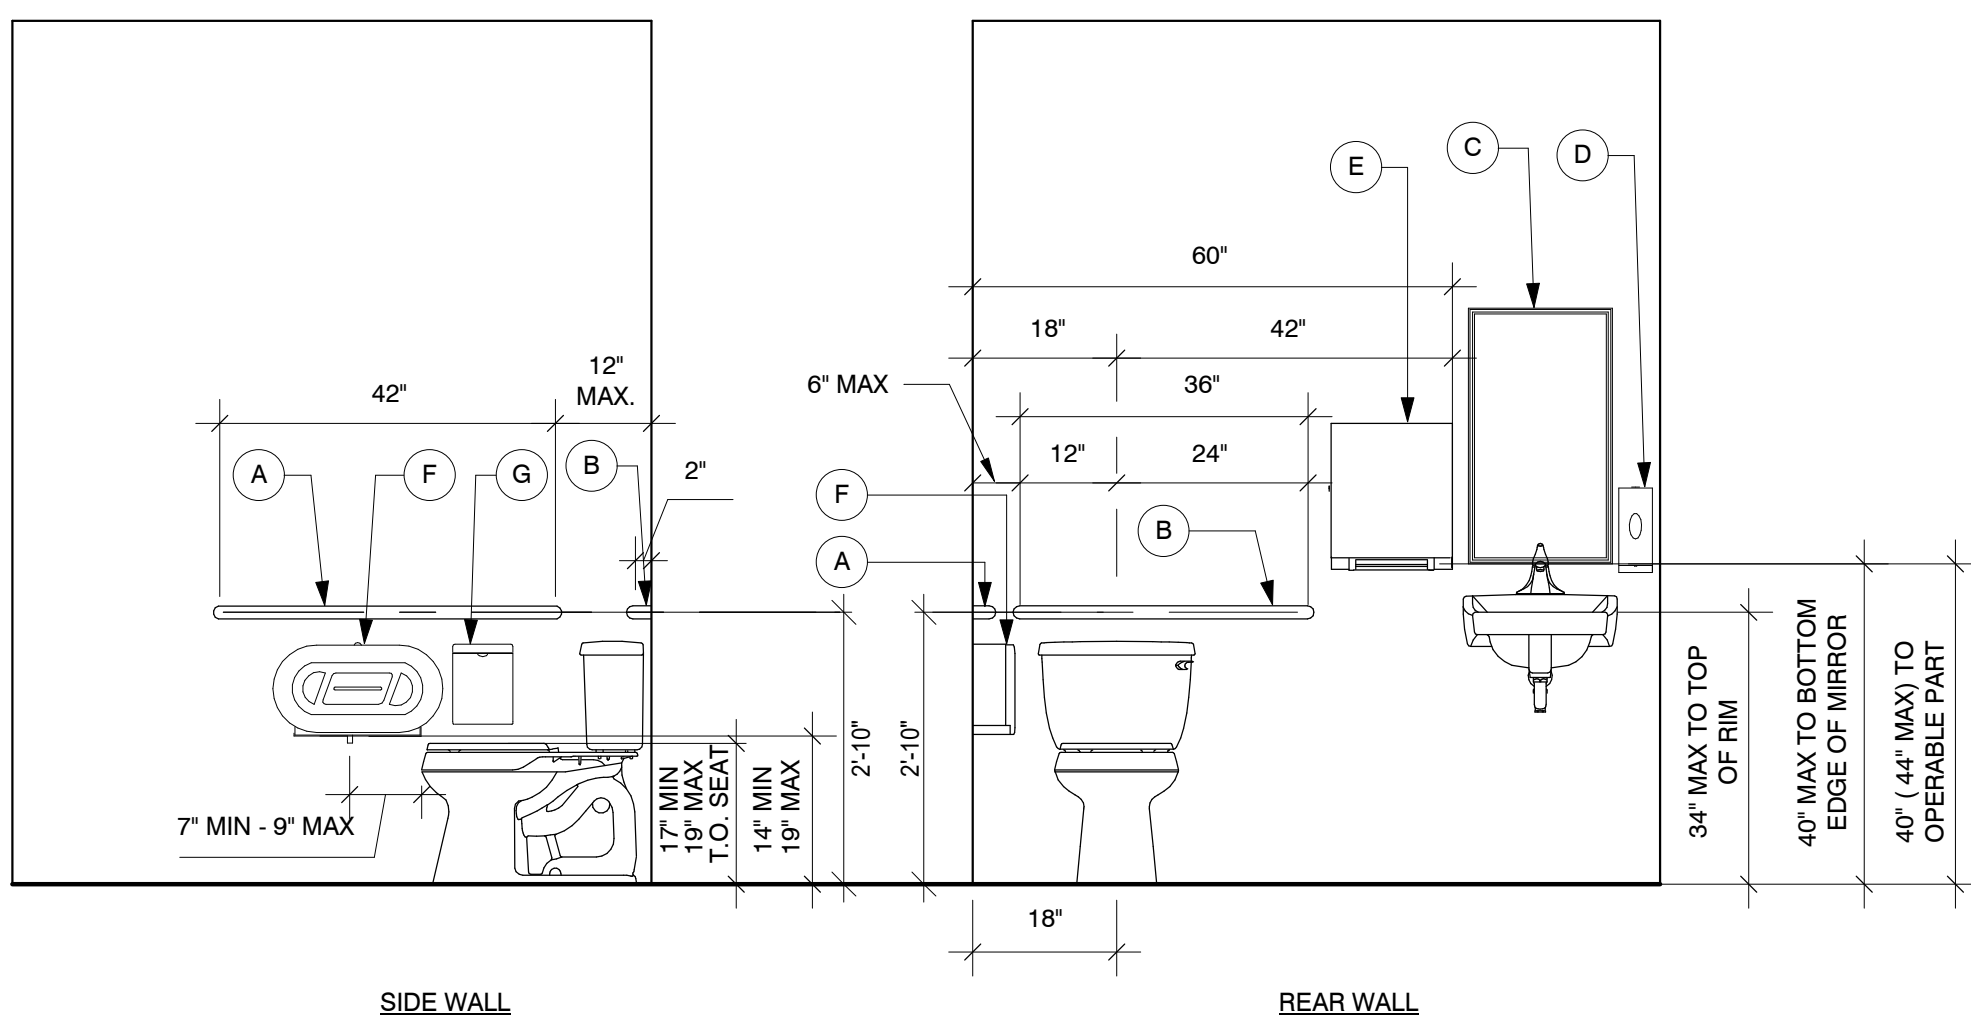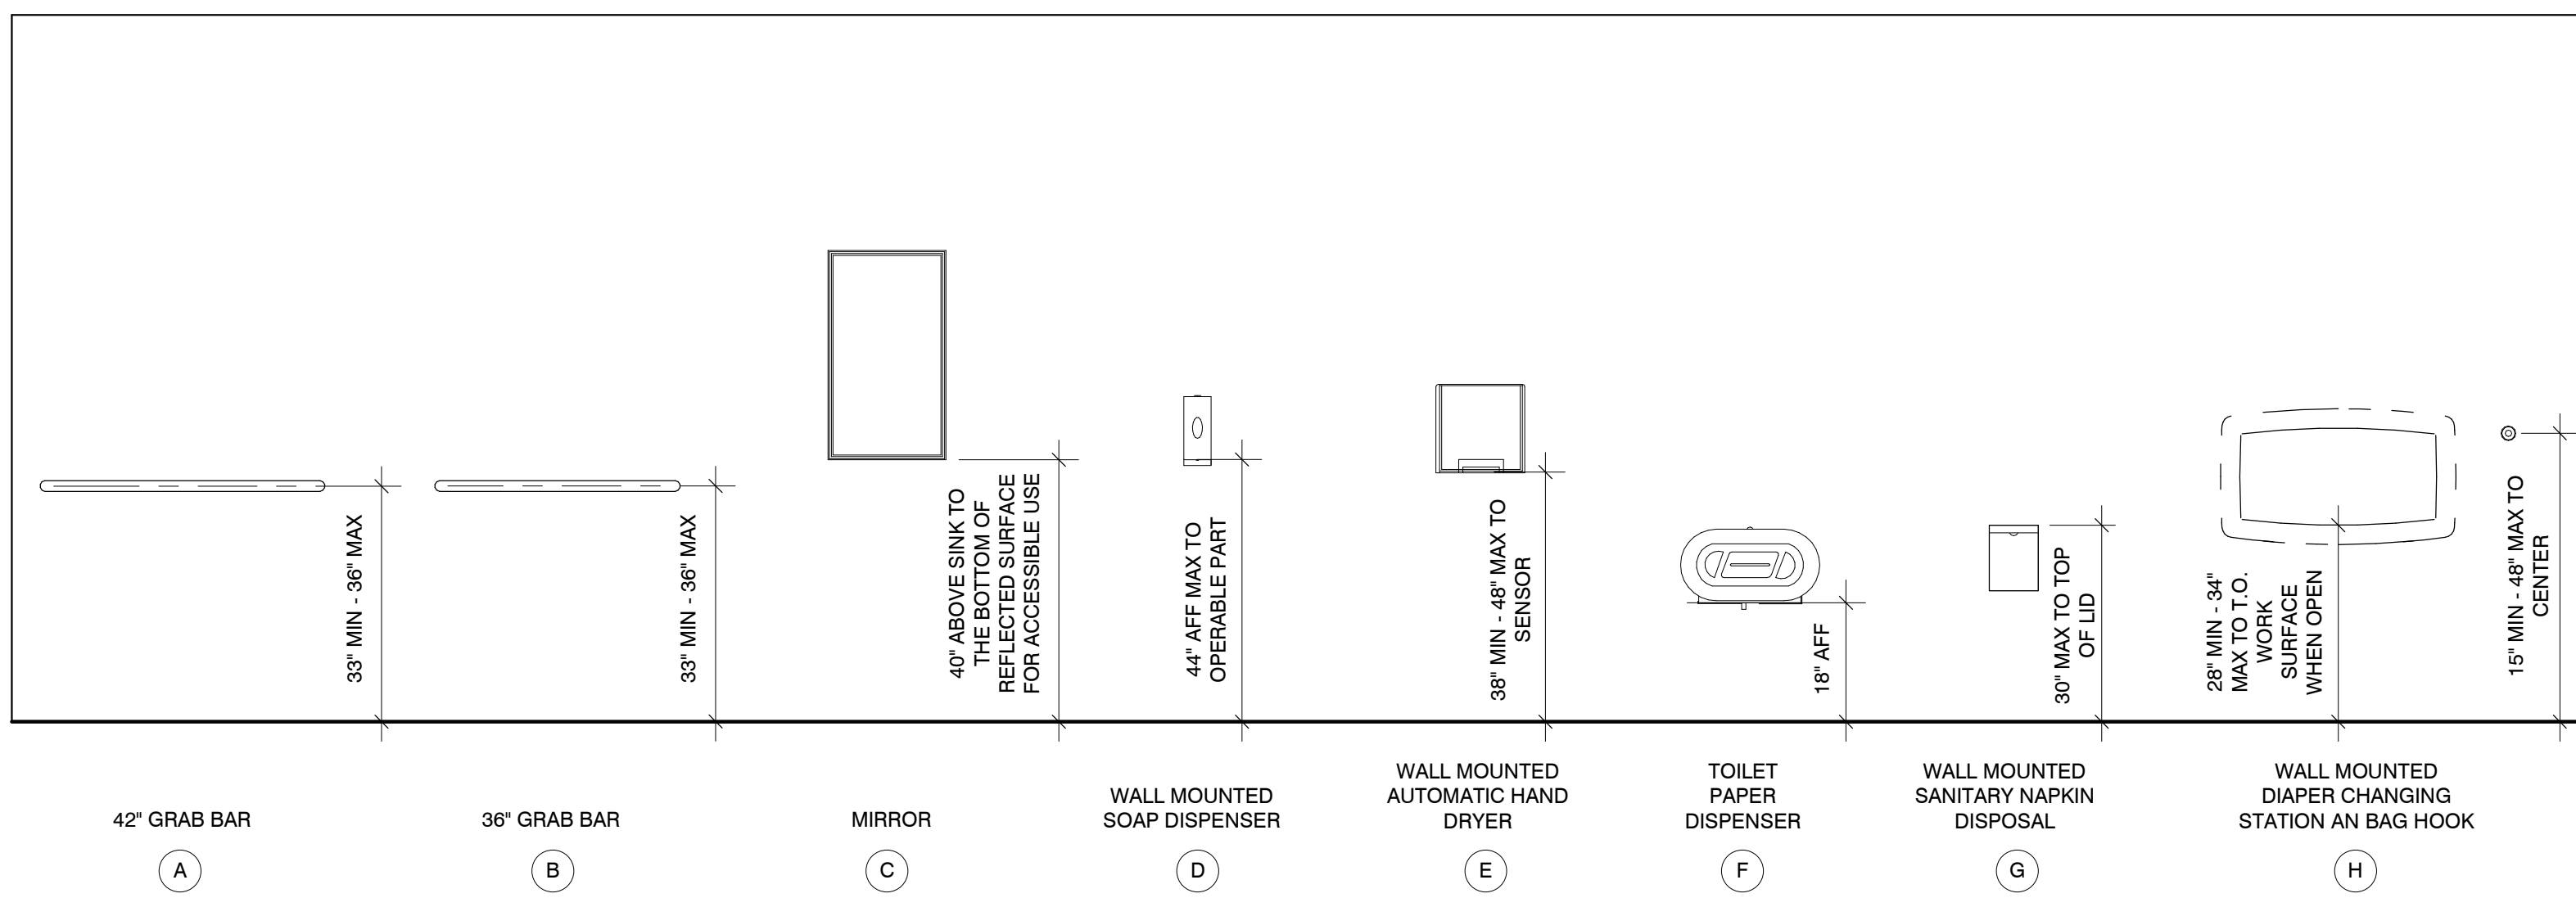

PROJECT NO:

23005.001

DATE: 10/19/2023

DESIGNED BY:

DRAWN BY:

CHECKED BY:

DRAWING TITLE:


INTERIOR ELEVATIONS

SHEET NO:


A-401

PERMIT BID SET 10-19-2023


©2022 Boggs Design Partners, LLC. All rights reserved. This document, together with the concepts and designs presented herein, is an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of any information or written authorization or adaptation by Boggs Design Partners, LLC, shall be without liability to Boggs Design Partners, LLC.

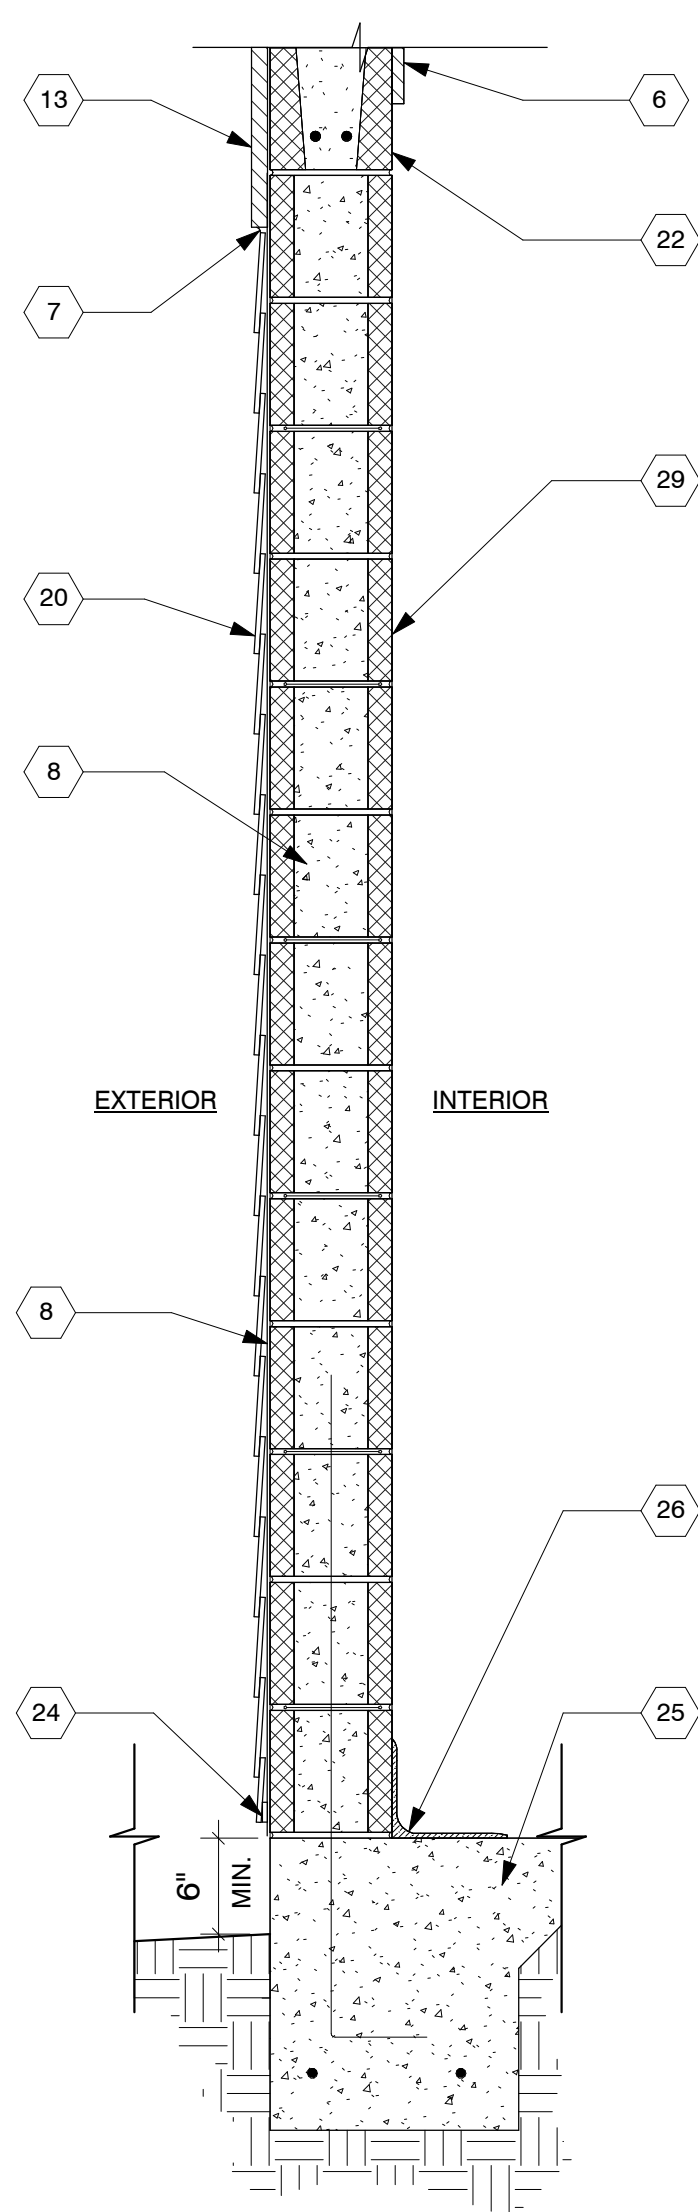


WALL TYPE 1
1" = 1'-0"

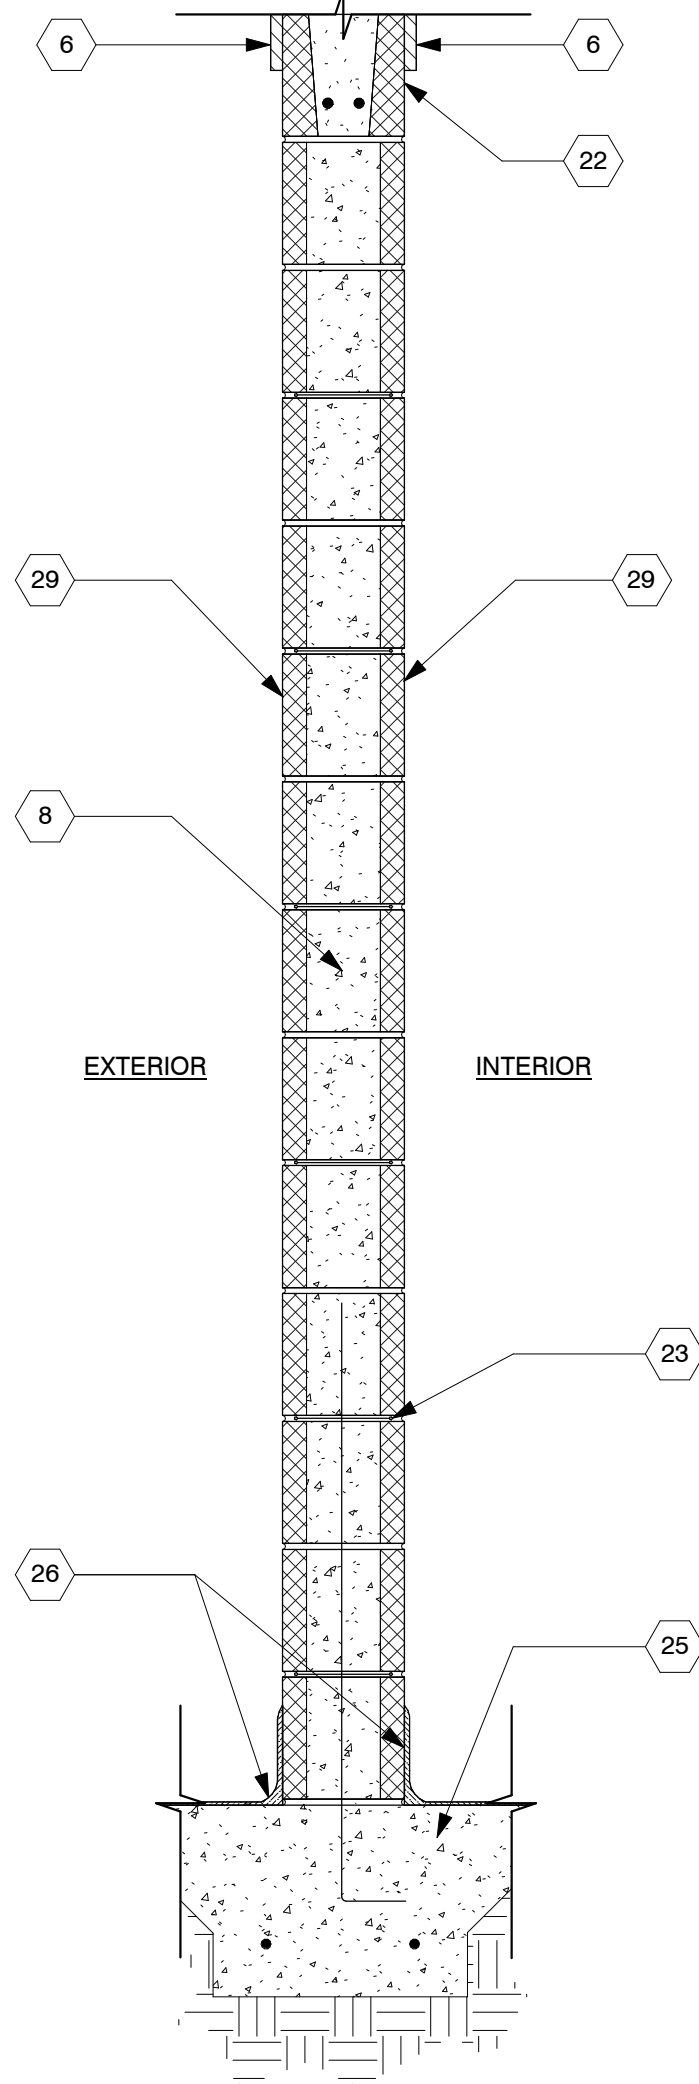


WALL TYPE 2
1" = 1'-0"

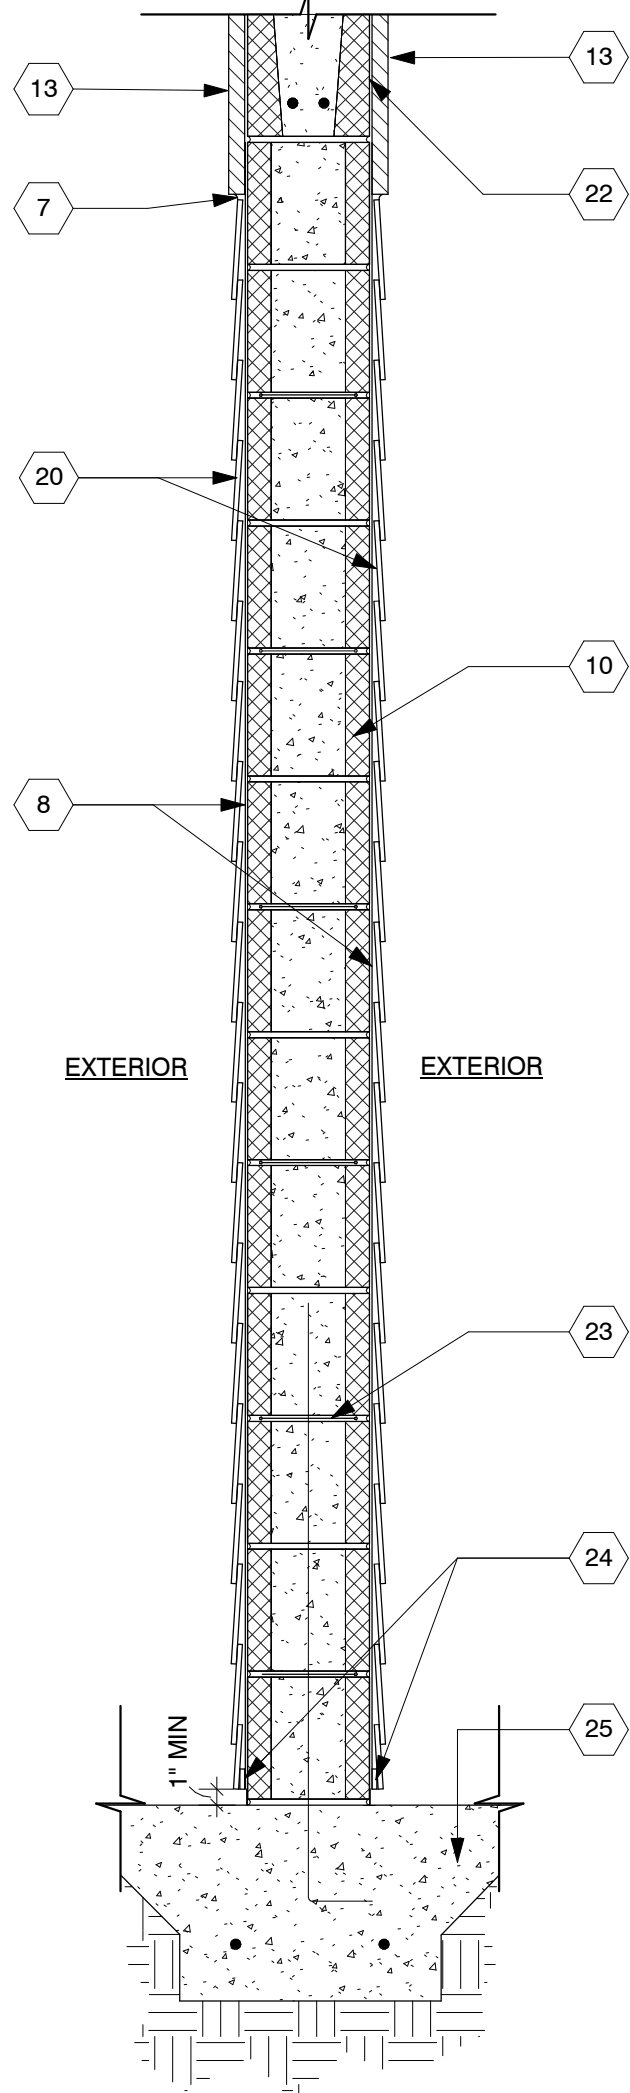


WALL TYPE 3
1" = 1'-0"

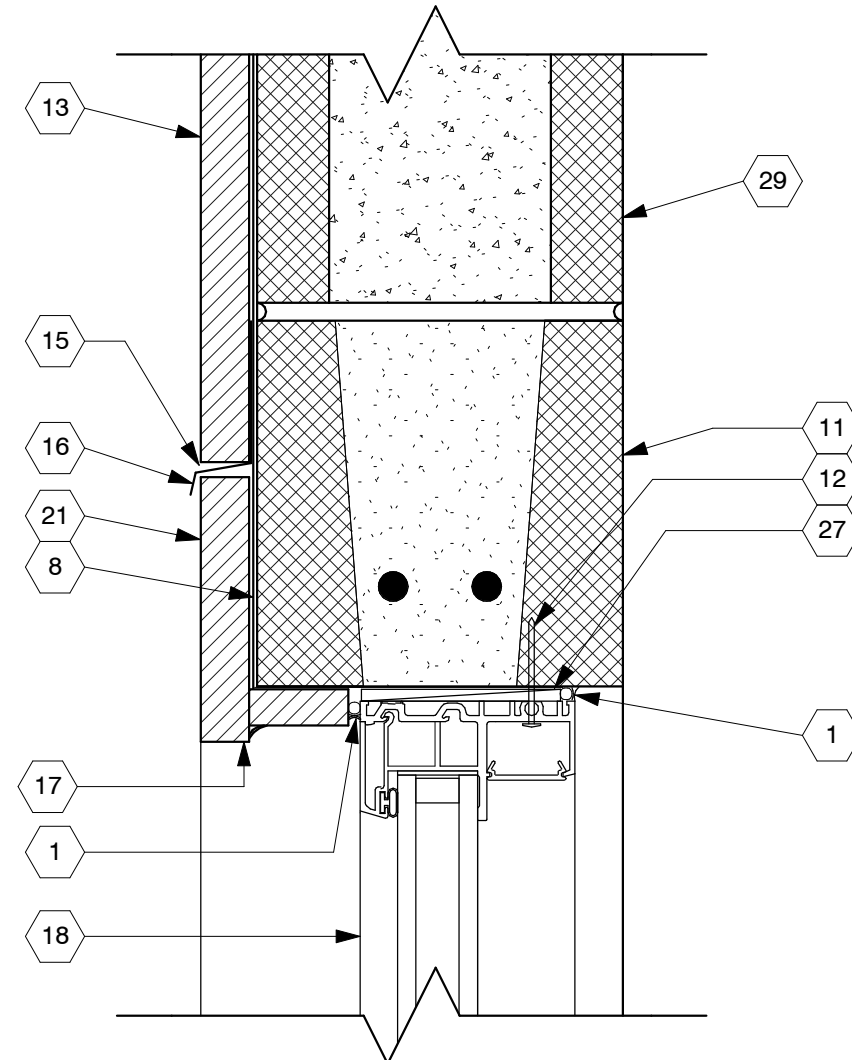

TYPICAL HEAD DETAIL AT WINDOW
3" = 1'-0"

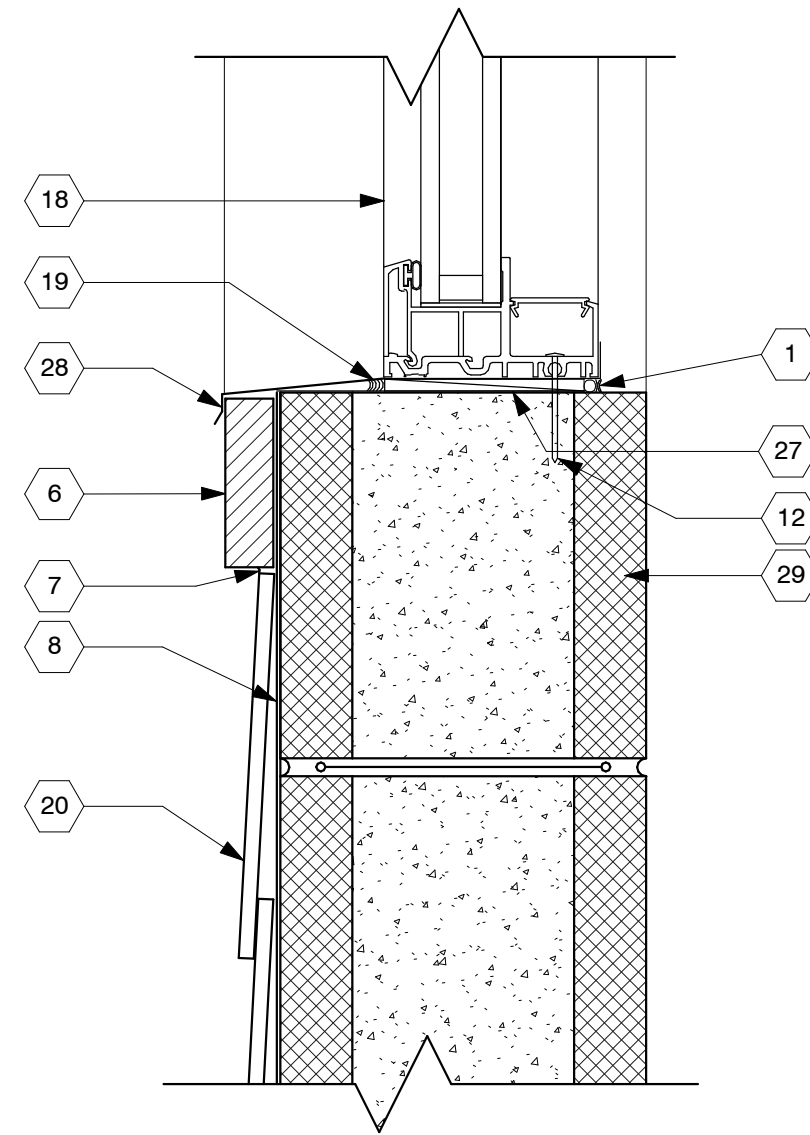

TYPICAL SILL DETAIL AT WINDOW
3" = 1'-0"

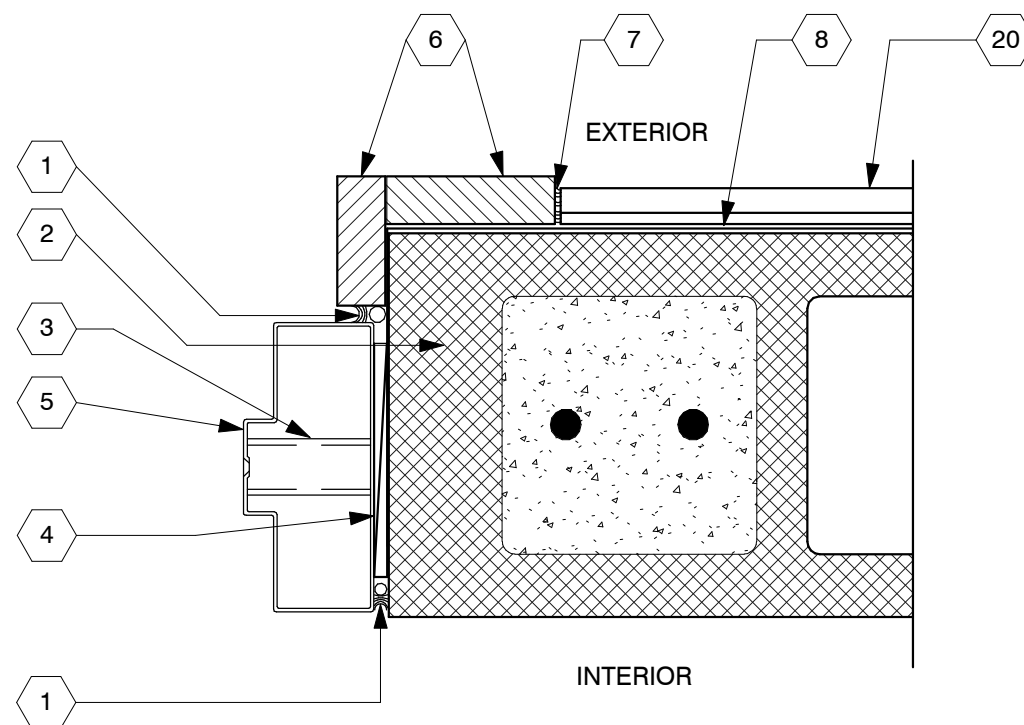

TYPICAL CMU HOLLOW METAL JAMB (HEAD SIMILAR)
3" = 1'-0"

GENERAL NOTES:

- REFER TO FLOOR PLANS, ROOF PLAN, RCP, EXTERIOR ELEVATIONS, AND STRUCTURAL FOR ADDITIONAL INFORMATION

SHEET NOTES

- SEALANT WITH BACKER ROD, TYP.
- 8" X 8" X 16" NOM. CMU
- MASONRY ANCHOR STRAP.
- BLOCKING AS REQUIRED.
- HOLLOW METAL FRAME.
- 3.5" X 1" PAINTED, SMOOTH HARDIE TRIM BOARD.
- LEAVE APPROPRIATE GAP AND CAULK.
- CONTINUOUS WATER RESISTIVE BARRIER.
- HARDIE PANEL.
- 8" CMU. SEE STRUCTURAL DRAWINGS FOR GROUT AND REINFORCEMENT NOTES.
- PRECAST LINTEL, SEE STRUCTURAL DRAWINGS
- CONCRETE / CMU INSTALLATION SCREWS PER FLORIDA PRODUCT APPROVAL
- 1" THICK X 11.25" WIDE PAINTED SMOOTH HARDIE TRIM BOARD.
- SEALANT WITH BACKER ROD, TYPICAL.
- 1/4" GAP. DO NOT CAULK.
- 2" FLASHING, SEE HARDIE STANDARD DETAILS
- EXTEND TRIM BOARD MIN 3/8" BEYOND HORIZONTAL. HEAD TRIM TO CREATE DRIP CONDITION AND SEAL JOINT.
- AWNING WINDOW INSTALLED PER FLORIDA PRODUCT APPROVAL DETAILS. SEE EXTERIOR ELEVATIONS AND WINDOW SCHEDULE FOR MORE INFORMATION.
- URETHANE SEALANT WITH BOND BREAK ROD, TYPICAL AT ALL SILLS. "BUTTER" ALL FLASHING PANS.
- PAINTED SMOOTH HARDIE PLANK LAP SIDING. SEE EXTERIOR ELEVATIONS.
- 1" THICK X 5.5" PAINTED, SMOOTH HARDIE BOARD TRIM.
- BOND BEAM. SEE STRUCTURAL DRAWINGS.
- HORIZONTAL JOINT REINFORCING @ 16 IN O.C. STARTING AT FIRST COURSE ABOVE FOUNDATION.
- 1-1/4" STARTING STRIP.
- CONCRETE FOOTER SEE STRUCTURAL DRAWINGS.
- FLOORING WITH 6" COVE BASE AND COVE STRIP AS SCHEDULED.
- SHIM, 1/4" MAX PER FLORIDA PRODUCT APPROVAL DETAILS.
- PREFINISHED METAL SILL PAN FLASHING WITH END DAMS, PROVIDE POSITIVE SLOPE TO EXTERIOR TO DRAIN PAN FLASHING.
- PAINTED CMU WITH BLOCK FILLER, MORTAR JOINTS TO BE STRUCK FLUSH WITH WALL SURFACE.

DATE: 10/19/2023
ERICA AZORIN ORANG
FL REG. NO. AR101635

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED ON THE DATE ADJACENT TO THE SEAL. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED FINISHED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

PROJECT NO:
23005.001

DATE: 10/19/2023
DESIGNED BY:
DRAWN BY:
CHECKED BY:

DRAWING TITLE:

WALL SECTION, HEAD,
JAMB AND SILL
DETAILS

SHEET NO:

A-501

PERMIT BID SET 10-19-2023

©2022 Boggs Design Partners, LLC. All rights reserved. This document, together with the concepts and designs presented herein, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document, without consultation or written authorization and adaptation by Boggs Design Partners, LLC, shall be without liability to Boggs Design Partners, LLC.

DOOR & FRAME SCHEDULE										
MARK	TYPE	DOOR			MATERIAL	GLAZING	FRAME		HARDWARE SET NO.	NOTES
		WIDTH	HGT	THK			MATERIAL	TYPE		
101A	2	3' - 0"	7' - 0"	1-3/4"	HM	N	HM	A	1	1,4
101B	--	2' - 0"	5' - 0"	1"	SP	N	--	--	2	3
101C	--	3' - 0"	5' - 0"	1"	SP	N	--	--	2	2
101D	--	3' - 0"	5' - 0"	1"	SP	N	--	--	2	2
102A	1	3' - 0"	7' - 0"	1-3/4"	HM	N	HM	A	3	1
103A	3	3' - 0"	7' - 0"	1-3/4"	HM	N	HM	A	4	1,4
104A	2	3' - 0"	7' - 0"	1-3/4"	HM	N	--	A	1	1,4
104B	--	2' - 0"	5' - 0"	1"	SP	N	--	--	2	3
104C	--	3' - 0"	5' - 0"	1"	SP	N	--	--	2	3
105A	1	3' - 0"	7' - 0"	1-3/4"	HM	N	HM	A	3	1
DOOR & FRAME NOTES										
GENERAL NOTES:						SCHEDULE NOTES:				
• ALL EXTERIOR DOORS MUST HAVE FLORIDA PRODUCT APPROVAL AND BE INSTALLED PER APPROVAL DETAILS. • ALL DOORS TO HAVE ADA AND FLORIDA ACCESSIBILITY CODE COMPLIANT HARDWARE.						1. PROVIDE ADA COMPLIANT THRESHOLDS AND LEVER HANDLES.				
						2. ADA COMPLIANT TOILET PARTITION DOOR. SEE INTERIOR ELEVATIONS.				
						3. TOILET PARTITION DOOR. SEE INTERIOR ELEVATIONS.				
						4. DOOR TO HAVE LOUVERS AS SHOWN IN DOOR ELEVATION TYPES. LOUVER TO BE COMPATIBLE WITH FLORIDA PRODUCT APPROVAL. SEE MECHANICAL FOR MORE INFORMATION AND TO CONFIRM LOUVER SIZE.				
DOOR HARDWARE SCHEDULE										
DOORS	HARDWARE SET NUMBER	DOOR TYPE		HARDWARE		DESCRIPTION		FINISH		NOTES
101A , 104A	1	EXTERIOR RESTROOM DOORS		3 HINGES		3 KNUCKLE HALF SURFACE HINGE, HEAVY WEIGHT		STEEL		
				1 PUSH / PULL PLATE				SATIN CHROME		
				1 DEADBOLT		GRADE 1 HEAVY DUTY		SATIN CHROME		
				1 DOOR CLOSER		NON-HANDED , HEAVY DUTY - ANSI GRADE 1		ALUMINUM		
				2 KICK PLATES		10" X 34"		SATIN STAINLESS STEEL		
				3 SILENCER				GRAY		
				1 DOOR GASKET (HEAD & JAMB)						
				1 DOOR SWEEP						
				1 SADDLE THRESHOLD		ADA COMPLIANT		ALUMINUM		
101B-C , 104B-D	2	INTERIOR STALL PARTITION DOORS		HINGE		CONTINUOUS		STAINLESS STEEL		
				BRACKETS		CONTINUOUS		STAINLESS STEEL		
				SLIDE		SURFACE MOUNT WITH OCCUPANCY INDICATOR		STAINLESS STEEL		
102A , 105A	3	INTERIOR JANITOR CLOSET		3 HINGES		3 KNUCKLE HALF SURFACE HINGE, HEAVY WEIGHT		STEEL		
				1 STOREROOM		GRADE 1 HEAVY DUTY		SATIN CHROME		
				1 DEADBOLT		GRADE 1 HEAVY DUTY		SATIN CHROME		
				1 OVERHEAD STOP		CONCEALED OVERHEAD MOUNT STOP AND HOLDER		ALUMINUM		
103A	3	EXTERIOR MECHANICAL ROOM		3 HINGES		3 KNUCKLE HALF SURFACE HINGE, HEAVY WEIGHT		STEEL		
				1 STOREROOM		GRADE 1 HEAVY DUTY		SATIN CHROME		
				1 DEADBOLT		GRADE 1 HEAVY DUTY		SATIN CHROME		
				1 OVERHEAD STOP		CONCEALED OVERHEAD MOUNT STOP AND HOLDER		ALUMINUM		
				LOUVER		VANDAL RESISTANT		STAINLESS STEEL		
				1 KICK PLATE		10" X 34"		STAINLESS STEEL		1
GENERAL NOTES:										
• CONTRACTOR TO PROVIDE SHOP DRAWINGS / SUBMITTALS FOR ALL HARDWARE FOR APPROVAL BY OWNER AND ARCHITECT PRIOR TO ORDERING.										
• CONTRACTOR SHALL COORDINATE KEYING REQUIREMENTS WITH OWNER.										
SCHEDULE NOTES:						1. INSTALL KICK PLATE ON EXTERIOR SIDE OF DOOR.				
DOOR ELEVATION TYPES										
DOOR FRAME ELEVATION TYPES										
WINDOW ELEVATION TYPES										
WINDOW SCHEDULE										
MARK	TYPE	GLAZING	SIZE		MATERIAL	FRAME FINISH	COLOR	NOTES		
W1	(PAIR) AWNING	DOUBLE GLAZED	HEIGHT	WIDTH						
			SEE WINDOW TYPES		VINYL	BLACK		1,2,3,4		
WINDOW NOTES										
GENERAL NOTES:					SCHEDULE NOTES:					
• ALL WINDOWS MUST HAVE FLORIDA PRODUCT APPROVAL AND BE INSTALLED PER APPROVAL DETAILS. • WINDOW DIMENSIONS PROVIDED ARE ROUGH OPENING DIMENSIONS. VERIFY ACTUAL SIZES WITH MANUFACTURER BASED ON SPECIFIED ROUGH OPENING SIZE. • ALL WINDOWS TO HAVE CLEAR, LOW-E INSULATED GLAZING. • SEE ARCHITECTURAL SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS.					1. PROVIDE MULL BAR BETWEEN PAIR OF WINDOWS AS REQUIRED.					
					2. PROVIDE COLONIAL MUNTINS IN CONFIGURATION SHOWN ON ELEVATIONS.					
					3. WINDOW TO BE FLANGE FRAME.					
					4. PROVIDE FROSTED OR OBSCURE GLAZING.					


BDP

DADE CITY - AMPHITHEATER MECHANICAL ROOM ADDITION

PROJECT ADDRESS




SHEET LIST	
SHEET NUMBE R	SHEET NAME
S0.00	COVER SHEET
S0.10	GENERAL NOTES
S0.11	GENERAL NOTES
S0.12	GENERAL NOTES
S1.00	FOUNDATION PLAN
S1.10	FRAMING PLAN
S5.00	TYPICAL FOUNDATION DETAILS
S5.40	MASONRY TYPICAL DETAILS
S5.70	ROOF FRAMING DETAILS
S6.50	HSS- STEEL COLUMN SCHEDULE AND DETAILS

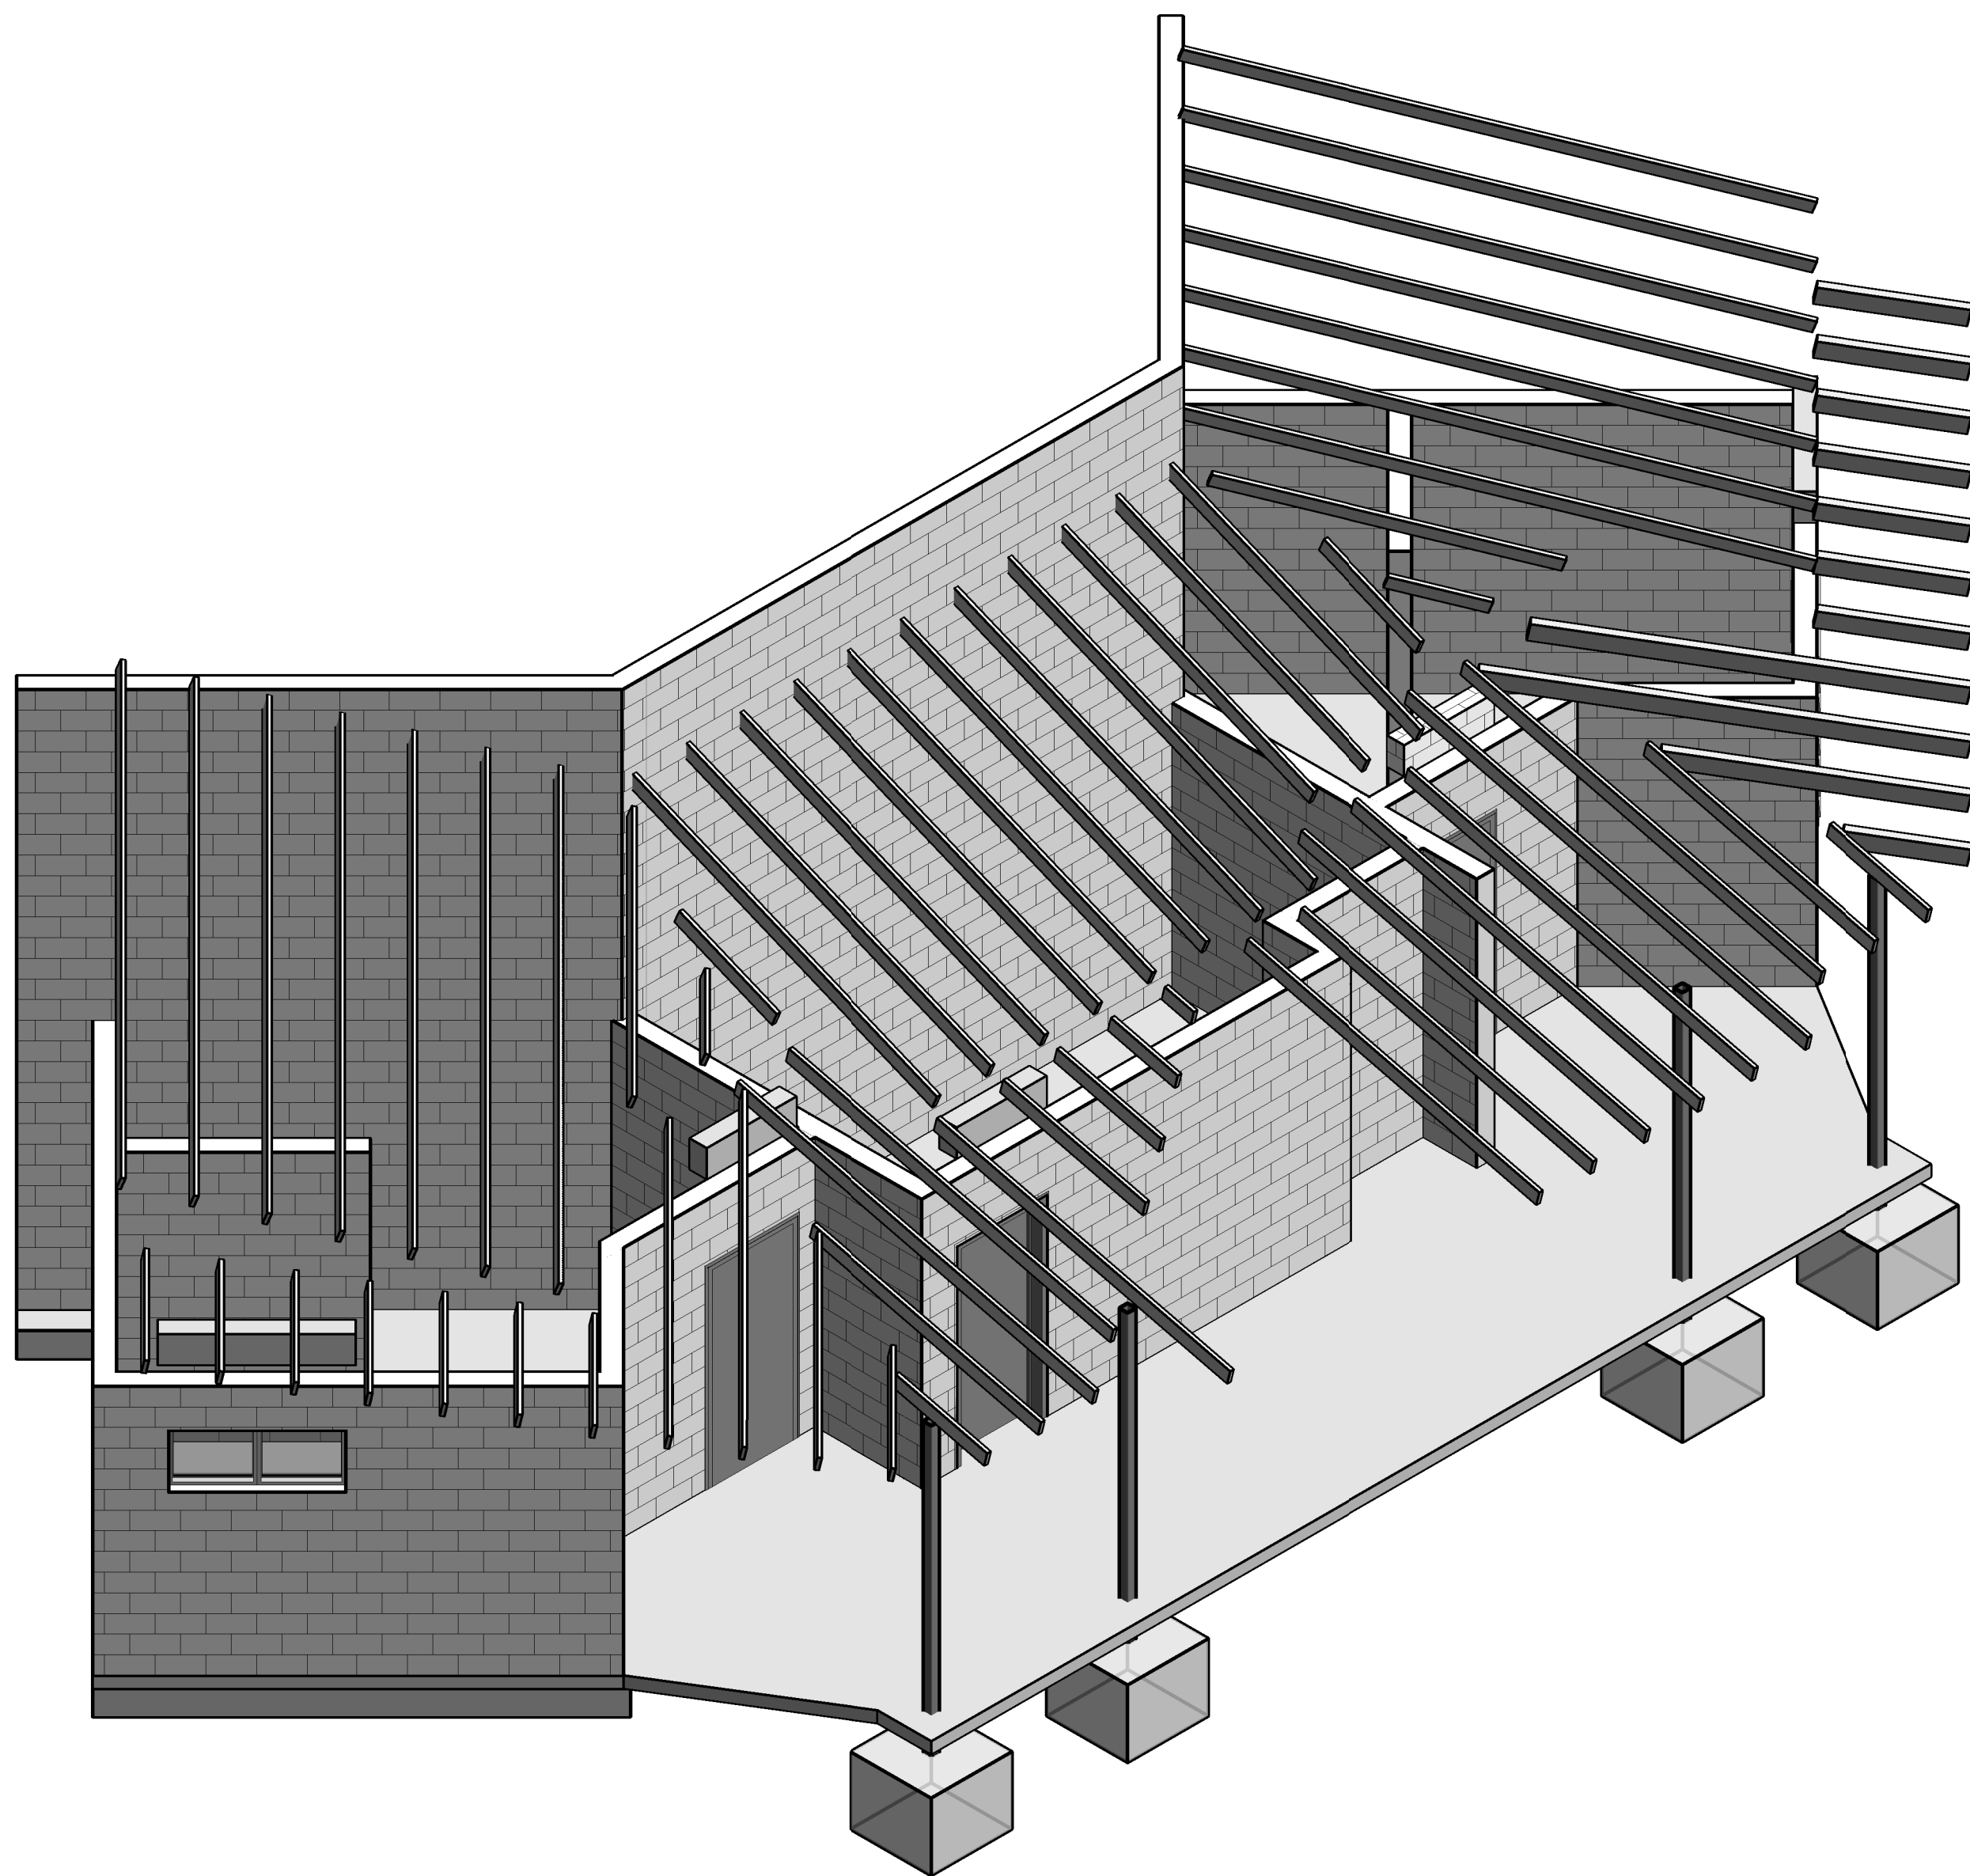

BDP
BOGGS DESIGN PARTNERS
Architecture + Interiors
607 S. ALEXANDER ST.
SUITE 101
PLANT CITY, FL 33563
813 . 946 . 8444
www.bdparchitects.com

214.307.4757
WGI
WGInc.com
8144 WALNUT HILL LANE SUITE 540 DALLAS, TX 75221


CITY OF DADE CITY
PARK RESTROOMS
37800 CHURCH AVENUE
DADE CITY, FL 33525

NO.	DATE	REVISION DESCRIPTION

PROJECT NO:
23005.001
DATE: 10/19/2023
DESIGNED BY:
DRAWN BY:
CHECKED BY:

DRAWING TITLE:

COVER SHEET

SHEET NO:

S0.00

PERMIT BID SET 10-19-2023

©2022 Boogs Design Partners, LLC. All rights reserved. This document, together with the associated design presented herein, as an instrument of service, is hereby given to the specific purpose and client for which it was prepared. No part of this document, together with the associated design presented herein, as an instrument of service, is to be reproduced or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of Boogs Design Partners, LLC.

1. ANSII/AISC 303-CURRENT EDITION
2. ANSII/AISC 341-CURRENT EDITION
3. ANSII/AISC 360-CURRENT EDITION
4. REFER TO APPLICABLE SPECIFICATION SECTIONS FOR ADDITIONAL INFORMATION

1. CHANNELS, ANGLES, M-SHAPES, S-SHAPES:

- C. METALS PROTECTION SHALL BE PER ACI 362.1R AS MINIMUMS, EXCEPT AS NOTED ON DRAWINGS AND SPECIFIED HEREIN. THE METALS PROTECTION SCHEDULE BELOW SHALL GOVERN IN ALL CASES EXCEPT WHERE DEVIATIONS ARE SPECIFICALLY NOTED ON DRAWINGS. ALL METAL COATINGS SHALL BE COORDINATED TO BE COMPATIBLE WITH FINAL PAINTING SYSTEMS.

D. FRAMING CONNECTIONS:

- i. ALL WELDING SHALL BE MADE WITH E70XX LOW HYDROGEN ELECTRODES UNLESS NOTED OTHERWISE AND SHALL CONFORM TO THE LATEST EDITION OF THE AMERICAN WELDING SOCIETY SPECIFICATIONS. ALL WELDS SHALL BE PERFORMED BY AN AWS CERTIFIED WELDER. CERTIFICATION SHALL BE APPROPRIATE FOR WELDING METHOD AND POSITION.
- ii. STAINLESS STEEL ELECTRODES SHALL BE TYPE 308L OR 347.
- iii. MINIMUM WELD SIZE IS 1/4 INCH UNLESS NOTED OTHERWISE.
- iv. FOR GALVANIZED CONNECTION HARDWARE REQUIRING FIELD WELDING, REMOVE SLAG, WIRE BRUSH, AND APPLY THREE COATS OF ZRC (COLD GALVANIZING) AFTER WELDING.
2. BOLTED CONNECTIONS:
 - i. BOLTED CONNECTIONS SHALL BE MADE USING ONE OF THE FOLLOWING:
 - a. BEARING TYPE CONNECTION WITH THREADS INCLUDED IN SHEAR PLANE (CONDITION N) WITH BOLTS, NUTS, AND WASHERS. TURN OF THE NUT METHOD.
 - b. SLIP CRITICAL OR OTHER TYPE CONNECTION AS INDICATED ON DRAWINGS.
 - ii. BOLT SIZE SHALL BE 3/4 INCH DIAMETER UNLESS NOTED OTHERWISE.
 - iii. MATERIAL PROPERTIES:
 - a. ASTM F1525 GRADE A325
 - iv. COATING PROPERTIES:
 - a. UNCOATED
 - b. ASTM B695 CLASS 50 (MECHANICALLY DEPOSITED ZINC COATING)
3. CONNECTIONS NOT SPECIFICALLY DETAILED ON DRAWINGS SHALL BE DESIGNED BY FABRICATOR IN ACCORDANCE WITH AISC SPECIFICATIONS
 - i. SHOP CONNECTIONS SHALL BE BOLTED OR WELDED.
 - ii. FIELD CONNECTIONS SHALL BE BOLTED WHERE POSSIBLE UNLESS NOTED OTHERWISE.
 - iii. USE DOUBLE ANGLE CONNECTIONS WHERE POSSIBLE UNLESS NOTED OTHERWISE.
 - iv. WHEN NO REACTIONS ARE INDICATED, DESIGN CONNECTIONS AS A SIMPLE SHEAR CONNECTION TO SUPPORT A REACTION VALUE EQUAL TO ONE HALF THE AISC TABULATED ALLOWABLE UNIFORM LOAD VALUE (6 KIPS MINIMUM)

1. ANCHOR RODS:

3. WASHERS:
 - i. MATERIAL PROPERTIES:
 - a. ASTM F436
 - b. ASTM F844
 - ii. COATING PROPERTIES:
 - a. MATCH MATING COMPONENTS

5. **HEADED STUD ANCHORS (FOR EMBEDS):**

- a. MATCH MATING EMBED
 - iii. CONNECTION TO EMBED:
 - a. MANUFACTURER TO PROVIDE AUTOMATIC STUD WELD

- i. MATERIAL PROPERTIES:
 - a. ASTM A496, AWS D1.1 TYPE C
 - b. ASTM A706 GRADE 60 (LOW-ALLOY WELDABLE)
- ii. COATING PROPERTIES:

- F. GENERAL - STEEL FRAMING:
1. NO SPLICES IN COLUMNS WILL BE PERMITTED UNLESS SPECIFICALLY NOTED ON DRAWINGS.

1 SPLICING OF STRUCTURAL STEEL MEMBERS IS PROHIBITED WITHOUT PRIOR APPROVAL OF

SHOWN AND DETAILED ON SHOP DRAWINGS WILL BE REJECTED.

ERUCTION TOLERANCES OF ANCHOR BOLTS, EMBEDDED ITEMS, AND ALL STRUCTURAL STEEL UNLESS SPECIFIED OTHERWISE ON THE STRUCTURAL DRAWINGS SHALL CONFORM TO THE AISC CODE OF STANDARD PRACTICE.

FIELD CUTTING OF STRUCTURAL STEEL OR ANY FIELD MODIFICATIONS TO STRUCTURAL STEEL SHALL NOT BE MADE WITHOUT PRIOR APPROVAL OF THE ENGINEER.

CONTRACTOR SHALL PROTECT ANY UNPRIMED STRUCTURAL STEEL FROM DETRIMENTAL EFFECTS OF CORROSION, AS REQUIRED, UNTIL THE STEEL IS ENCLOSED AND PROTECTED BY THE NEW CONSTRUCTION.

- 5 GRIND SMOOTH ALL WELDS VISIBLE TO THE PUBLIC. GRIND OFF ALL WELD SPLATTER. CONTRACTOR SHALL COORDINATE STRUCTURAL STEEL FIREPROOFING REQUIREMENTS. ALL INTERIOR STRUCTURAL STEEL, INCLUDING STEEL JOISTS, SCHEDULED OR INDICATED TO RECEIVE SPRAY APPLIED FIREPROOFING SHALL BE DELIVERED TO THE PROJECT SITE UNPRIMED. STEEL EXPOSED TO CORROSIVE CONDITIONS AFTER INSTALLATION SHALL BE PRIMED WITH A PROTECTIVE COATING WHICH DOES NOT DIMINISH THE BOND BETWEEN THE SPRAY APPLIED FIREPROOFING, AND THE STEEL SUBSTRATE. ANY PRIMER, AND/OR COATING APPLIED TO STRUCTURAL STEEL SHALL BE APPROVED FOR USE IN THE APPLICABLE U.L. FIRE RESISTANCE ASSEMBLY USED ON THE PROJECT.

- ## DIVISION 06 - WOOD, PLASTICS, AND COMPOSITES

A. ALL WOOD FRAMED CONSTRUCTION

- ## 6.2 WOOD FRAMING SPECIFICATIONS

- | <u>NAIL SIZE SHOWN</u> | <u>DIAMETER</u> | <u>LENGTH</u> |
|------------------------|-----------------|---------------|
| 8D | 0.131" | 2 1/2" |
| 10D | 0.148" | 3" |
| 16D | 0.162" | 3 1/2" |

- ### 6.3 PRE-ENGINEERED WOOD TRUSS NOTES

- B. DEFINITIONS:

- C. DESIGN:
1. TRUSSES SHALL BE DESIGNED IN ACCORDANCE WITH THESE SPECIFICATIONS AND WHERE ANY APPLICABLE DESIGN FEATURE IS NOT SPECIFIED HEREIN, DESIGN SHALL BE IN ACCORDANCE WITH APPLICABLE

3. TRUSS DESIGN DRAWINGS SHALL INCLUDE AS MINIMUM INFORMATION:
- a. SPAN, DEPTH, SLOPE, AND SPACING OF TRUSSES

- b. REQUIRED BEARING WIDTH
- c. DESIGN LOADS, AS APPLICABLE:
 - i. TOP CHORD LIVE LOAD
 - ii. TOP CHORD DEAD LOAD
 - iii. BOTTOM CHORD LIVE LOAD
 - iv. BOTTOM CHORD DEAD LOAD
 - v. CONCENTRATED LOADS AND THEIR POINTS OF APPLICATION
 - vi. WIND AND SEISMIC CRITERIA
- d. ADJUSTMENT TO LUMBER AND PLATE DESIGN LOADS FOR CONDITION OF USE
- e. REACTIVE FORCES, THEIR POINTS OF OCCURRENCE AND DIRECTION
- f. ALPINE OR MITEK PLATE TYPE, GAUGE, SIZE, AND LOCATION OF PLATE AT EACH JOINT
- g. LUMBER SIZE, SPECIES, AND GRADE FOR EACH MEMBER
- h. LOCATION OF ANY REQUIRED CONTINUOUS LATERAL BRACING
- i. CALCULATED DEFLECTION RATIO AND MAXIMUM DEFLECTION FOR LIVE AND TOTAL LOAD
- j. MAXIMUM AXIAL COMPRESSIVE FORCES IN TRUSS MEMBERS
- k. LOCATION OF JOINTS
- l. CONNECTION REQUIREMENTS FOR:
 - i. TRUSS TO TRUSS GIRDERS OR FLUSH BEAMS
 - ii. TRUSS PLY TO PLY
 - iii. FIELD SPLICES

1. LUMBER

- a. LUMBER USED FOR TRUSS MEMBERS SHALL BE IN ACCORDANCE WITH PUBLISHED VALUES OF LUMBER RULES WRITING AGENCIES APPROVED BY THE BOARD OF REVIEW OF AMERICAN LUMBER STANDARDS COMMITTEE. LUMBER SHALL BE IDENTIFIED BY GRADE MARK OF A LUMBER INSPECTION BUREAU OR AGENCY APPROVED BY THAT BOARD, AND SHALL BE AS SHOWN ON DESIGN DRAWINGS.
- b. MOISTURE CONTENT OF LUMBER SHALL BE NO GREATER THAN 19 PERCENT AT TIME OF FABRICATION.
- c. ADJUSTMENT OF VALUES FOR DURATION OF LOAD OR CONDITIONS OF USE SHALL BE IN ACCORDANCE WITH NATIONAL DESIGN SPECIFICATIONS FOR WOOD CONSTRUCTION (NDS).
2. METAL CONNECTOR PLATES
 - a. METAL CONNECTOR PLATES SHALL NOT LESS THAN .0356 INCHES IN THICKNESS (20 GAUGE) AND SHALL MEET OR EXCEED ASTM A653 GRADE 37. AND SHALL BE HOT DIPPED GALVANIZED ACCORDING TO ASTM A653, COATING DESIGNATION G60. DESIGN VALUES SHALL BE DETERMINED IN ACCORDANCE WITH ANSII/HP 1.
 - b. IN HIGHLY CORROSIVE ENVIRONMENTS, SPECIAL APPLIED COATINGS OR STAINLESS STEEL MAY BE REQUIRED.
 - c. AT THE REQUEST OF ARCHITECT, MANUFACTURER SHALL FURNISH A CERTIFIED RECORD THAT MATERIALS COMPLY WITH STEEL SPECIFICATIONS.

1. TRUSSES SHALL BE FABRICATED IN A PROPERLY EQUIPPED MANUFACTURING FACILITY OF A PERMANENT NATURE. TRUSSES SHALL BE MANUFACTURED BY EXPERIENCED WORKMEN, USING PRECISION CUTTING, JIGGING AND PRESSING EQUIPMENT MEETING REQUIREMENTS OF ANSIT/PI 1, SECTION 3. TRUSS MEMBERS SHALL BE ACCURATELY CUT TO LENGTH ANGLE AND TRUE TO LINE TO ASSURE PROPER FITTING JOINTS WITHIN TOLERANCES SET FORTH IN ANSIT/PI 1, CHAPTER 3, AND PROPER FIT WITH OTHER WORK.

1. TRUSSES SHALL BE HANDLED DURING FABRICATION, DELIVERY AND AT JOBSITE SO AS NOT TO BE SUBJECTED TO EXCESSIVE BENDING.
2. TRUSSES SHALL BE UNLOADED ON SMOOTH GROUND TO AVOID LATERAL STRAIN. TRUSSES SHALL BE PROTECTED FROM DAMAGE THAT MIGHT RESULT FROM ON-SITE ACTIVITIES AND ENVIRONMENTAL CONDITIONS. PREVENT TOPPLING WHEN BANDING IS REMOVED.
3. HANDLE DURING INSTALLATION IN ACCORDANCE WITH LATEST VERSION OF BUILDING COMPONENT SAFETY INFORMATION (BCSI 1) FROM TPI, AND ANS/ITP 1. INSTALLATION SHALL BE CONSISTENT WITH GOOD WORKMANSHIP AND GOOD BUILDING PRACTICES AND SHALL BE RESPONSIBILITY OF TRUSS INSTALLER.
4. APPARENT DAMAGE TO TRUSSES, IF ANY, SHALL BE REPORTED TO MANUFACTURER PRIOR TO INSTALLATION.
5. TRUSSES SHALL BE SET AND SECURED LEVEL AND PLUMB, AND IN CORRECT LOCATION. TRUSSES SHALL BE HELD IN CORRECT ALIGNMENT UNTIL SPECIFIED PERMANENT BRACING IS INSTALLED.
6. CUTTING AND ALTERING OF TRUSSES IS NOT PERMITTED.
7. CONCENTRATED LOADS SHALL NOT BE PLACED ATOP TRUSSES UNTIL ALL SPECIFIED BRACING HAS BEEN INSTALLED AND DECKING IS PERMANENTLY NAILED IN PLACE. SPECIFICALLY AVOID STACKING FIRE BUNDLES OF DECKING OR OTHER HEAVY MATERIALS ON UNHEATED TRUSSES.
8. ERECTION BRACING IS ALWAYS REQUIRED. PROFESSIONAL ADVICE SHOULD ALWAYS BE SOUGHT TO PREVENT TOPPLING OR DOMINOING OF TRUSSES DURING INSTALLATION.
9. THE CONTRACTOR IS RESPONSIBLE FOR OBTAINING AND FURNISHING THE MATERIALS USED FOR INSTALLATION AND PERMANENT BRACING.

31.1 FOUNDATIONS AND OTHER EARTH BEARING SYSTEMS

- A. FOUNDATIONS AND OTHER EARTH BEARING SYSTEMS ARE DESIGNED IN ACCORDANCE WITH FLG BUILDING CODE SECTION 1806.
- B. OTHER EARTH BEARING SYSTEMS:
1. CAST-IN-PLACE CONCRETE SLAB-ON-GRADE:
- i. SIZES AND LOCATIONS AS SPECIFIED ON DRAWINGS.
- ii. MATERIAL PROPERTIES AS SPECIFIED IN DIVISION 03.
- iii. CONCRETE ELEMENTS ON NATIVE SOIL OR ENGINEERED FILL:
- a. LOCATION SHALL BE ASSUMED AS TYPICAL UNLESS NOTED OTHERWISE.
- d. ALL MATERIALS TO BE COMPACTED STANDARD PROCTOR ASTM D698. TEST LAB
LABORATORY TO VERIFY ADEQUACY OF SUBGRADE PREPARATION, FILL MATR
COMPACTION AS FOLLOWS: 95%
2. SITE PAVINGS, WALKS, AND AREAS OF GENERAL GRADING/BACKFILLING:
- i. AS SPECIFIED BY CIVIL UNLESS NOTED OTHERWISE
- ii. CONCRETE ELEMENTS ON NATIVE SOIL OR ENGINEERED FILL:
- b. ALL MATERIALS TO BE COMPACTED STANDARD PROCTOR ASTM D698. TEST LAB
LABORATORY TO VERIFY ADEQUACY OF SUBGRADE PREPARATION, FILL MATR
COMPACTION AS FOLLOWS: 95%
- C. SHALLOW FOUNDATIONS:
- 1 FOUNDATIONS SHALL BE PLACED AT ELEVATIONS SPECIFIED ON DRAWINGS.
- 2 CAST-IN-PLACE CONCRETE FOOTINGS, MATS, AND STRIPS:
- i. SIZES AND LOCATIONS AS SPECIFIED ON DRAWINGS.
- ii. MATERIAL PROPERTIES AS SPECIFIED IN DIVISION 03.
- iii. CONCRETE ELEMENTS ON NATIVE SOIL OR ENGINEERED FILL:
- a. LOCATION SHALL BE ASSUMED AS TYPICAL UNLESS NOTED OTHERWISE.
- b. ALLOWABLE DESIGN CAPACITIES:
1. GRAVITY BEARING (UNIFORM UNO) 1500 PSF
2. LATERAL BEARING PRESSURE 100 PSF
- BE/F

A. ALL FOUNDATIONS AND OTHER EARTH BEARING SYSTEMS, PERMANENT LATERAL EARTH RETAINING ELEMENTS, EARTHWORK, EXCAVATION, BACKFILL, AND SUBGRADE DRAINAGE SHALL BE SUBJECT TO OBSERVATION BY GEOTECHNICAL ENGINEER WHOSE APPROVAL IS REQUIRED PRIOR TO PLACEMENT OF ANY OTHER CONSTRUCTION MATERIALS OR CONCRETE. CONTRACTOR SHALL COORDINATE THE CONSTRUCTION SCHEDULE WITH THE GEOTECHNICAL ENGINEER TO FACILITATE OBSERVATION.

- B. CONTRACTOR SHALL DETERMINE IN FIELD HORIZONTAL AND VERTICAL LOCATION OF ANY EXISTING UTILITIES, LINES AND/OR APPURTENANCES AND ADVISE ENGINEER OF ANY CONFLICTS WITH NEW STRUCTURES TO BE CONSTRUCTED. DO NOT DESTROY ANY EXISTING UNDERGROUND STRUCTURES UNLESS AUTHORIZATION IS OBTAINED PRIOR TO CONSTRUCTION.

- C. CONTRACTOR SHALL MAINTAIN SAFETY IN CONNECTION WITH EARTH SLOPES CAUSED BY TRENCING, EXCAVATION, AND/OR FILL DURING CONSTRUCTION. WHERE HEIGHT OF SUCH SLOPES WILL EXCEED 10 FEET OR AS SPECIFIED ON DRAWINGS, SUBMIT FOR RECORD LAYOUT DRAWINGS INDICATING DESIGN OF TEMPORARY EARTH RETENTION SYSTEM WHICH WILL BE IMPLEMENTED (SUCH AS SHEETING AND RAIL OR OTHER METHOD), PREPARED, SIGNED, AND SEALED BY A LICENSED CIVIL AND/OR STRUCTURAL ENGINEER REGISTERED IN STATE WHICH PROJECT IS LOCATED. REFER TO SPECIFICATION SECTION 01.06.00 ADDL INFO.

- D. ANY UNUSUAL SOIL CONDITIONS (WATER, SOFT LAYERS, ODORS, ETC.) ENCOUNTERED DURING B SHOULD BE IMMEDIATELY BROUGHT TO ATTENTION OF THE GEOTECHNICAL ENGINEER.

FOUNDATION PLAN NOTES:

1. FINISH FLOOR ELEVATION = 0'-0", UNLESS NOTED OTHERWISE. REFER TO THE CIVIL DRAWINGS FOR ADDITIONAL INFORMATION.
2. REFER TO THE ARCHITECTURAL DRAWINGS FOR EXACT LOCATIONS OF FLOOR RECESSES, DROPS AND SLOPES NOT DIMENSIONED ON PLAN. REFER TO MECHANICAL, ELECTRICAL, AND PLUMBING DRAWINGS FOR LOCATION AND DIMENSIONS OF FLOOR PENETRATIONS NOT DIMENSIONED ON PLAN. CONTRACTOR TO COORDINATE.
3. CENTERLINES OF FOUNDATIONS NOT SPECIFICALLY LOCATED ON PLAN BY NOTE OR DIMENSION SHALL BE LOCATED AS FOLLOWS:
 - A. SUPPORTING FREESTANDING COLUMNS:
CENTERLINES OF COLUMN.
 - B. SUPPORTING GRADEBEAMS AND WALLS:
CENTERLINE OF GRADEBEAM OR WALL IN ONE DIRECTION. GRID OR AS NOTED IN OTHER DIRECTION. AT CORNER CONDITIONS:
CENTERLINES OF GRADEBEAMS OR WALLS.
 - C. COLUMNS EMBEDDED IN GRADEBEAMS OR WALLS (PILASTERS): CENTERLINES OF THE COLUMN.
4. REF. S5.0 FOR ADD'L SLAB-ON-GRADE INFORMATION
5.  = 8" CMU WALLS
6.  = 8" CMU SHEAR WALL



STEEL COLUMN NOTES:

DENOTES COLUMN MARK

STEEL COLUMN -

CIP PLINTH

DENOTES BASEPLATE MARK

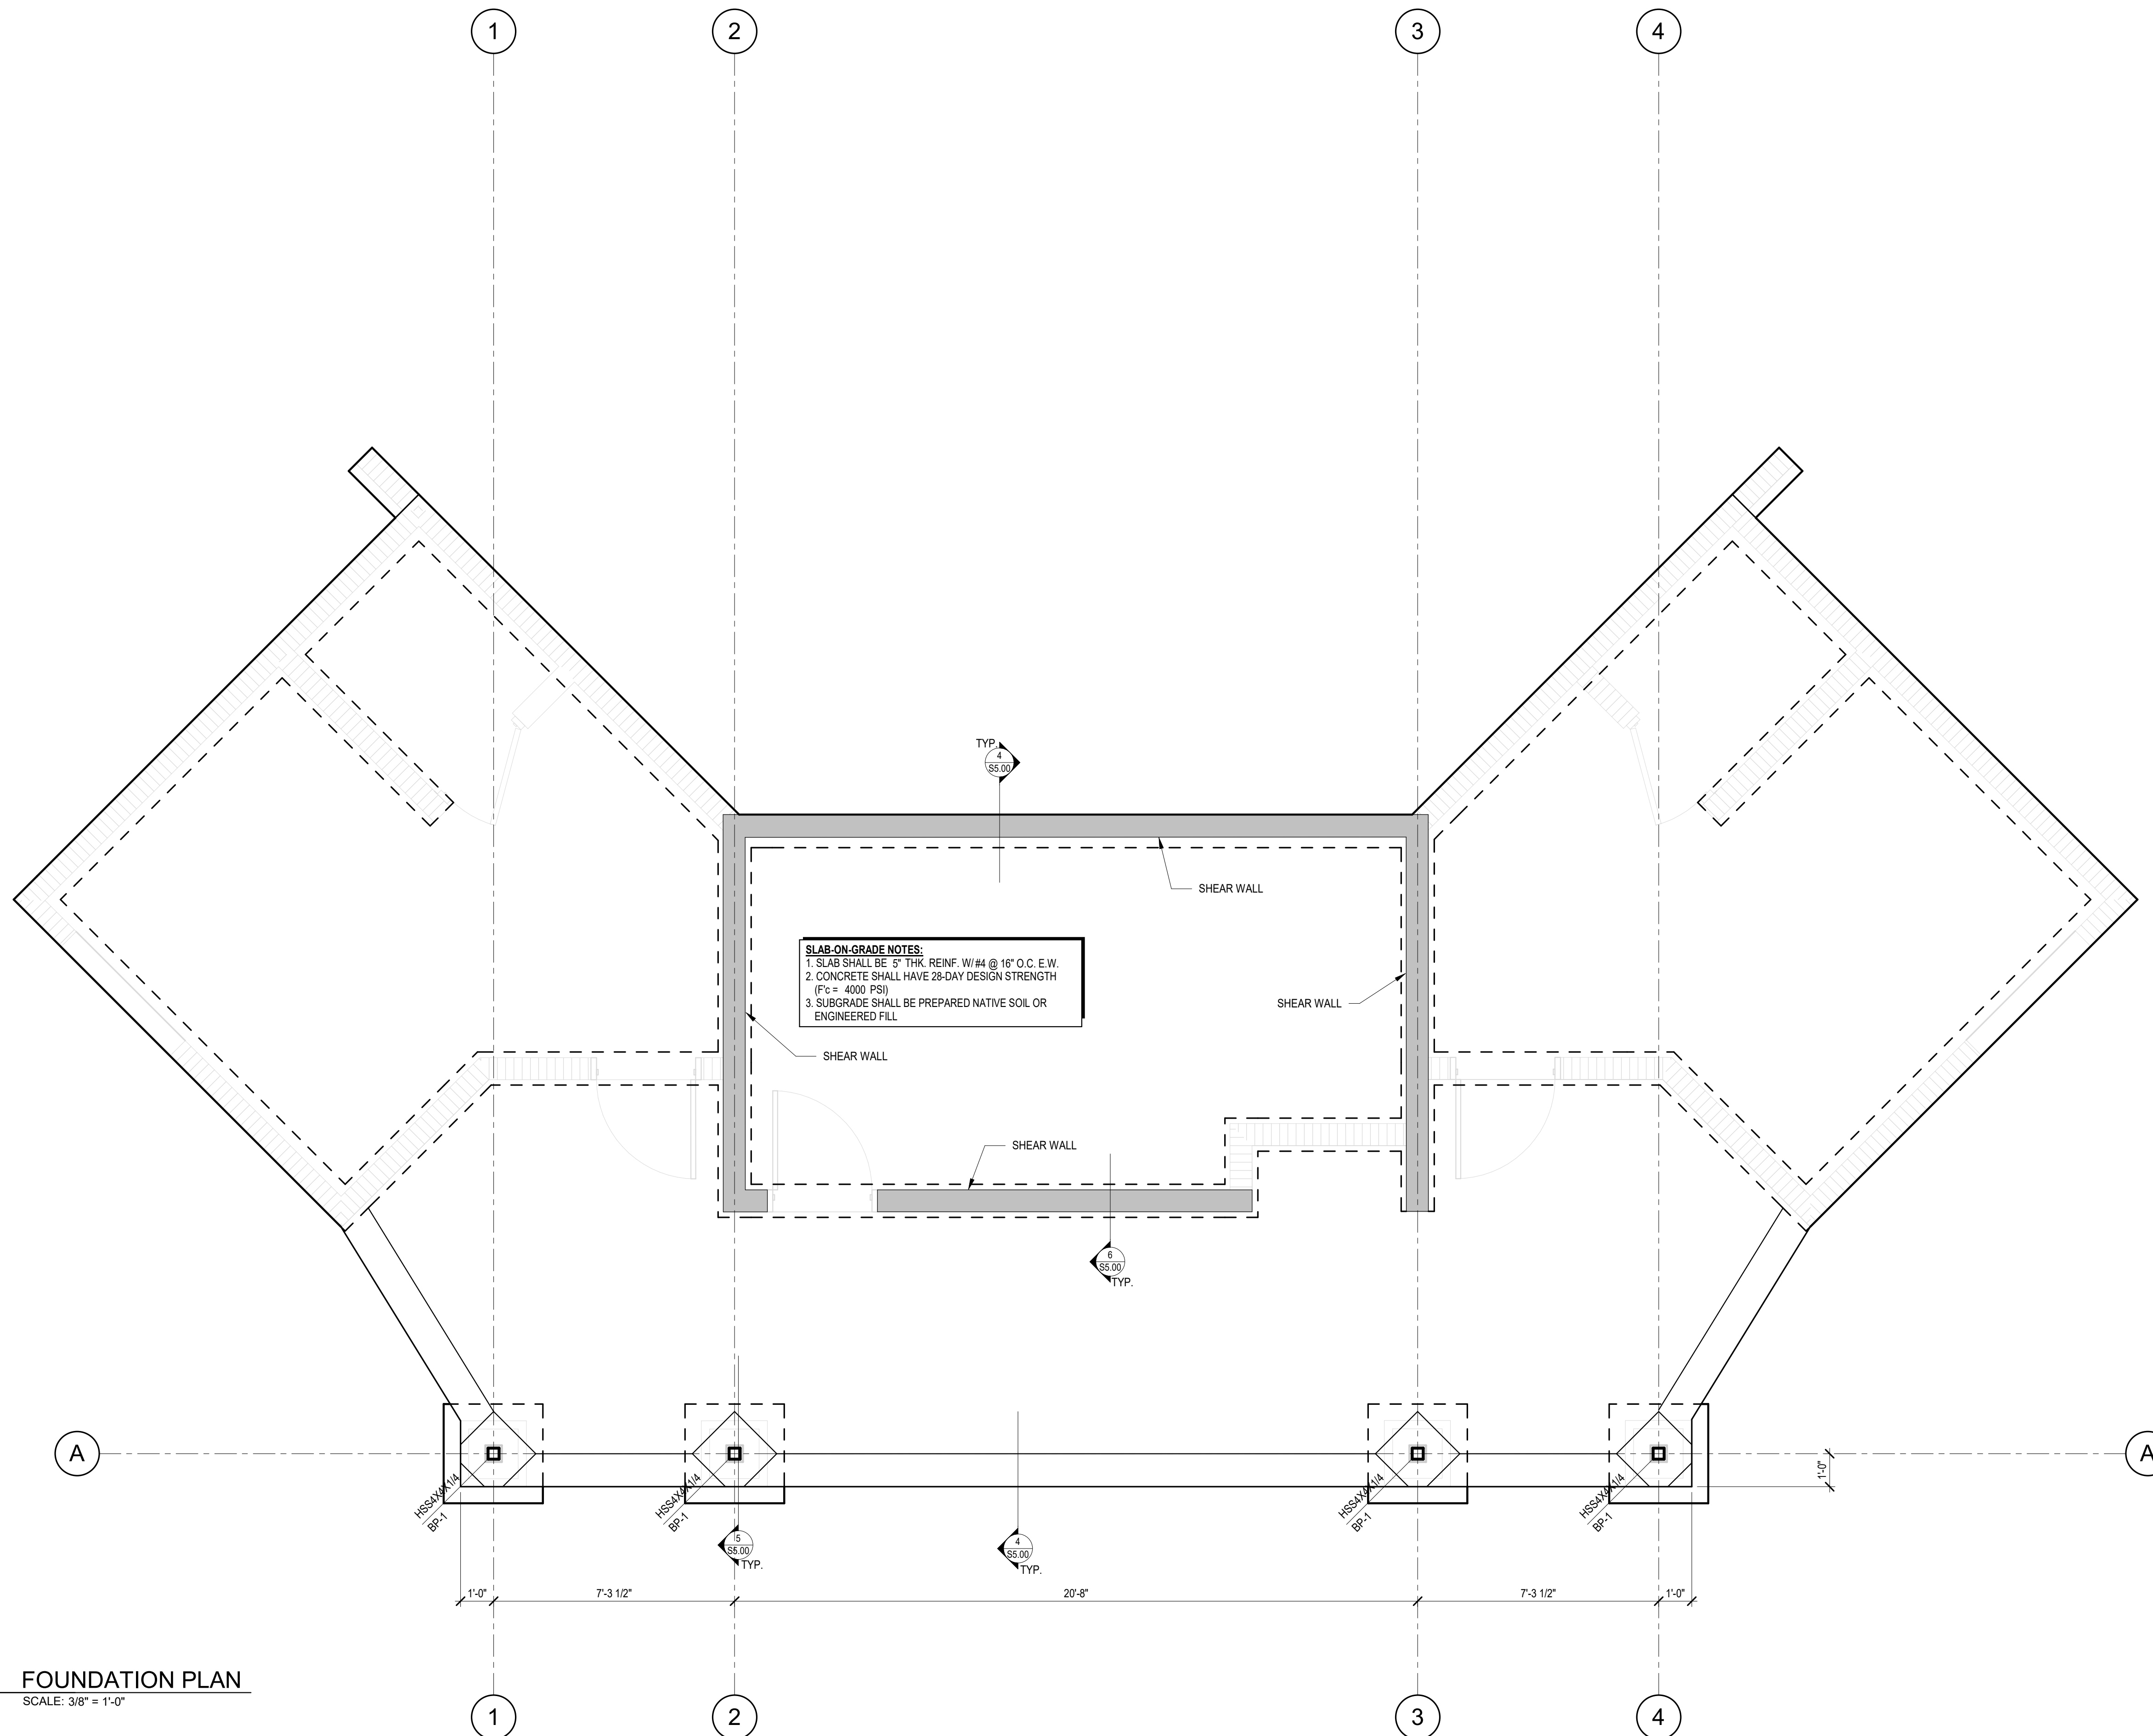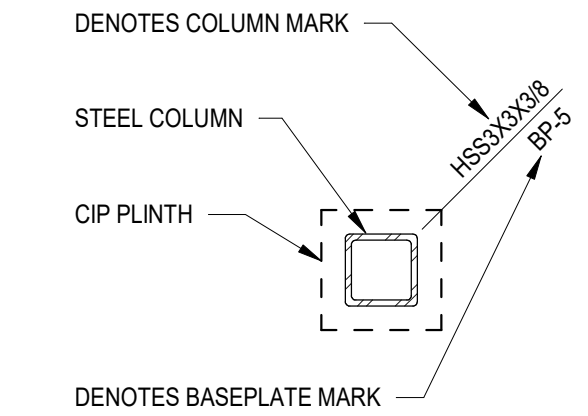

1 FOUNDATION PLAN

SCALE: 3/8" = 1'-0"



**CITY OF DADE COUNTY
FLORIDA
PARK RESTROOMS**

37800 CHURCH AVENUE
DADE COUNTY, FL 33525

[illegible]

PROJECT NO:

23005.001

DATE: 10/19/2023

DESIGNED BY: _____

DRAWN BY: _____

CHECKED BY: _____

DRAWING TITLE:

FOUNDATION PLAN

SHEET NO:

S1.00

PERMIT BID SET	10-19-2023
----------------	------------

1. FLOOR FRAMING SHALL BE PRE-ENGINEERED WOOD TRUSSES AS FOLLOWS:
RT = PREFABRICATED ROOF TRUSS
GT = PREFABRICATED GIRDER TRUSS
2. SPAN ARROWS INDICATE TRUSS SPAN DIRECTION. ACTUAL LAYOUT TRUSSES SHALL BE PROVIDED BY TRUSS MANUFACTURER.
3. ALL TRUSS LAYOUT MECHANICAL LOCATIONS WITHIN TRUSS AND TRUSS DRAWINGS. FRAMING MEMBERS SHALL NOT BE DAMAGED TO INSTALLATION OF MECHANICAL OR PLUMBING SYSTEM AN ENGINEER SHALL BE NOTIFIED OF CONFLICTS FOR PROPER RESOLUTION. TRUSS MANUFACTURER SHALL PROVIDE OPEN CHAMFER AS REQUIRED FOR MEP SYSTEMS.
4. COORDINATE ALL STEPS, SLOPES AND DIMENSIONS NOT SHOWN WITH ARCHITECTURAL DRAWINGS.
5. ALL DETAILS AND SECTIONS SHALL BE CONSIDERED TYPICAL FOR SIMILAR CONDITIONS, U.N.O.
6. WELD CONCEALED JOINTS OF HUC HANGERS TO STEEL COLUMN PER SPMSCON TECHNICAL BULLETIN T-C-HUHC-HW

[illegible]


DATE:	10/19/2023
DESIGNED BY:	
DRAWN BY:	
CHECKED BY:	

FRAMING PLAN

S1.10


PERMIT BID SET 10-19-2023

©2023 Boggs Design Partners, LLC. All rights reserved. This document is the property of Boggs Design Partners, LLC. It is to be used only for the specific project and site for which it was prepared. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, without prior written permission from Boggs Design Partners, LLC. All rights reserved. The design of this document is the property of Boggs Design Partners, LLC. It is to be used only for the specific project and site for which it was prepared. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, without prior written permission from Boggs Design Partners, LLC. All rights reserved.

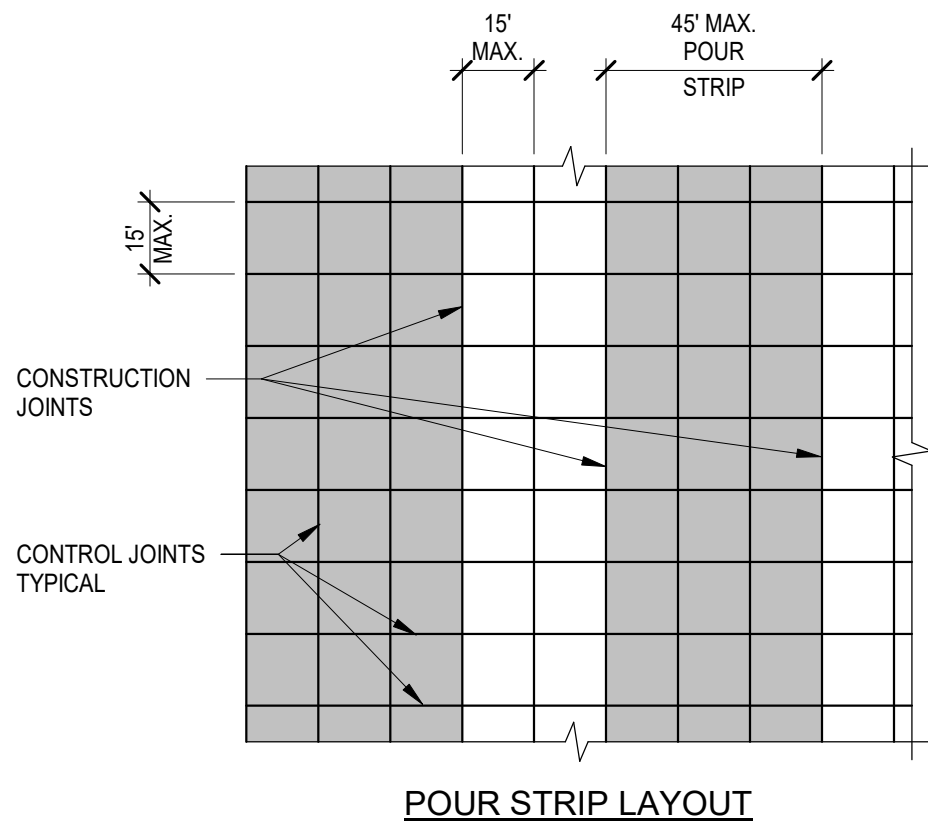


- SLAB-ON-GRADE NOTES:**
1. SLABS SHALL BE POURED IN A STRIP PATTERN WITH WIDTHS NOT EXCEEDING 45'-0".
 2. SEE PLAN FOR THICKNESS OF SLAB (T) AND REINFORCING.
 3. SAWCUT JOINTS MUST BE MADE WITHIN 12 HOURS AFTER THE SLAB HAS BEEN PLACED.
 4. IF METAL FORMS ARE USED, REMOVE THEM BEFORE POURING ADJACENT SLAB.
 5. FOR SLABS WITH THICKNESS (T) GREATER THAN 6", THICKENED EDGES ARE NOT REQUIRED AT JOINTS.
 6. PROVIDE A CONSTRUCTION OR A CONTROL JOINT ON THE CENTERLINES OF COLUMNS.
 7. INFILL STRIPS CAN BE PLACED AFTER INITIAL SLAB STRIPS HAVE CURED FOR 3 DAYS.
 8. LAP REINFORCING 38 BAR DIAMETER MINIMUM.


1 POUR STRIP LAYOUT
NOT TO SCALE

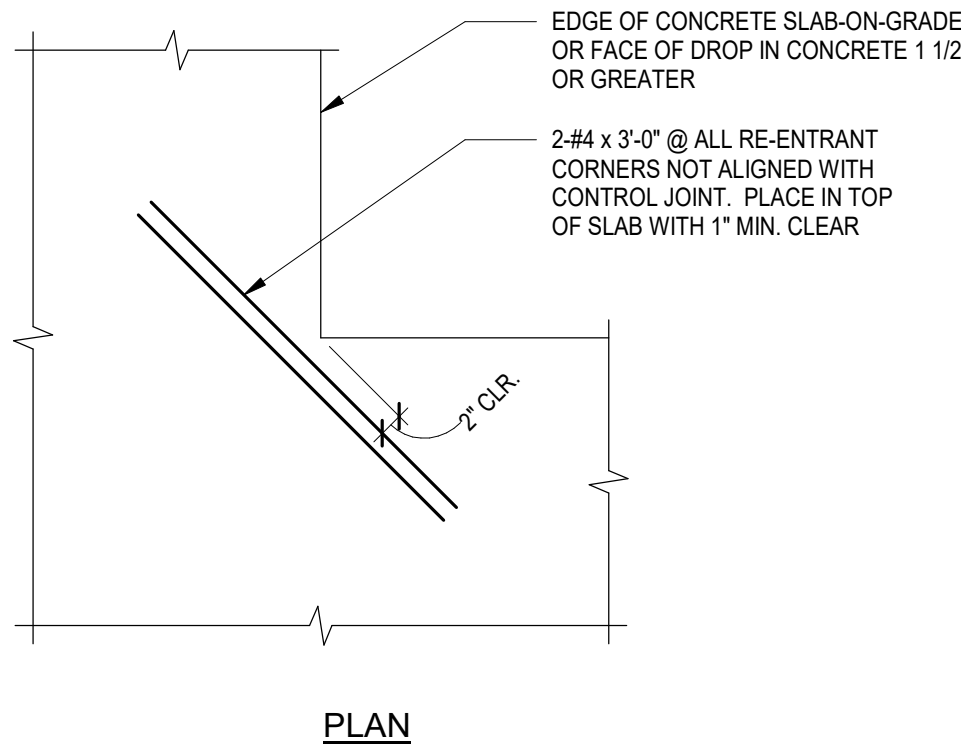


2 TYPICAL SLAB-ON-GRADE RE-ENTRANT CORNER REINFORCING DETAIL
SCALE: 3/4" = 1'-0"

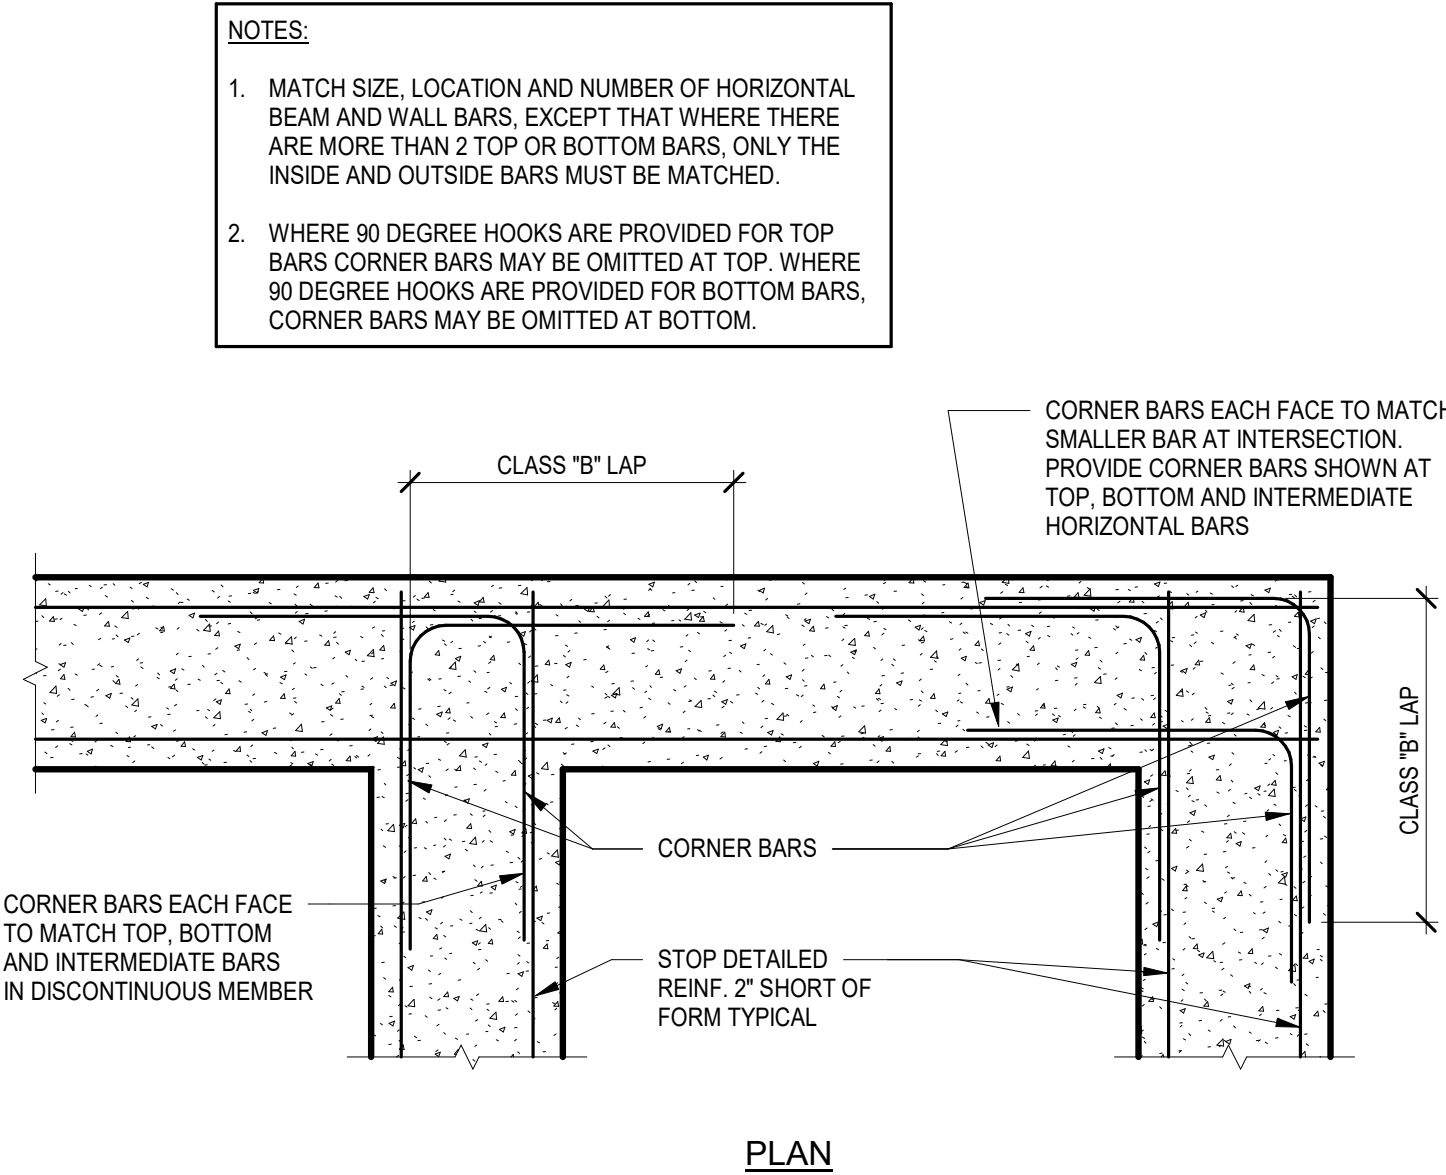


3 TYPICAL CORNER BARS AT GRADE BEAM INTERSECTION DETAIL
SCALE: 3/4" = 1'-0"

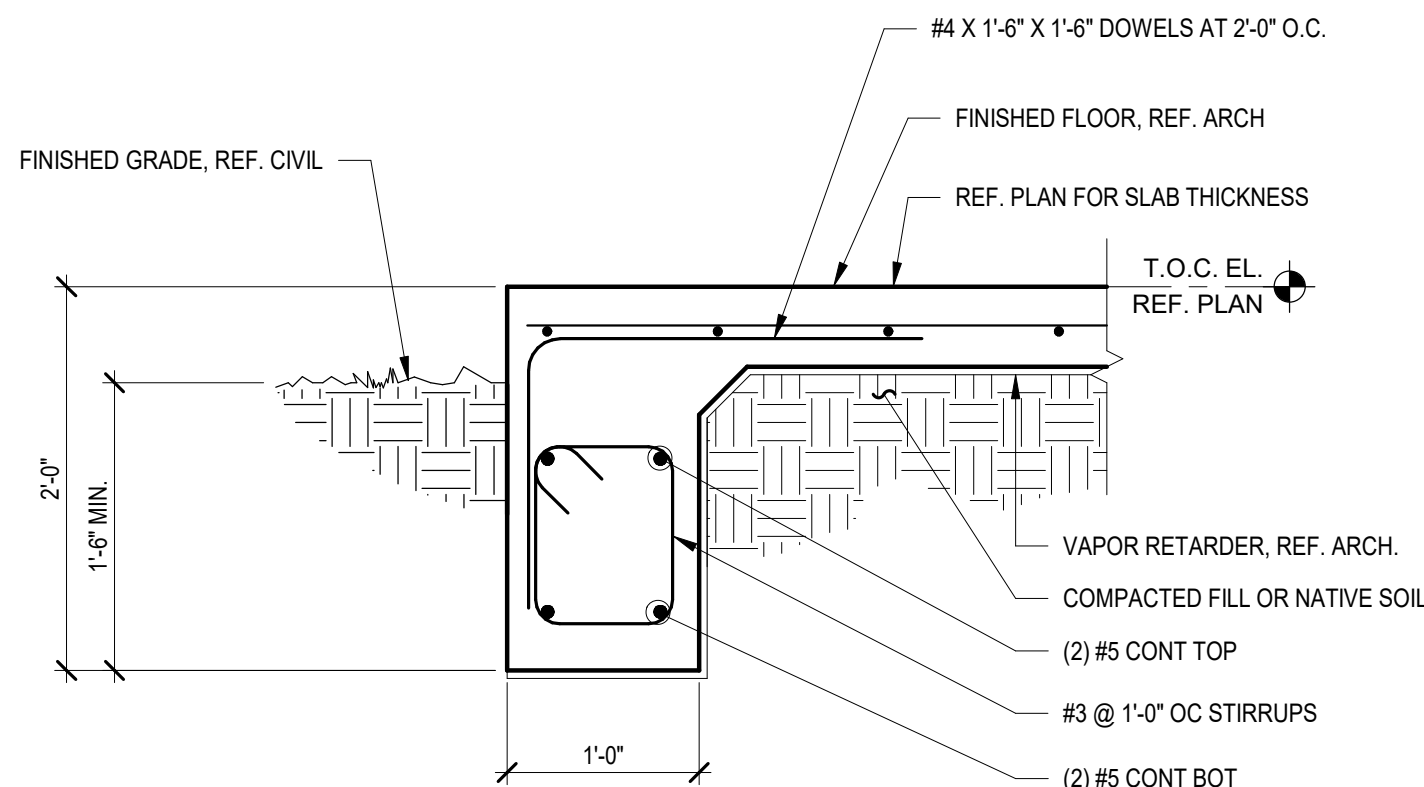

4 EXTERIOR GRADE BEAM DETAIL
SCALE: 1" = 1'-0"

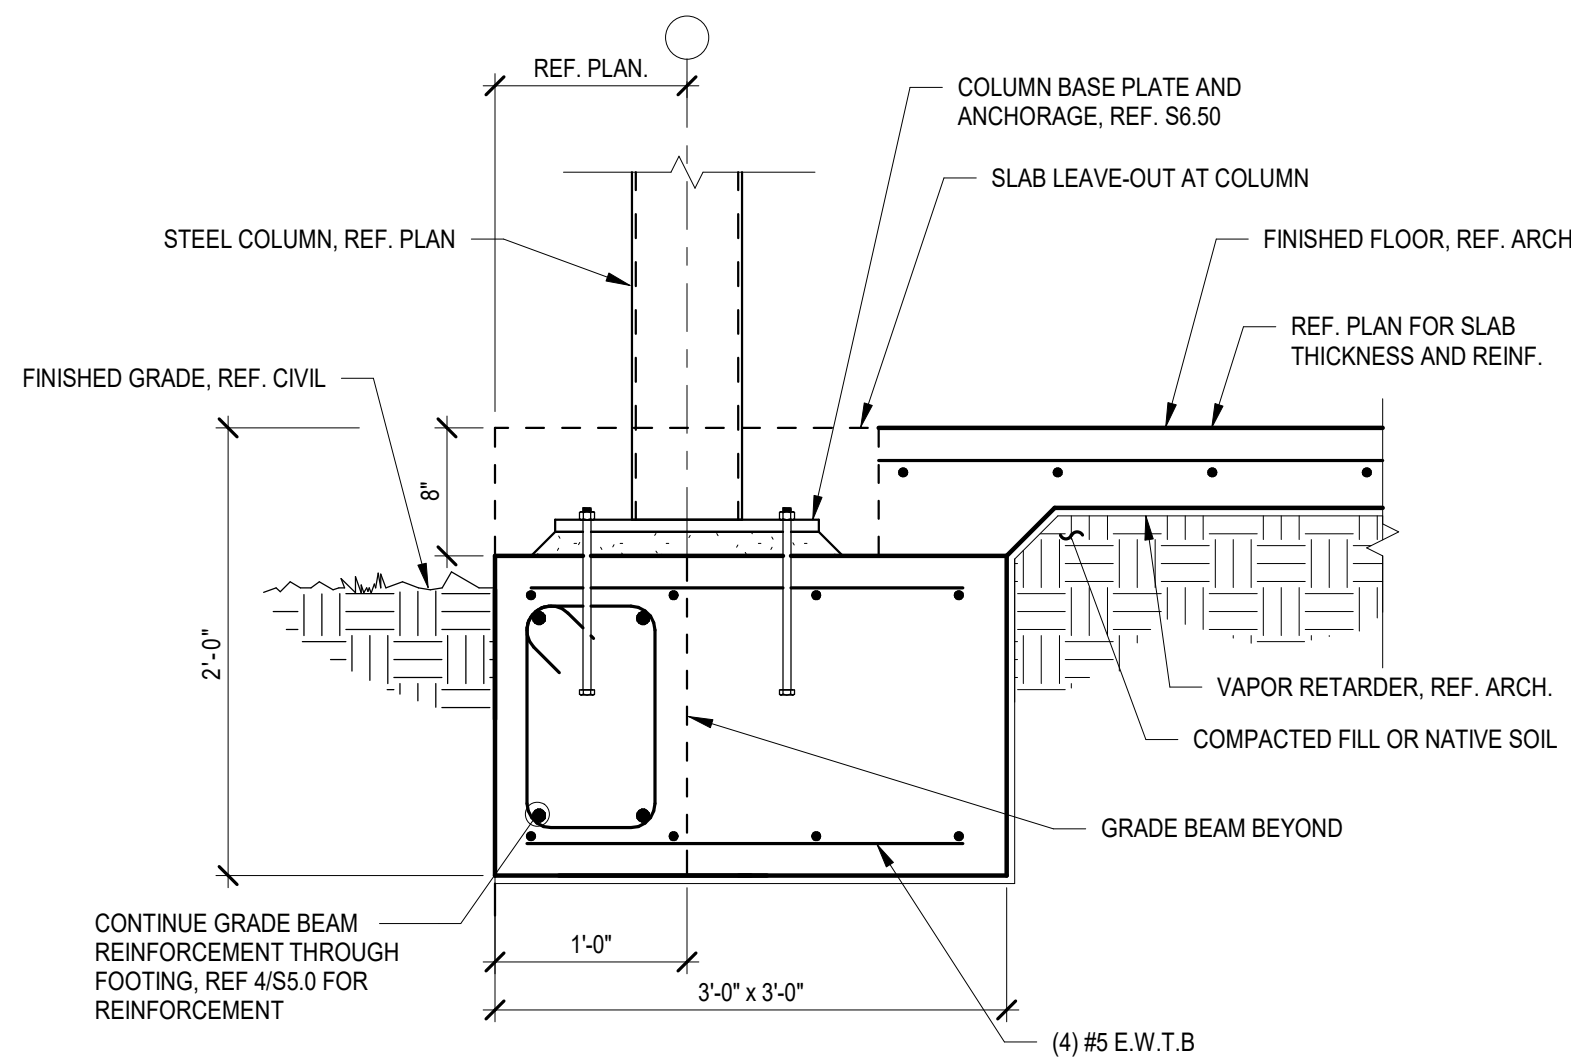

5 EXTERIOR GRADE BEAM DETAIL AT FTG.
SCALE: 1" = 1'-0"

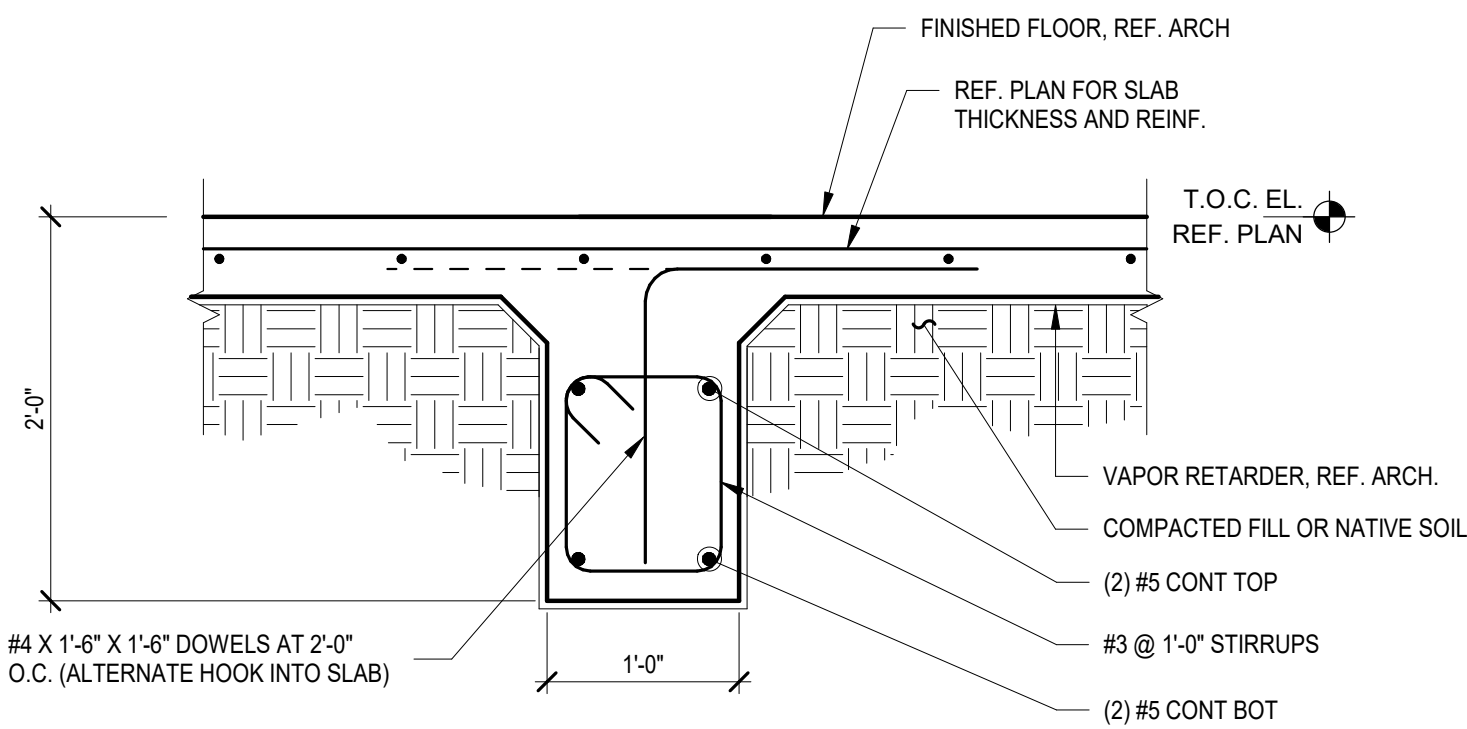

6 INTERIOR GRADE BEAM DETAIL
SCALE: 1" = 1'-0"

NO.	DATE	REVISION DESCRIPTION

PROJECT NO:
23005.001
DATE: 10/19/2023
DESIGNED BY:
DRAWN BY:
CHECKED BY:

DRAWING TITLE:

TYPICAL FOUNDATION DETAILS


SHEET NO:

S5.00


PERMIT BID SET 10-19-2023

REINFORCEMENT SPLICE LENGTH SCHEDULE	
fm=1500 psi MASONRY	
BAR SIZE	MASONRY
#3	1'-4"
#4	1'-9"
#5	2'-8"
#6	4'-6"
#7	5'-3"
#8	6'-0"
#9	6'-9"


- NOTES:
- LAP LENGTHS LISTED ABOVE APPLY UNDER THE FOLLOWING CONDITIONS:
 - REINFORCING BARS ARE GRADE 60 (F_y=60,000 PSI)
 - MASONRY STRENGTH IS AT LEAST 1,500 PSI
 - WALL BARS ARE SPACED AT LEAST 5 BAR DIA. O.C.
 - CLEAR COVER ASSUMED TO BE 2 1/2" FOR BAR SIZES OF #6 AND LESS.
 - CLEAR COVER ASSUMED TO BE 3" FOR #7 BARS AND 4" FOR #8 AND #9 BARS.
 - WHERE CLEAR COVER OR CLEAR SPACING FOR MASONRY REINF. IS LESS, INCREASE SPLICE LENGTHS SHOWN BY MULTIPLYING LENGTHS BY MAX. RATIO OF ASSUMED CLEAR COVER TO ACTUAL CLEAR COVER.
 - WHERE A LARGER BAR LAPS A SMALLER BAR, THE SMALLER SCHEDULED LAP LENGTH APPLIES.
 - SEE CONCRETE TYPICAL DETAILS FOR DOWELS AND HOOK LENGTHS.

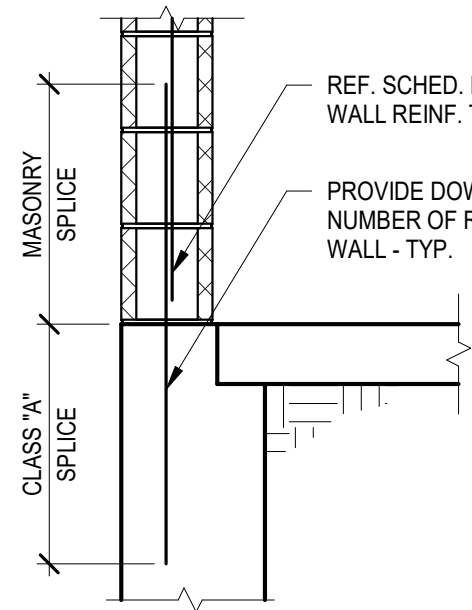

CAST-IN-PLACE (STRAIGHT BAR)

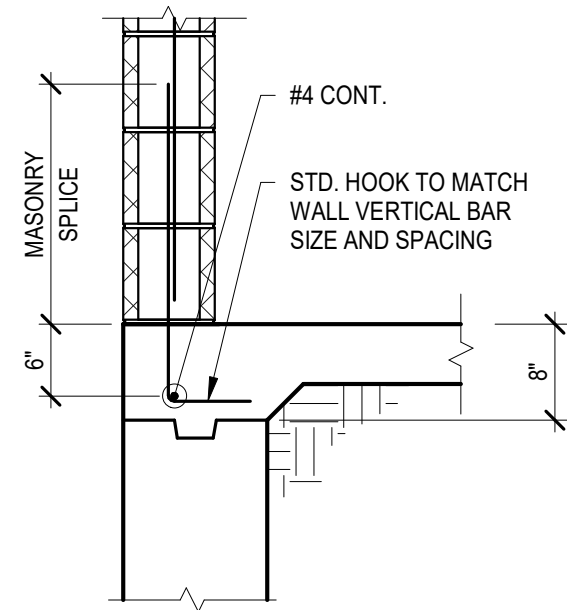


CAST-IN-PLACE (HOOKED BAR)

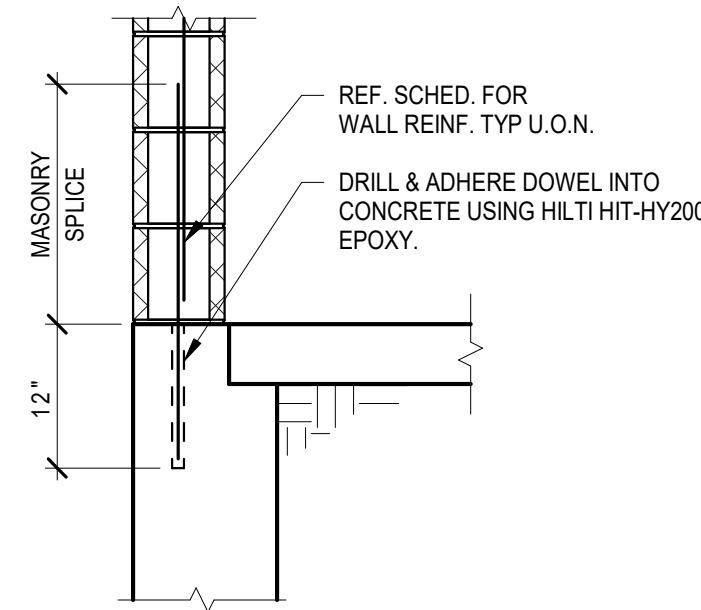

DRILLED-IN-ADHESIVE ALTERNATE

- NOTES:
- MASONRY DOWEL TO MATCH SIZE & SPACING OF VERTICAL WALL REINF. TYP.
 - REF. REINFORCEMENT SPLICE LENGTH SCHEDULE ON 1/S5.40 FOR ADD'L INFO.

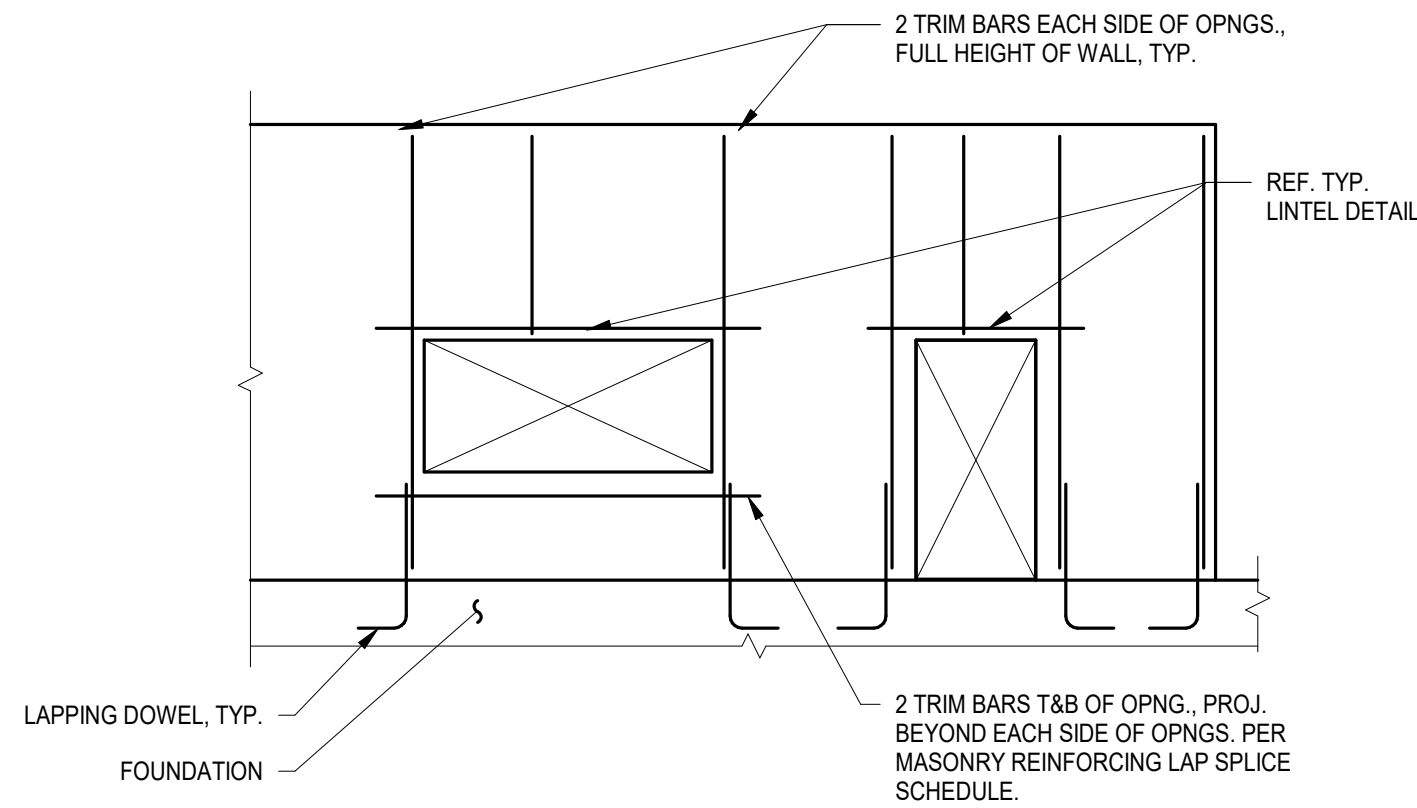

TYPICAL ELEVATION

- NOTES:
- TRIM BAR SIZES TO MATCH WALL REINFORCING, #5 MIN.
 - TRIM BARS ARE IN ADDITION TO TYPICAL WALL REINFORCING
 - VERTICAL STEEL SHALL BE FULL HEIGHT EACH SIDE OF OPENINGS. PROVIDE LAP PLICES TO MATCH VERTICAL STEEL.
 - APPLIED ONLY TO WALLS 2'-0" OR THINNER. FOR OPENINGS THROUGH THICKER WALLS, SEE STRUCTURAL ENGINEER FOR SPECIAL DETAILS.

1 MASONRY LAP SPLICE SCHEDULE


NOT TO SCALE

2 TYPICAL DETAIL WALL ANCHORAGE

NOT TO SCALE


3 TYPICAL DETAIL MINIMUM REINFORCEMENT AROUND CMU WALL OPENINGS

NOT TO SCALE

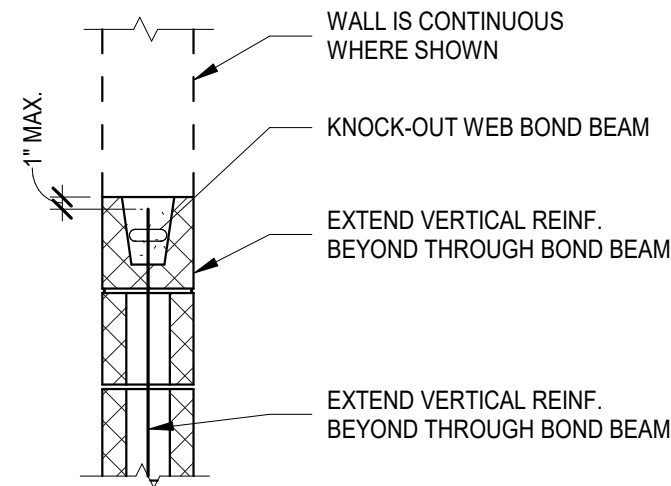

4 TYPICAL CMU BOND BEAM DETAIL


SCALE: 3/4" = 1'-0"

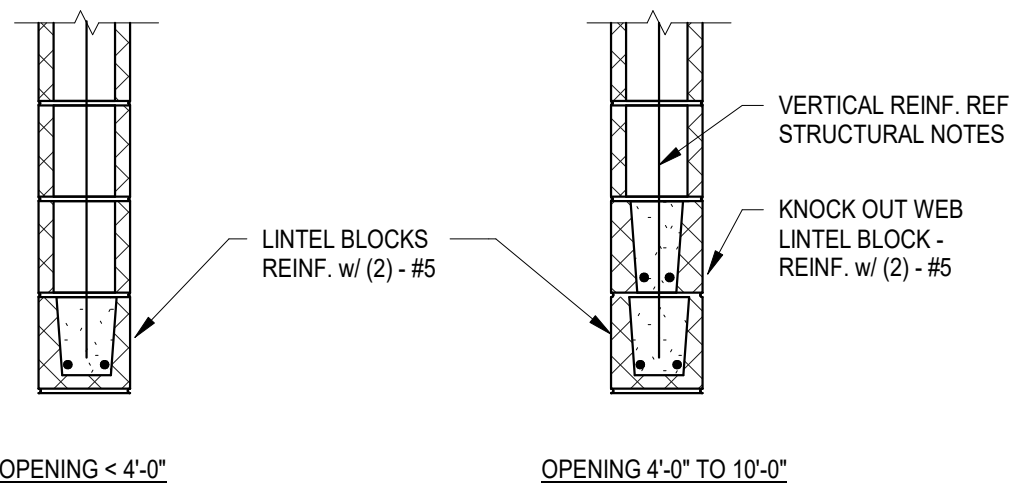

- NOTES:
- REFER TO ARCHITECTURAL DRAWINGS FOR OPENING SIZES AND LOCATIONS.
 - EXTEND BOND BEAM 8" EACH SIDE OF OPENING.
 - PROVIDE GROUTED VERTICAL CELL EACH SIDE OF OPENING - GROUT TO UNDERSIDE OF BOND BEAM - REINF. w/ #5.

5 TYPICAL DETAIL LINTEL

NOT TO SCALE

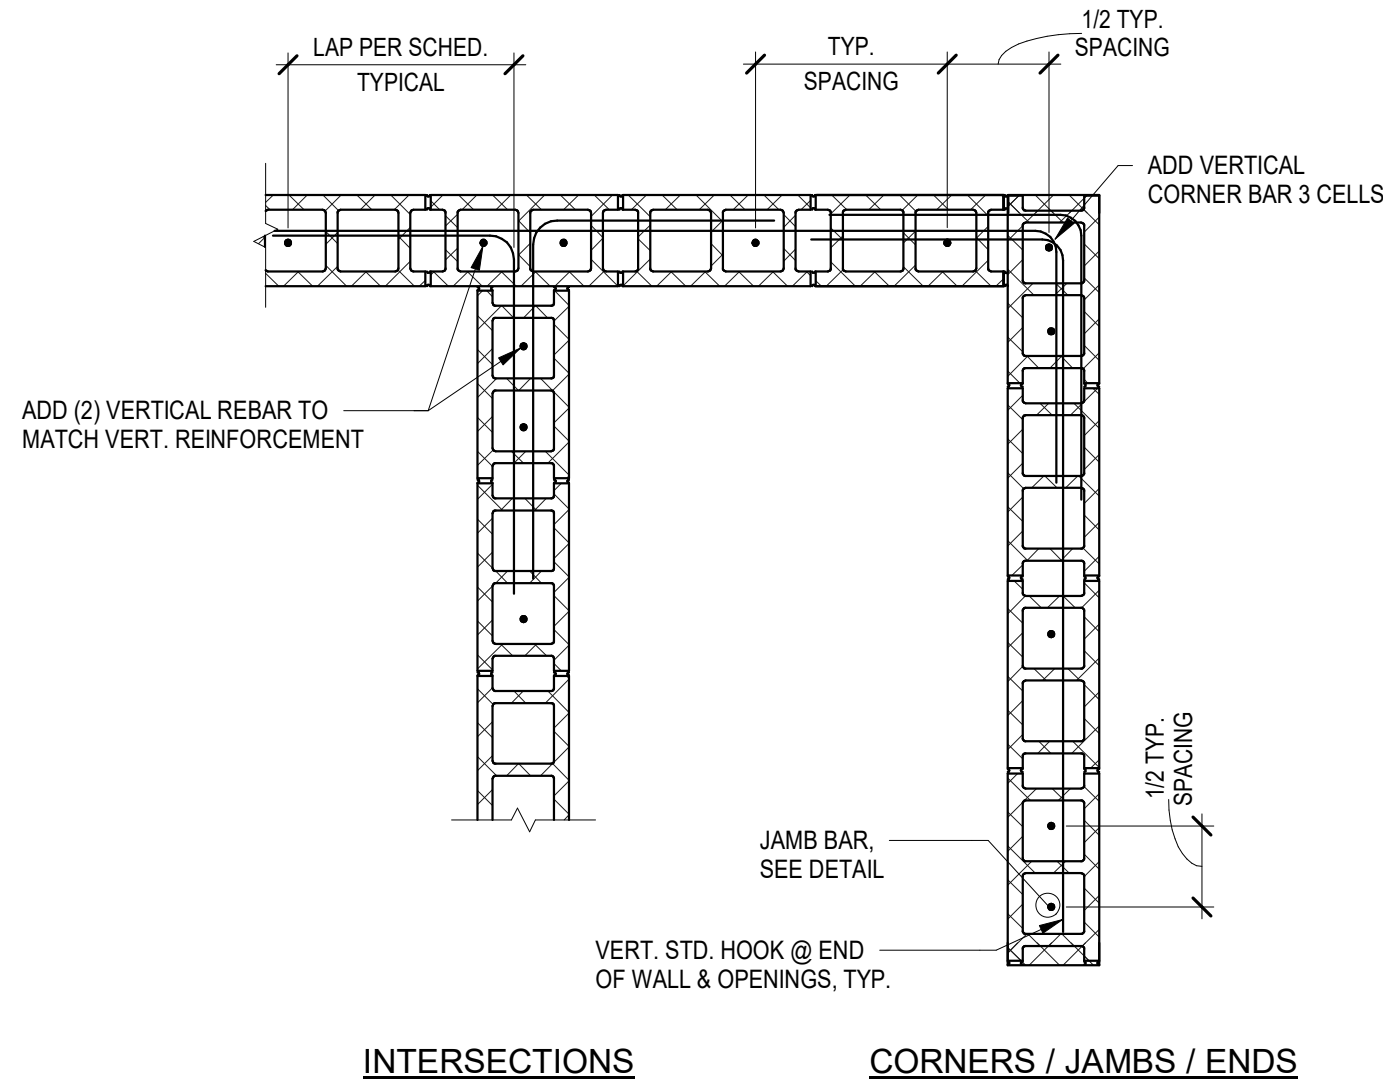


INTERSECTIONS

CORNERS / JAMBS / ENDS

6 TYPICAL DETAIL CMU WALL CORNER REINFORCING


NOT TO SCALE

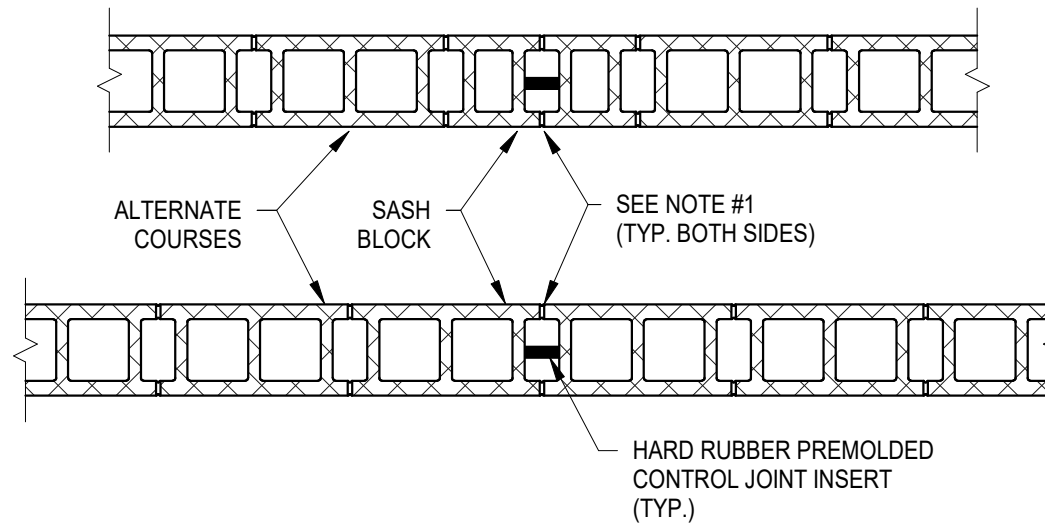

- NOTES:
- USE SEALANT BOTH SIDES FULL HEIGHT OF WALL.
 - MAXIMUM CONTROL JOINT SPACING IS 20'-0" O.C.
 - WHERE POSSIBLE, POSITION CMU WALL CONTROL JOINT TO COINCIDE WITH SLAB-ON-GRADE CONTROL/CONSTRUCTION JOINTS.
 - SUBMIT A CMU CONTROL JOINT PLAN TO THE ARCHITECT FOR REVIEW AND APPROVAL.
 - IN LIEU OF HARD RUBBER PREMOLDED CONTROL JOINT INSERT AND SPECIAL SASH BLOCKS, A CONTROL JOINT SHEAR BAR (12" LONG x 1" WIDE x 1/4" THICK MAY BE GROUTED INTO THE WALL AT THE CONTROL JOINT AT 16" O.C.

7 TYPICAL DETAIL WALL CONTROL JOINT

NOT TO SCALE

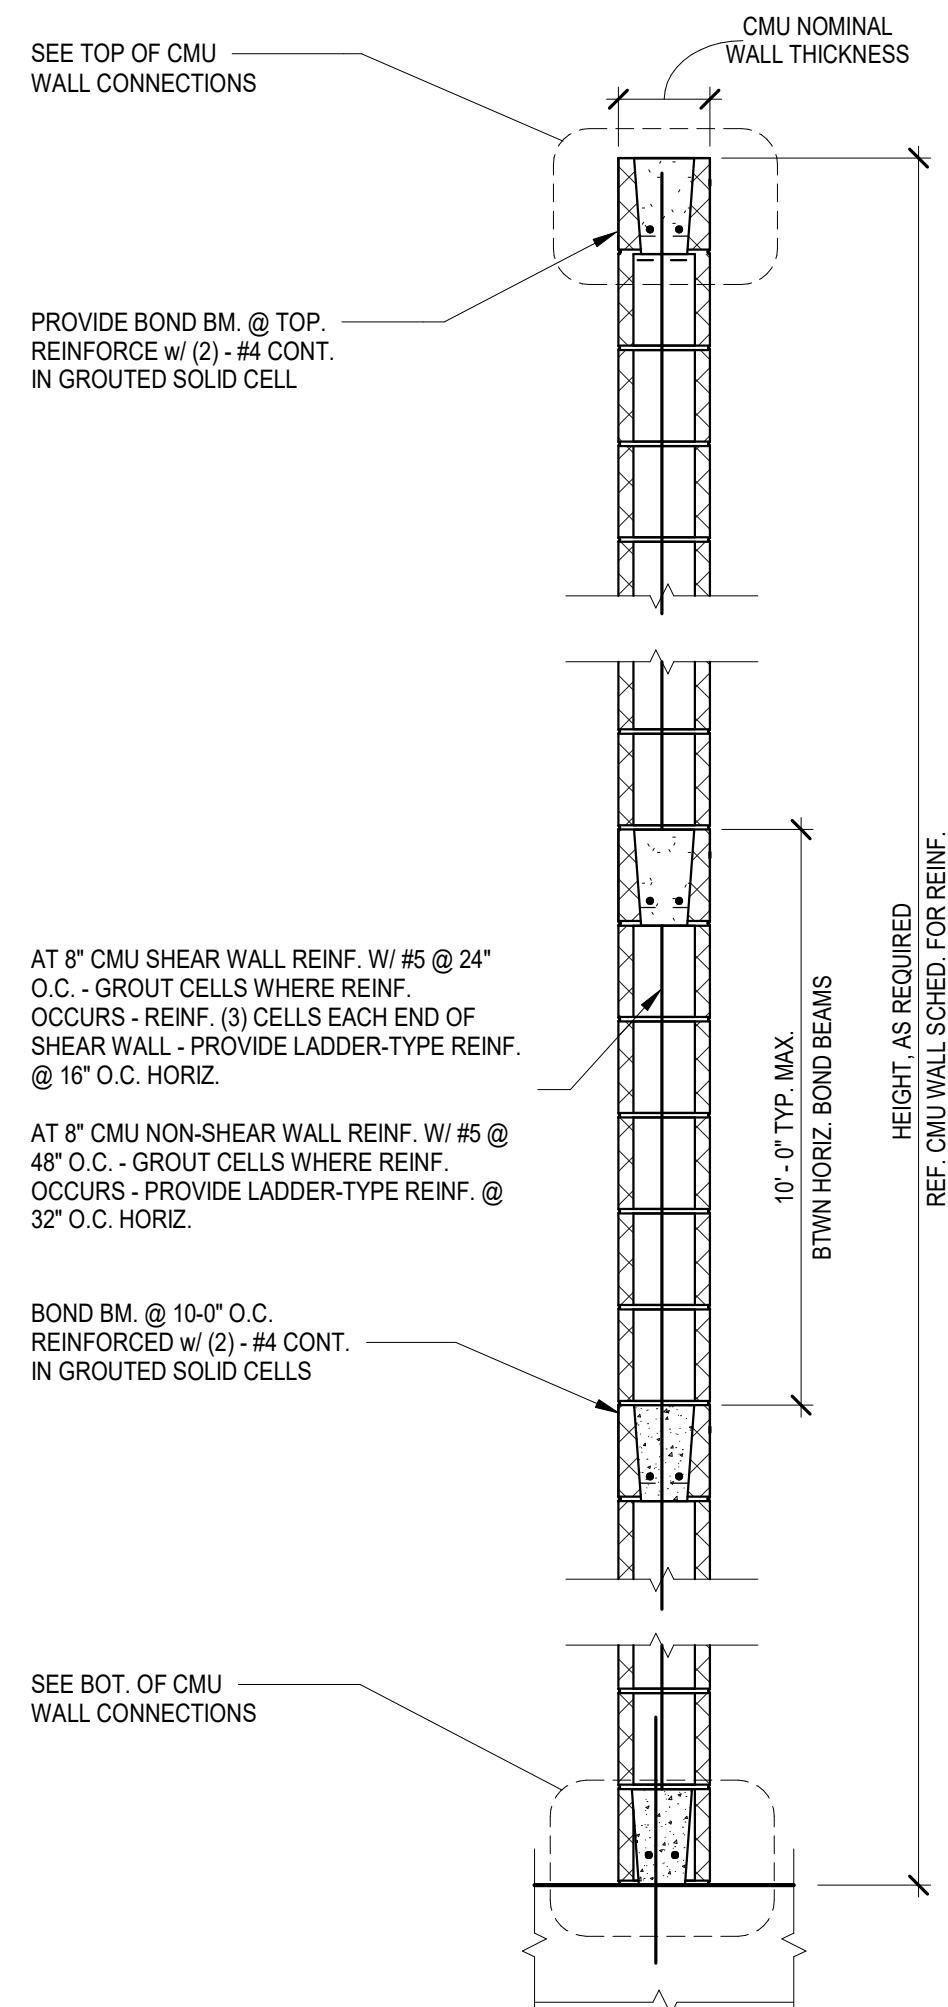

8 TYPICAL DETAIL WALL SECTION

SCALE: 3/4" = 1'-0"






- NOTES:
1. USE TYPE "A" ROD, TYPICAL U.N.O.
 2. USE TYPE "B" ROD AT ALL BRACE LOCATIONS AND OTHER LOCATIONS AT CONTRACTOR'S OPTION.
 3. HEADED BOLTS MAY BE USED IN LIEU OF TYPE "A" OR TYPE "B" RODS AT CONTRACTOR'S OPTION.

SCALE: 1" = 1'-0"


NOTES:

1. CIRCULAR OR SQUARE WASHERS MEETING THE WASHER SIZE ARE ACCEPTABLE.
2. WASHERS SHALL BE FIELD WELDED ALL AROUND TO BASE PL. USING MINIMUM WELDS SIZE PER AISC.

SCALE: 1" = 1'-0"

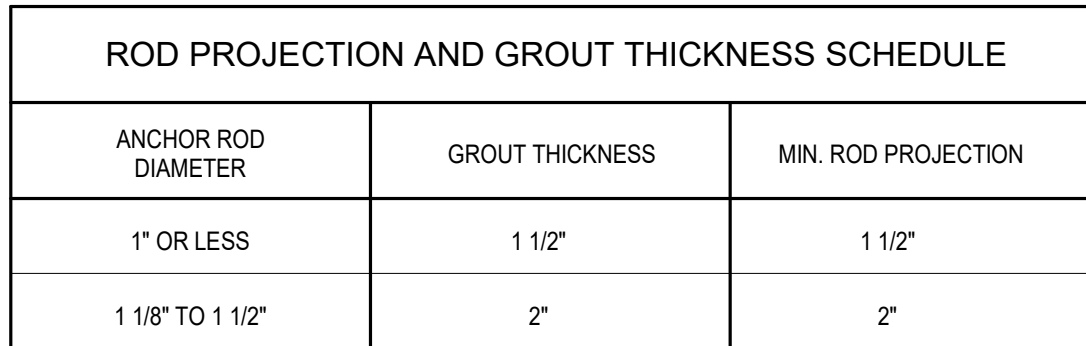

SCALE: 1 1/2" = 1'-0"

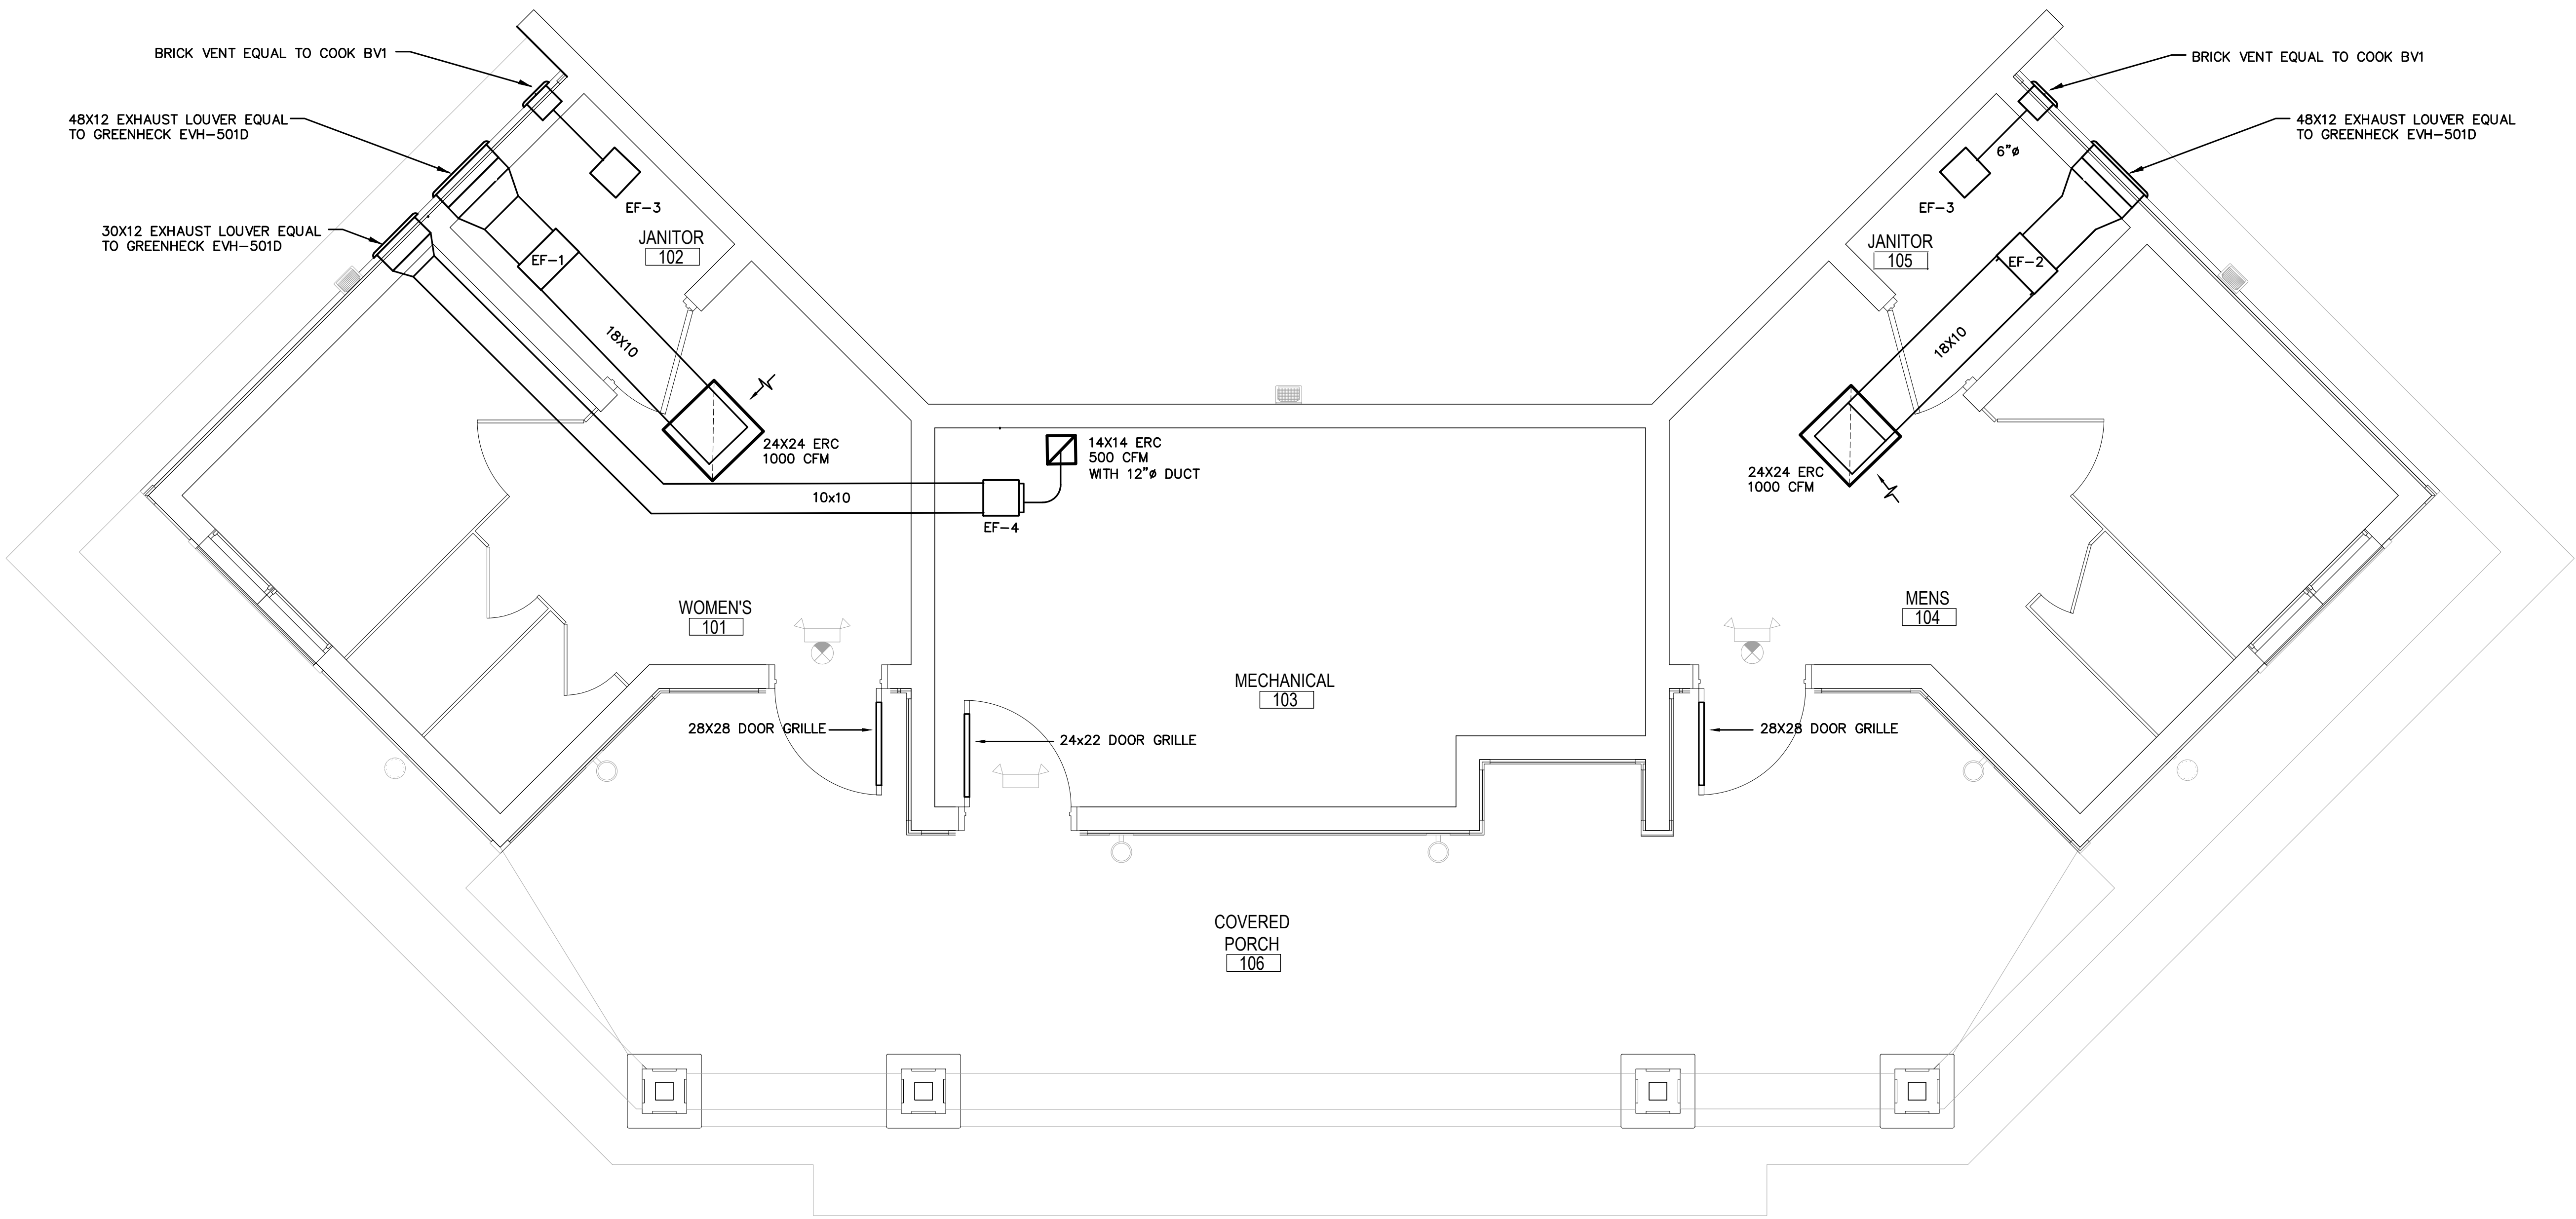

MECHANICAL FLOOR PLAN
3/8"=1'-0" 22.0487

Engineering Professionals, Inc.
Mechanical Engineers
EIT 6437
912 W. Dr. Martin Luther King Jr. Blvd.
Tampa, FL 33603 (813) 251-6848

BDP
BOGGS DESIGN PARTNERS
Architecture + Interiors
607 S. ALEXANDER ST.
SUITE 101
PLANT CITY, FL 33563
813. 946. 8444
www.bdparchitects.com

SHANE R. HAMILTON, PE
FLORIDA LICENSE #75420

CITY OF DADE CITY
PARK RESTROOMS
37800 CHURCH AVENUE
DADE CITY, FL 33525

NO.	DATE	REVISION DESCRIPTION

PROJECT NO:
23005.001
DATE: 10/19/2023
DESIGNED BY:
DRAWN BY:
CHECKED BY:
DRAWING TITLE:

MECHANICAL FLOOR PLAN

SHEET NO:
M-1

PERMIT BID SET 10-19-2023

MECHANICAL GENERAL NOTES

- IN GENERAL, PLANS AND DIAGRAMMS ARE SCHEMATIC ONLY AND SHOULD NOT BE SCALED.
- INTENT OF THESE NOTES AND MECHANICAL NOTES ON DRAWINGS IS TO CLARIFY THE SCOPE OF WORK AND ALERT CONTRACTOR OF EXISTING CONDITIONS. CONTRACTOR TO VISIT SITE AND VERIFY ALL CLEARANCES BEFORE FABRICATION OF DUCTWORK AND PROVIDE ADDITIONAL OFFSET AND/OR CHANGES IN DUCT SIZES TO MEET FIELD CONDITIONS AND COORDINATE WITH ELECTRICAL, PLUMBING AND FIRE PROTECTION SUBCONTRACTOR BEFORE ANY CONSTRUCTION WORK.
- CONTRACTOR SHALL NOTIFY THE OWNER, ARCHITECT OR HIS AUTHORIZED REPRESENTATIVE OF ANY DAMAGE TO THE EXISTING INSTALLATION BEFORE PROCEEDING WITH THE WORK.
- COORDINATE AIR DEVICE LOCATIONS WITH LIGHTING FIXTURES AND FIRE SPRINKLER HEADS.
- DUCT DIMENSIONS SHOWN ON DRAWINGS ARE CLEAR INSIDE DIMENSIONS.
- DUCTWORK, DIFFUSERS, REGISTERS, GRILLES, AND OTHER ITEMS OF THE AIR HANDLING SYSTEM SHALL NOT BE SUPPORTED BY THE CEILING OR CEILING SUSPENSION SYSTEM.
- CONTRACTOR SHALL PROVIDE A COPY OF THE TEST AND BALANCE REPORT AT THE FINAL INSPECTION. THIS REPORT MUST BE REVIEWED AND APPROVED BY THE ENGINEER PRIOR TO THE FINAL ACCEPTANCE.
- ALL DUCTWORK MUST BE INSTALLED 6" AWAY FROM ANY FIRE RATED WALL TO FACILITATE INSPECTION.
- THE GENERAL CONTRACTOR IS RESPONSIBLE FOR ALL TRADES INSTALLATION SCHEDULES. FIXED WORK SUCH AS DUCTWORK AND PLUMBING SHALL BE INSTALLED PRIOR TO ANY TRADE WORK THAT CAN BE EASILY RELOCATED OR OFFSET SUCH AS ELECTRICAL CONDUITS, SMALL WATER LINES ETC.
- UNLESS OTHERWISE NOTED, INSTALL DUCTWORK AS HIGH AS POSSIBLE, TIGHT TO BOTTOM OF STRUCTURE. COORDINATE DUCT ELEVATION WITH RAIN LEADERS, WATER PIPING, SANITARY DRAINS AND MAJOR ELECTRICAL CONDUITS.
- CONTRACTOR SHALL PROVIDE ALL SUPPLEMENTARY STEEL REQUIRED TO SUSPEND MECHANICAL EQUIPMENT AND MATERIALS.
- ALL MECHANICAL WORK SHALL MEET ALL THE REQUIREMENTS OF THE "2020 FLORIDA BUILDING CODE, MECHANICAL-7TH EDITION".
- ALL EXHAUST DUCTS SHALL BE GALVANIZED SHEET METAL.
- MECHANICAL SUBCONTRACTOR SHALL COORDINATE THEIR WORK WITH THE GENERAL CONTRACTOR AND ALL OTHER TRADES PRIOR TO COMMENCEMENT OF THE CONSTRUCTION OF THE PROJECT. MECHANICAL SUBS SHALL TRAIN ON-SITE STAFF PRIOR TO OPEN DATE. PROVIDE COORDINATED SHOP DWGS WITH MEP PLUS K TRADES PRIOR TO INSTALL.

MECHANICAL LEGEND

SYMBOL	DESCRIPTION
	NEW DUCTWORK, PIPING, OR EQUIPMENT
	RETURN OR EXHAUST DUCT SECTION
	FLEXIBLE DUCT
	DUCTWORK TRANSITION
	MANUAL AIR VOLUME CONTROL DAMPER
	RETURN AIR DEVICE
	EXHAUST AIR DEVICE
	UNDERCUT DOOR 1"
	MECHANICAL NOTE - NUMBER
	RETURN REGISTER AT CEILING

IMPORTANT NOTES FOR CONTRACTOR AND SUBCONTRACTOR:

ANY DISCREPANCIES OR OMISSIONS ON THESE DOCUMENTS MUST BE BROUGHT TO THE ATTENTION OF THE ARCHITECT PRIOR TO THE COMMENCEMENT OF CONSTRUCTION AND BID TO OWNER. FAILURE BY CONTRACTOR TO IDENTIFY DISCREPANCIES OR OMISSIONS WILL THEN BECOME THE RESPONSIBILITY OF THE CONTRACTOR.

FAN SCHEDULE

TAG	-	EF-1	EF-2	EF-3	EF-4
SERVICE	-	TOILET MENS	WOMENS TOILET	JAN CLOSET	MECHANICAL
AIR QUANTITY	CFM	1000	1000	70	500
EXT. STATIC PRESS.	IN. H ₂ O	.5	.5	.5	.5
FAN TYPE	-	INLINE	INLINE	CEIL. MTD	INLINE
DRIVE	-	DIRECT	DIRECT	DIRECT	DIRECT
SONES	-	7.5	7.5	1.2	4
MOTOR	HP	242 WATTS	242 WATTS	31.5 WATTS	192 WATTS
FAN SPEED	RPM	1125	1125	902	1260E
POWER	V/ø	115/1	115/1	115/1	115/1
CONTROL	-	WITH LIGHTS SWITCH	WITH LIGHTS SWITCH	WITH LIGHTS SWITCH	WITH LIGHTS SWITCH
LOCATION	-	ABOVE CEIL	ABOVE CEIL	ABOVE CEIL	ABOVE CEIL
MANUFACTURER	-	COOK	COOK	COOK	COOK
MODEL	-	GN-920	GN-920	GC-146	GN-720
NOTES/ACCESSORIES	Ⓐ	ⒶⒷⒸⒹ	ⒶⒷⒸⒹ	ⒶⒷⒸ	ⒶⒷⒸ


NOTES/ACCESSORIES
A. ALUMINIZED BIRDSCREEN
B. SAFETY DISCONNECT SWITCH
C. GRAVITY BACKDRAFT DAMPER
D. AMCA SEAL & U.L. CERTIFIED
E. SPEED CONTROLLER

AIR DEVICE SCHEDULE

MARK	TYPE	MATERIAL	FINISH	ACCESSORIES	MANUFACTURER AND MODEL	REMARKS
ERC	EXHAUST REGISTER	ALUMINUM	BAK. WHT. ENAMEL	OBD	PRICE 630FL	.
DG	DOOR GRILLE	ALUMINUM	BAK. WHT. ENAMEL	.	PRICE ATG	.

NOTE:

- BORDER TYPE SHALL MATCH CEILING TYPE.
- FULL FACE LAY IN SHALL BE USED IN DROPPED CEILING AREAS.

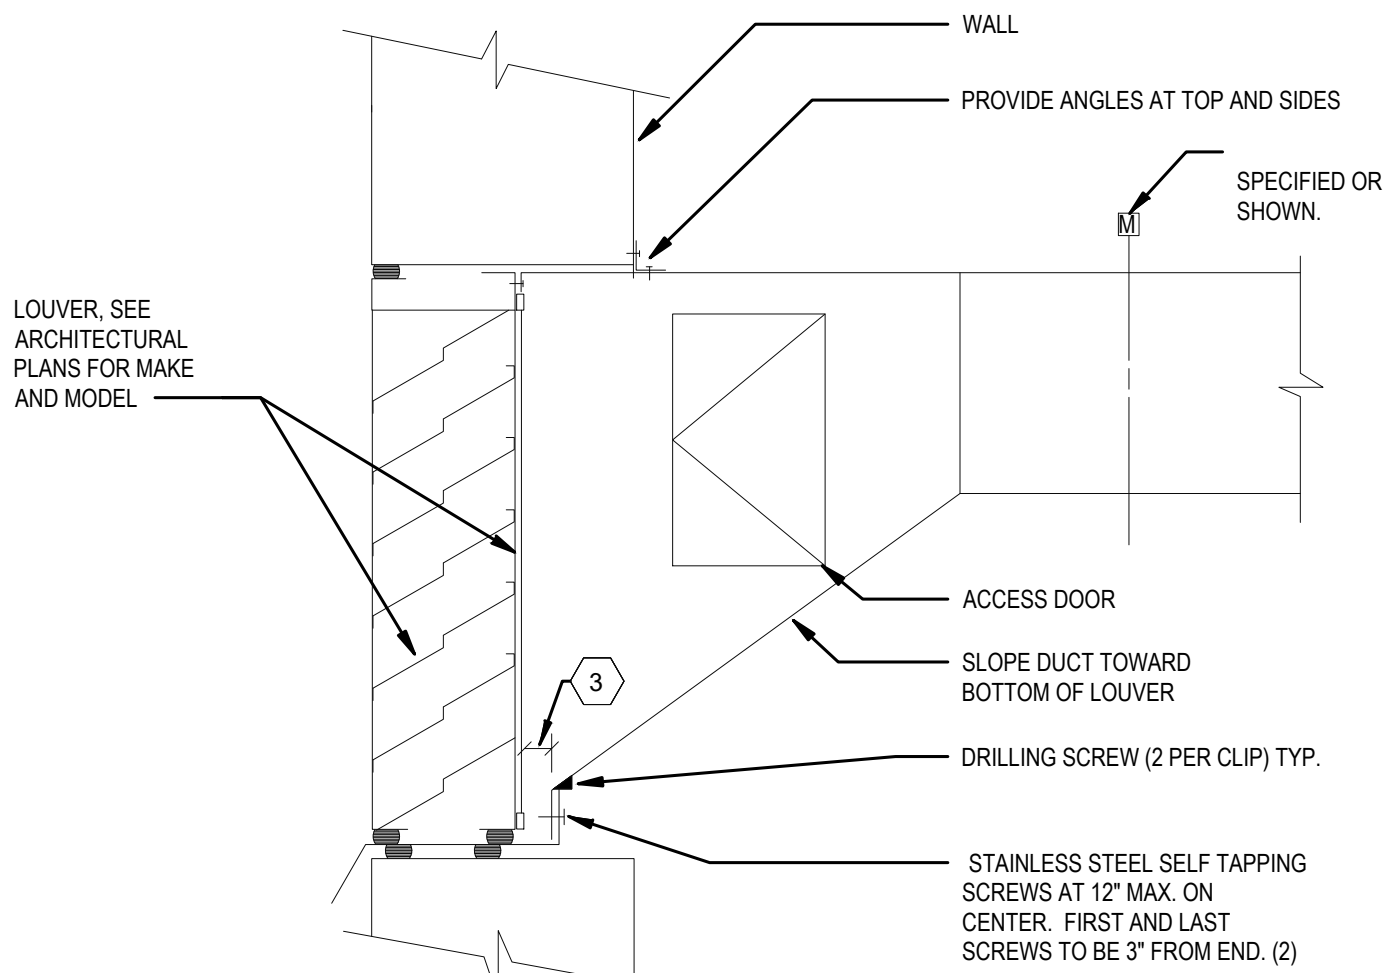


GENERAL NOTES

1. PLENUM CONNECTION TO LOUVER IS SIMILAR
2. BOTTOM OF DUCT TO BE COMPLETELY OVERLAPPED WITH TURN-UP. DRILL TURN-UP PRIOR TO INSTALLING SELF TAPPING SCREW TO ENSURE DUCT IS DRAWN TIGHT TO TURN-UP.
3. MINIMUM 1" SCREW CONNECTION CLEARANCE.


DUCT TRANSITION DETAIL

NO SCALE

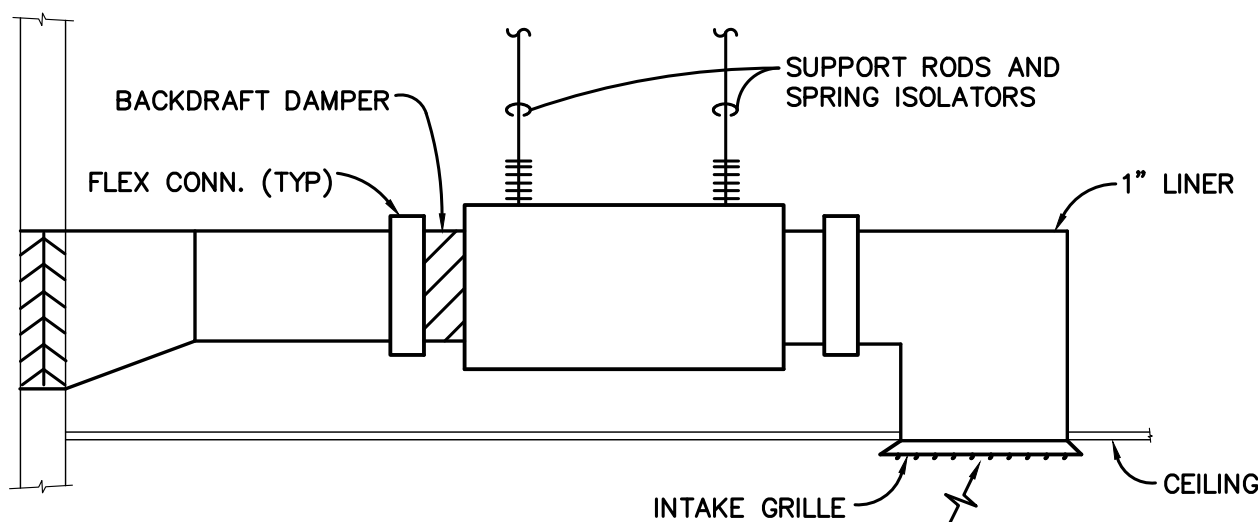

INLINE EXHAUST FAN DETAIL

NO SCALE

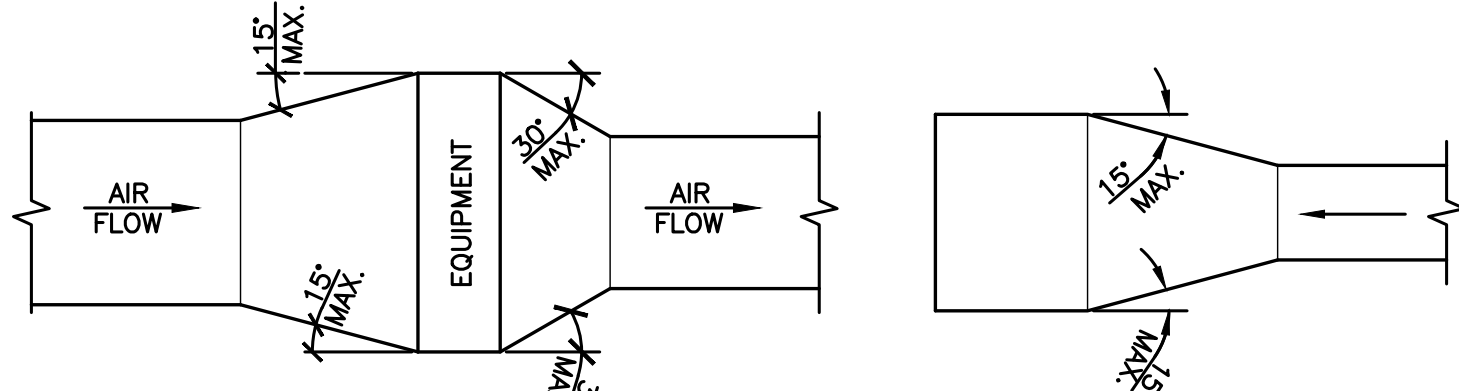

TYPICAL DUCTWORK TRANSITION WITH EQUIPMENT MOUNTED IN DUCT. PLAN OR SIDE VIEW

TYPICAL DUCTWORK TRANSITION PLAN OR SIDE VIEW

NOTE:

UNLESS OTHERWISE INDICATED ON PLANS, MAXIMUM ANGLES SHOWN SHALL APPLY.


DUCTWORK TRANSITIONS DETAIL

NO SCALE



607 S. ALEXANDER ST.
SUITE 101
PLANT CITY, FL 33563
813.946.8444
www.bdparchitects.com

SHANE R. HAMILTON, PE
FLORIDA LICENSE #75420



CITY OF DADE CITY
PARK RESTROOMS
37800 CHURCH AVENUE
DADE CITY, FL 33525

NO.	DATE	REVISION DESCRIPTION

PROJECT NO.:

23005.001

DATE: 10/19/2023

DESIGNED BY:

DRAWN BY:

CHECKED BY:

DRAWING TITLE:

SCHEDULES, LEGENDS
AND DETAILS

SHEET NO.:

M-2

©2022 Boggs Design Partners, LLC. All rights reserved. This document, together with the concepts and designs presented herein, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and/or improper reliance on this document, without consultation or written authorization and adoption by Boggs Design Partners, LLC, shall be without liability to Boggs Design Partners, LLC.

- ©2022 Boggs Design Partners, LLC. All rights reserved. This document, together with the concepts and designs presented herein, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and/or improper reliance on this document, without consultation or written authorization and adoption by Boggs Design Partners, LLC, shall be without liability to Boggs Design Partners, LLC.


©2022 Boggs Design Partners, LLC. All rights reserved. This document, together with the concepts and designs presented herein, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and/or improper reliance on this document, without consultation or written authorization and adoption by Boggs Design Partners, LLC, shall be without liability to Boggs Design Partners, LLC.

©2022 Boggs Design Partners, LLC. All rights reserved. This document, together with the concepts and designs presented herein, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and/or improper reliance on this document, without consultation or written authorization and adoption by Boggs Design Partners, LLC, shall be without liability to Boggs Design Partners, LLC.

©2022 Boggs Design Partners, LLC. All rights reserved. This document, together with the concepts and designs presented herein, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and/or improper reliance on this document, without consultation or written authorization and adoption by Boggs Design Partners, LLC, shall be without liability to Boggs Design Partners, LLC.

©2022 Boggs Design Partners, LLC. All rights reserved. This document, together with the concepts and designs presented herein, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and/or improper reliance on this document, without consultation or written authorization and adoption by Boggs Design Partners, LLC, shall be without liability to Boggs Design Partners, LLC.

©2023 Boggs Design Partners, LLC. All rights reserved. The document, together with its contents and design parameters, shall be the property of Boggs Design Partners, LLC. and no portion shall be reproduced, stored, or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, without the prior written permission of Boggs Design Partners, LLC. and no portion shall be reproduced, stored, or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, without the prior written permission of Boggs Design Partners, LLC.

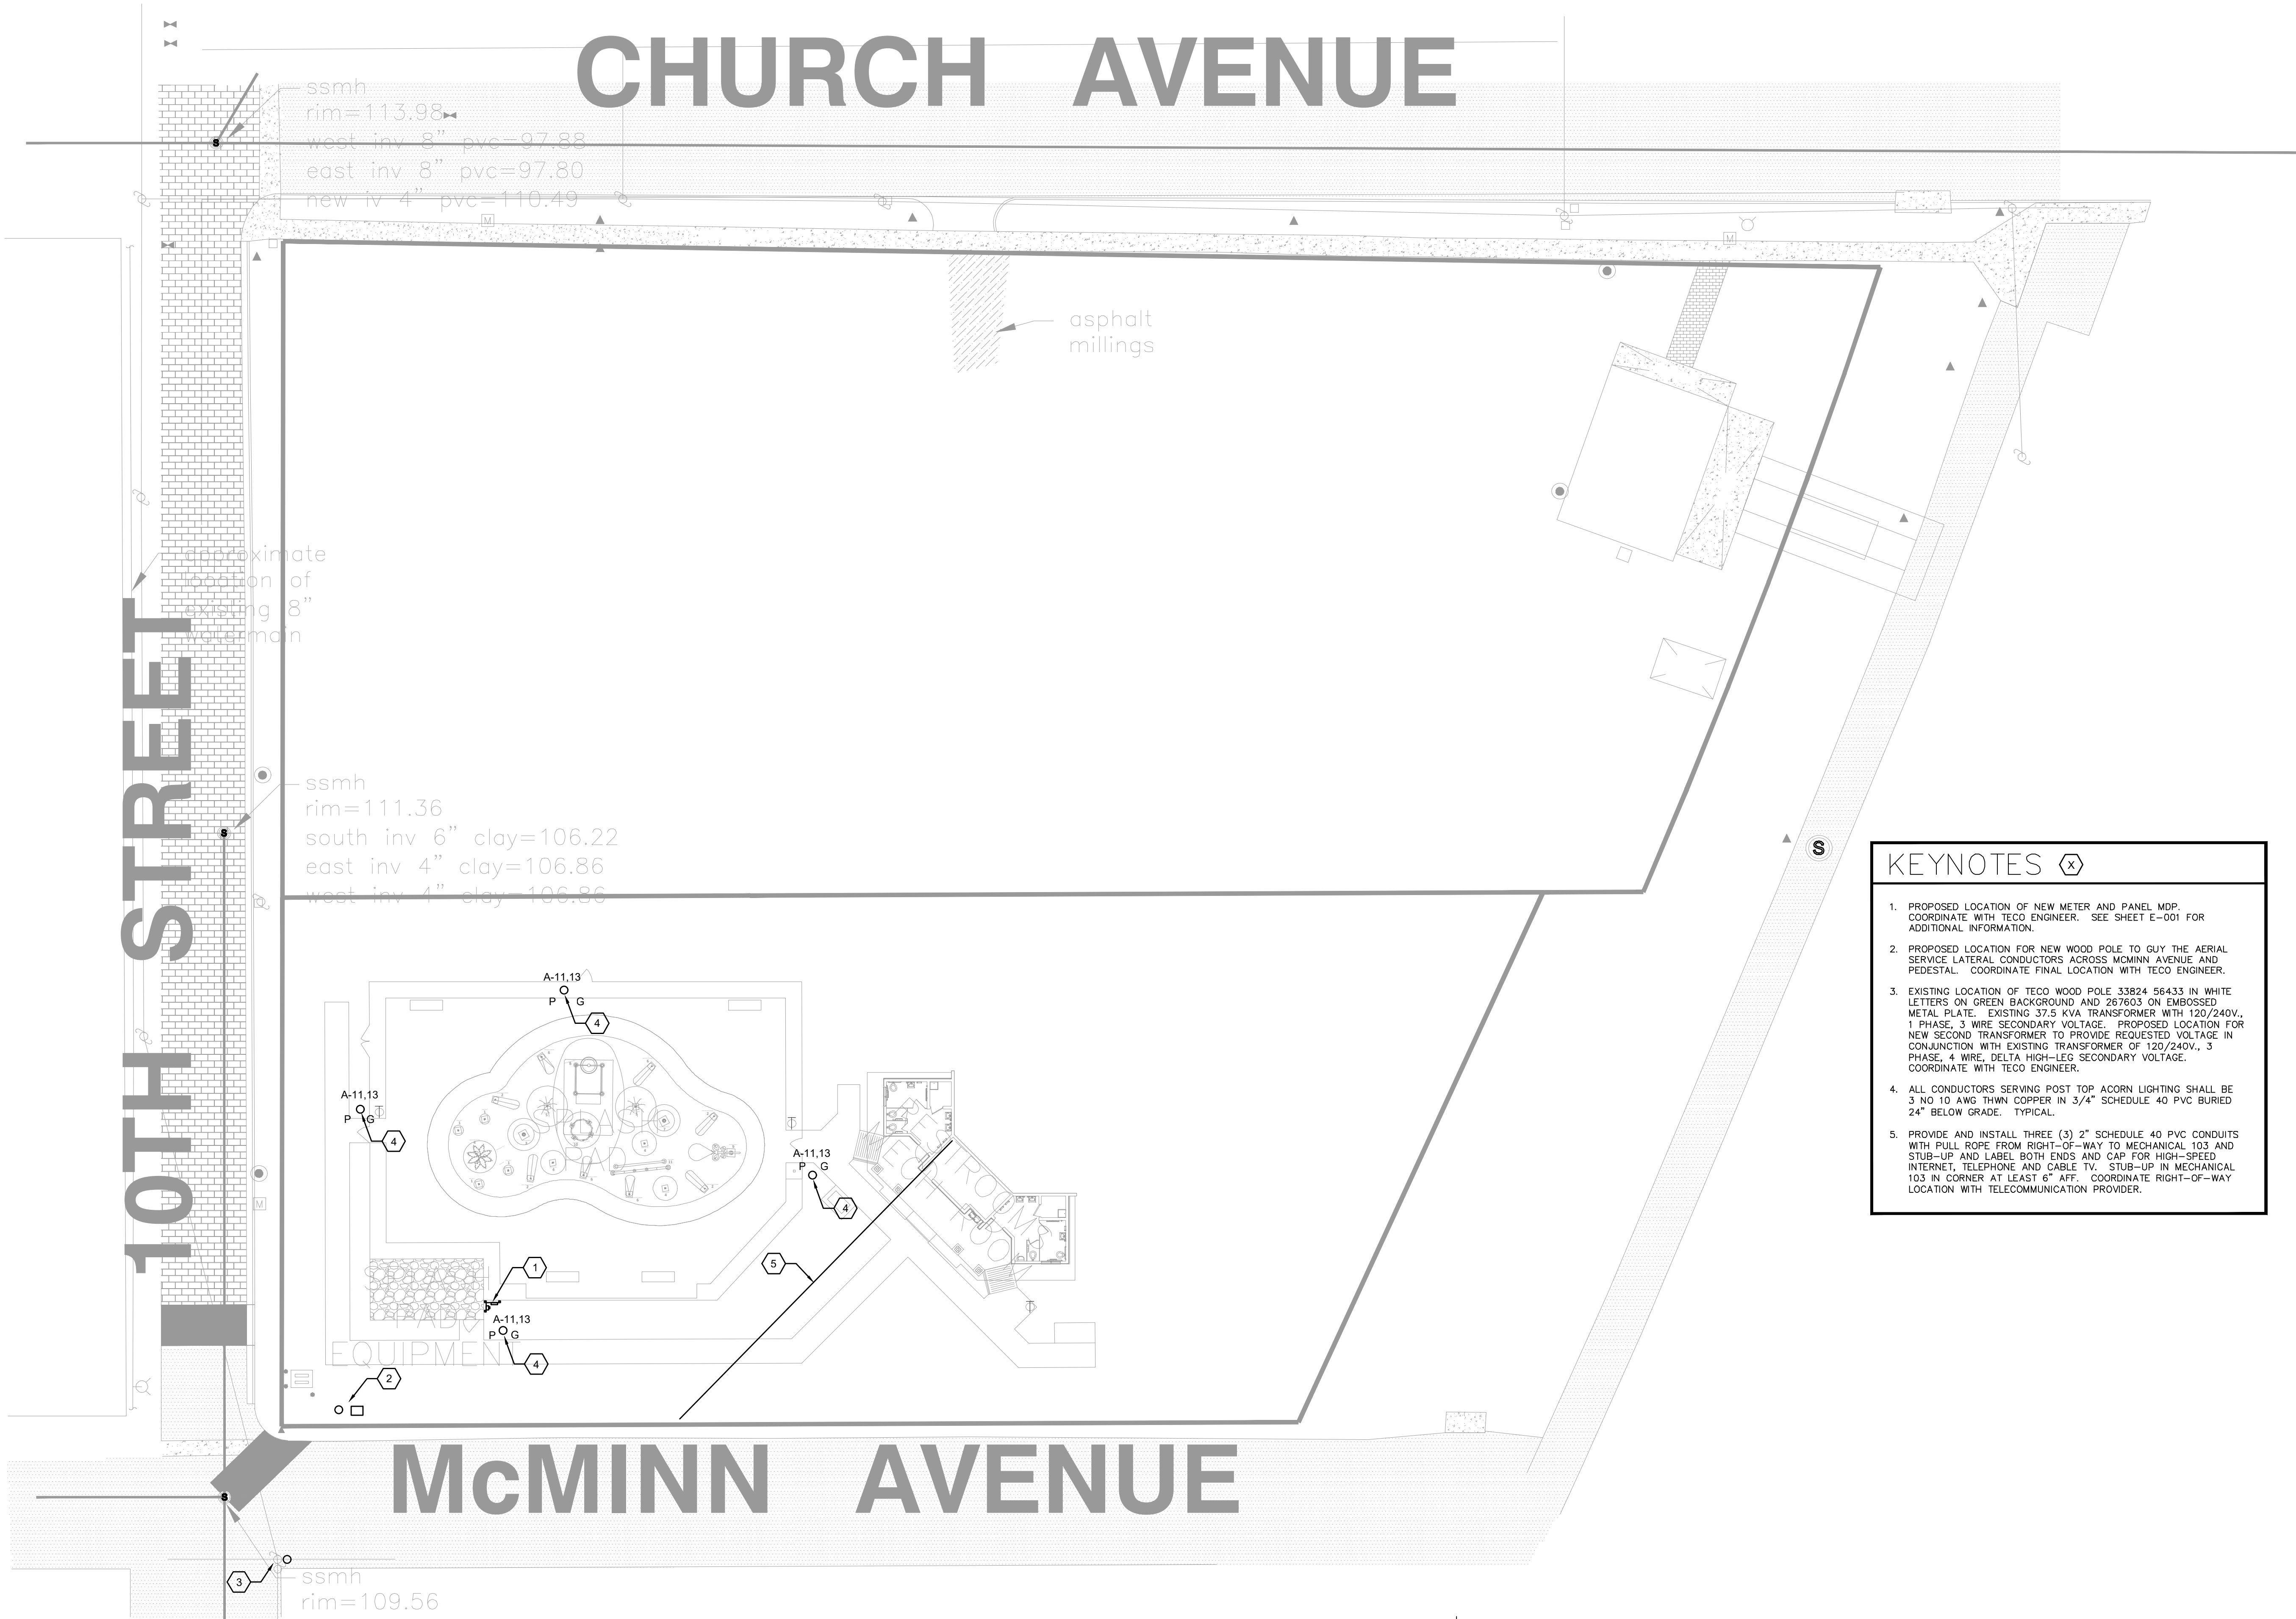

BDP
BOGGS DESIGN PARTNERS
Architecture + Interiors
607 S. ALEXANDER ST.
SUITE 101
PLANT CITY, FL 33563
813.946.8444
www.bdparchitects.com

PMD
engineering
PMD Engineering, LLC
6117 School House Court
Wesley Chapel FL 33545
(813) 322-4373
COA Florida No. 28666

DATE: 08/21/23
PABLO MANUEL DIAZ
FL PE NO. 65597
THIS ITEM HAS BEEN INITIALLY SIGNED AND SEALED ON THE DATE ADJACENT TO THE SEAL. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

**CITY OF DADE CITY
PARK RESTROOMS
37800 CHURCH AVENUE
DADE CITY, FL 33523**

NO.	DATE	REVISION DESCRIPTION

PERMIT BID SET 10-19-2023


PROJECT NO:
22042

DATE: 10/19/2023
DESIGNED BY: PMD
DRAWN BY: PMD
CHECKED BY: PMD

DRAWING TITLE:

SITE PLAN -
POWER, DATA &
LIGHTING

SHEET NO:
E-002

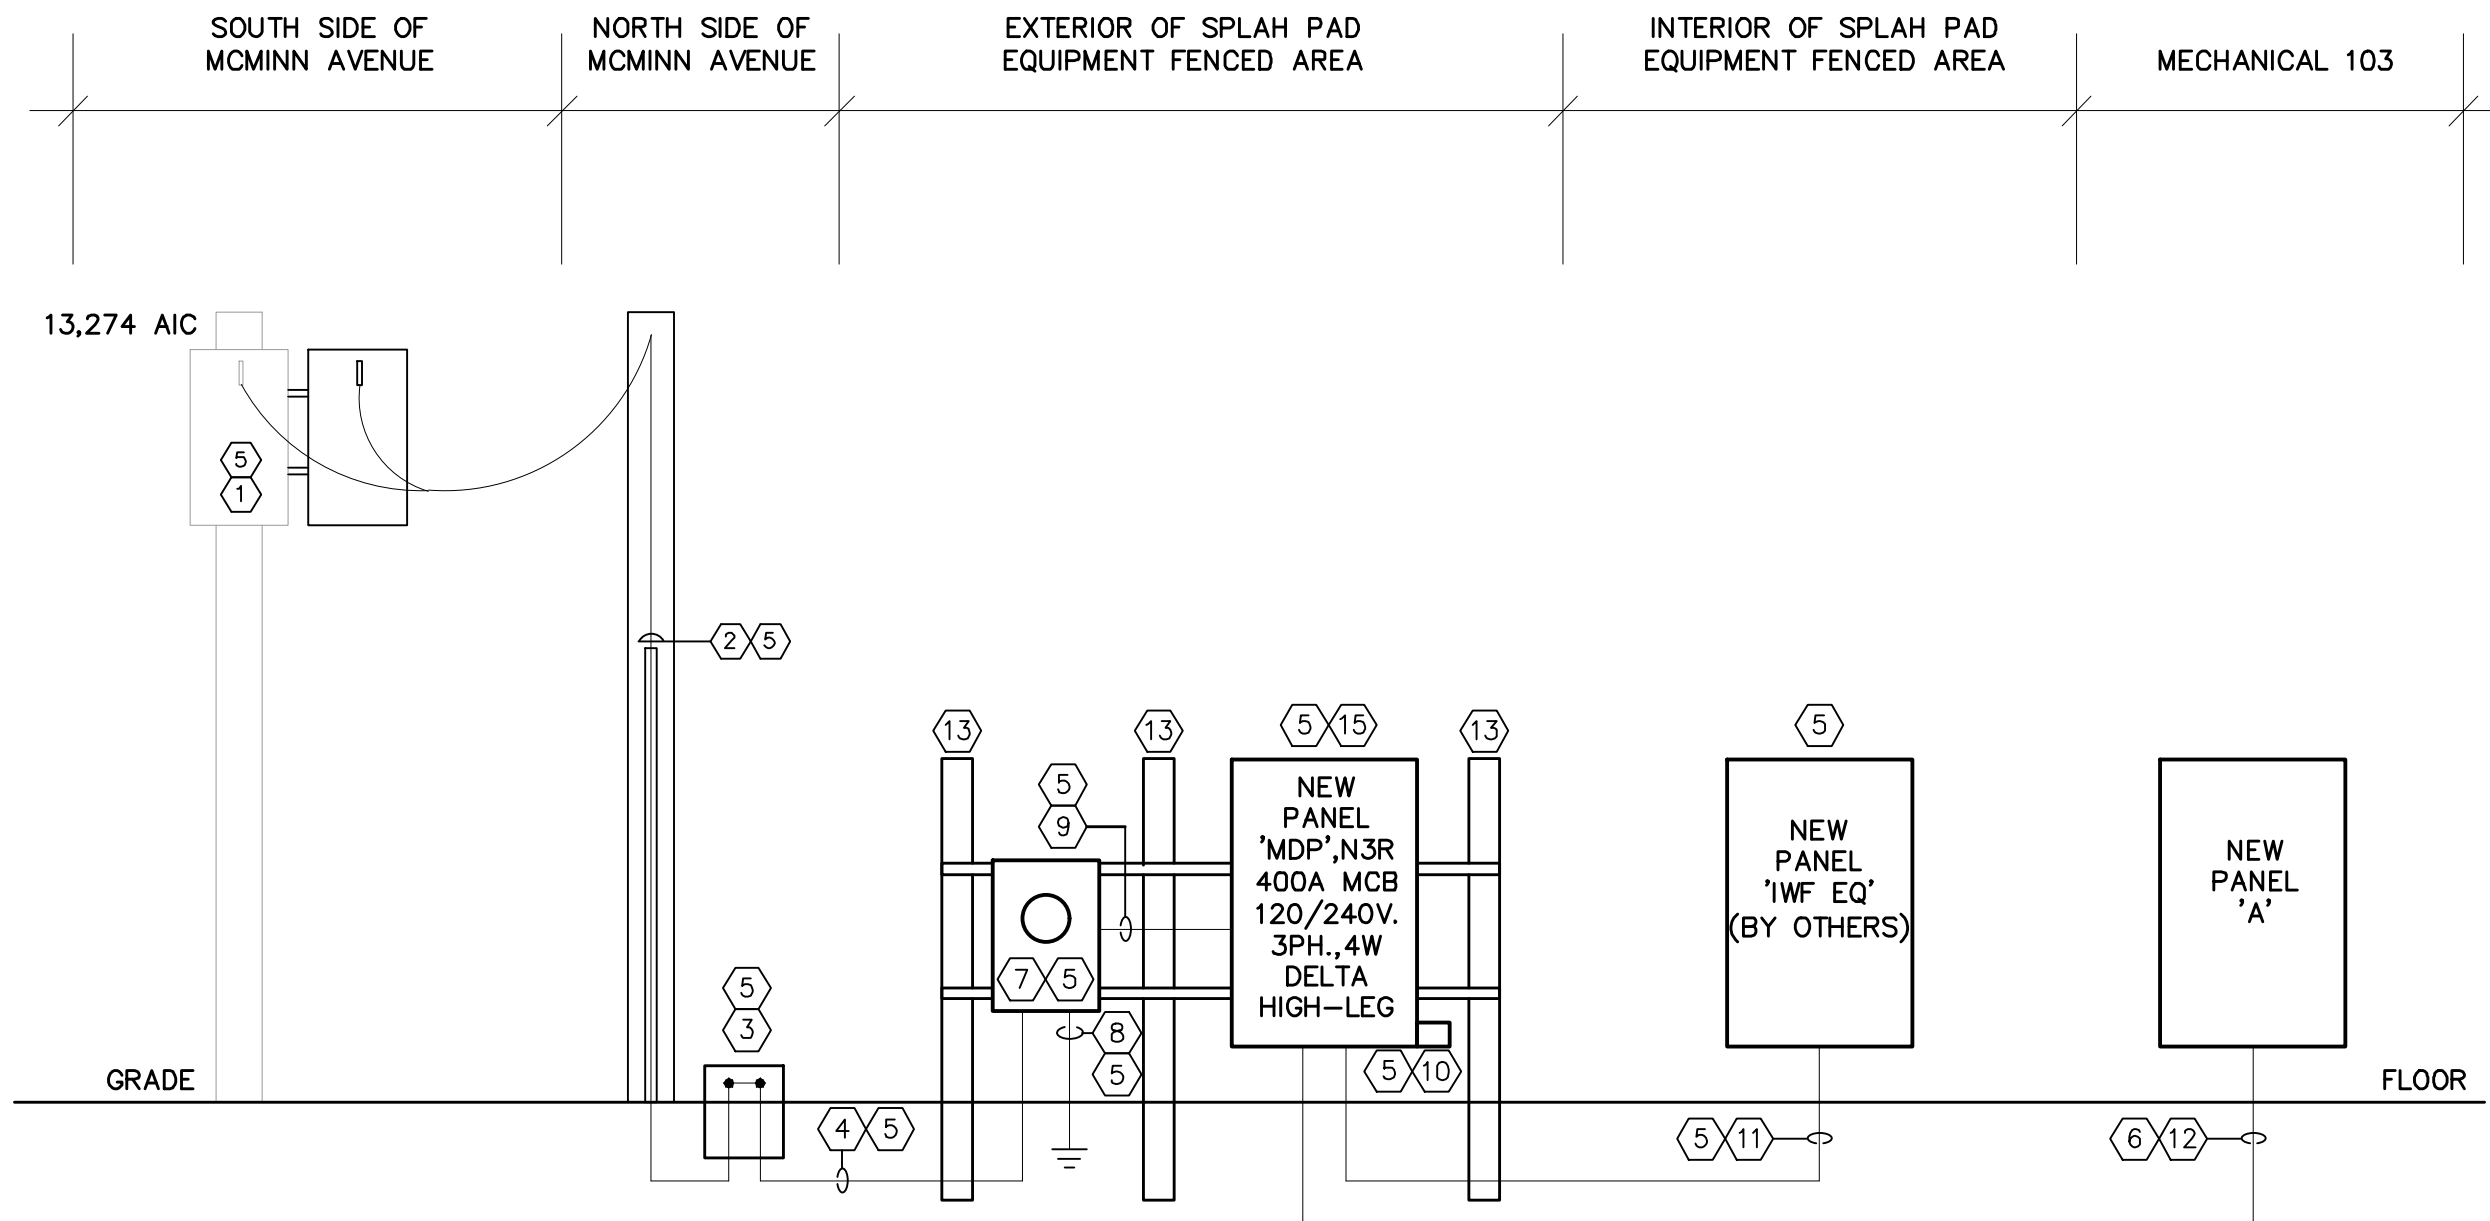

NOTE: The above fixtures are the basis of design. Other fixtures may be submitted for approval up to 10 working days prior to bid date, to allow for proper evaluation. If another fixture package is selected, photometric performance drawings shall be submitted for evaluation. Submissions within 10 working days prior to bid date will not be evaluated. Equipment is approved through addendum only.



1. PROVIDE AND INSTALL TWO (2) WEATHER PROOF JUNCTION BOXES WITH INTERMATIC CATALOG NUMBER EK4136S PHOTOCELL MOUNTED IN EACH JUNCTION BOX WITH WIRING FACING DOWN PER THE MANUFACTURER'S INSTRUCTIONS TO AVOID WATER INTRUSION AND FAILURE OF PHOTOCELL. ONE PHOTOCELL SHALL ENERGIZE CIRCUIT A-7 FOR EXTERIOR BUILDING LIGHTING AND THE OTHER PHOTOCELL SHALL ENERGIZE CIRCUITS A=11,13 FOR POST TOP ACONR LUMINAIRES.
2. CEILING MOUNTED OCCUPANCY SENSOR SHALL CONTROL ALL LUMINAIRES IN RESTROOM.
3. EXHAUST FAN SHALL BE ENERGIZED ALONG WITH LUMINAIRES.
4. THESE RECEPTACLES SHALL BE RECESSED IN BLOCK WALL. COORDINATE WITH STRUCTURAL TO AVOID FILLED CELL LOCATIONS. PROVIDE INSTANTANEOUS WEATHER PROOF, IN-USE COVERS WHICH SHALL ALSO HAVE THE PROVISION TO BE LOCKED WITH PADLOCK OR OTHER MEANS.
5. MOUNT RECEPTACLE INSIDE ELECTRIC WATER COOLER. BREAKER CONTROLLING THIS RECEPTACLE SHALL BE GFI.
6. LOCATION OF JUNCTION BOX WITH 120V FOR FLOWSHOWER. COORDINATE MOUNTING HEIGHT WITH PLUMBING CONTRACTOR PRIOR TO ROUGH-IN.
7. PROVIDE THREE (3) 1" SCHEDULE 40 PVC CONDUITS FROM PANEL A WITH HANDLE ROPE STUBBED INTO 24" LONG X 12" WIDE X 1/2" DEEP PUNCH ROPE OPEN BOTTOM WITH HERR 13 RATED COVER AND END AT THE TOP OF THE FUTURE FLOORING, FLOORING AND POST TOP ACONR TO BE FED FROM COORDINATE EXIST LOCATIONS WITH ARCHITECT AND CIVIL ENGINEER PRIOR TO ROUGH-IN.
8. LOCATION FOR TELECOMMUNICATION CONDUIT STUB-UPS. SEE SHEET E-002 FOR ADDITIONAL INFORMATION.



PMD
engineering
PMD Engineering, LLC
6117 School House Court
Wesley Chapel FL 33542
(813) 322-4373
COA Florida No. 28666

DATE: 08/21/23
PABLO MANUEL DIAZ
FL PE. NO. 65597

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED
ON THE DATE ADJACENT TO THE SEAL. PRINTED
COPIES OF THIS DOCUMENT ARE NOT CONSIDERED
SIGNED AND SEALED AND THE SIGNATURE MUST BE
VERIFIED ON ANY ELECTRONIC COPIES.


**CITY OF DADE CITY
PARK RESTROOMS**
37800 CHURCH AVENUE
DADE CITY, FL 33523


[illegible]

PROJECT NO: 22042	
DATE: 10/19/2023	
DESIGNED BY: PMD	
DRAWN BY: PMD	
CHECKED BY: PMD	
DRAWING TITLE:	

FLOOR PLAN LIGHTING & POWER

SHEET NO:
E-101

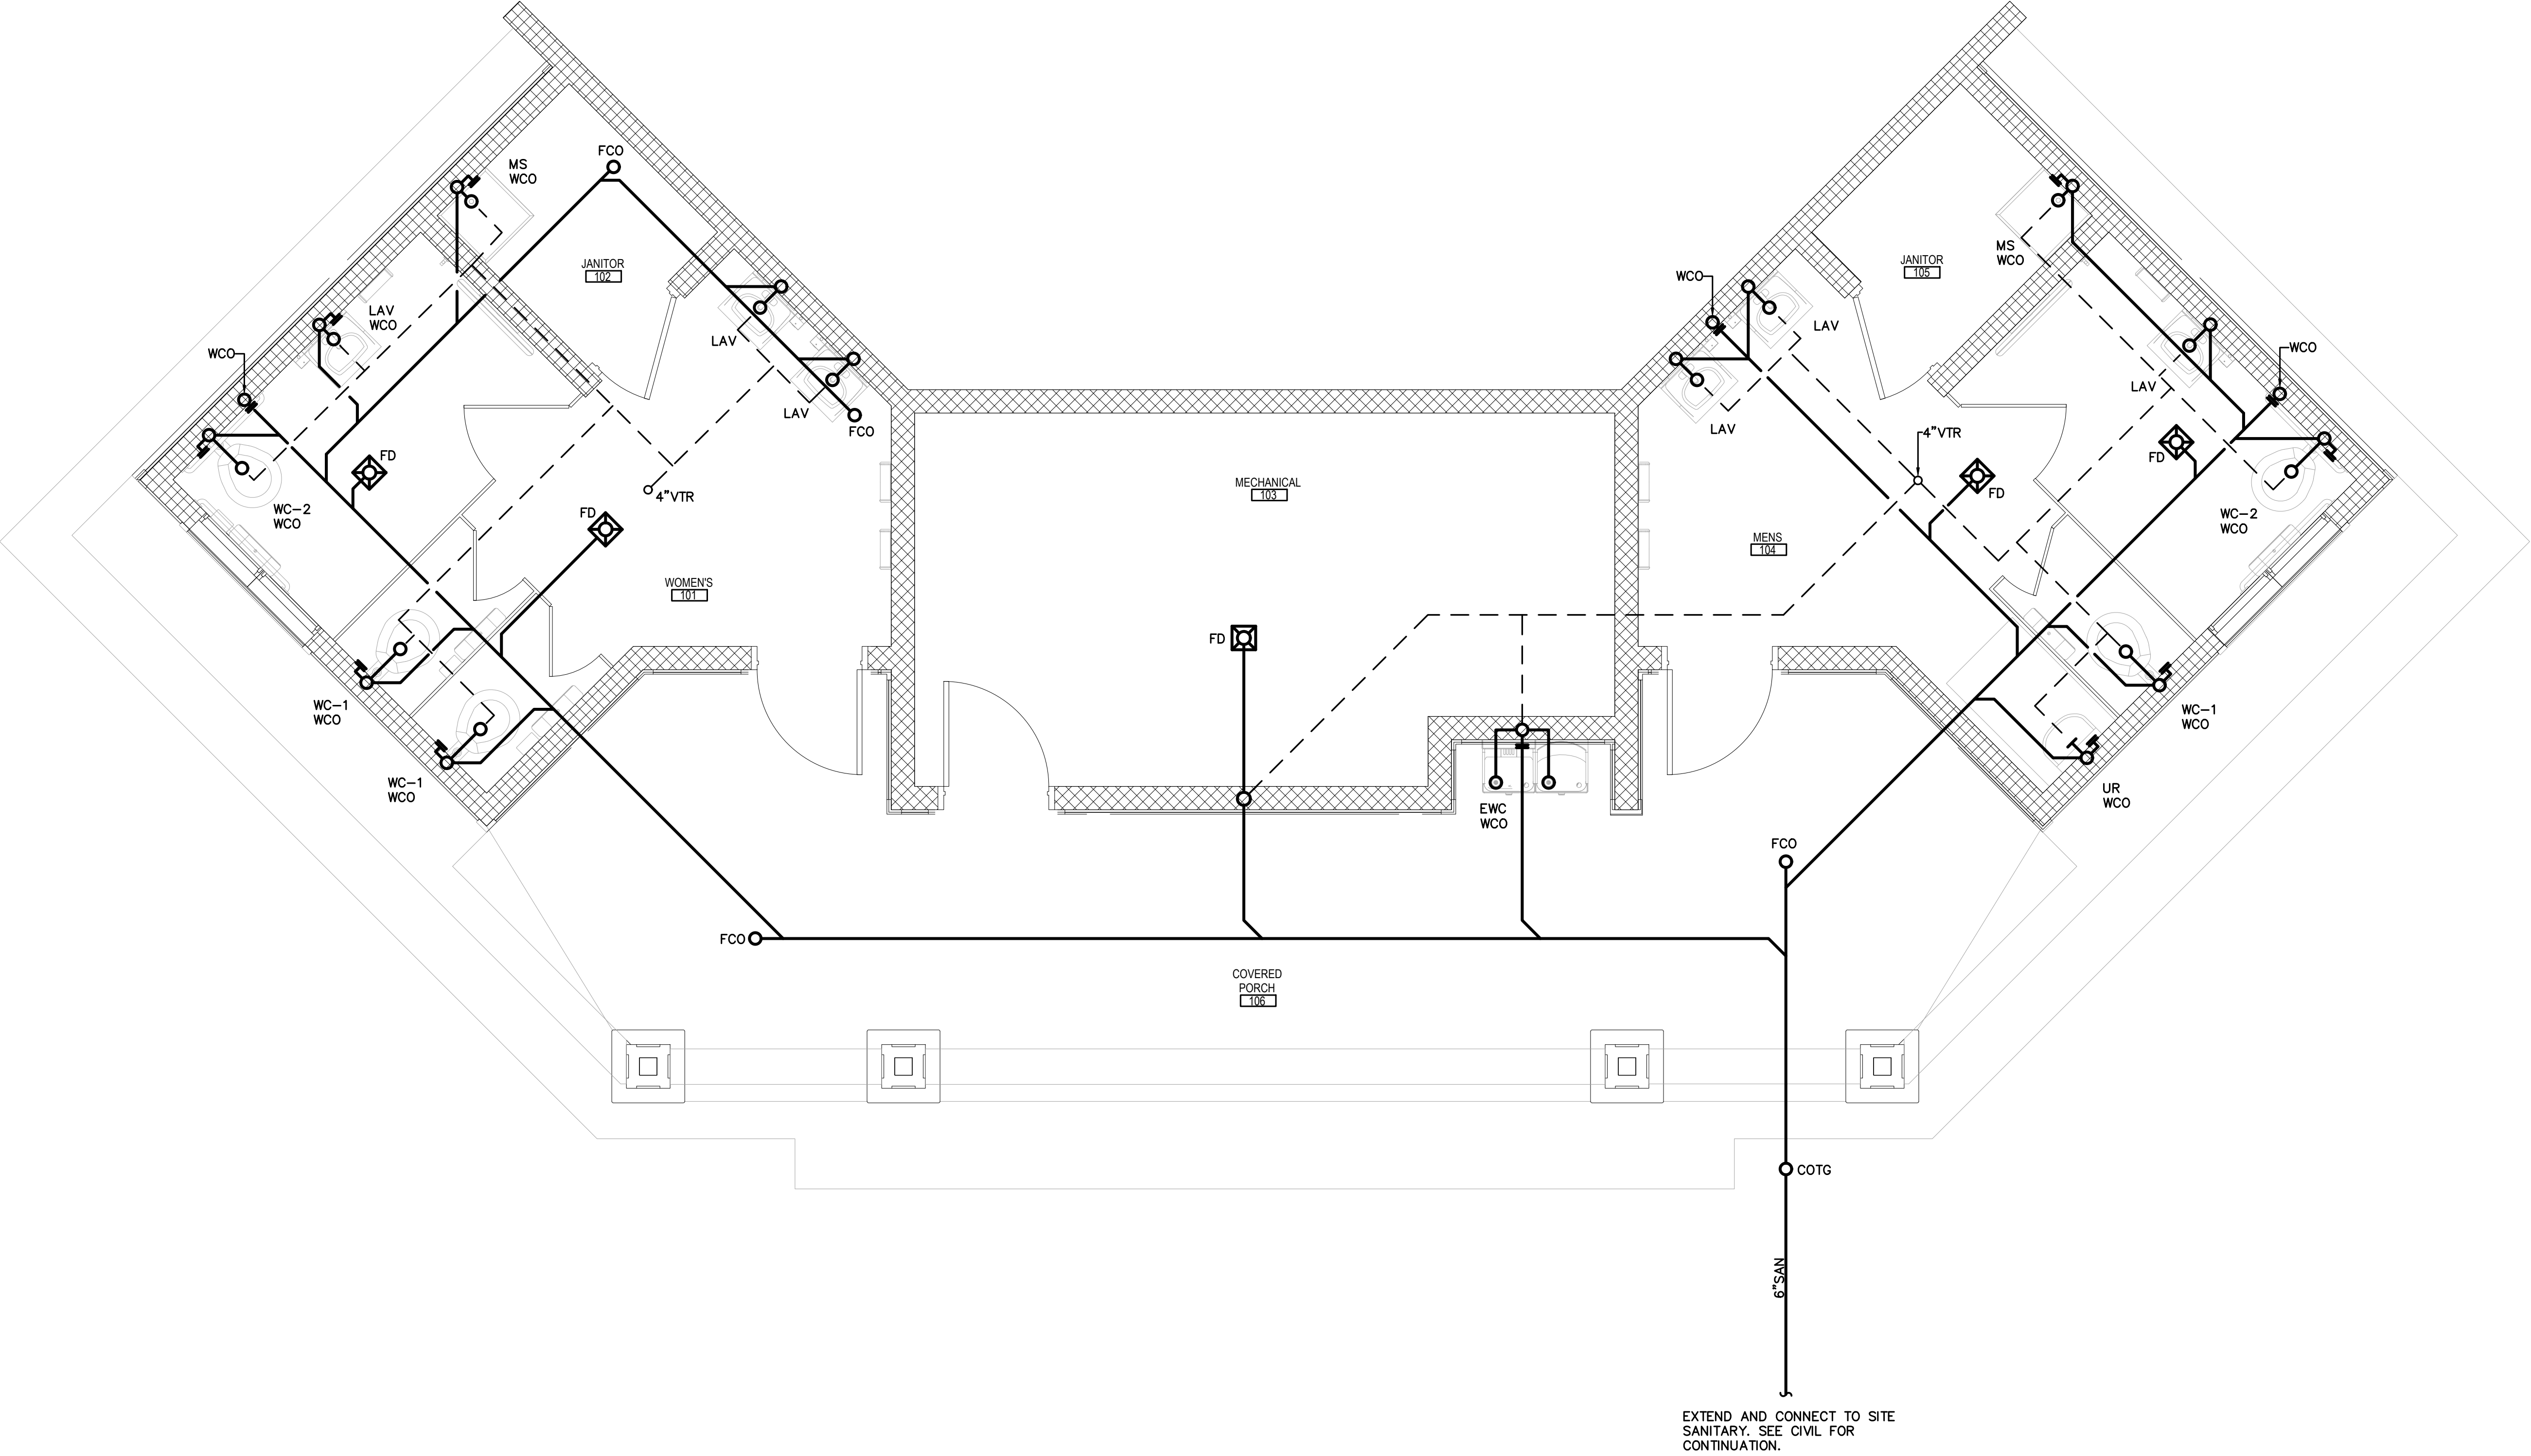


 **FLOOR PLAN – SANITARY**
SCALE: 3/8"=1'-0" 22.0487

Engineering Professionals, Inc.
Professional Engineers
912 W. Dr. Martin Luther King Jr. Blvd.
Tampa, FL 33603 (813) 251-6848

BDP
BOGGS DESIGN PARTNERS
Architecture + Interiors
607 S. ALEXANDER ST.
SUITE 101
PLANT CITY, FL 33563
813. 946. 8444
www.bdparchitects.com

SHANE R. HAMILTON, PE
FLORIDA LICENSE #75420


CITY OF DADE COUNTY
PARK RESTROOMS
37800 CHURCH AVENUE
DADE CITY, FL 33525


NO.	DATE	REVISION DESCRIPTION


PROJECT NO:
23005.001
DATE: 10/19/2023
DESIGNED BY:
DRAWN BY:
CHECKED BY:
DRAWING TITLE:

SANITARY FLOOR PLAN

SHEET NO:
P-1

PERMIT BID SET 10-19-2023

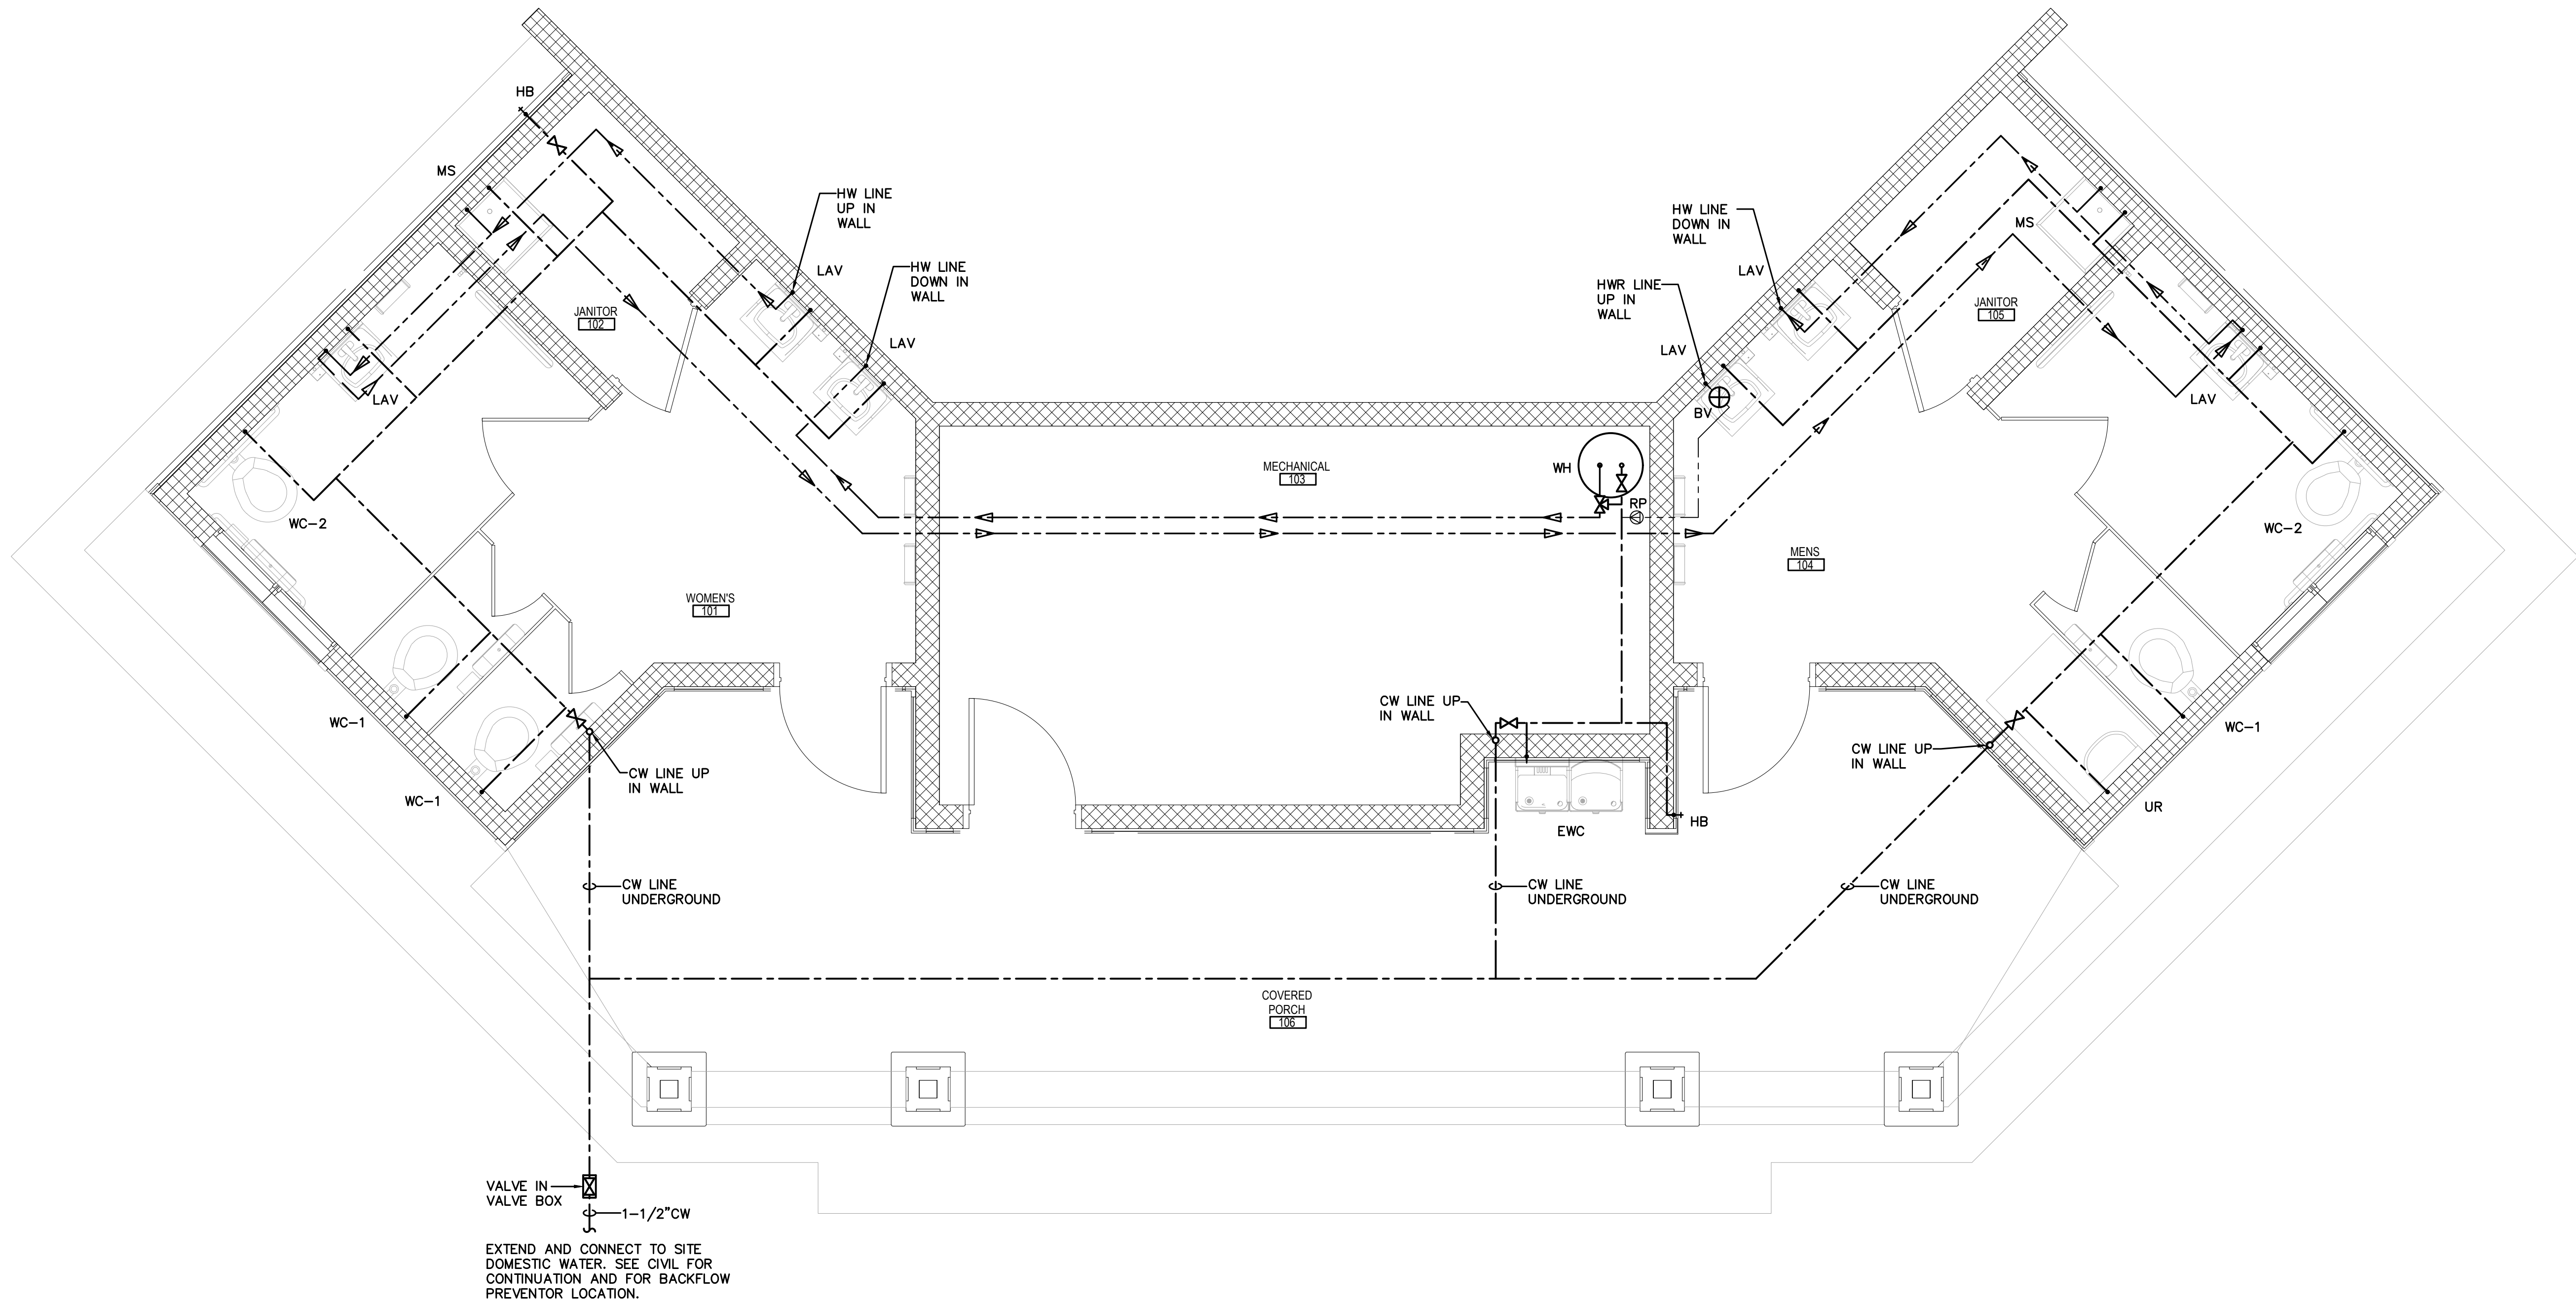

 **FLOOR PLAN — WATER**
SCALE: 3/8"=1'-0" 22.0487


NO.	DATE	REVISION DESCRIPTION

PROJECT NO:
23005.001
DATE: 10/19/2023
DESIGNED BY:
DRAWN BY:
CHECKED BY:
DRAWING TITLE:


WATER FLOOR PLAN

SHEET NO:


P-2

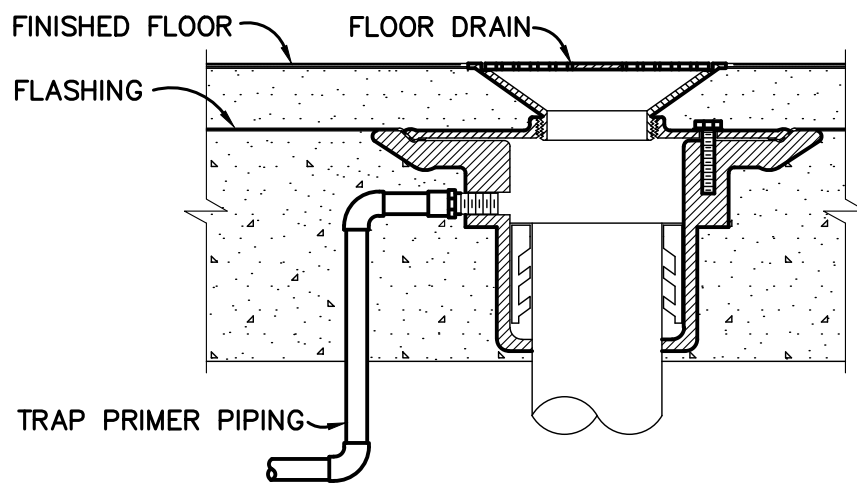


TRAP PRIMER CONNECTION DETAIL
NO SCALE

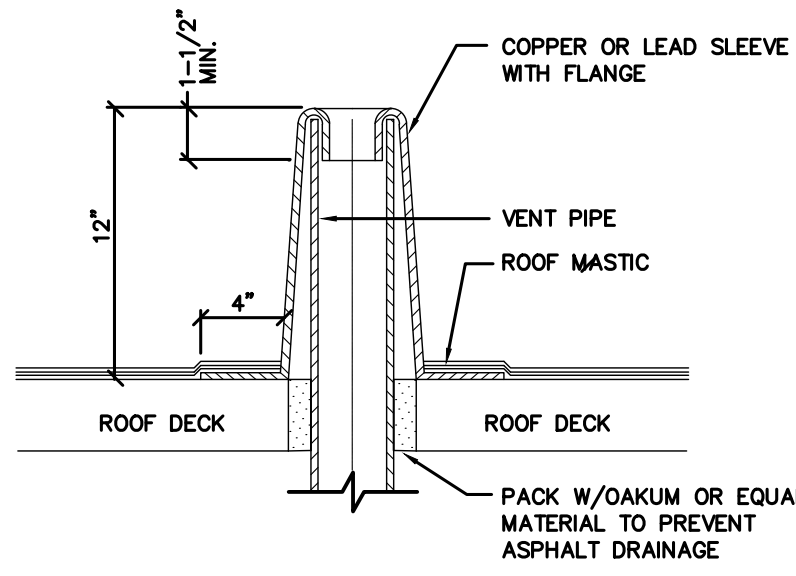

VENT THRU ROOF DETAIL
NO SCALE

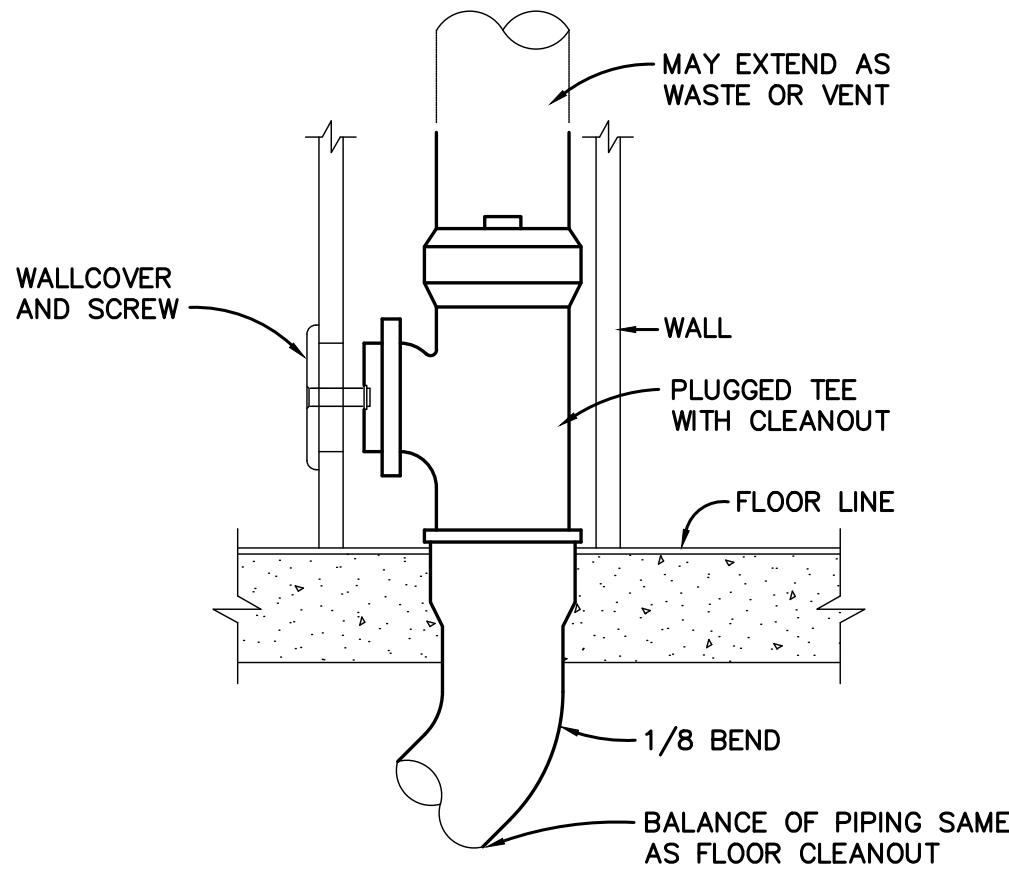


WALL CLEANOUT DETAIL
NO SCALE

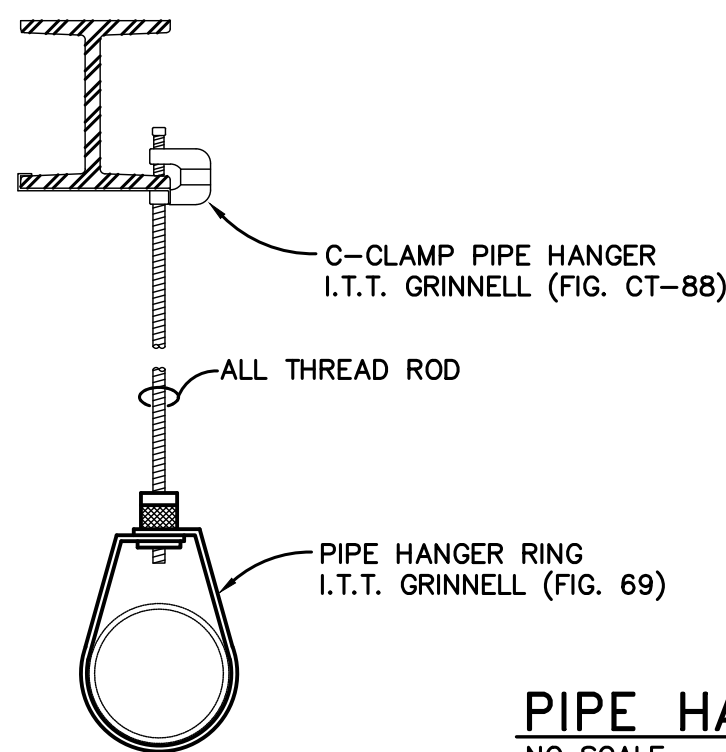


PIPE HANGER DETAIL
NO SCALE
U.L./F.M. APPROVED


PIPE SIZE (IN)	ROD SIZE (IN)	MAX SPACE (FT)
1/2	1/4	5
3/4	1/4	6
1	1/4	7
1-1/2	3/8	9
2	3/8	10
2-1/2	3/8	11
3	3/8	12
4	1/2	14

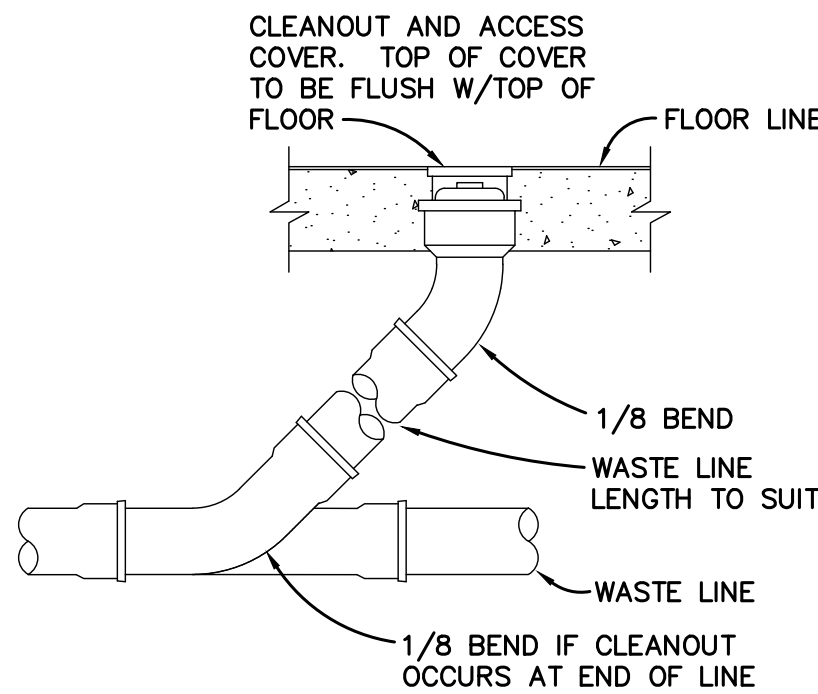

FLOOR CLEANOUT DETAIL
NO SCALE

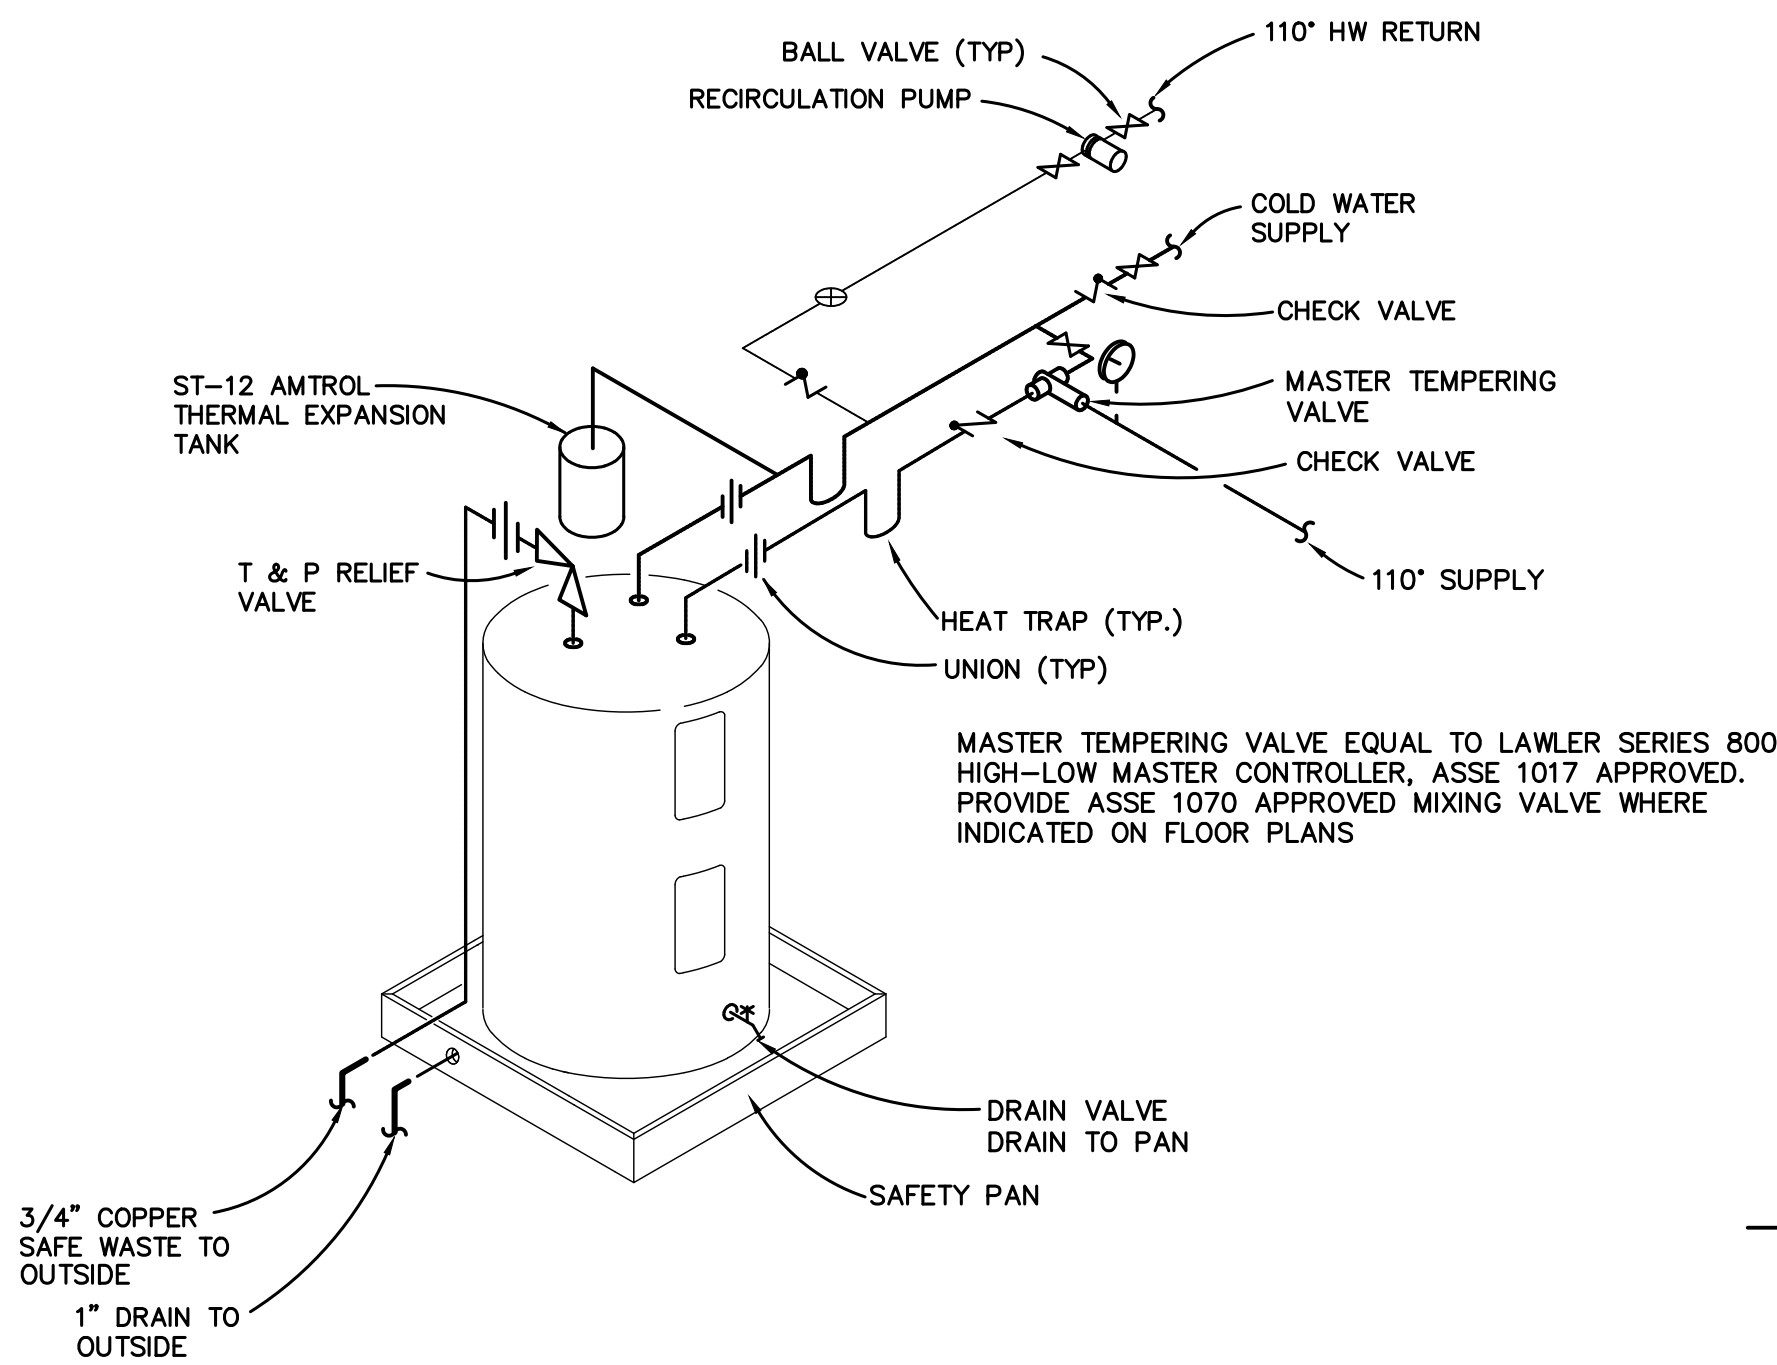

WATER HEATER PIPING DETAIL
NO SCALE

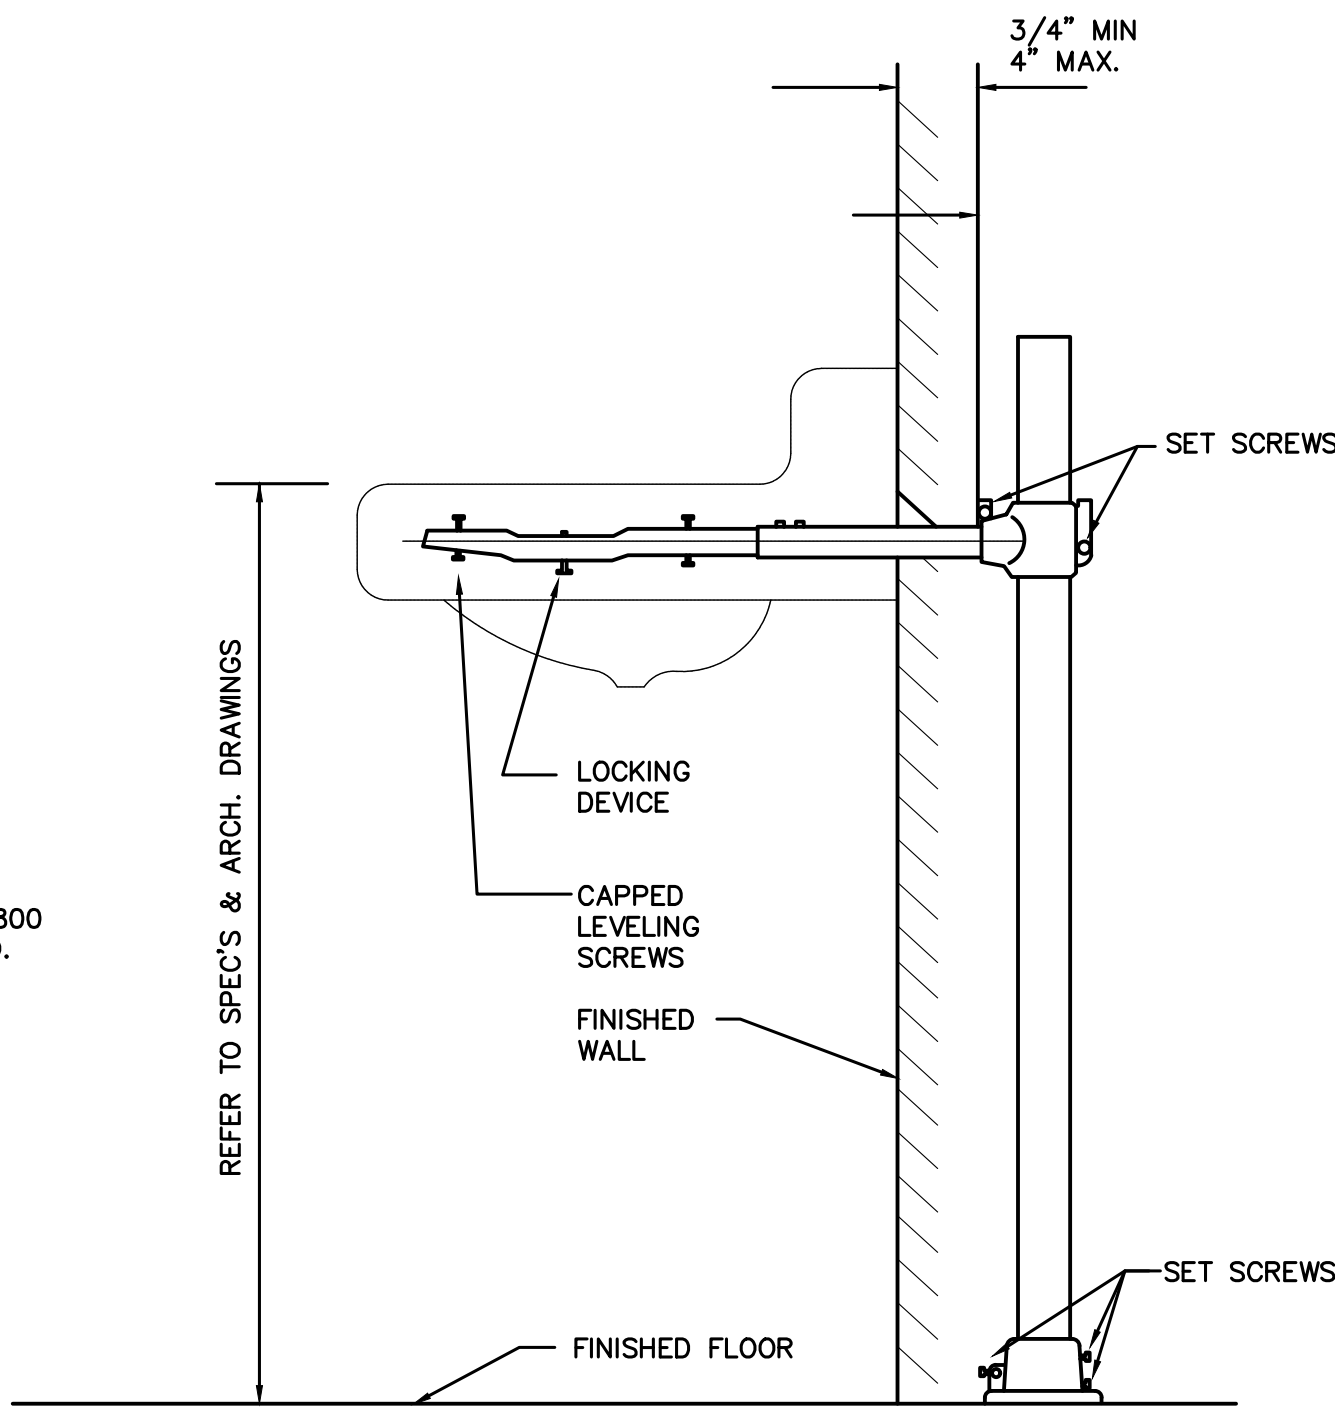

CONCEALED LAVATORY SUPPORT DETAIL
NO SCALE

PLUMBING FIXTURE SCHEDULE

WC-1:	WATER CLOSET BARRIER FREE: AMERICAN STANDARD, MADERA NO. 3043.001 FLOOR MOUNTED, VITREOUS CHINA, ELONGATED, 1-1/2" TOP SPUD. PROVIDE FLUSH VALVE ZURN MODEL ZEM5600AV-IS-MOB, 1.6 GPF, CENTOCO NO. 1500STSCSS OPEN FRONT SEAT LESS COVER, STAINLESS STEEL SELF SUSTAINING CHECK HINGE. 1" CW, 2" VENT, 4" SAN.
WC-2:	WATER CLOSET BARRIER FREE: AMERICAN STANDARD MADERA NO. 3043.102 FLOOR MOUNTED, 17" HIGH, VITREOUS CHINA, ELONGATED, 1-1/2" TOP SPUD. PROVIDE FLUSH VALVE ZURN MODEL ZEM5600AV-IS-MOB, 1.6 GPF. (PROVIDE OFFSET TAIL PIECE TO AVOID GRAB BARS). CENTOCO NO. 1500STSCSS OPEN FRONT SEAT LESS COVER, STAINLESS STEEL SELF SUSTAINING CHECK HINGE. 1" CW, 2" VENT, 4" SAN. FLUSH HANDLE MUST ALWAYS BE MOUNTED ON THE WIDE SIDE OF THE TOILET (OPPOSITE GRAB BAR).
LAV:	LAVATORY: AMERICAN STANDARD LUCERNE NO. 0355.012, ADA, 20x18" VITREOUS CHINA, WALL HUNG, 4" CENTERS. PROVIDE FLOOR CARRIER WITH CONCEALED ARMS. PROVIDE FAUCET ZURN MODEL Z6913-XL AQUASENSE BATTERY-POWERED FAUCET, 1/2 GPM FLOW RESTRICTOR, GRID DRAIN ASSEMBLY. PROVIDE STOPS, SUPPLIES, TRAP, ETC., TO MAKE A COMPLETE INSTALLATION. 1/2" CW, 1/2" HW, 2" VENT, 2" SAN. PROVIDE ASSE 1070 APPROVED WATTS MODEL LFMV. SET TO 110°.
UR:	URINAL: AMERICAN STANDARD WASHBROOK FLOWSE NO. 6590.001, WASHOUT FLUSH ACTION, 3/4" TOP SPUD, VITREOUS CHINA, 1.0 GPF. PROVIDE FLUSH VALVE ZURN MODEL ZEM5600AV-IS, 1.0 GPF. ZURN FLOOR CARRIER Z-1221. MOUNT AT 24" ABOVE FINISHED FLOOR TO TOP OF RIM FOR BARRIER FREE MOUNT AT 17" AFF TO LIP. 1" CW, 2" VENT, 3" SAN.
EW:	ELECTRIC WATER COOLER: ELKAY VANDAL-RESISTANT BOTTLE FILLING STATION & BI-LEVEL REVERSE COOLER, NON-FILTERED NON-REFRIGERATED STAINLESS STEEL, ADA COMPLIANT, MODEL VRCTLRDWSK FURNISHED WITH VANDAL RESISTANT BUBBLER. ELECTRONIC BOTTLE FILLER BUTTON WITH MECHANICAL FRONT BUBBLE BUTTON. 1.0 FLA, 15 WATTS. MOUNT ONE AT 39-9/16" ORIFICE HEIGHT AND ONE AT 33-1/16" ORIFICE HEIGHT. CONNECT WATER SUPPLY AND WASTE LINES. PROVIDE FLOOR CARRIERS, STOP, SUPPLY, TRAP, ETC., TO MAKE A COMPLETE INSTALLATION. 3/2" CW, 2" VENT, 2" SAN.
MS:	MOP SINK: FIAT, MOLDED STONE NO. MSB 2424, 24x24". COMBINATION DOME STRAINER AND LINT BASKET. T&S NO. B-0665-BSTR ROUGH CHROME PLATE FINISH SERVICE SINK FAUCET WITH VACUUM BREAKER. 1/2" CW, 1/2" HW, 2" VENT, 3" SAN.
WH:	WATER HEATER - A.O. SMITH, MODEL DRE-52-12, 50 GALLON, 12.0 KW, 240 VOLT, SINGLE PHASE. HEAT TRAPS, EXPANSION TANK AND CODE APPROVED DRAIN PAN. SEE DETAIL. 1" CW/HW, 3/4" T&P, 1" DRAIN PAN DRAIN PIPING.
RP:	CIRCULATOR PUMP, BELL & GOSSETT NO. NBF-22 INLINE PUMP. BRONZE BODY, 115 VOLT, 0.80 F.L. AMPS, PROVIDE AQUASTAT. 7-DAY TIMECLOCK INTERMATIC NO. ETB015C, 30-AMPS SPST ELECTRONIC ASTRONOMIC TIME SWITCH, CLOCK VOLTAGE 120-VOLT - 277-VOLT NEMA 1.
TMV:	THERMOSTATIC MIXING VALVE - WATTS MODEL #USG-B-SC, WITH INLINE CHECK, WALL BRACKET AND FACTORY SET AT 110°, OR ASSE 1070 APPROVED EQUAL. INSTALL UNDER PUBLIC LAVATORIES.
HB:	WALL HYDRANT, MODERATE CLIMATE - ZURN NO. Z-1335, ENCASED FLUSH WALL HYDRANT, NICKEL BRONZE BOX AND HINGED COVER WITH OPERATING KEY LOCK AND "WATER" CAST ON COVER. 3/4" CW
WCO:	WALL CLEAN-OUT - ZURN, #Z-1441, SMOOTH STAINLESS STEEL ACCESS COVER, DURA-COATED CAST IRON BODY. MATCH TO PIPE SIZE.
ECO:	FLOOR CLEANOUT - ZURN NO. Z-1444, POLISHED BRONZE ACCESS COVER, DURA-COATED CAST IRON BODY. MATCH TO PIPE SIZE.
ED:	FLOOR DRAIN - ZURN Z-415-P WITH "TYPE B" ADJUSTABLE STRAINER TOP WITH SQUARE HEELPROOF OPENINGS AND SECURED GRATE. DURA COATED CAST IRON BODY WITH TRAP PRIMER CONNECTION ZURN MODEL Z1022-XL SANI-GARD AUTOMATIC TRAP PRIMER WITH INTEGRAL VACUUM BREAKER. SIZE TO PIPE SIZE.
* ALL FIXTURES SHALL BE APPROVED BY OWNER OR OWNER'S REPRESENTATIVE BEFORE PURCHASE. COORDINATE FINAL FINISHES WITH ARCHITECT.	

MATERIAL SPECIFICATIONS

- DOMESTIC HOT AND COLD WATER PIPING AND SOLVENT FITTINGS 1/2" TO 2" SHALL BE CPVC FLOWGUARD GOLD SDR11, PIPE SIZES 2-1/2" TO 16" SHALL BE CORZAN CPVC SCHEDULE 80. ALL PIPING AND FITTINGS SHALL CONFORM WITH ASTM, ANSI/NSF AND CSA STANDARD. CONTRACTOR TO PROVIDE PROPER TYPE OF PIPING IN PLENUM RETURN TO MEET LOCAL FLAME/SMOKE SPREAD RATING. CONTRACTOR TO PROVIDE UV PROTECTION TO EXPOSED PIPING WITH MANUFACTURER APPROVED LATEX PAINT.
- SANITARY WASTE AND VENT PIPING SHALL BE SCHEDULE 40 PVC PIPE WITH SOLVENT FITTINGS, CONFORMING TO ASTM STANDARDS. PVC SHALL NOT BE USED IN ANY RETURN AIR PLENUM.
- INSULATION SHALL BE FLEXIBLE UNICELLULAR-SELF-SEAL ARMAFLEX AP, PROVIDE 1" THICK INSULATION FOR HOT WATER PIPING UP TO 1 1/2", 1 1/2" THICK FOR PIPING 1 1/2" AND LARGER - PROVIDE SHEET METAL SADDLES AT EACH HANGER.

PLUMBING GENERAL NOTES

- ALL WORK SHALL COMPLY WITH FLORIDA BUILDING CODE 2020 7TH EDITION AND APPLICABLE NATIONAL, STATE, AND LOCAL CODES WITH AMENDMENTS.
- REVIEW PLANS OF ALL TRADES PRIOR TO BIDDING AND INSTALLATION TO INCLUDE ALL PLUMBING FOR COMPLETE SYSTEMS SHOWN ON THE PLANS AND AS REQUIRED.
- COORDINATE WITH OTHER TRADES TO PREVENT INTERFERENCE WITH HVAC DUCTS, STRUCTURE, ELECTRICAL LIGHTING, AND OTHER PIPING IN THE CEILING SPACE. VENT PIPING AND WATER PIPING SHALL BE HELD EITHER ABOVE OR BELOW HVAC DUCTWORK AS COORDINATED WITH THE HVAC CONTRACTOR.
- ALL CHANGES SHALL BE APPROVED BY THE ARCHITECT.
- COORDINATE WITH ARCHITECTURAL DRAWINGS BEFORE ROUGHING-IN PLUMBING FIXTURES AND EQUIPMENT SUPPLIES.
- THE PLUMBING SUBCONTRACTOR SHALL FURNISH AND INSTALL ALL PLUMBING FIXTURES, UNLESS NOTED OTHERWISE.
- THE PLUMBING SUBCONTRACTOR SHALL INSTALL AND MAKE ALL PLUMBING CONNECTIONS TO OWNER FURNISHED EQUIPMENT.
- VERIFY MOUNTING HEIGHT AND WATER CONNECTION SIZES TO ALL PLUMBING FIXTURES PRIOR TO ROUGH-IN. FURNISH CUT-OUT TEMPLATES, FOR PLUMBING FIXTURES TO BE INSTALLED IN MILLWORK, TO THE GENERAL CONTRACTOR.
- MAKE PROPER HOT AND COLD WATER, WASTE AND VENT PIPING CONNECTIONS TO ALL FIXTURES AND EQUIPMENT EVEN THOUGH ALL FITTINGS AND CONNECTIONS ARE NOT SHOWN.
- VERIFY LOCATION OF EXISTING WATER SERVICE AND THE LOCATION/INVERTS OF SANITARY PIPING PRIOR TO INSTALLATION.
- THIS CONTRACTOR TO DO ALL CUTTING AND PATCHING REQUIRED TO INSTALL ANY PORTION OF THIS WORK. PATCH WITH NEW MATERIALS OF THE SAME TYPE THAT WAS REMOVED. REFINISH PATCHED SURFACE TO MATCH EXISTING ADJACENT SURFACES.
- ALL PLUMBING VENTS IN EXTERIOR WALLS SHALL BE OFF-SET A MINIMUM OF 3'-0" BEFORE ROOF PENETRATION.
- PROVIDE TRAP PRIMERS FOR FLOOR DRAINS, FROM THE NEAREST LAVATORY, AS SHOWN ON THE PLAN AND AS REQUIRED BY LOCAL CODE. PRIMERS SHALL BE LOCATED IN A SERVICABLE LOCATION AND INSTALLED PER MANUFACTURERS INSTALLATION INSTRUCTIONS.
- INSTALL WATER HAMMER ARRESTERS WHERE WATER PRESSURES ARE EXCESSIVE OR WHERE REQUIRED TO ELIMINATE WATER HAMMER OR WHEN DEEMED NECESSARY BY LOCAL AUTHORITIES. LOCATE AND SIZE AS RECOMMENDED BY THE AMERICAN SOCIETY OF PLUMBING ENGINEERS.
- ALL WORK ASSOCIATED WITH THESE PLANS SHALL NOT PASS THRU OR ABOVE ANY ROOM DESIGNATED AS AN ELECTRICAL ROOM.
- IT IS IN THE INTENT OF THESE DRAWINGS TO COVER ALL WORK AND MATERIAL FOR A FIRST CLASS INSTALLATION. ANY EQUIPMENT, PLUMBING FIXTURE, TRIM HARDWARE AND/OR DEVICES USUALLY UTILIZED IN THE CLASS OF WORK, THOUGH NOT SPECIFICALLY MENTIONED OR SHOWN ON THESE DRAWINGS, BUT WHICH MAY BE NECESSARY FOR THE SATISFACTORY COMPLETION OF THE WORK (AS DETERMINED BY THE ARCHITECT) SHALL BE FURNISHED AND INSTALLED BY THE CONTRACTOR AS PART OF HIS TOTAL WORK.
- ALL WORK, BOTH MATERIAL AND INSTALLATION, SHALL BE GUARANTEED FOR A PERIOD OF ONE YEAR FROM DATE OF ACCEPTANCE BY THE OWNER.
- PRIOR TO CONNECTION TO ANY EXISTING SANITARY LINES, CONTRACTOR SHALL SCOPE THE LINES TO VERIFY THEY ARE CONNECTED TO THE MUNICIPAL SYSTEM. PROVIDE EVIDENCE TO THE LANDLORD OF THIS WORK PRIOR TO MAKING ANY FINAL CONNECTIONS.
- CONTRACTOR SHALL VISIT THE SITE AND FAMILIARIZE HIMSELF WITH ALL DETAILS OF THE WORK AND EXISTING CONDITIONS. THE INTENT OF THESE NOTES AND MECHANICAL NOTES ON DRAWINGS IS TO CLARIFY THE SCOPE OF WORK AND ALERT CONTRACTOR OF EXISTING CONDITIONS.
- CONTRACTOR SHALL REVIEW STRUCTURAL DRAWINGS BEFORE INSTALLATION TO AVOID ANY BEAM CONFLICTS AND COORDINATE PIPING ACCORDINGLY.
- FIELD VERIFY EXISTING INSTALLATIONS OF ALL TRADES. MODIFY EXISTING PLUMBING SYSTEMS, WHICH ARE TO REMAIN ACTIVE, TO FACILITATE RECONNECTION AND EXTENSION UNDER THE NEW WORK.
- UTILITIES AND SERVICES INDICATED ARE TAKEN FROM VARIOUS OLD AND NEW SURVEYS, AS-BUILT RECORDS, AND FIELD INVESTIGATION. IT IS TO BE UNDERSTOOD THAT UNFORESEEN CONDITIONS PROBABLY EXIST AND NEW WORK MAY NOT BE FIELD LOCATED EXACTLY AS SHOWN ON DRAWINGS.
- PIPE ROUTING IS SCHEMATIC AND IS NOT INTENDED TO INDICATE EXACT ROUTING OR ANY ADDITIONAL OFFSETS OR FITTINGS REQUIRED FOR PROPER INSTALLATION AND CLEARANCES. CONTRACTOR TO VERIFY STRUCTURAL, MECHANICAL, ELECTRICAL INSTALLATIONS AND OBSTRUCTIONS OF ALL TRADES AND ROUTE PIPING TO AVOID ANY INTERFERENCES.

PLUMBING CODE CRITERIA


ALL PLUMBING WORK SHALL MEET ALL THE REQUIREMENTS OF THE FOLLOWING LOCAL, STATE AND NATIONAL CODES:

FLORIDA BUILDING CODE 2020 7TH EDITION - ALL SECTIONS
FLORIDA ENERGY EFFICIENCY CODE - FBC 2020 FLORIDA ENERGY CODE
FLORIDA FIRE PREVENTION CODE 2020

PLUMBING SHEET INDEX

P-1 SANITARY FLOOR PLAN
P-2 WATER FLOOR PLAN
P-3 PLUMBING RISER DIAGRAMS
P-4 PLUMBING NOTES, SCHEDULES AND DETAILS

Engineering
Professionals, Inc.
Mechanical Engineers
912 W. Dr. Martin Luther King Jr. Blvd.
Tampa, FL 33603 (813) 251-6848
ES 6437



CITY OF DADE CITY
PARK RESTROOMS
37800 CHURCH AVENUE
DADE CITY, FL 33525

PROJECT NO:

23005.001

DATE: 10/19/2023

DESIGNED BY:

DRAWN BY:

CHECKED BY:

DRAWING TITLE:

PLUMBING NOTES
SCHEDULES AND
DETAILS

SHEET NO:

P-4