


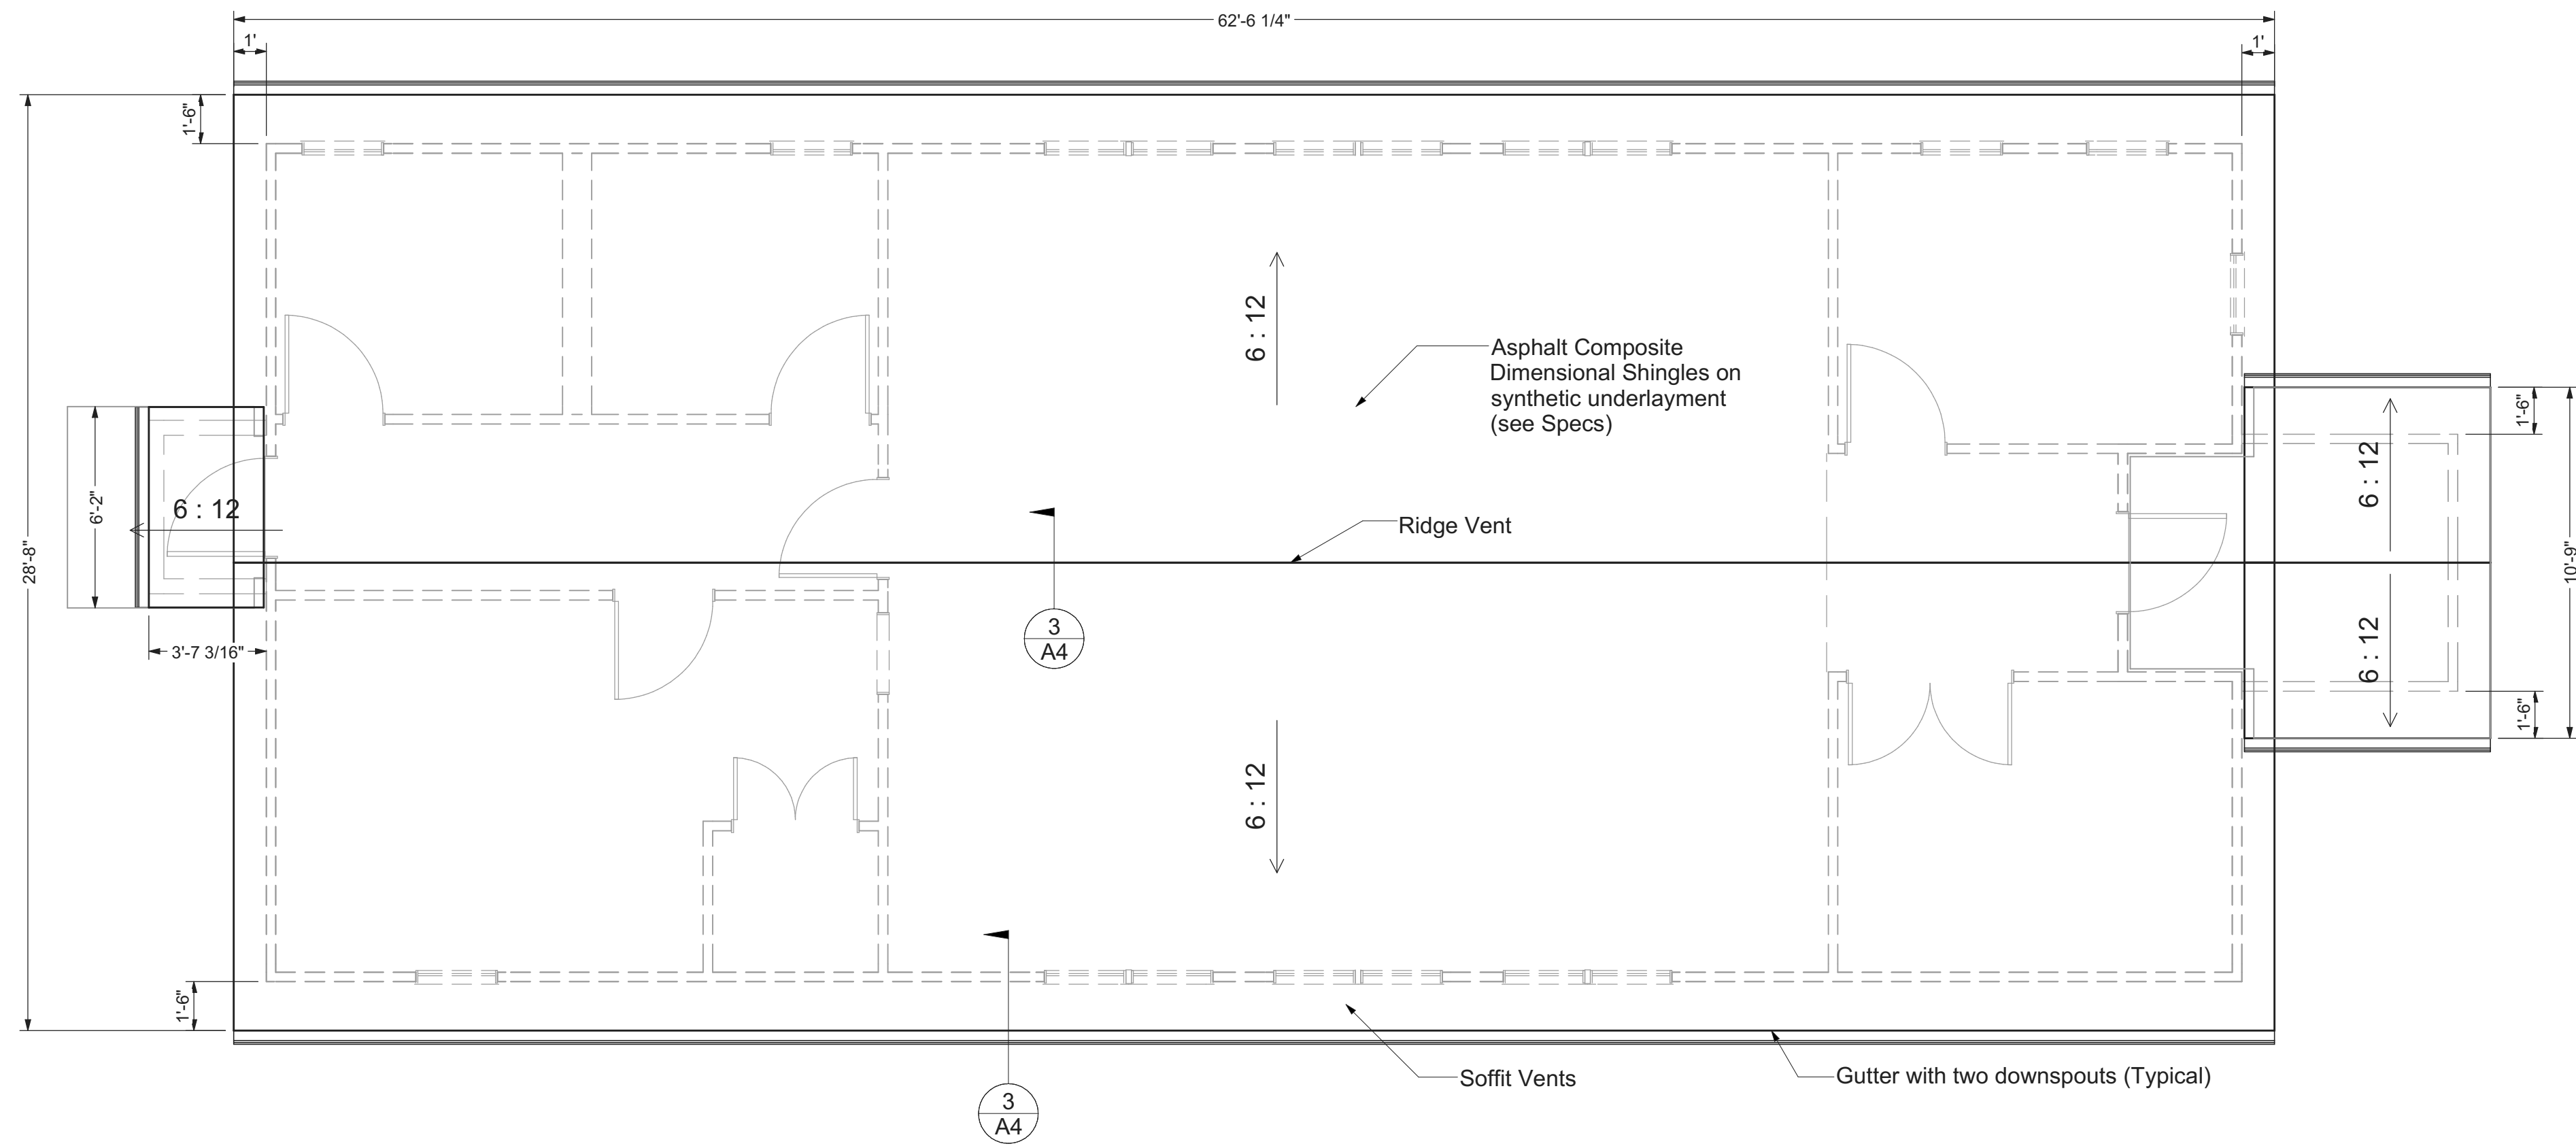

Roof Plan 1/4" = 1' - 0" (when printed on 24x36)

Roofing Notes

Disposal of Materials: The contractor shall be responsible for disposal of all waste materials (shingles, felt, waste and/or trash) off of the property. Contractor shall sweep the ground area around the building several times a day and again at the conclusion of the work with a magnetic roller to remove any nails.

Coordination of On-Site Work: The contractor will coordinate the replacement of the shingles with the Housing Authority representative at least five days in advance of any work being accomplished on the buildings. The contractor shall provide to the Housing Authority/City representative a progress schedule for approval. Said progress schedule shall show the various work trades (demo, installation of felt, and installation of shingles) for each building and shall reflect the start and completion of each building in this project.

Clean-up: The contractor shall keep worksite clear of debris and/or material during the work and shall accomplish clean-up of the worksite at the end of each day. Materials removed or demolished shall not be allowed to accumulate on the job-site. During periods of high wind, the contractor shall keep a worker on the ground around the building to police up any paper debris and keep it from blowing to other areas of the grounds. Any items damaged (by the contractor) during performance of the work shall be restored to original condition by the contractor and at no cost to the Housing Authority.

Standard of Workmanship: The contractor shall perform all work in accordance with roofing industry standards and manufacturers recommendations. Workmanship shall be of the highest grade throughout this project. All wires, signs, lights, radio antenna and other such antennas attached to the roof at the time of reroofing shall be removed by the contractor. These items shall be re-attached by the contractor in a manner satisfactory to the Contracting Officer on completion of the re-roofing work. All underlayment shall be installed in accordance with Manufacturer's recommendation. Edges of shingles at vertical projections shall be set in plastic cement in addition to placing a heavy bead of plastic cement at the intersection after all shingles are in place. Shingles installed in valleys shall be installed utilizing the "weaving method" with no open valley cuts. A layer of Ice and Rain Shield shall be installed in valleys (centered in valley) and extending from the start to the end of the valley prior to installation of shingles. Fiberglass shingles shall be kept in closed and covered buildings until shortly before installation on roof. Space for storage of shingles will be provided by the contractor. Shingles exposed to rain during transportation will not be used. Only the quantity of shingles to be installed during the work day will be placed on roof decks at the beginning of the work day and any shingles not installed by the end of the day will be returned to storage. Shingles shall never be stacked in contact with ground. The contractor will exercise care in the placement of shingles on the roof and shall not overload any structural members of the buildings by stacking bundles on shingles excessively on a structural member. The contractor shall take precaution to protect the interior of the buildings being work on from damage during periods of inclement weather. Any buildings contents that is damaged from weather, due to the contractors operations and failure to adequate protect the building, shall be corrected to original condition by the contractor at no cost to the Housing Authority. All noted construction deficiencies shall be corrected within 1 day and before proceeding to the next building. --


Safety: All work shall be accomplished in strict compliance with OSHA Safety Standards. The contractor shall incorporate the use of safety in the use of all ladders, scaffolds and lifts to include workers using lifts being tied-off with full body harnesses during work execution.

Work Hours: The contractor shall execute subject project between the hours of (hours will be determined at the Pre-Construction meeting) each weekly work day (Monday thru Friday) excluding state recognized holidays.


Warranty: The contractor shall provide to the customer a 30 year warranty from the shingle manufacturer on the shingles installed. The contractor shall also warrant all workmanship to be free from any defects within one year from the date of installation and acceptance.

Point of Contact:
Mr. Doug Brooks
Owner/Representative - Contract Manager
256-236-1575


Measurements: It shall be the responsibility of the contractor to field-verify measurements prior to bid of this project.

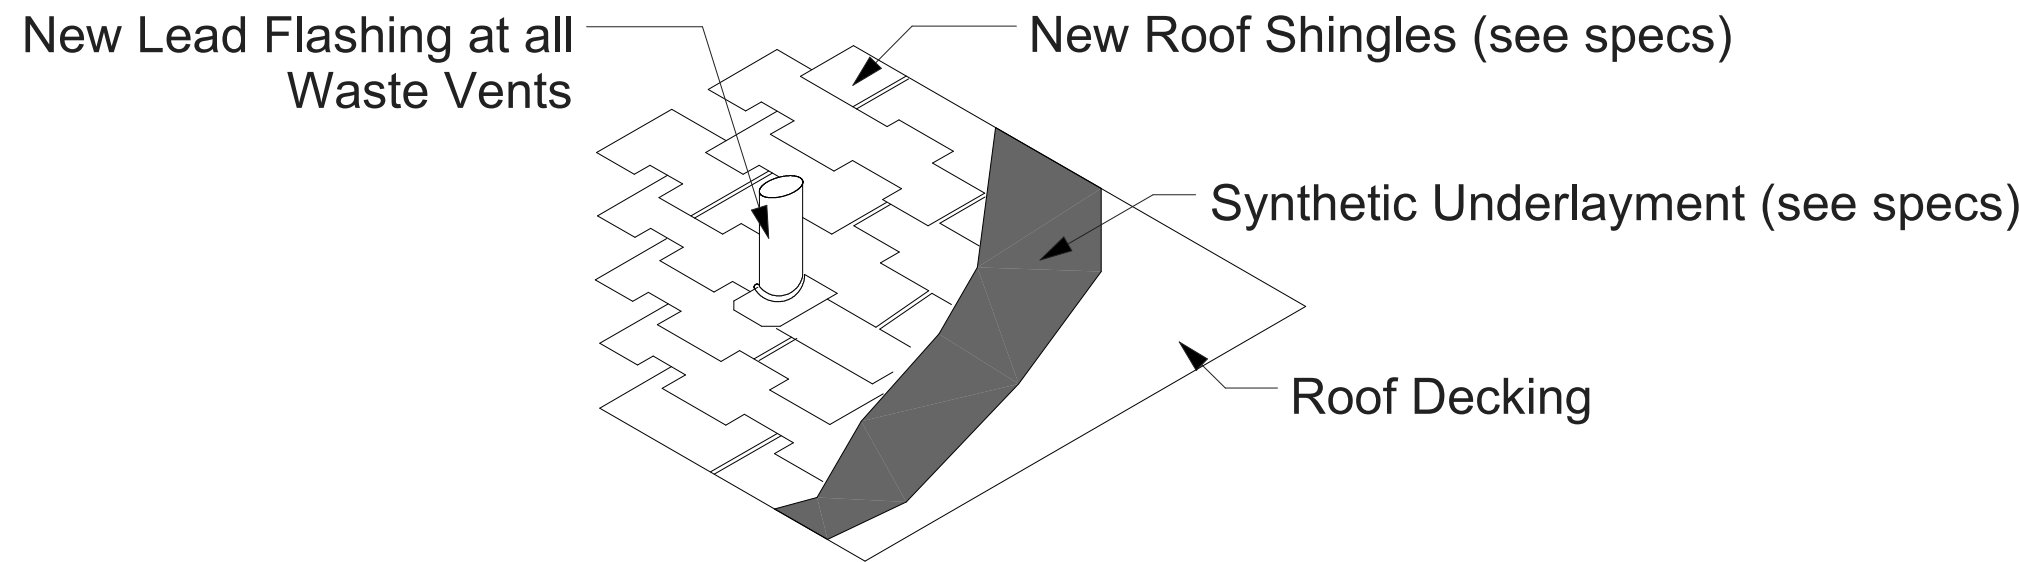

2 A4 Roof Detail 1 1 in = 1 ft

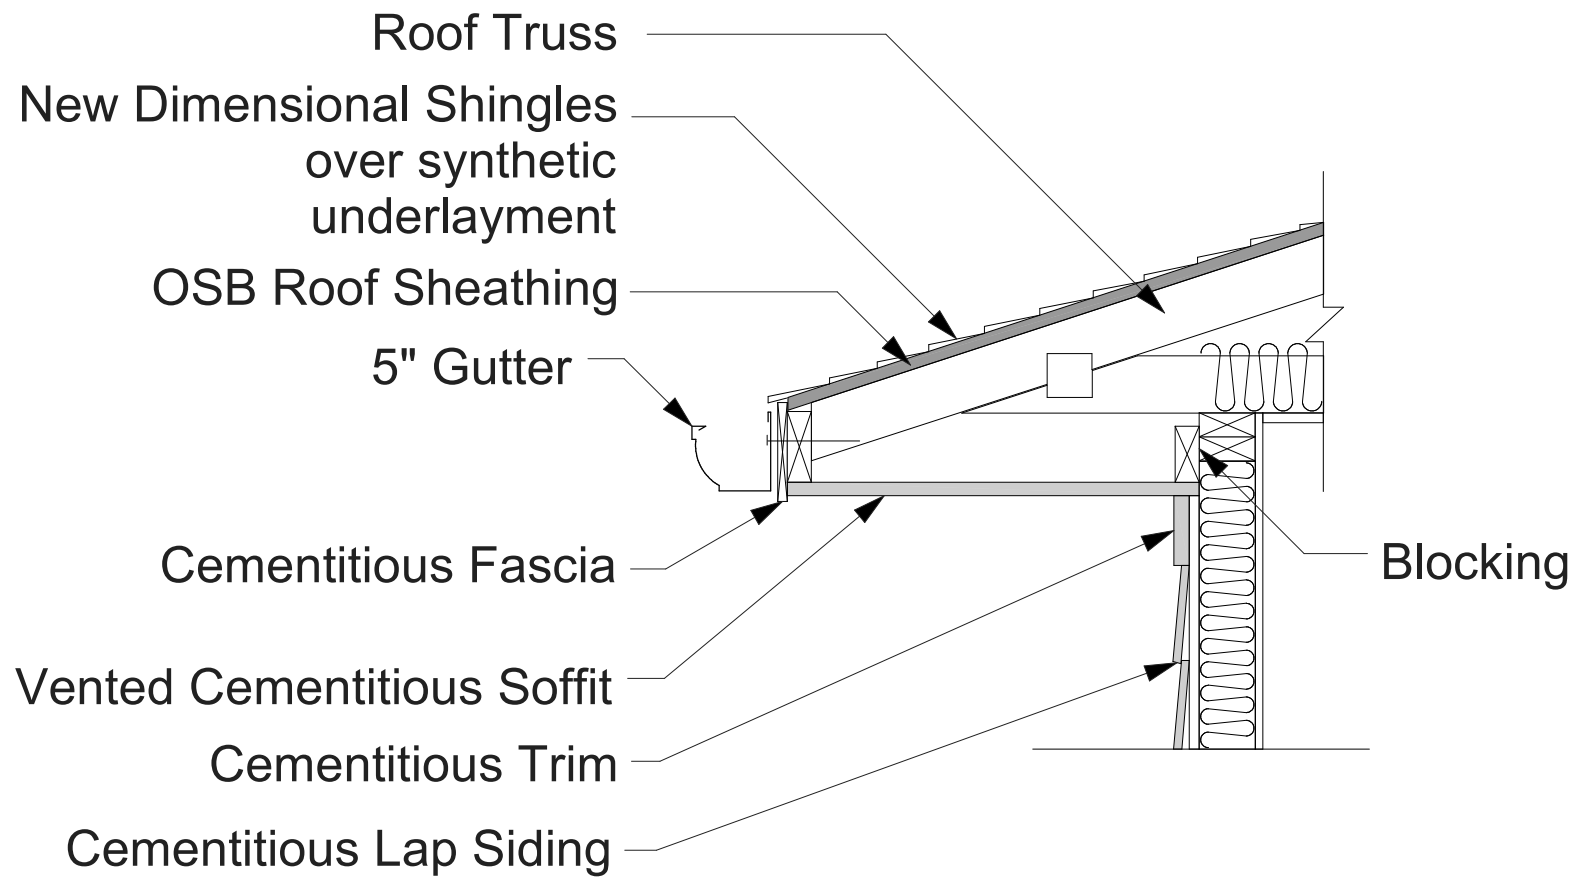

3 A4 Roof Eave Detail 1 in = 1 ft

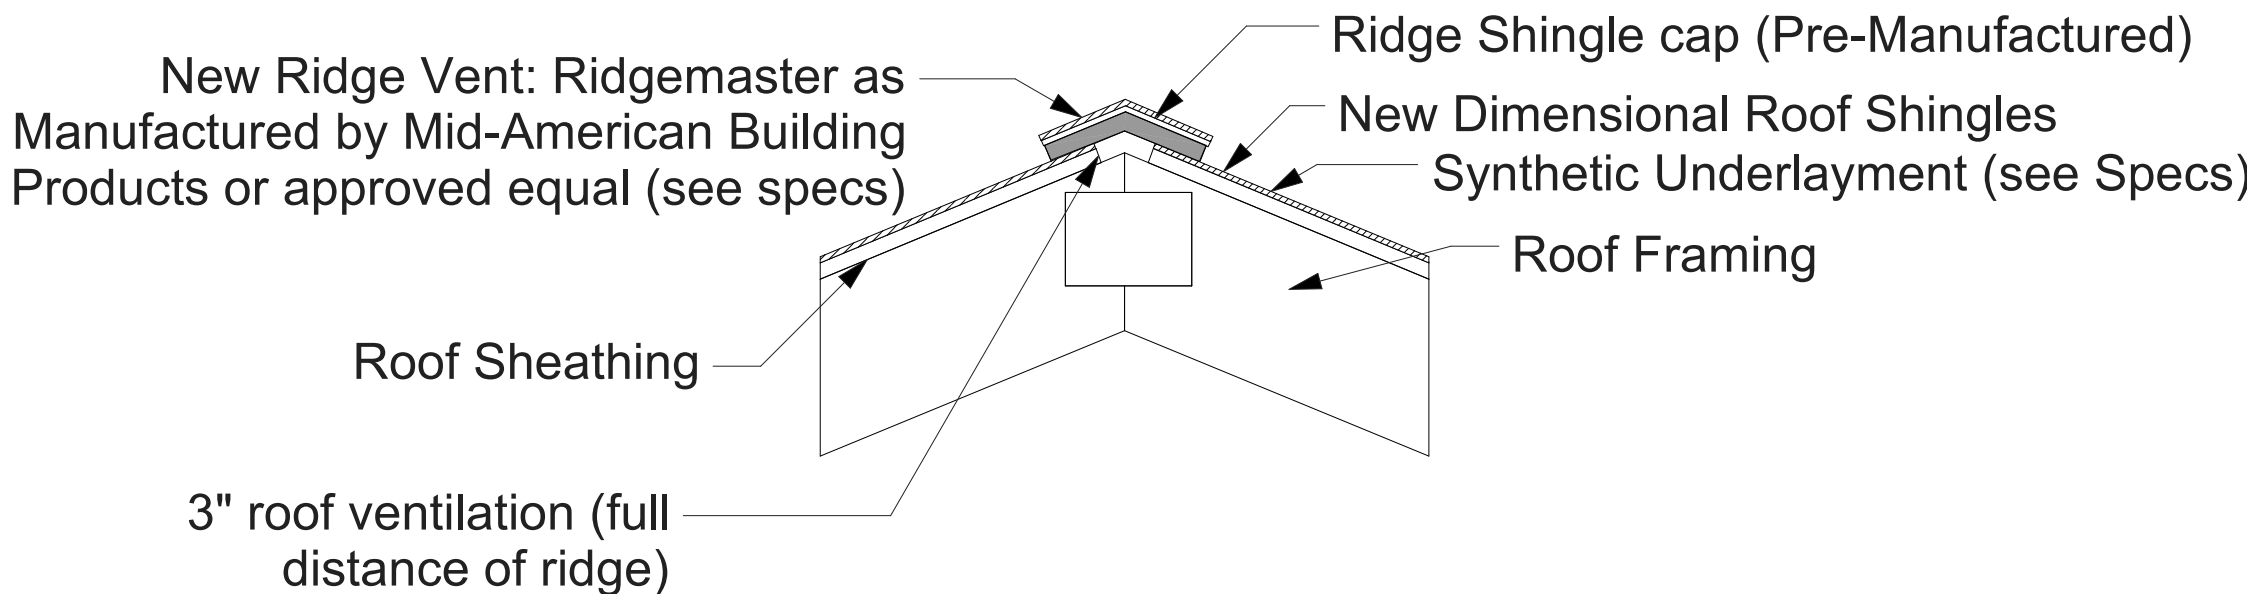

1 A4 Roof Detail 2 1 in = 1 ft

Roofing Details

Revision Table		Revised By		Description	
Number	Date				