

Pottawattamie County Health Building


Design Documents

March 10, 2023

Pottawattamie
County Health
Building

THESE ARE NOT THE FINAL BID DOCUMENTS - REFERENCE ONLY

LOCATION MAP

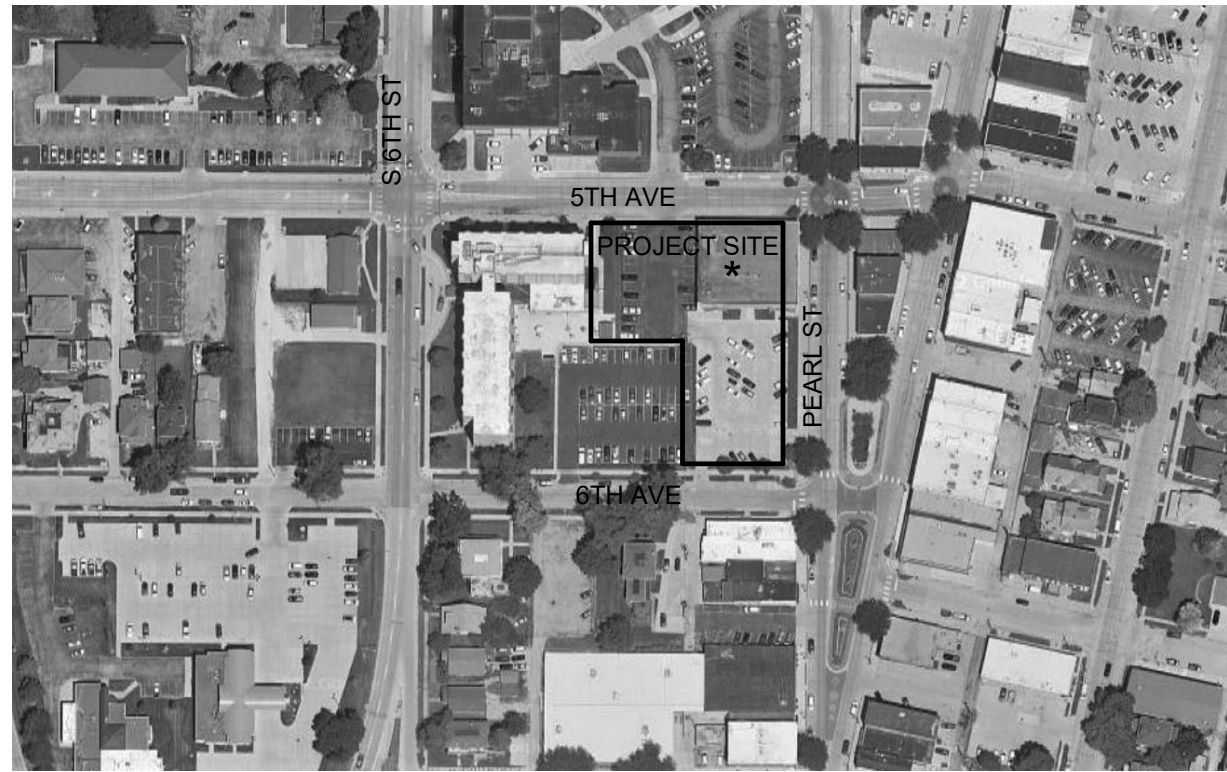

Project Location

PROJECT NOTES

PROJECT CONTACT INFORMATION

OWNER'S REPRESENTATIVE		ARCHITECT	CIVIL ENGINEER	STRUCTURAL ENGINEER	MECHANICAL ENGINEER	ELECTRICAL ENGINEER
		Alley Poyner Macchietto Architecture	C.E. Firm Name	S.E. Firm Name	M.E. Firm Name	E.E. Firm Name
Organization Address		1516 Cumming Street	C.E. Address	S.E. Address	M.E. Address	E.E. Address
Organization City/State/Zip		Omaha, NE 68102	C.E. Address 2	S.E. Address 2	M.E. Address 2	E.E. Address 2
Organization Phone		(T) 402.341.1544	City / State / Zip	City / State / Zip	City / State / Zip	City / State / Zip
		www.alleypoyner.com	Phone	Phone / Fax	Phone / Fax	Phone / Fax
Project Contact		Project Contact	Project Contact	Project Contact	Project Contact	Project Contact
Organization Contact			C.E. Contact	S.E. Contact	M.E. Contact	E.E. Contact

SHEET INDEX

GENERAL	
G0.0	COVER SHEET
G0.1	GENERAL INFORMATION
CODE ANALYSIS	
CP1.1	CODE PLANS
ARCHITECTURAL	
A0.1	ASSEMBLIES, PARTITION TYPES & NOTES
A1.1	FLOOR PLAN - FIRST LEVEL
A1.2	ROOF PLAN
A2.1	EXTERIOR ELEVATIONS
A3.1	BUILDINGS / WALL SECTIONS
A6.1	DOOR AND FRAME ELEVATIONS
A9.0	ARCH AND INTERIOR FINISH NARRATIVE
A9.1	SCHEDULES
A9.2	FINISH PLANS
A10.1	SIGNAGE PLAN - FIRST LEVEL
A10.2	SIGNAGE PLAN - SECOND LEVEL
STRUCTURAL	
S1.1	FOUNDATION PLAN
S1.2	SECOND FLOOR FRAMING PLAN
S1.3	ROOF FRAMING PLAN
S2.1	BRACE ELEVATIONS
S3.1	STRUCTURAL SECTIONS
S3.2	STRUCTURAL SECTIONS
MECHANICAL	
M0.0	MECHANICAL COVERSHEET
M1.1	FLOOR PLANS - HVAC
M1.2	ROOF PLAN - MECHANICAL
M2.0	BELOW GRADE FLOOR PLAN - PLUMBING
M2.1	FLOOR PLANS - PLUMBING
M4.0	MECHANICAL ENLARGED PLANS
M4.1	WASTE AND VENT RISER DIAGRAM
M5.0	MECHANICAL CONTROL DIAGRAMS
M5.1	MECHANICAL CONTROL DIAGRAMS
M6.0	MECHANICAL DETAILS
M6.1	MECHANICAL DETAILS
M7.0	MECHANICAL SCHEDULES
M7.1	MECHANICAL SCHEDULES
M7.2	PLUMBING FIXTURE SCHEDULE
FIRE PROTECTION	
FP1.1	FLOOR PLANS - FIRE PROECTION
ELECTRICAL	
E0.0	ELECTRICAL COVER SHEET
E1.1	FLOOR PLANS - LIGHTING
E2.1	FLOOR PLANS - POWER
E3.1	FLOOR PLANS - SPECIAL SYSTEMS
E4.1	ELECTRICAL RISER DIAGRAM
E5.0	ELECTRICAL DETAILS
E5.1	TELECOM SYSTEMS DETAILS
E6.1	ELECTRICAL SCHEDULES
TELECOM	
T1.1	FLOOR PLANS - TELECOM
T2.0	TELECOM DETAILS
SECURITY	
TY1.1	FLOOR PLANS - SECURITY
AUDIO VISUAL	
AV1.1	FLOOR PLANS - AUDIO/VISUAL
AV2.0	AUDIO/VISUAL DETAILS

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE

APMA Coord Prof

REVISION	DATE
Project Number:	21064
Date:	March 10, 2023

COPYRIGHT © 2023

COVER SHEET

G0.0

NOT FOR CONSTRUCTION

THESE ARE NOT THE FINAL BID DOCUMENTS - REFERENCE


SYMBOL LEGEND

- ###

###
- ###



###
- 0 - - - ->
- →
- →
- EGRESS STAIR
- EGRESS CAPACITY: 3" / PERSON
- STAIR A
160 / 140
- ANTICIPATED LOAD

ADA CLEARANCE LEGEND

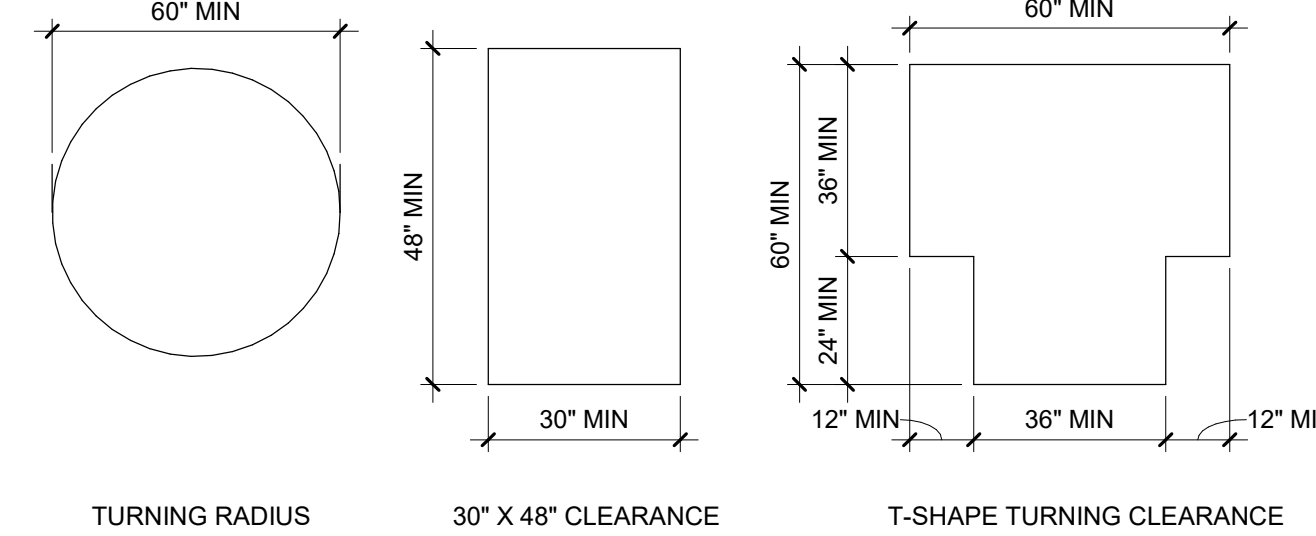

WALL RATING LEGEND

- 1-HOUR
- 2-HOUR

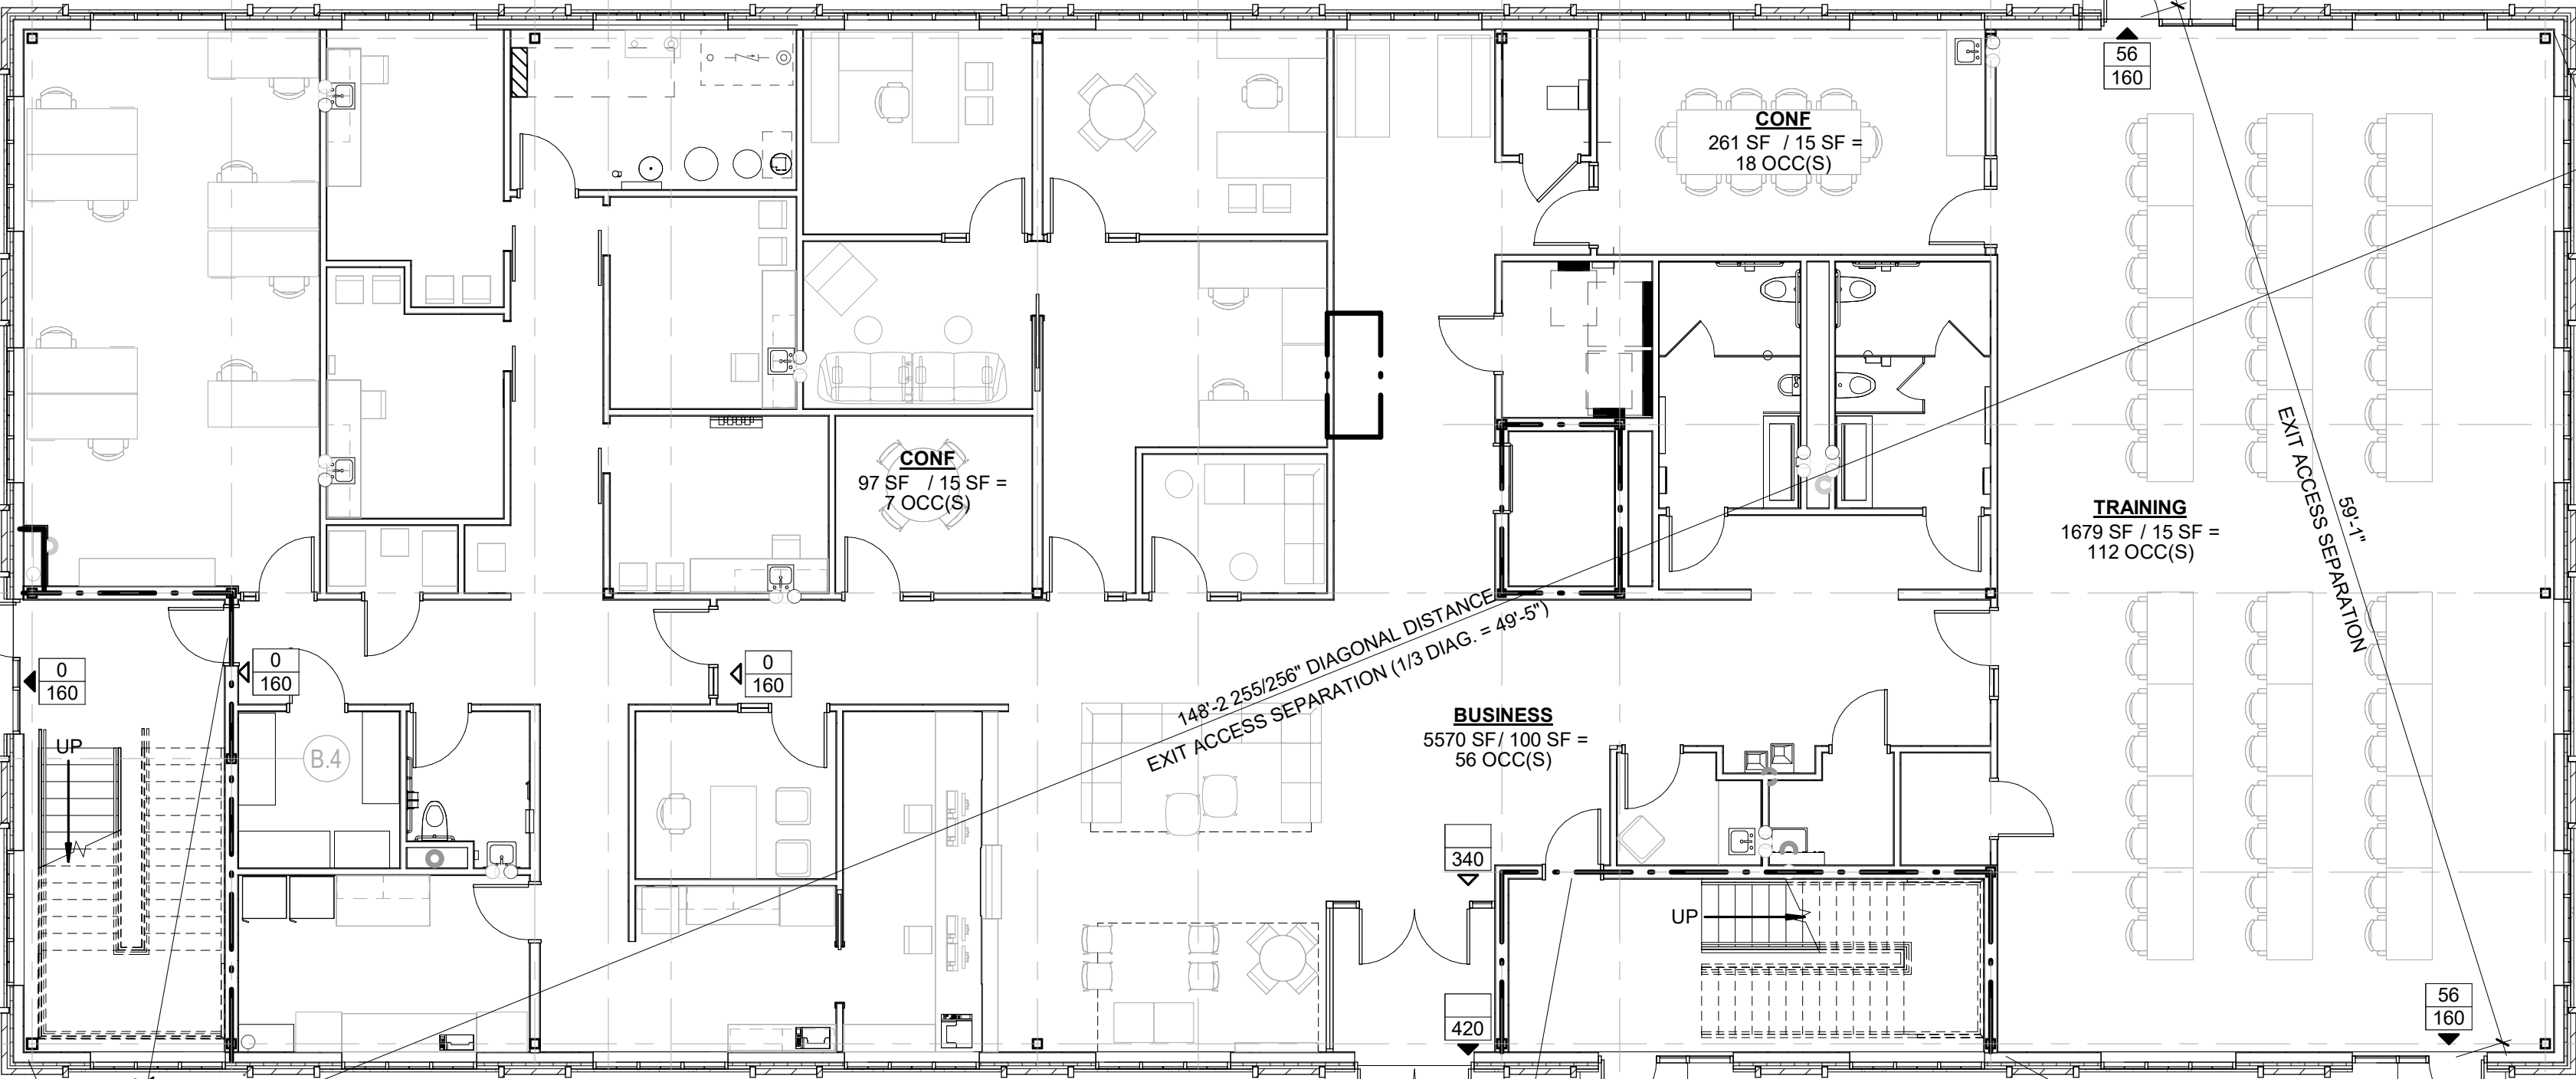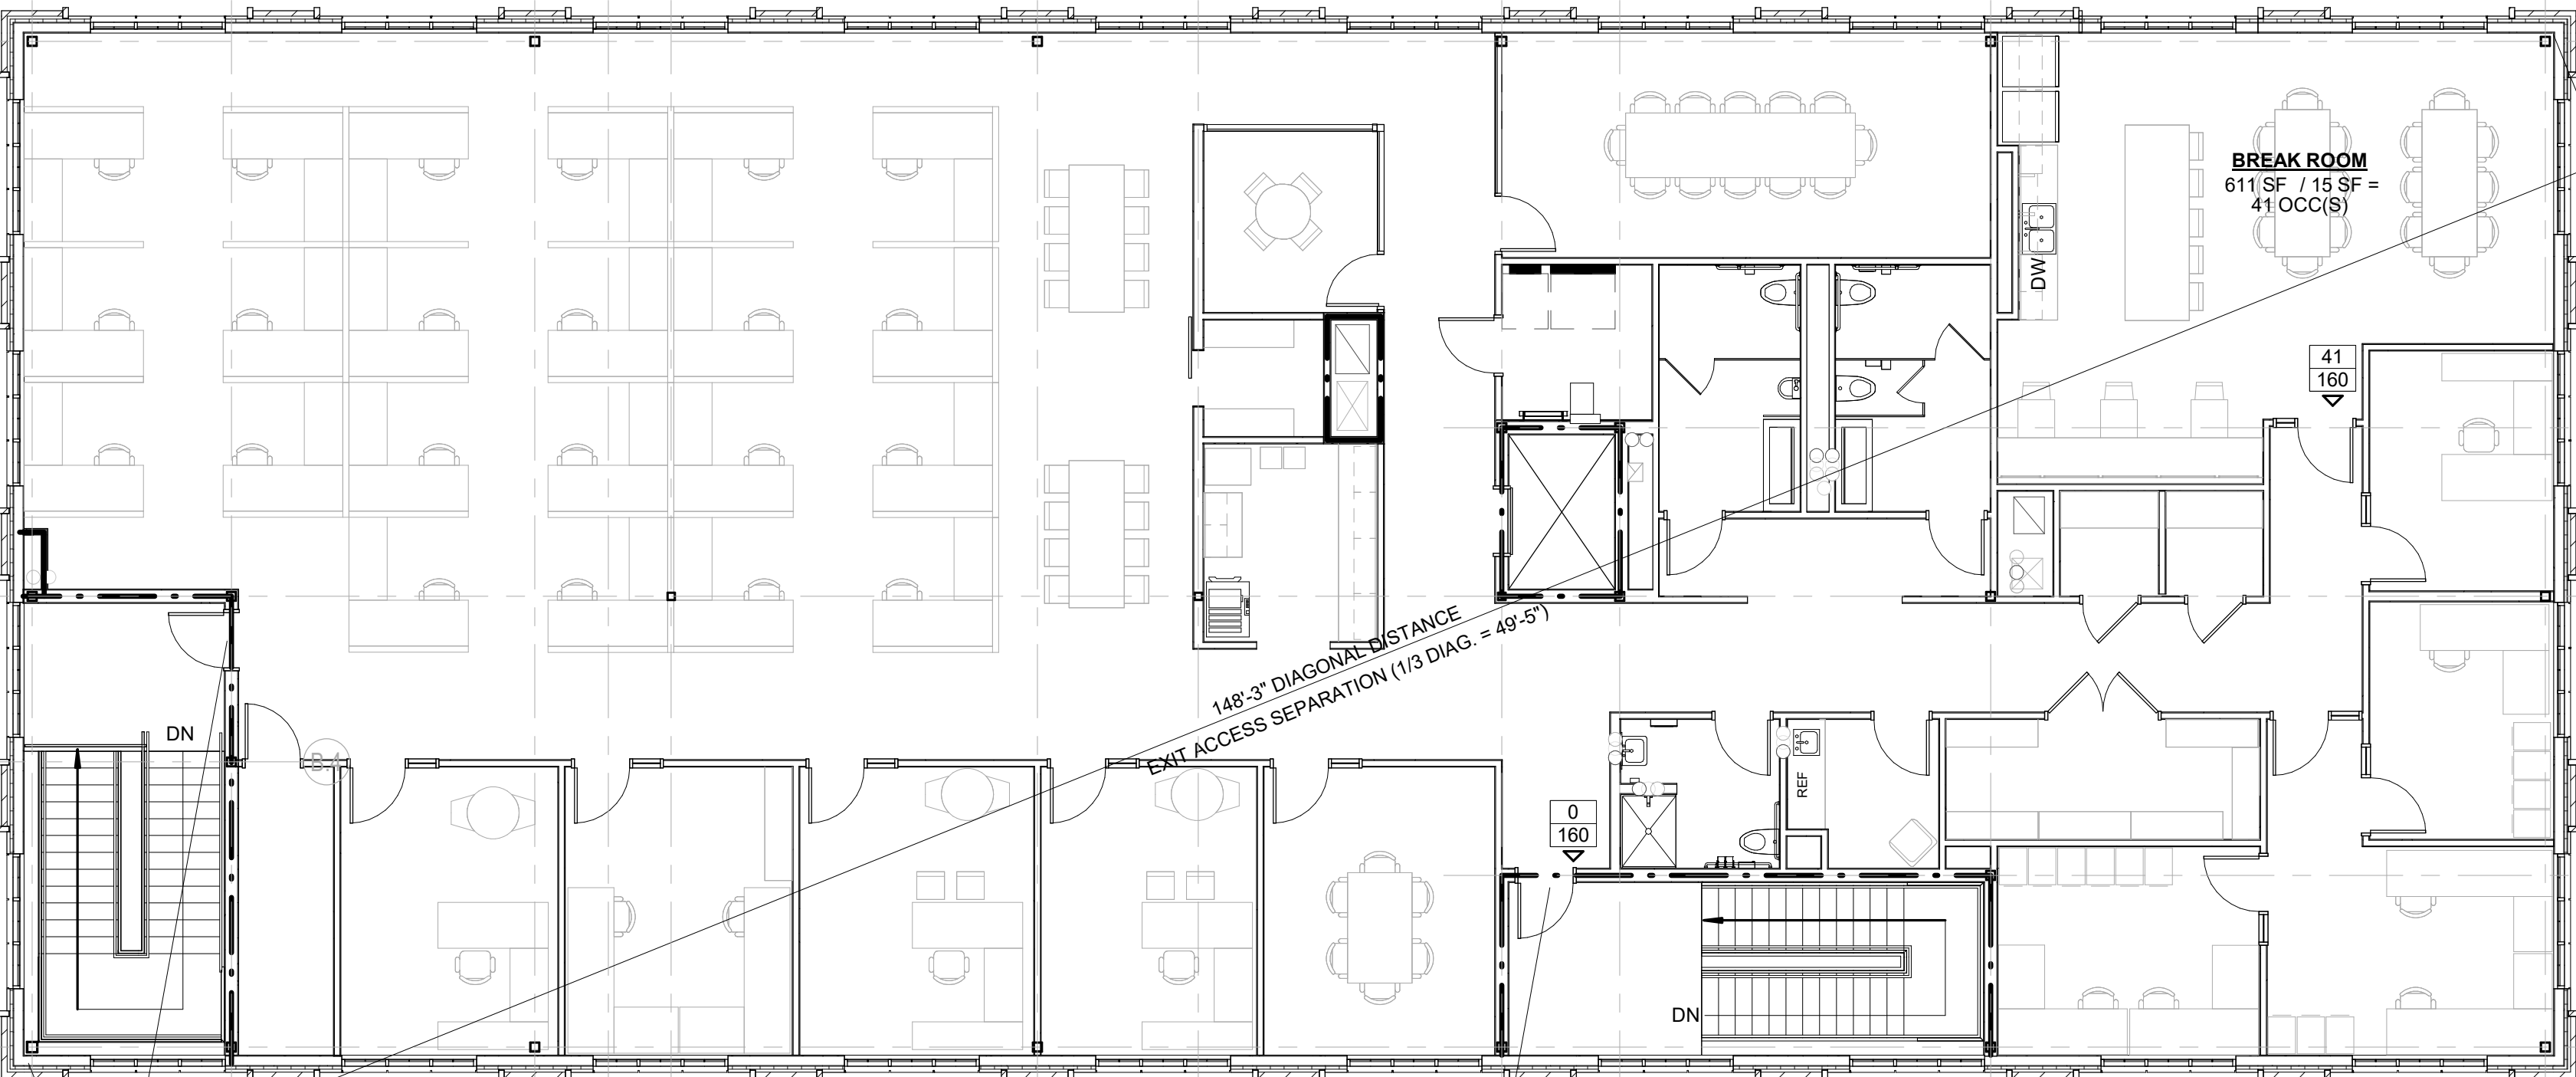

AGENCY APPROVAL


ALLEY POYNER
MACCHIETTO
ARCHITECTURE


REVISION	DATE
Project Number:	21064
Date:	March 10, 2023

CODE PLANS

CP1.1

~~AGENCY APPROVAL~~

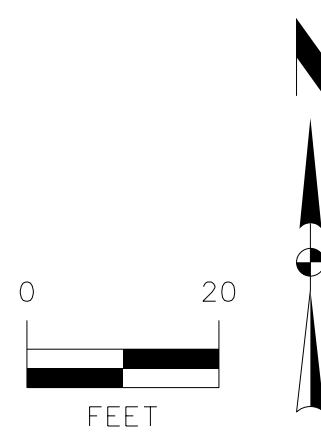
DEMOLITION PLAN

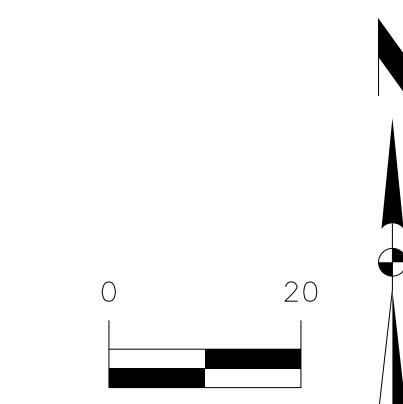

AGENCY APPROVAL


C3

THESE ARE NOT THE FINAL BID DOCUMENTS - REFERENCE ONLY

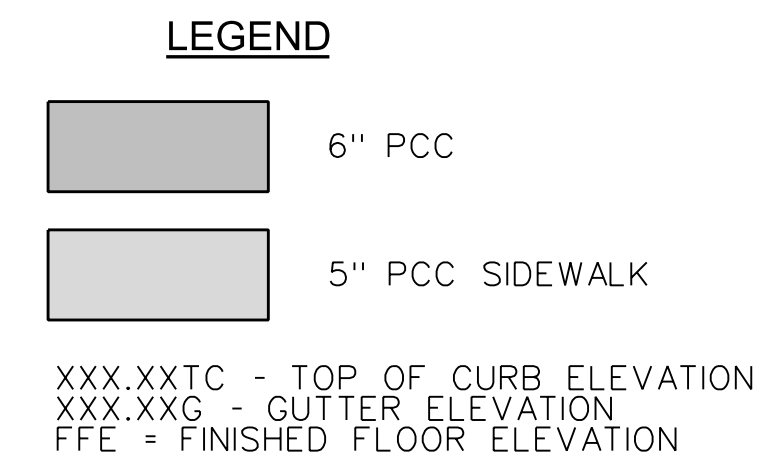

1. CONTRACTOR TO SUBMIT JOINTING PLAN TO BE REVIEWED AND APPROVED BY ENGINEER PRIOR TO BEGINNING CONSTRUCTION.
2. JOINTS ARE TO BE INSTALLED PER STATEWIDE URBAN DESIGN AND SPECIFICATIONS (SUDAS).
3. ANY EXCESS CUT TO BE SPREAD ON SITE AS DIRECTED BY ENGINEER DURING CONSTRUCTION. PLACE TOPSOIL OVER ALL AREAS DISTURBED.
4. EROSION CONTROL: TEMPORARILY SEED THE SITE AFTER ROUGH GRADING HAS BEEN COMPLETED IF PERMANENT SEEDING WILL NOT TAKE PLACE WITHIN 2 WEEKS. PLACE SILT FENCE AND MAINTAIN IN PROBLEM AREAS. COMPLY WITH EROSION CONTROL LAW.
5. ALL SPOTS SHOWN ARE TOP OF SLAB UNLESS OTHERWISE NOTED.



~~AGENCY APPROVAL~~

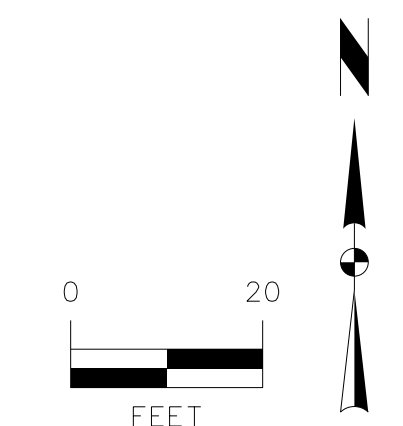

△ REVISION	DATE
Project Number:	21064
Date:	March 8th, 2023
COPYRIGHT © 2022	

GRADING PLAN

1 TYPICAL PAVEMENT CROSS SECTIONS

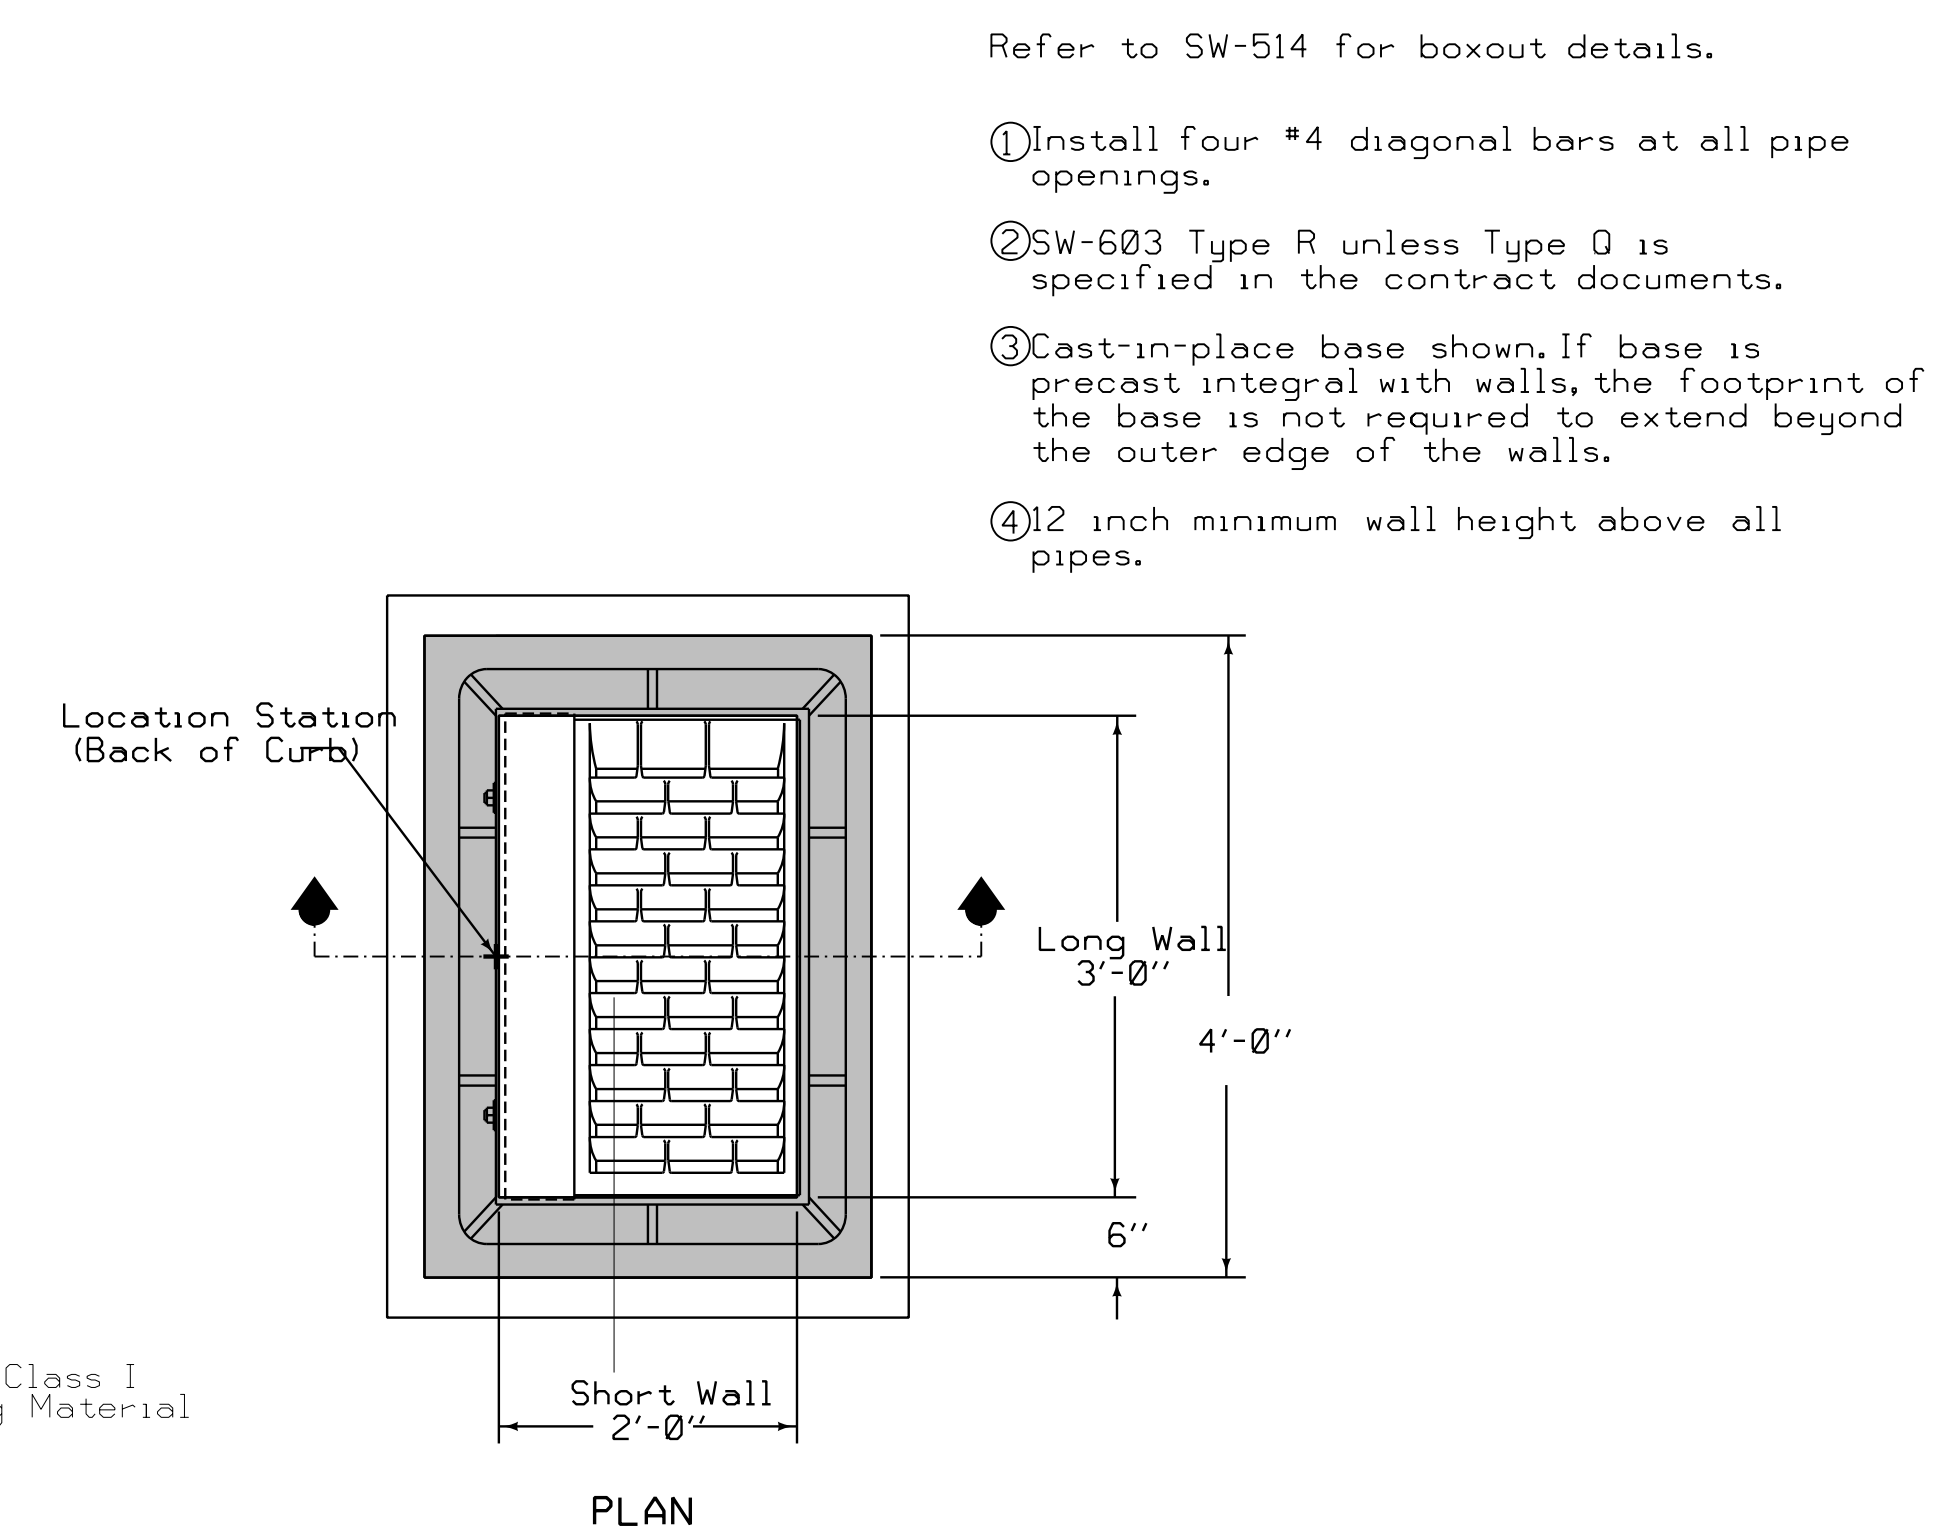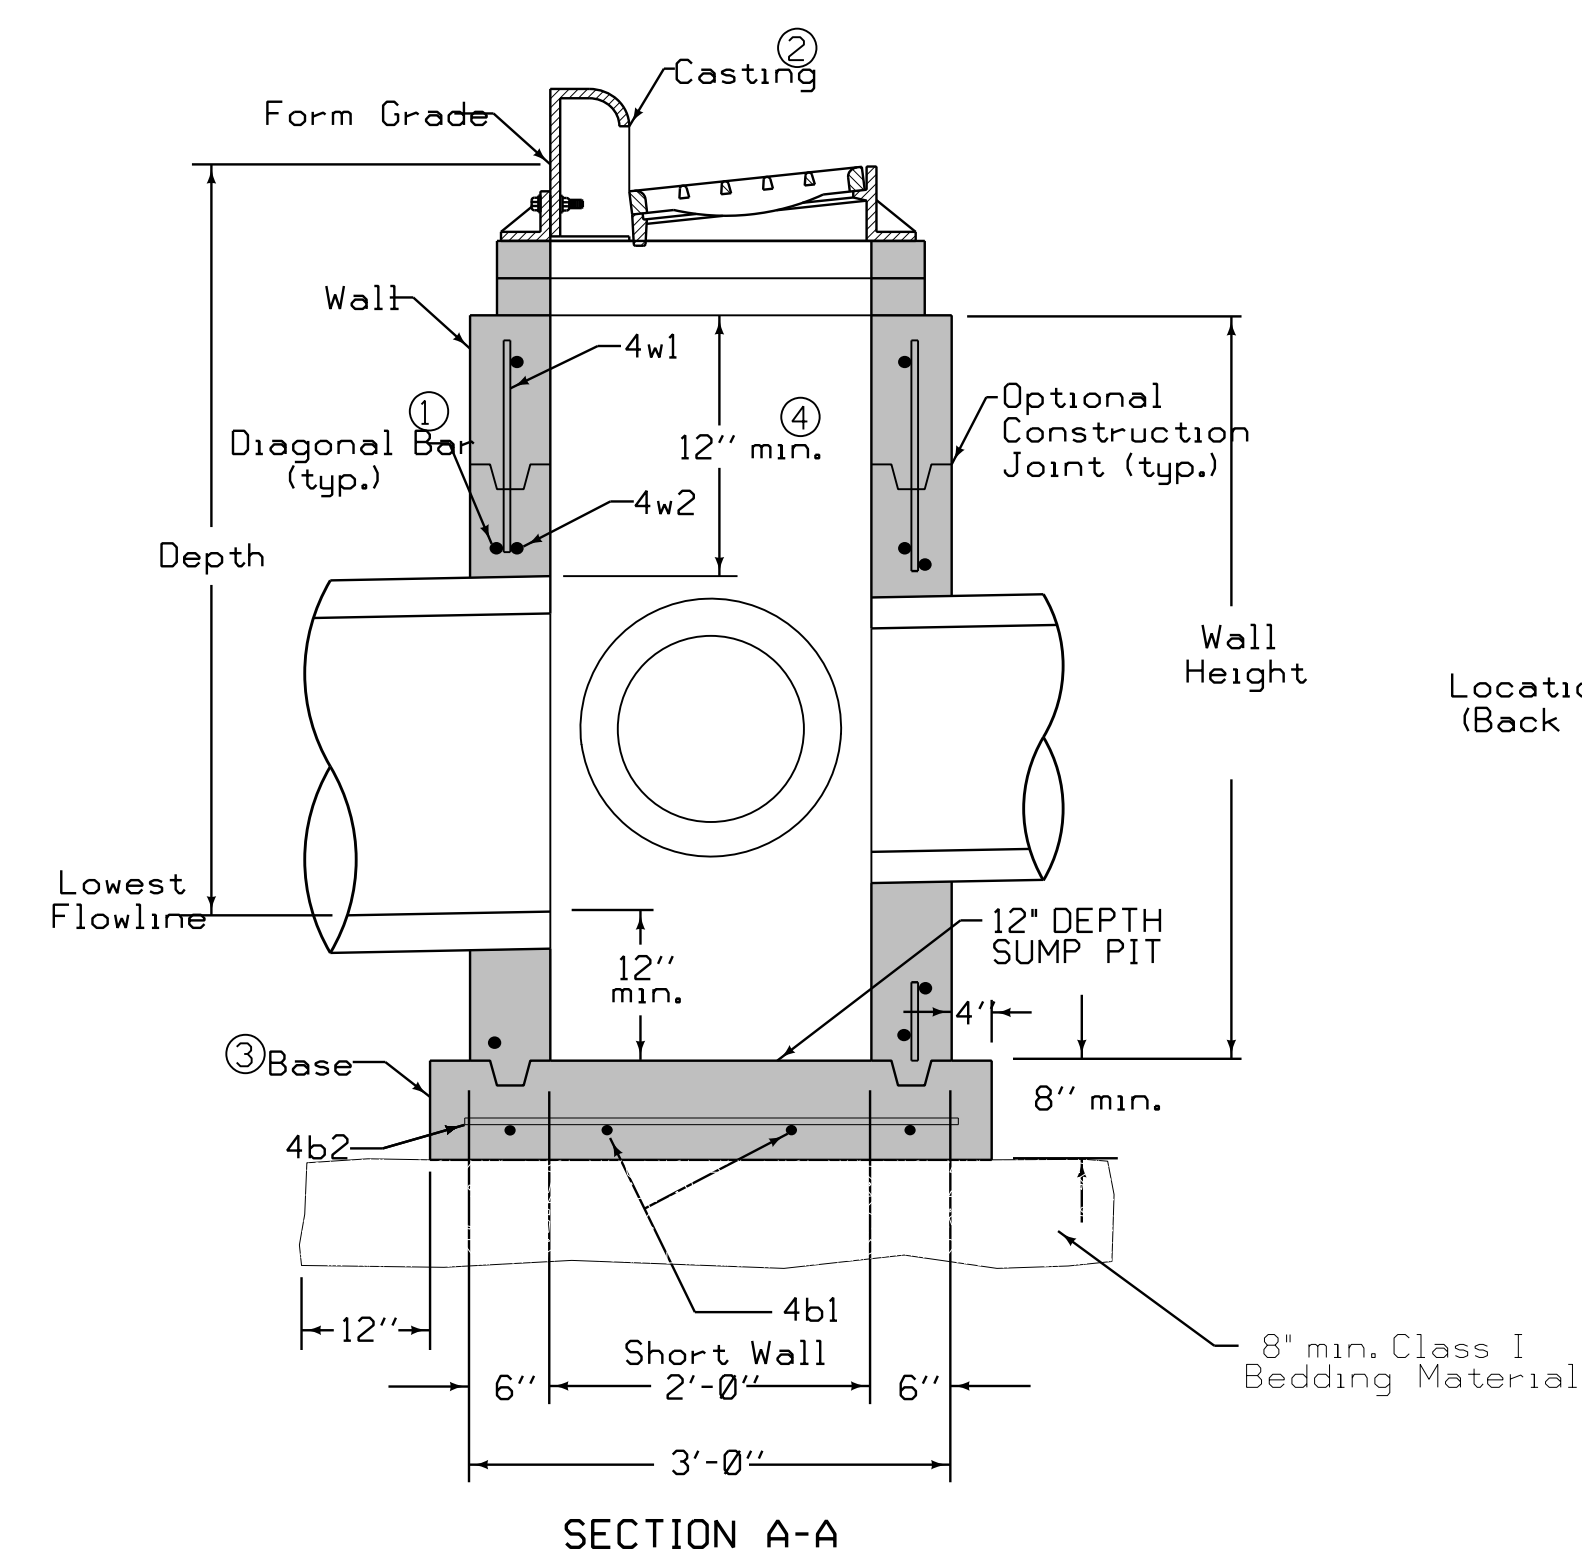

MAXIMUM PIPE DIAMETERS		
Pipe Location	Precast Structure	Cast-in-place Structure
Short Wall	15"	18"
Long Wall	24"	30"

REINFORCING BAR LIST									
Mark	Q	Locat	Shape	Length	Count	Sp			
4w1	4	Walls	—	Wall Height	min 14"	1			
4w2	4	Long Walls	—	3'8"	Vertical	1			
4w3	4	Short Walls	—	2'8"	Vertical	1			
4b1	4	Base	—	4'-2"		4		10"	
4b2	4	Base	—	3'-2"		5		10"	

2	SINGLE GRATE INTAKE WITH MODIFIED SUMP.
5	NO SCALE

AGENCY APPROVAL

REVISION	DATE
Project Number:	21064
Date:	March 8th, 2023



COPYRIGHT © 2022

PROJECT DETAILS

C5

PARTITION TYPE NOTES @ METAL STUDS, MASONRY &
CONCRETE

- A. ALL INTERIOR PARTITION TO BE A1A TO BOTTOM OF DECK UNLESS OTHERWISE NOTED.
- B. THE PARTITION TYPES SHOWN INDICATE THE GENERAL CONSTRUCTION FEATURES OF THE MAJORITY OF THE CONSTRUCTION TO BE PROVIDED. THEY ARE NOT INTENDED TO REPRESENT A COMPLETE LISTING OF SYSTEMS REQUIRED AND DO NOT NECESSARILY INDICATE ALL OF THE CONSTRUCTION REQUIREMENTS TO BE PROVIDED BY THE CONTRACT DOCUMENTS.
- C. SEE CP SHEETS FOR RATED WALL LOCATIONS
- D. REFER TO THE GENERAL NOTES ON SHEET 00.1 FOR ADDITIONAL REQUIREMENTS REGARDING GWB PARTITIONS.
- E. SEE ROOM FINISH SCHEDULE FOR LOCATION OF APPLIED FINISHES (SUCH AS CERAMIC TILE, WALL COVERING, ETC) THAT MAY AFFECT THE PARTITION SURFACE AND CONSTRUCTION REQUIREMENTS.
- F. PROVIDE MANUFACTURER'S PROPRIETARY TYPE 'X' GYPSUM BOARD (MEETING THE DESIGNATED FIRE REFERENCE LISTED) WHERE PARTITION IS INDICATED TO BE FIRE RATED ON PLANS. RATED PARTITION TO MEET CONSTRUCTION REQUIREMENTS OF FIRE RATING REFERENCE LISTED.
- G. PROVIDE ACOUSTICAL SEALANT AT PERIMETER OF FULL HEIGHT PARTITIONS AND AT ALL PARTITION SEPARATIONS. IF PARTITION IS FIRE RATED, PROVIDE UL LABELED FIRE-STOPPING IN PLACE OF ACOUSTICAL SEALANT. AT PARTITIONS THAT ARE SOUND AND FIRE RATED, PROVIDE ACOUSTICAL SEALANT AT PARTITION PENETRATIONS THAT DO NOT REQUIRE FIRESTOPPING.
- H. THE PERIMETER OF ALL SOUND WALLS TO BE SEALED WITH ACOUSTICAL SEALANT.
- I. ALL WALLS ARE TO REST ON CONTINUOUS FOAM SILL SEALER UNLESS OTHERWISE NOTED. PROVIDE CONT. SEALANT AT EACH SIDE OF STUD WALL.
- J. DRAWINGS INDICATE SOME LOCATIONS FOR CONTROL JOINTS IN DRYWALL. REFER TO SPECIFICATION FOR ADDITIONAL TYPICAL LOCATIONS FOR REQUIRED CONTROL JOINTS.
- K. ALL FINISHES ON RATED WALLS AND CEILINGS ARE TO BE CONTINUOUS AT INTERSECTING WALLS. SEE PLANS FOR ADDITIONAL SPECIFIC INFORMATION AND DETAILS.
- L. GWB @ CORRIDOR WALLS TO EXTEND TO FLOOR/ROOF SHEATHING U.O.N. SEE SECTIONS AND DETAILS.
- M. EXTEND WALL FRAMING AND GYPSUM BOARD AT ALL PARTITIONS FULL HEIGHT TO UNDERSIDE OF DECK UNLESS OTHERWISE SHOWN OR NOTED.
- N. WALLS IS INDICATED TO RECEIVE A VAPOR RETARDER, EXTEND FURRING AND GYPSUM BOARD FULL HEIGHT.
- O. RC CHANNEL TO BE LOCATED ON TAGGED SIDE OF WALL; U.O.N.
- Q. SEE SPECIFICATIONS FOR LOCATIONS OF PAPER-FACED GYPSUM WALLBOARD, MOISTURE-RESISTANT GYPSUM WALLBOARD CONSTRUCT PERIMETER RELIEF AND CONTROL JOINTS IN ACCORDANCE WITH 'GA-600-200 FIRE RESISTANCE DESIGN MANUAL - 16TH EDITION', FIGURES 9 AND 10.
- R. SEE ROOM FINISH SCHEDULE FOR LOCATION OF APPLIED FINISHES (SUCH AS CERAMIC TILE, WALL COVERING, ETC) THAT MAY AFFECT THE PARTITION SURFACE AND CONSTRUCTION REQUIREMENTS.
- S. VERIFY ALL SHEAR WALL LOCATIONS WITH STRUCT DRAWINGS.
- T. PROVIDE FIRESTOPPING AT ALL THROUGH PENETRATIONS AT RATED WALLS AND FLOOR/CEILING ASSEMBLIES PER SPECIFICATIONS.

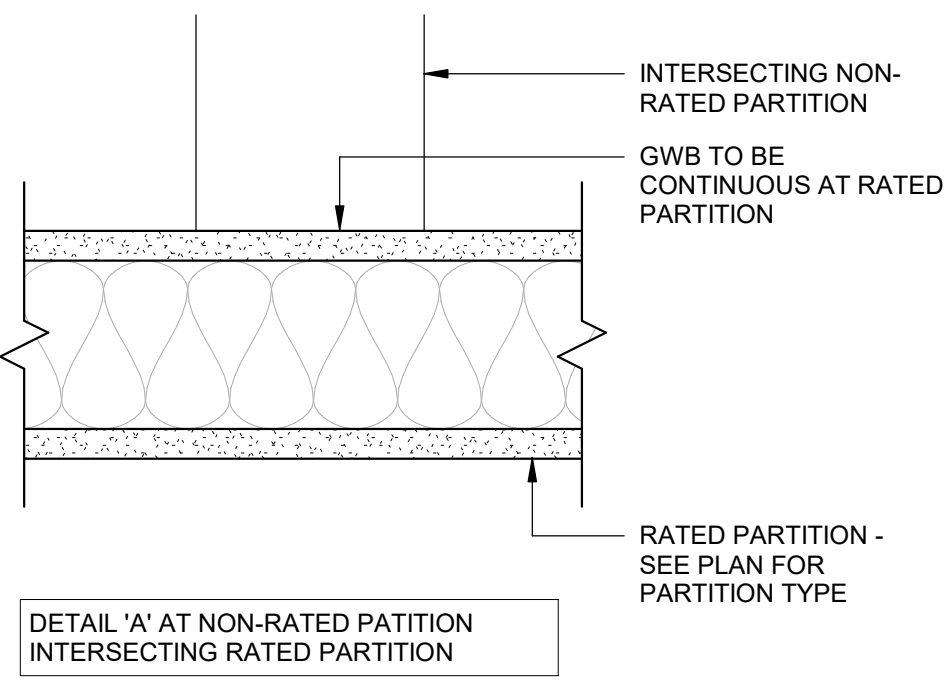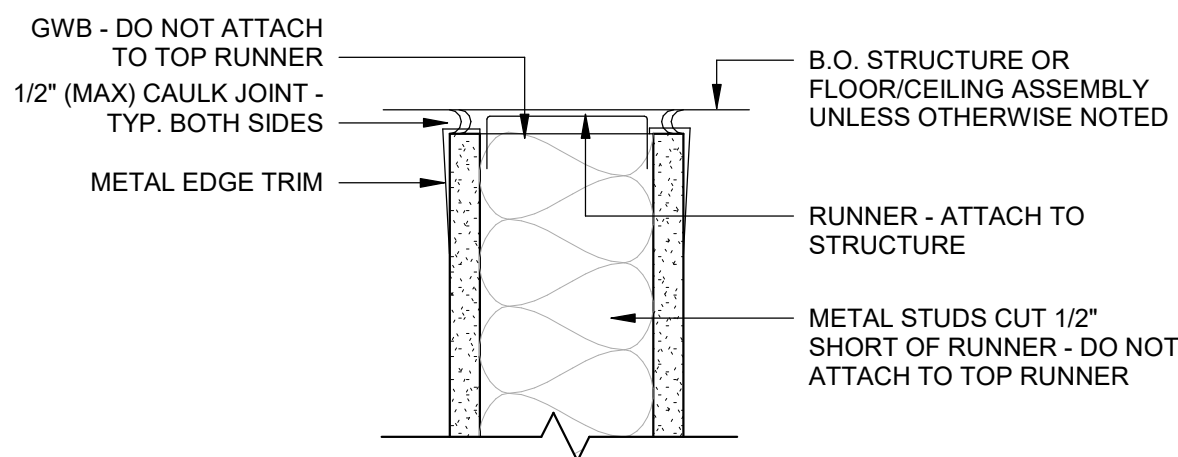


C1 PERIMETER RELIEF DETAILS - METAL STUDS

A0.1 SCALE: 3/4" = 1'-0"


TYP NON-RATED TO RATED PARTITION INTERSECTION DETAILS - METAL STUDS

A0.1 SCALE: 3/4" = 1'-0"

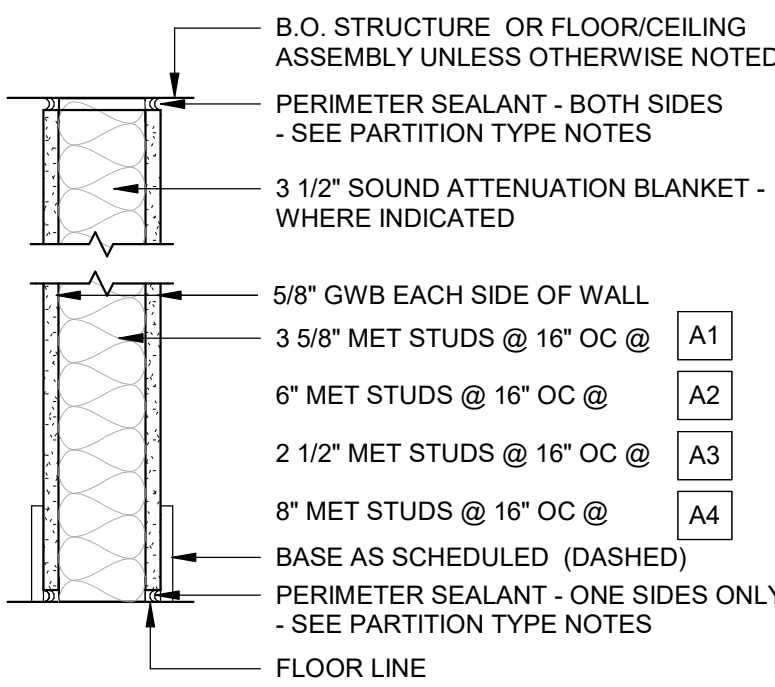


METAL STUD W/ GWB

A1 A2 A3 A4
A1A/A2A/A3A/A4A
1 HR - UL: U465 (WHERE RATED); STC: 45-49
##A INDICATES SOUND WALL THAT SHALL RECEIVE FULL HEIGHT ACOUSTIC INSULATION

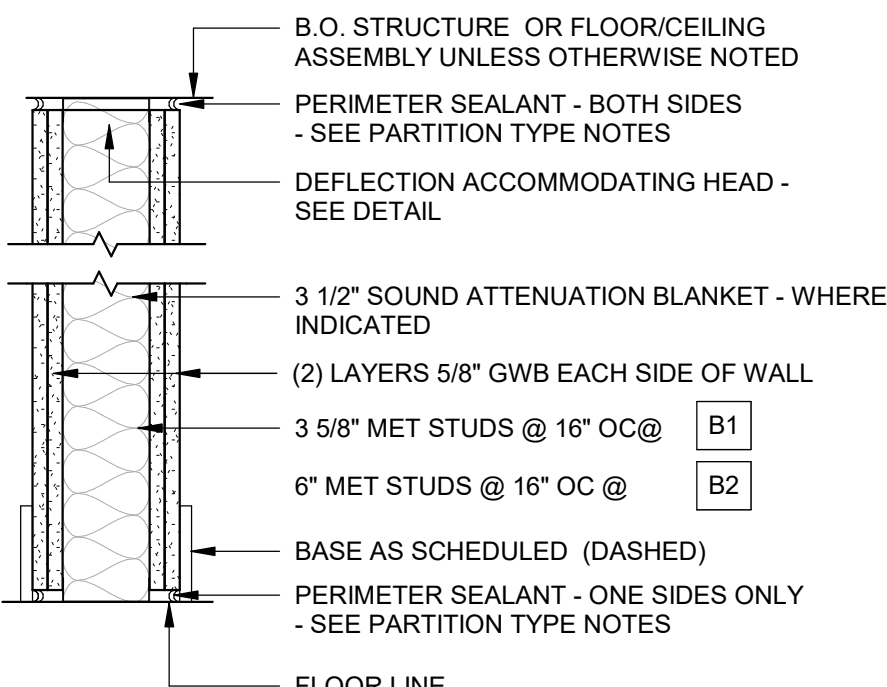


METAL STUD W/ GWB

B1 B2
B1A/B2A
2 HR - UL: U411 (WHERE RATED); STC: 55
##A INDICATES SOUND WALL THAT SHALL RECEIVE FULL HEIGHT ACOUSTIC INSULATION

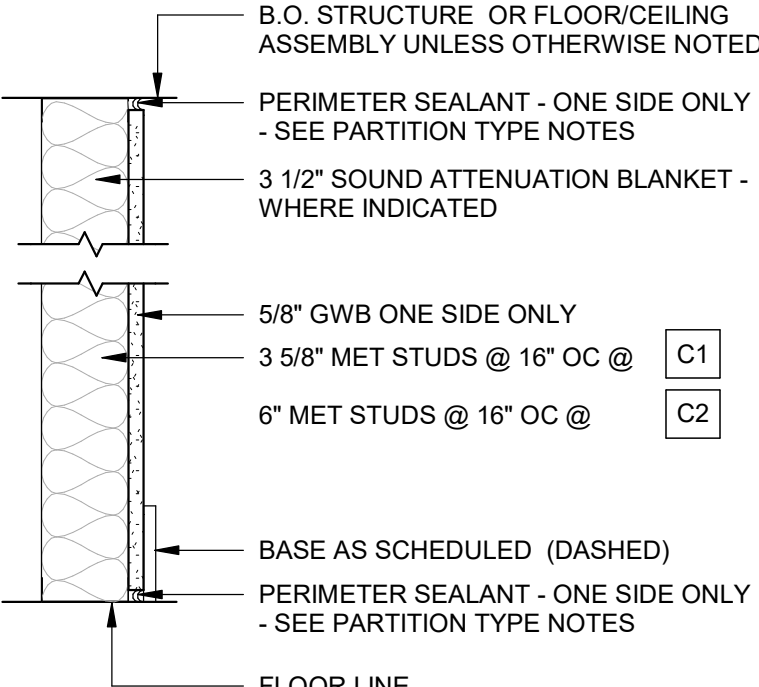


METAL STUD W/ GWB

C1 C2
(NON-RATED)
##A INDICATES SOUND WALL THAT SHALL RECEIVE FULL HEIGHT ACOUSTIC INSULATION

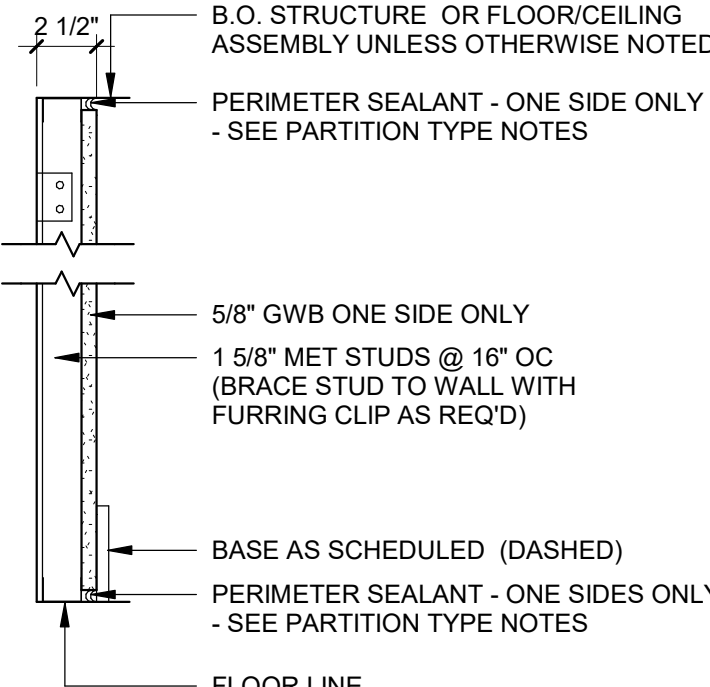


METAL STUD W/ GWB

C3 NOT RATED

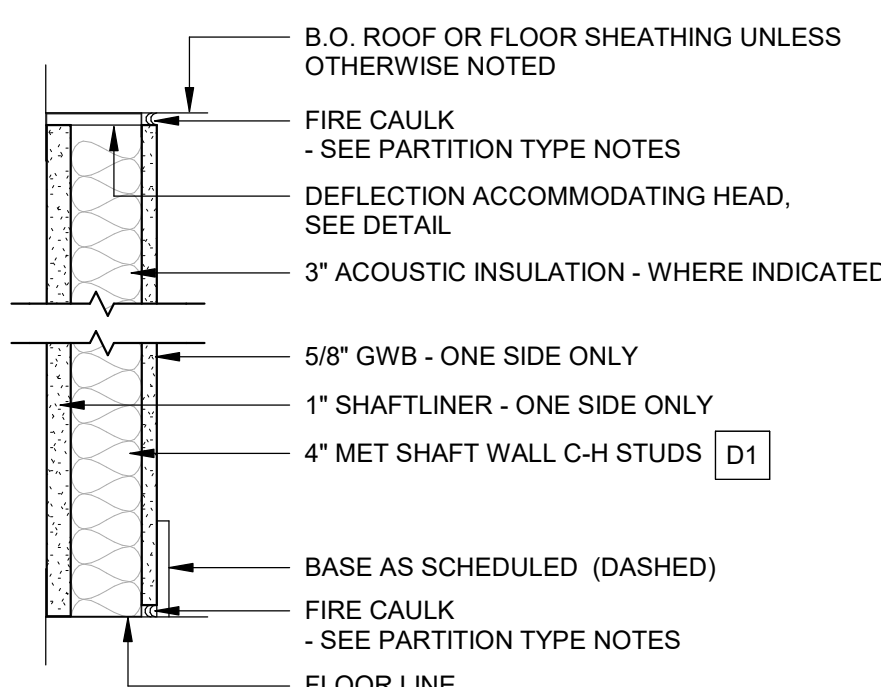


SHAFTWALL - METAL STUD

D1
D1A
1 HR - UL: U415; STC: 39
##A INDICATES SOUND WALL THAT SHALL RECEIVE FULL HEIGHT ACOUSTIC INSULATION

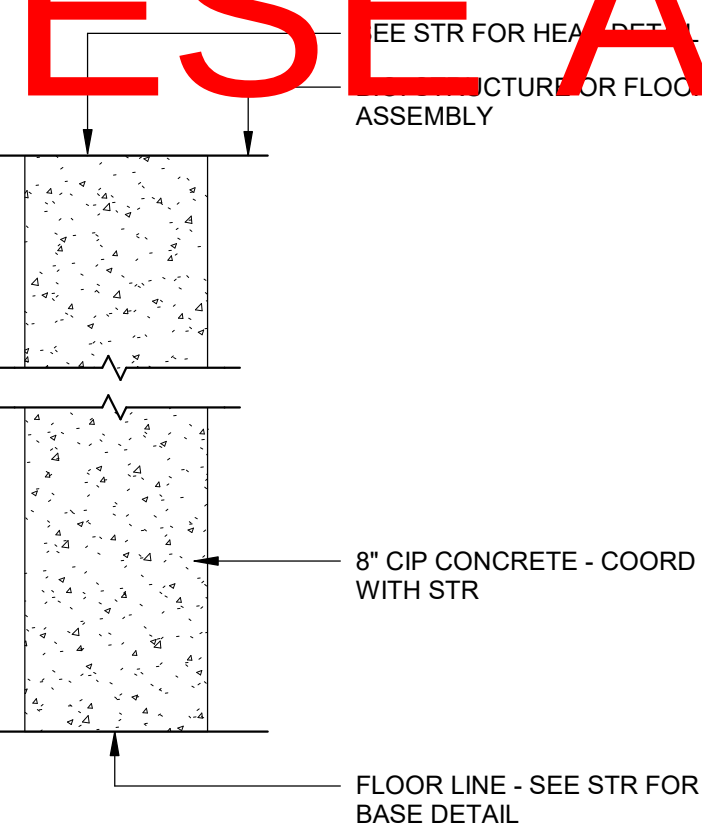


CIP CONCRETE


N1
2 HR - UL: U905 / U906 (WHERE RATED)

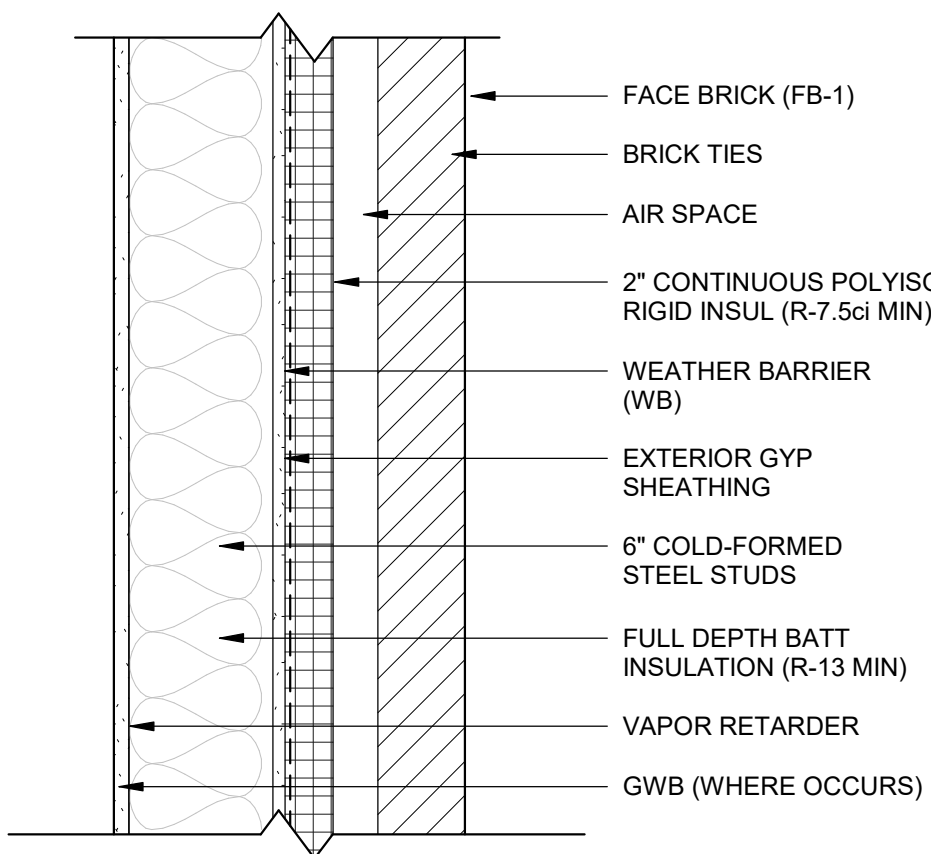


EXTERIOR WALL ASSEMBLY: EW-1

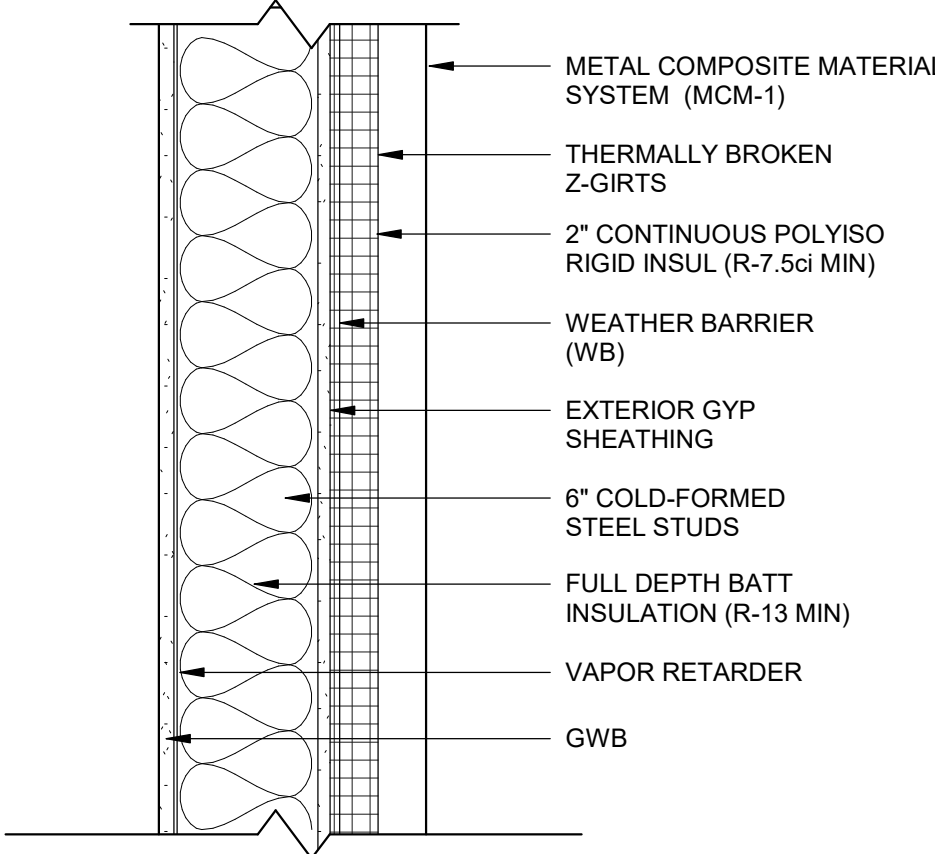


EXTERIOR WALL ASSEMBLY: EW-2

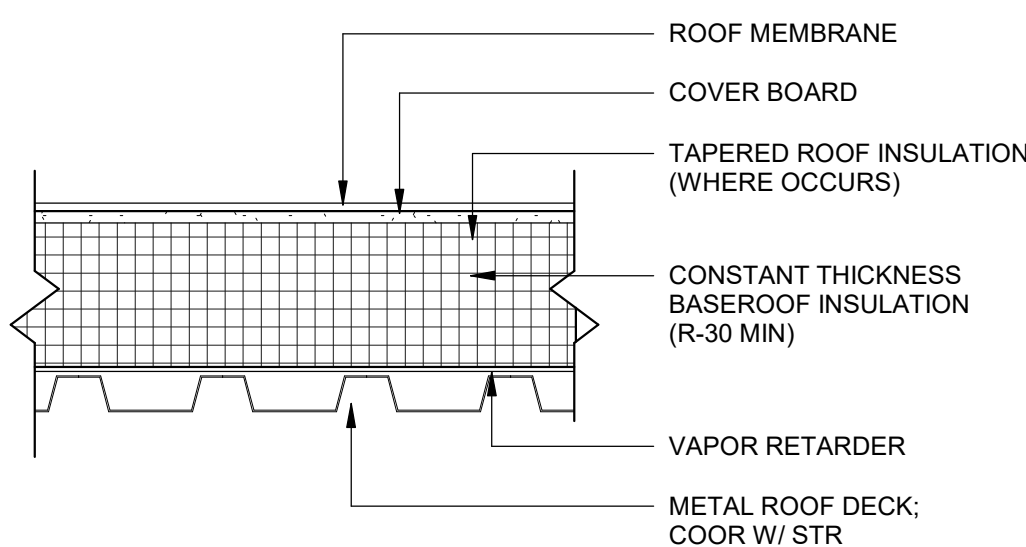

ROOF ASSEMBLY: RF-1

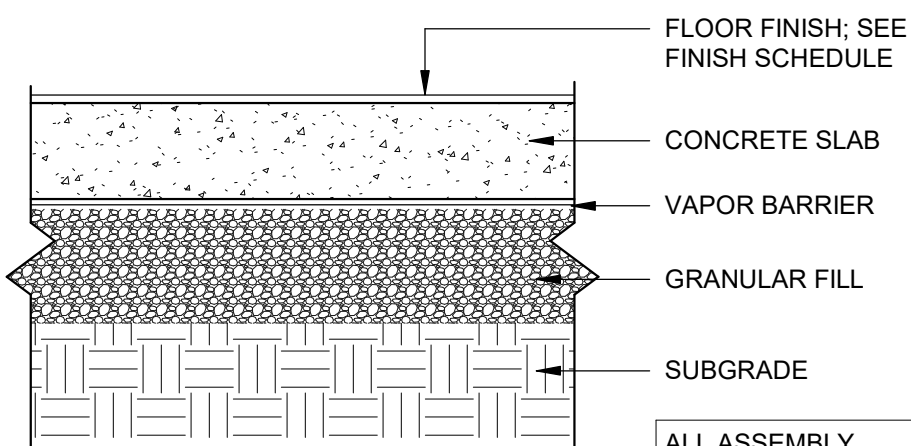

FLOOR ASSEMBLY - SLAB ON GRADE: FL-1

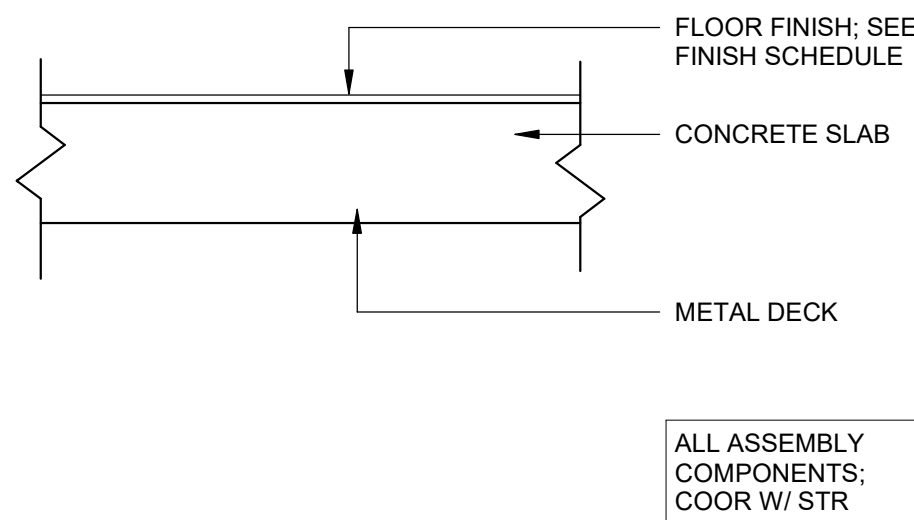

FLOOR ASSEMBLY - RAISED SLAB: FL-2

EXTERIOR ASSEMBLIES

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE



REVISION DATE
Project Number: 21064
Date: March 10, 2023
COPYRIGHT © 2022

ASSEMBLIES, PARTITION
TYPES & NOTES

A0.1

NOT FOR CONSTRUCTION

GENERAL NOTES:	
ALL INTERIOR PARTITION TO BE A1A TO BOTTOM OF DECK UNLESS OTHERWISE NOTED.	
FLOOR PLAN KEYED NOTES	
01	STOOP; REFER TO STR

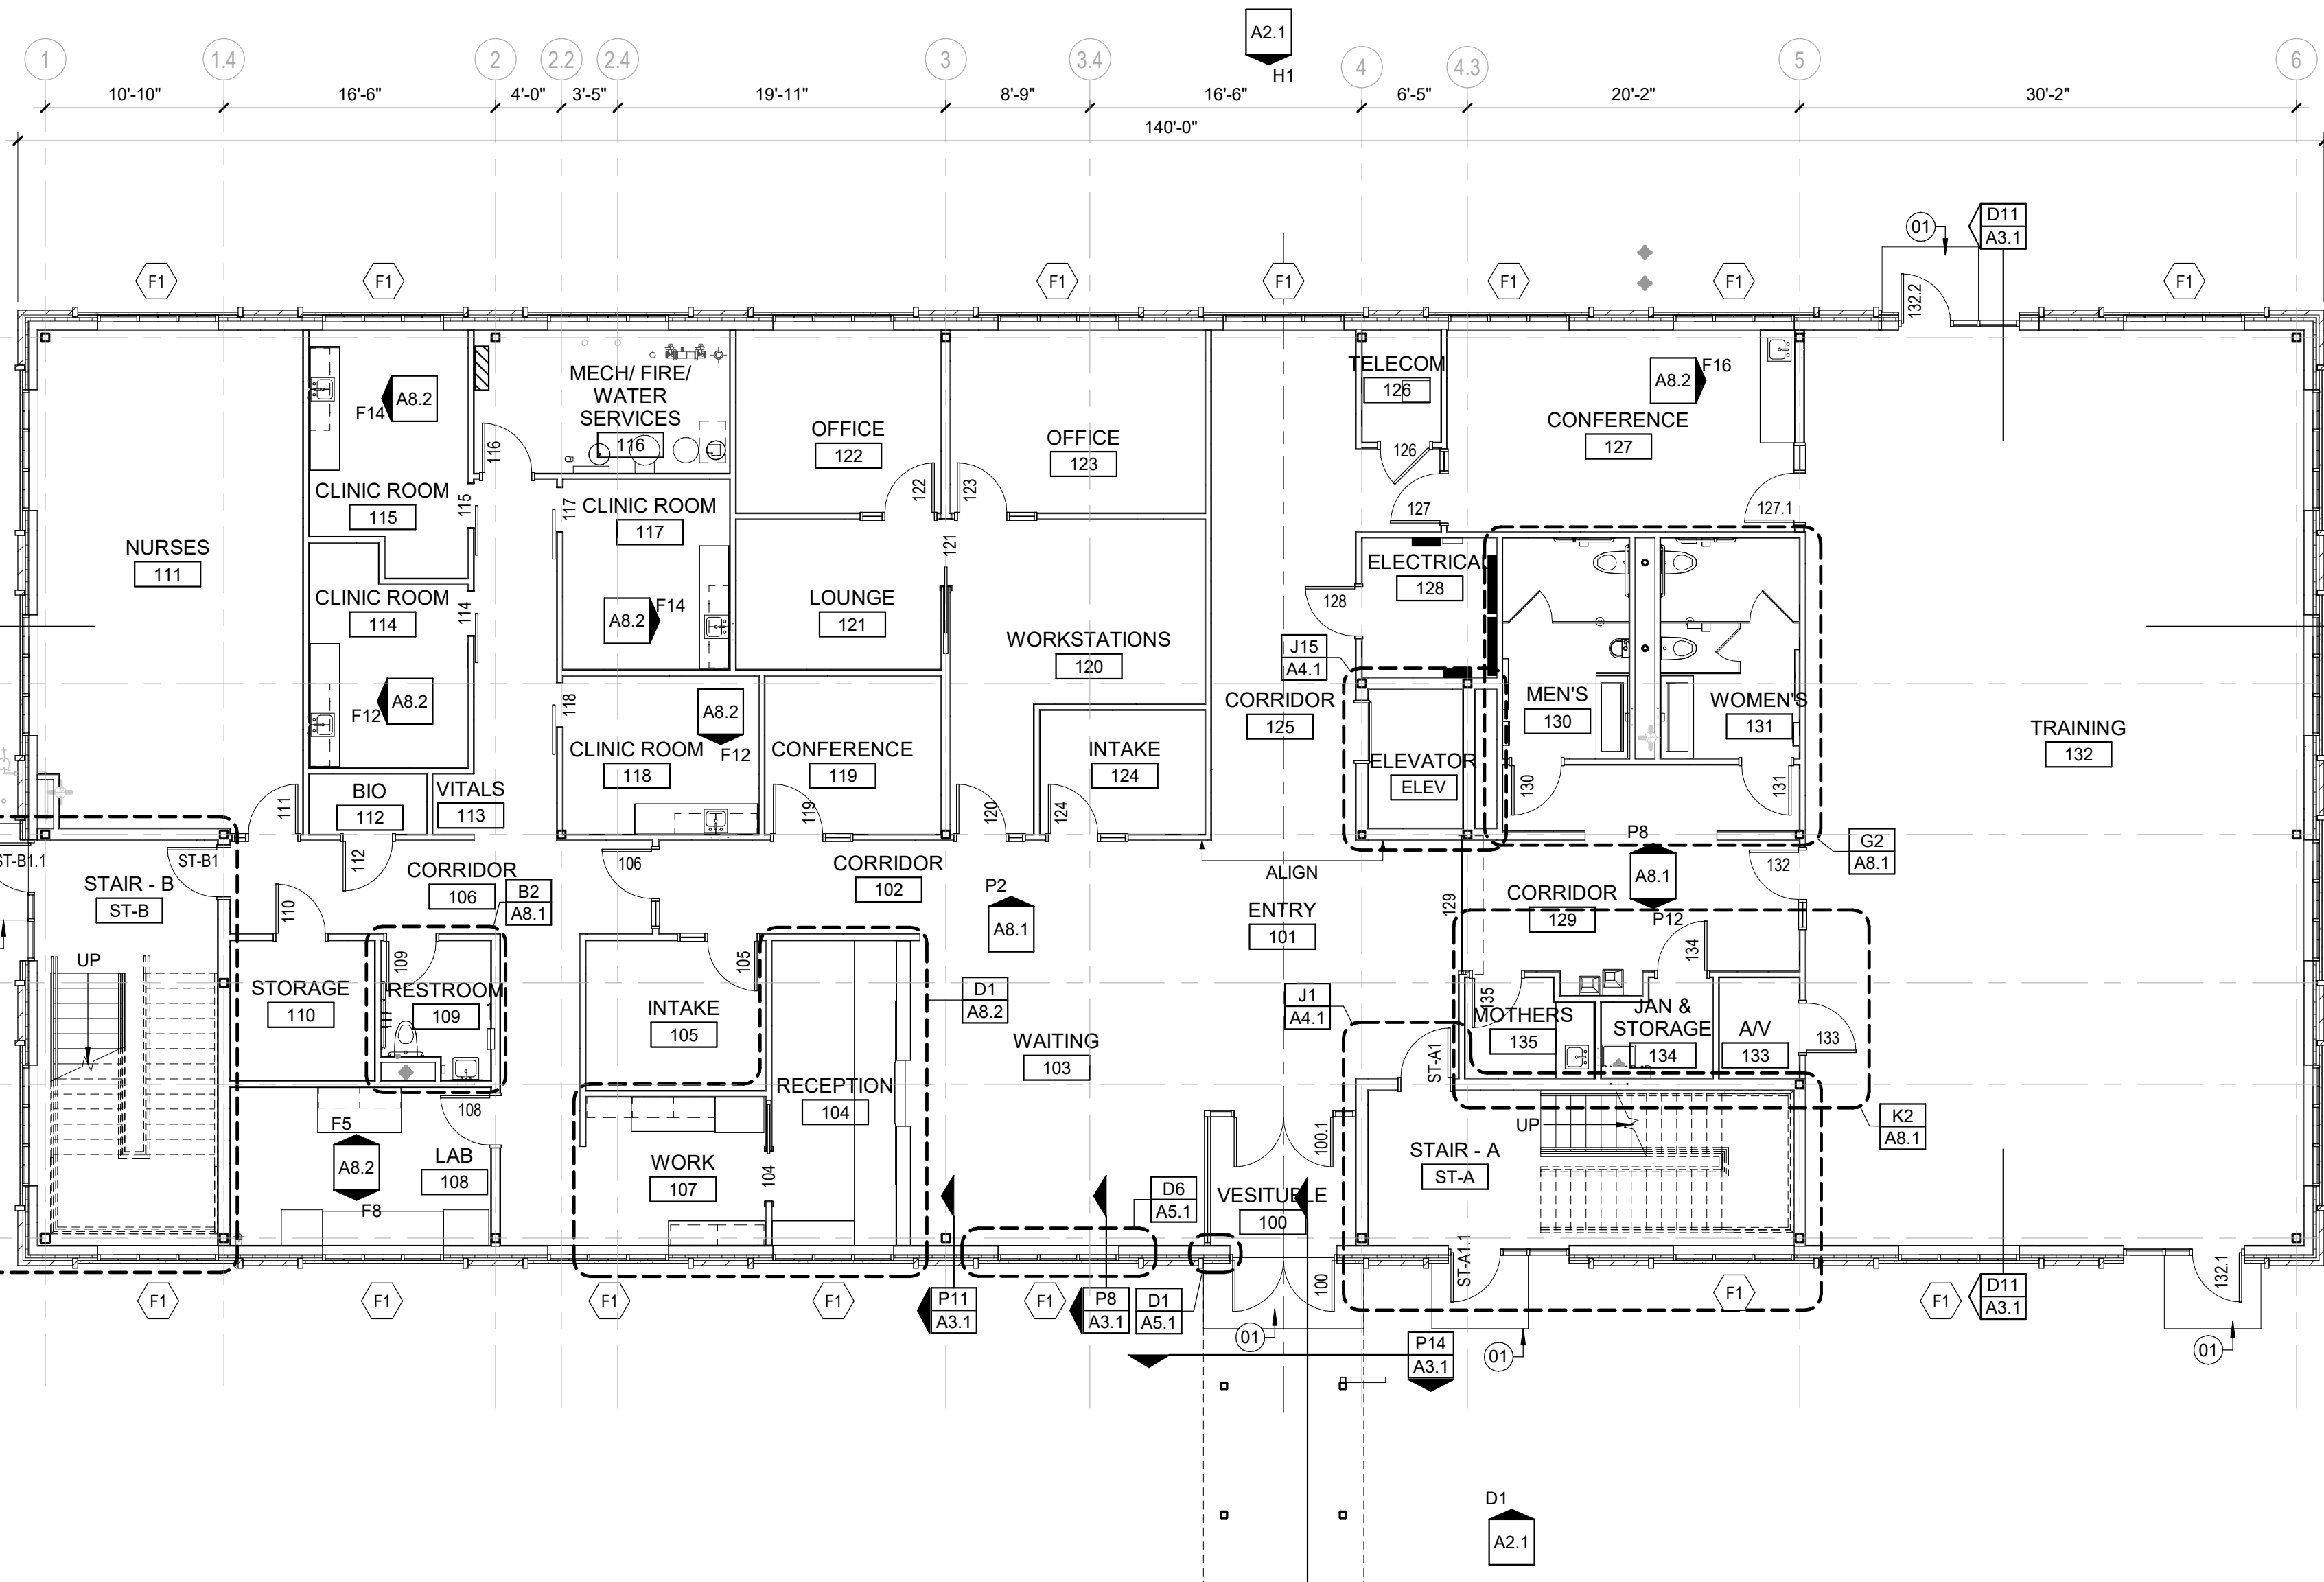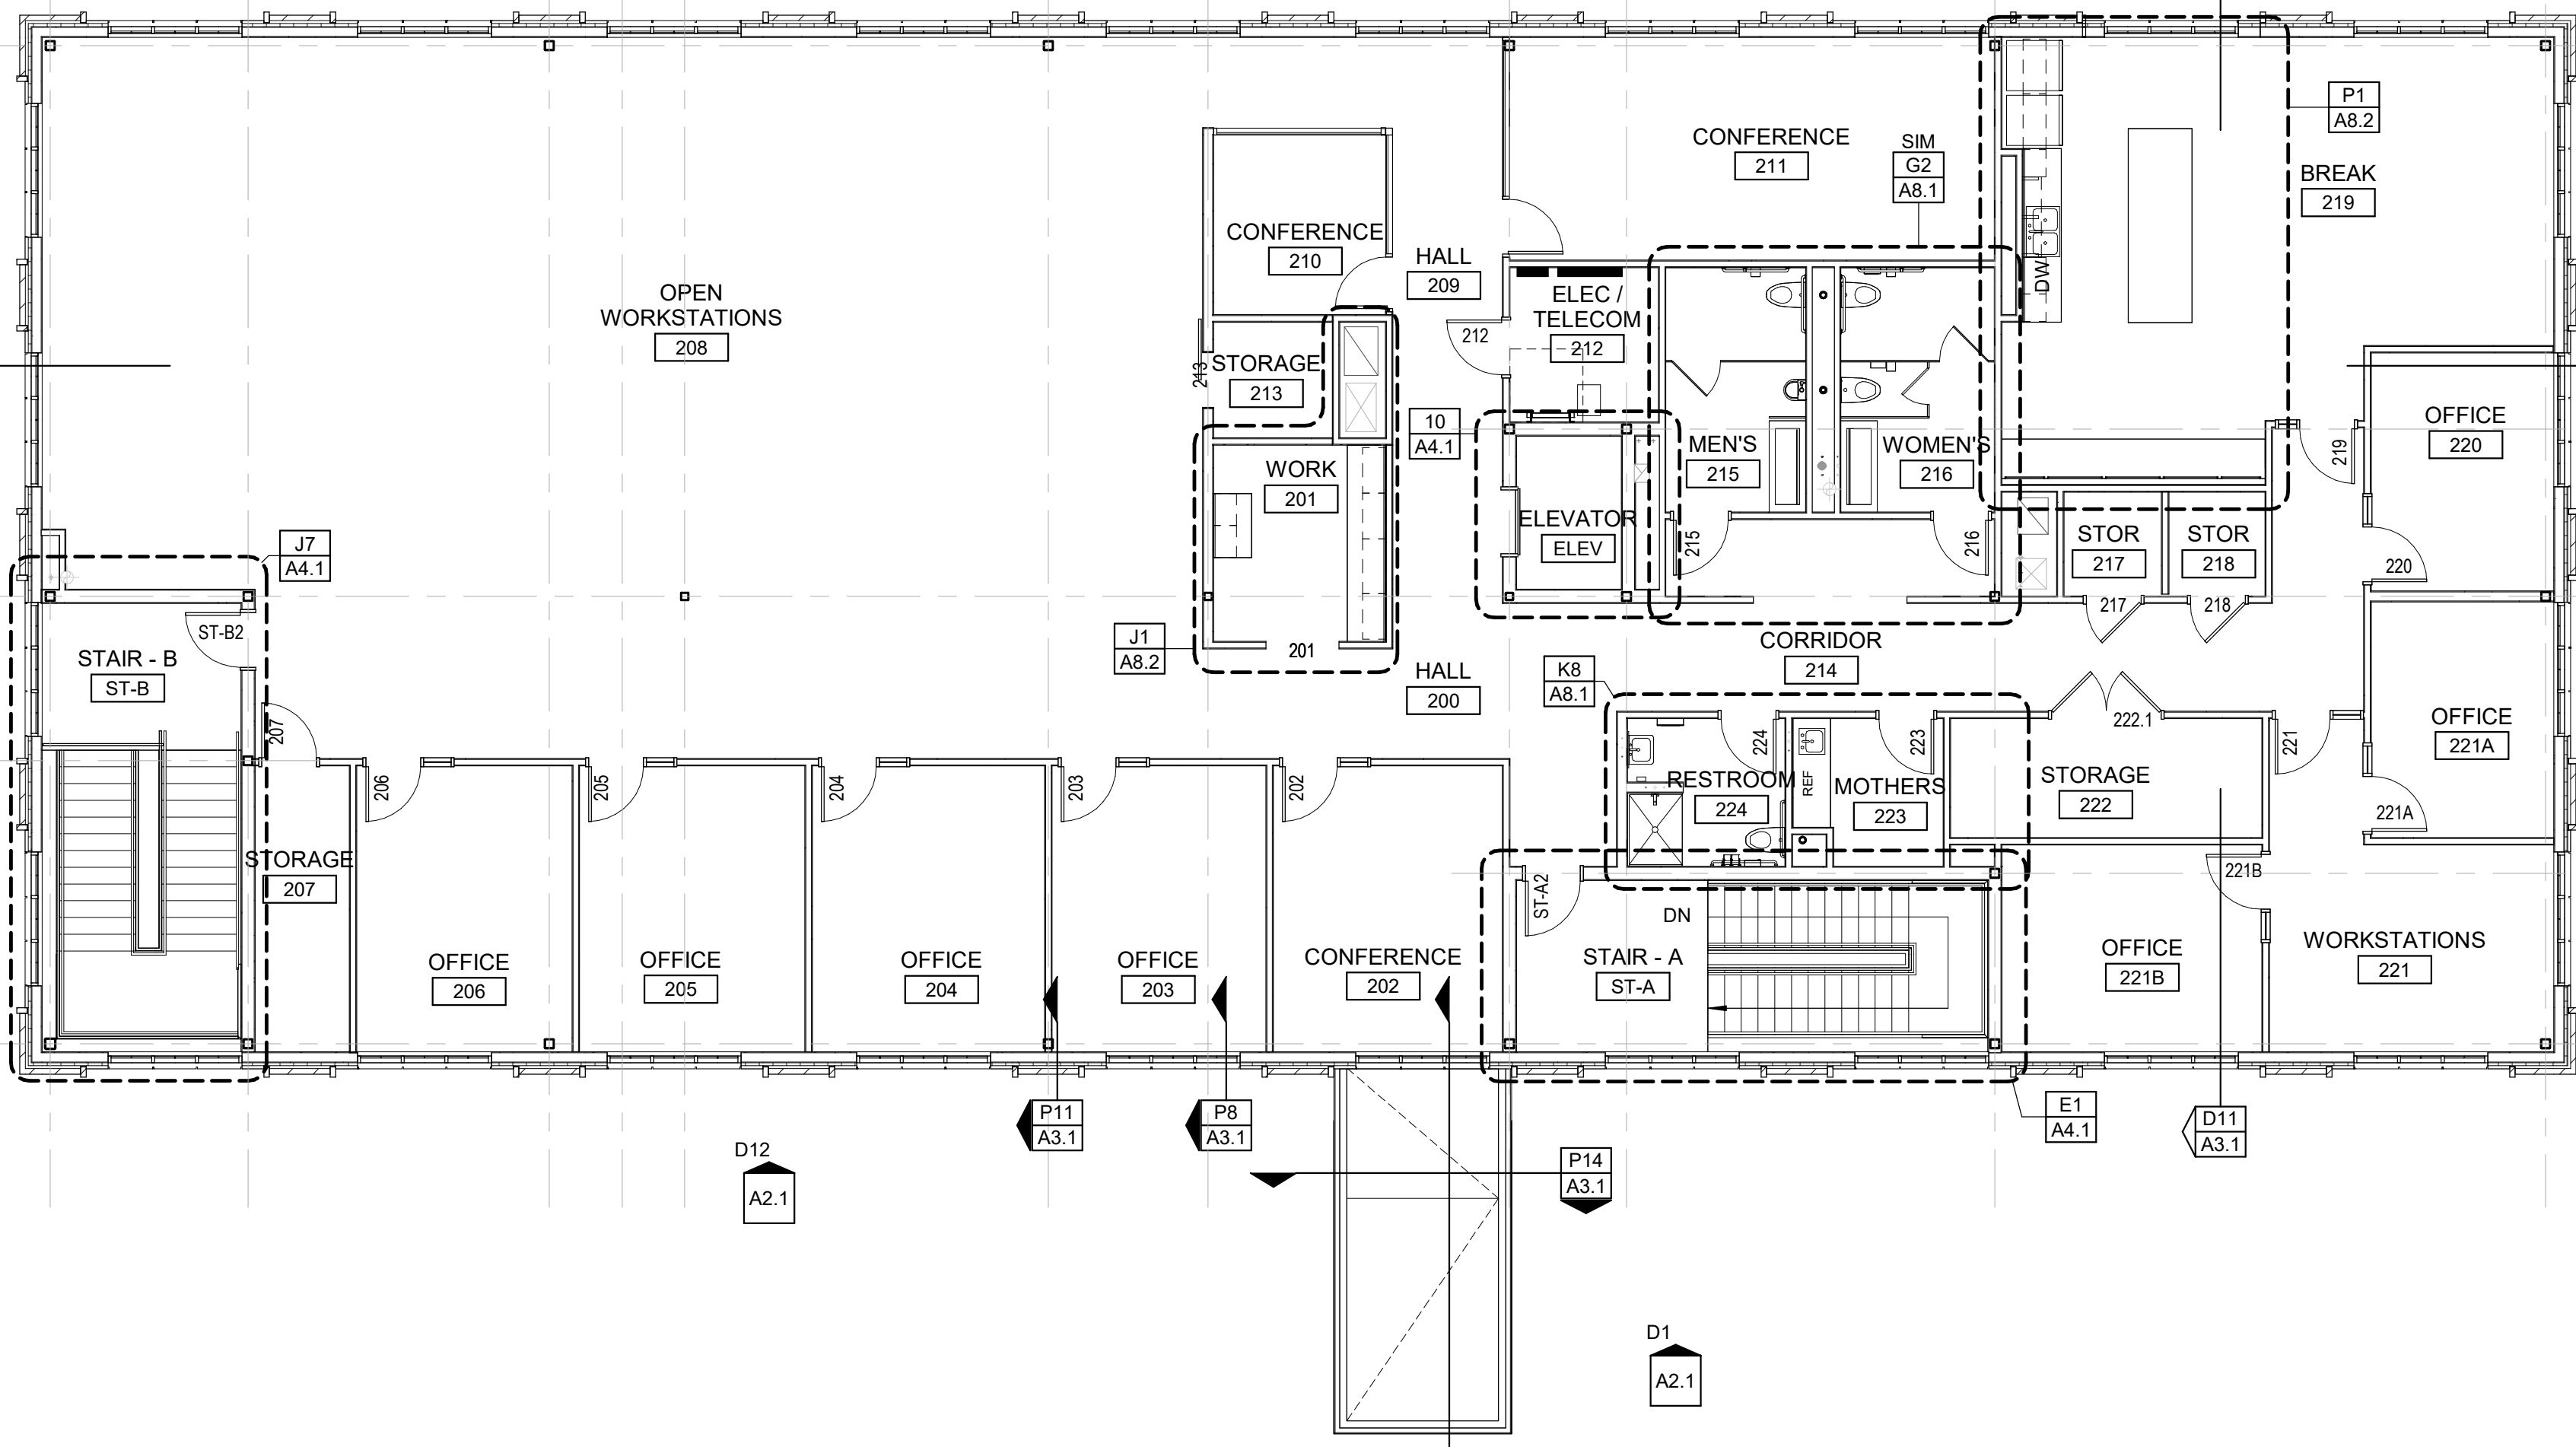

THESE ARE NOT THE FINAL BID DOCUMENTS - REFERENCE ONLY

ALLEY POYNER
MACCHIETTO
ARCHITECTURE


REVISION	DATE
Project Number:	21064
Date:	March 10, 2023
COPYRIGHT © 2022	

FLOOR PLAN - FIRST LEVEL

A1.1

NOT FOR CONSTRUCTION

ROOF PLAN KEYED NOTES	
01	ROOF HATCH 48"x48" METAL ROOF HATCH WITH METAL INSULATED LIDS INSULATED DOUBLE WALL CURBS.
02	ROOF AND OVERFLOW DRAINS. REFER TO MEP
03	CAST IN PLACE SOUND ISOLATION SLAB AT EXTENTS OF RTU SCREENING. REFER TO STR
04	PREFORMED METAL PANEL SCREEN WALL OVER GALVANIZED STEEL TUBE FRAMED STRUCTURE. REFER TO STR

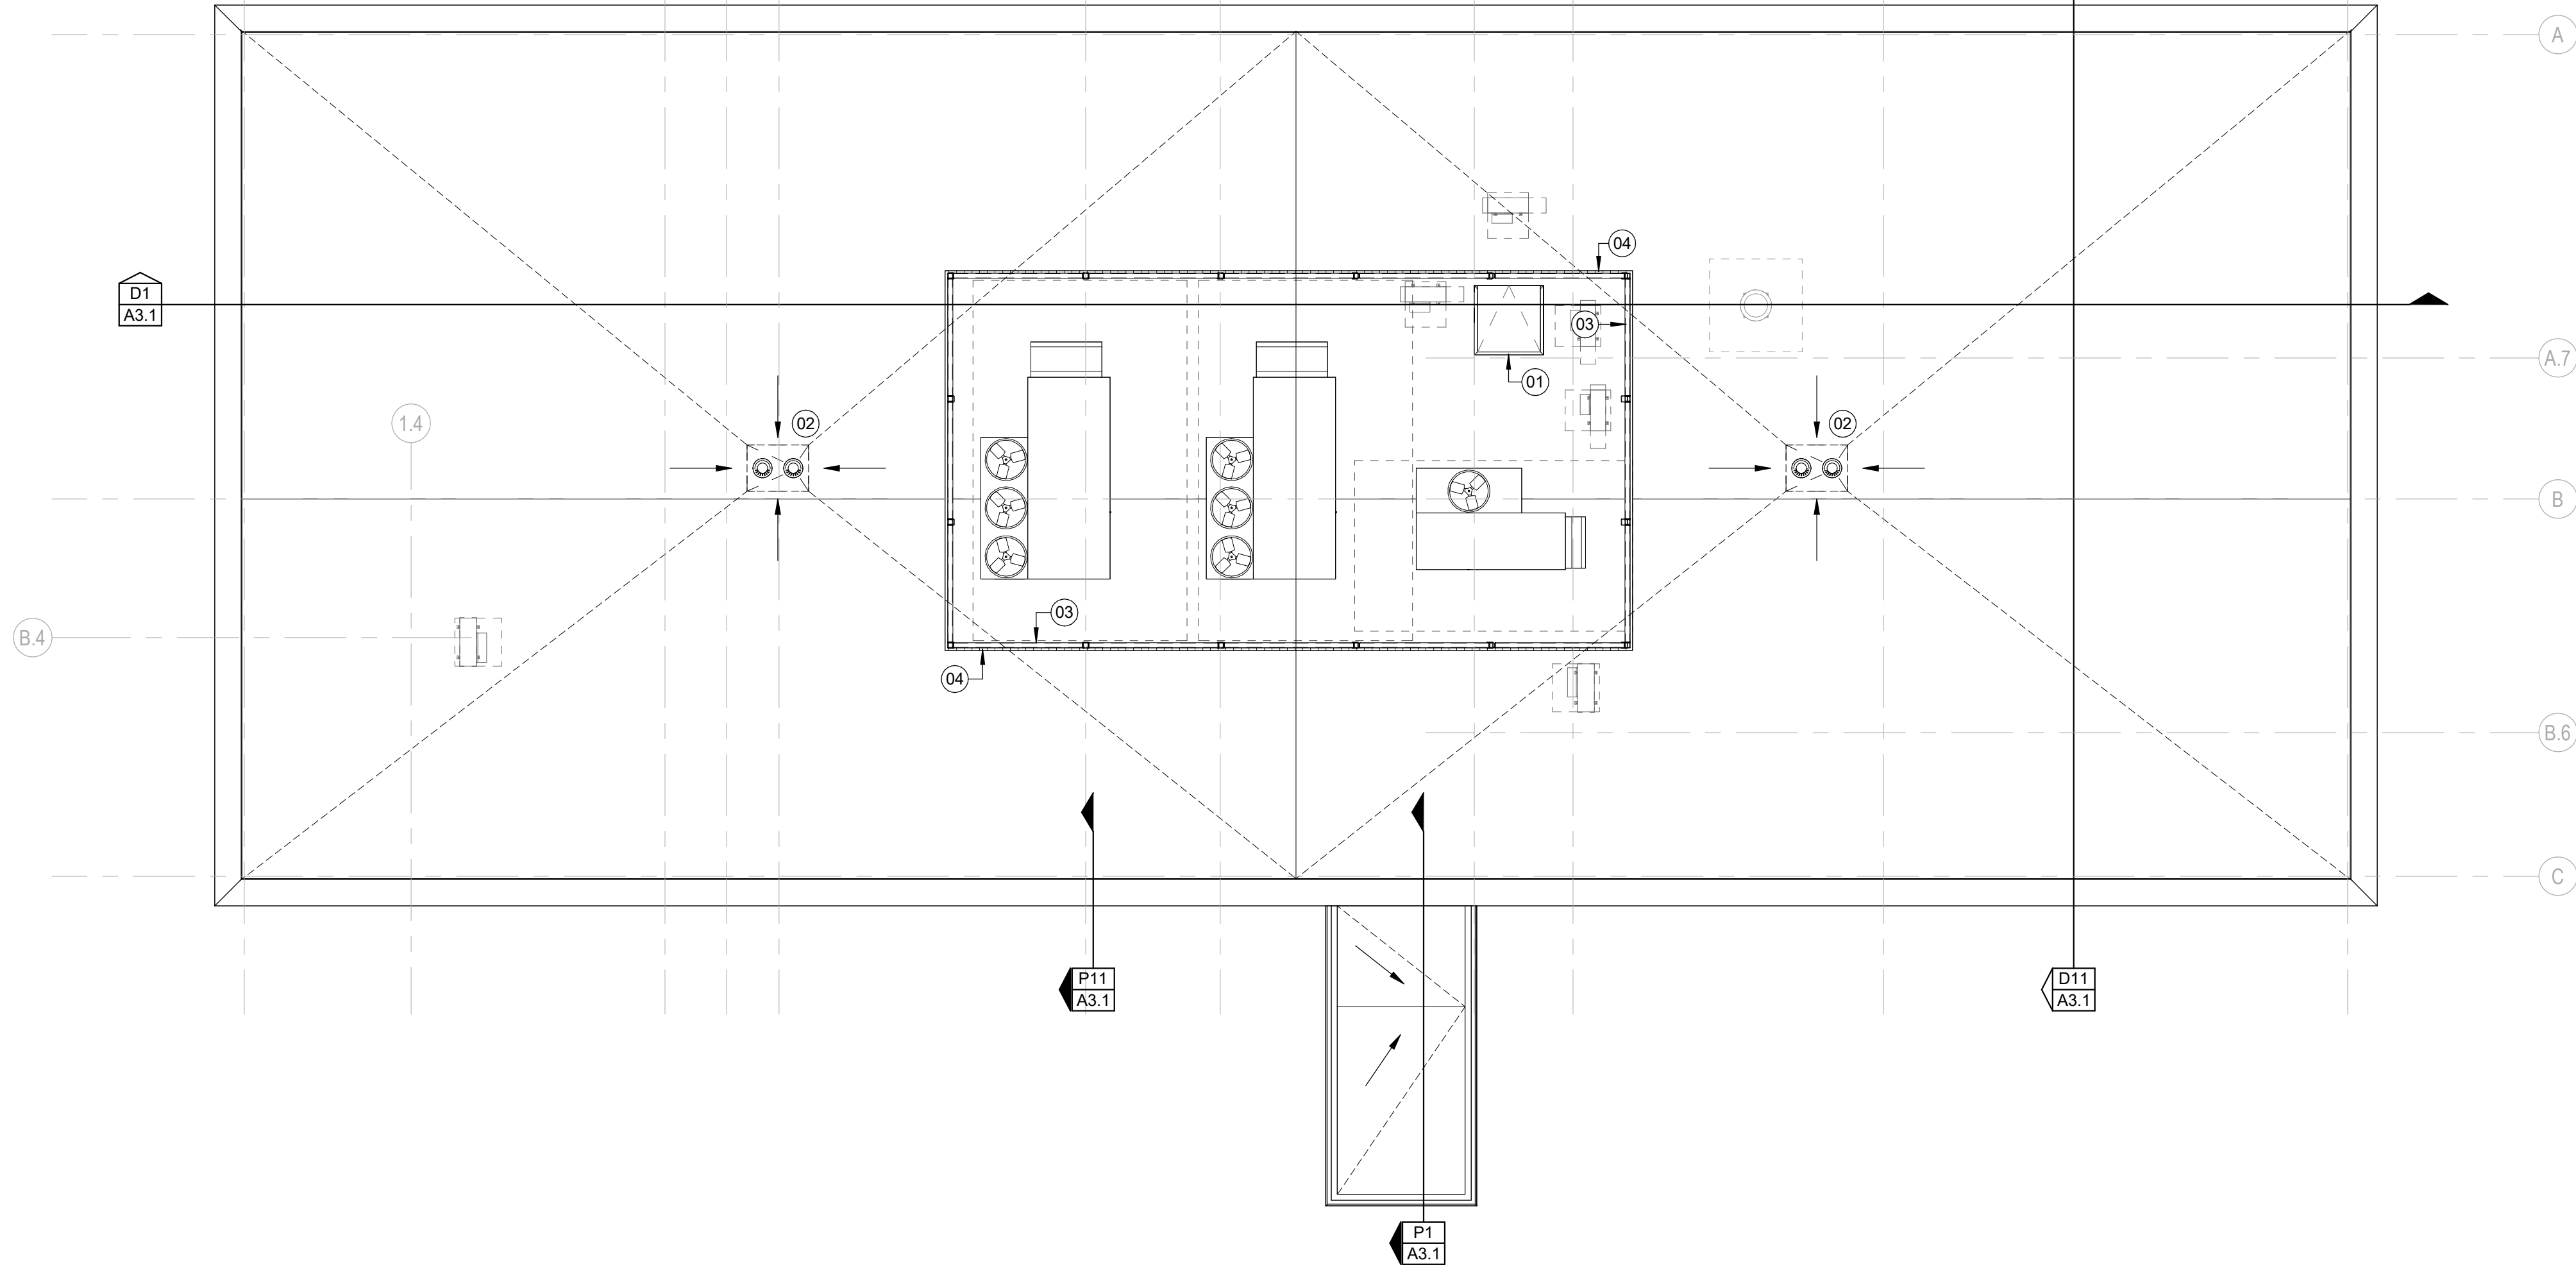

THESE ARE NOT THE FINAL BID DOCUMENTS - REFERENCE ONLY

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE

△ REVISION	DATE
Project Number:	21064
Date:	March 10, 2023


COPYRIGHT © 2022

ROOF PLAN


A1.2

NOT FOR CONSTRUCTION


ELEVATION KEYED NOTES	
01	PREFINISHED METAL COPING
02	MASONRY CONTROL JOINT
03	BRICK FRAMED OPENING WITH 2" PROJECTION; VERTICAL SIDES TO BE STACK BOND, HORIZONTAL HEAD TO BE ROWLOCK
04	METAL PANEL JOINT; DRY JOINT - NO SEALANT; TYPICAL
05	CAST STONE SILL; TYPICAL AT MCP, AND SF LOCATIONS
06	METAL COMPOSITE WALL PANEL OVER STRUCTURAL STEEL ENTRY CANOPY; REFER TO STR
07	PREFORMED METAL PANEL SCREEN WALL OVER GALVANIZED STEEL TUBE FRAMED STRUCTURE; REFER TO STR

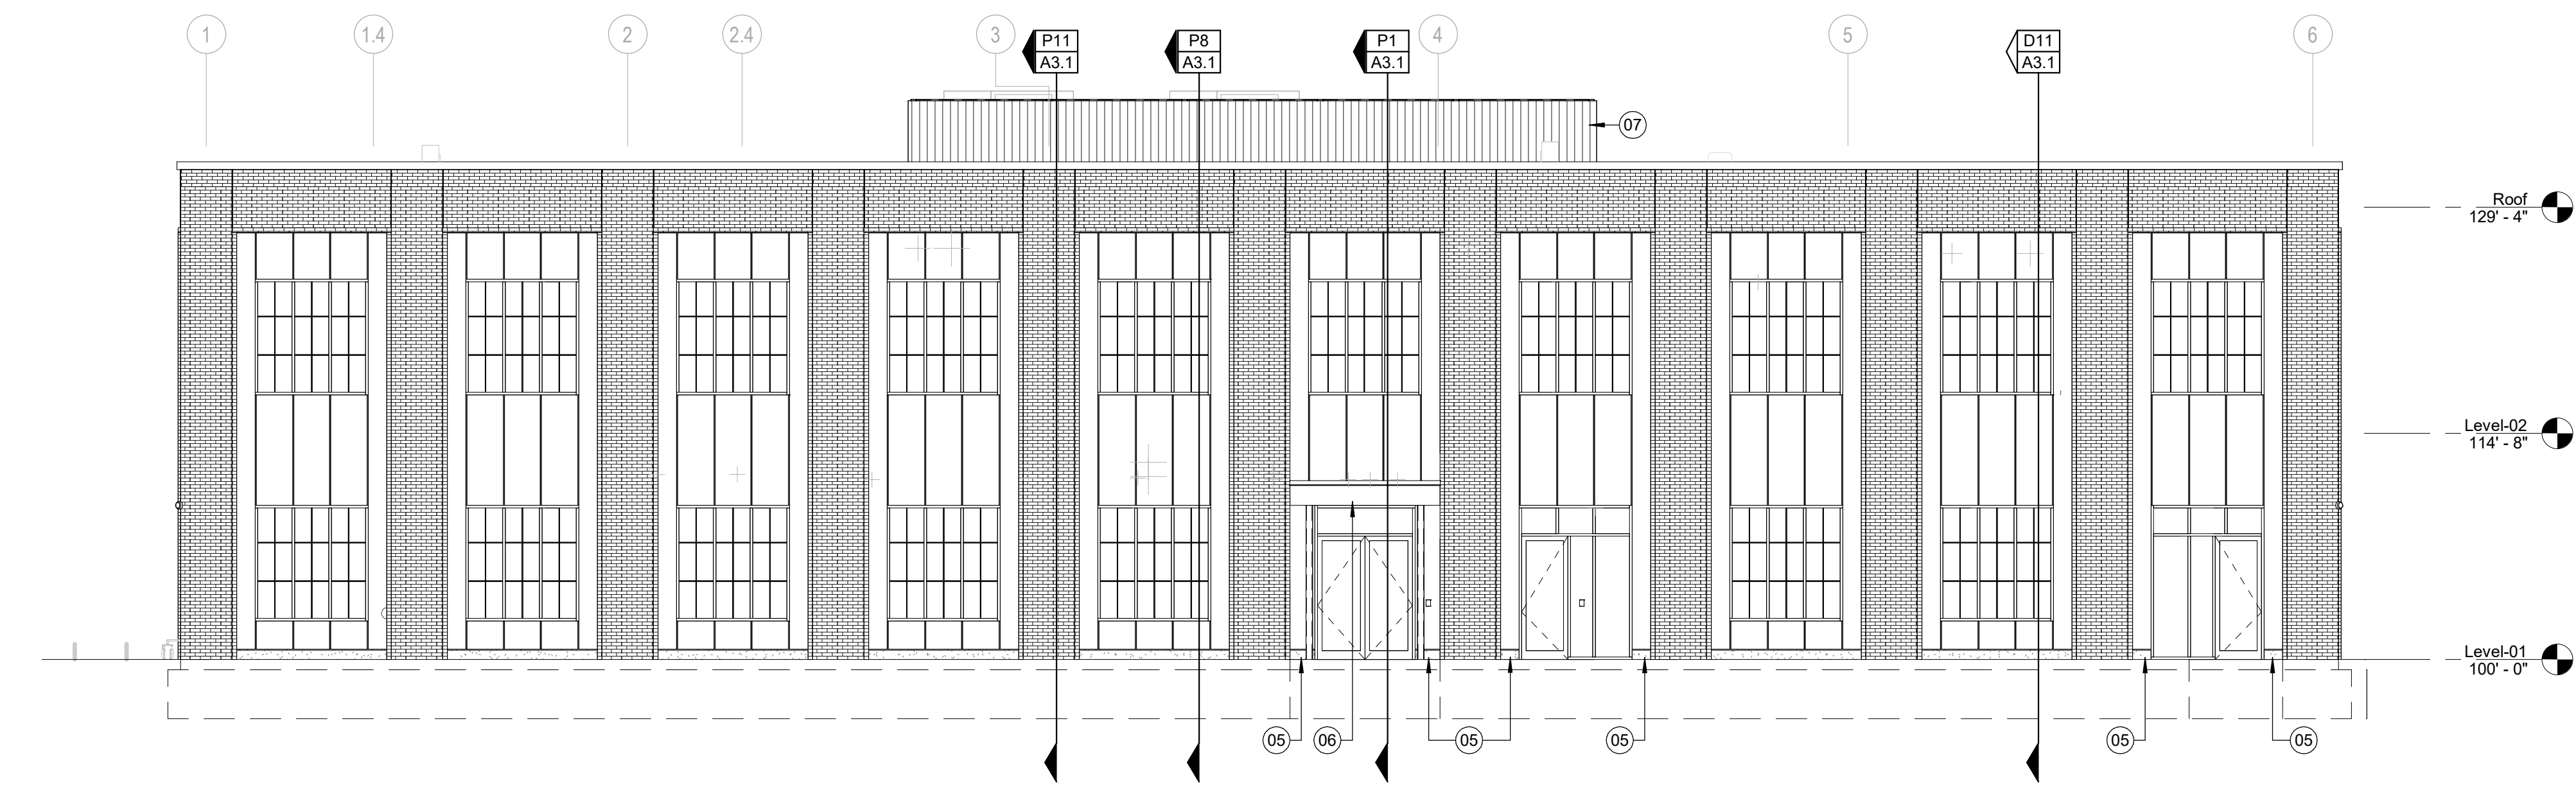


D1 BUILDING ELEVATION - SOUTH
A2.1 SCALE: 1/8" = 1'-0"

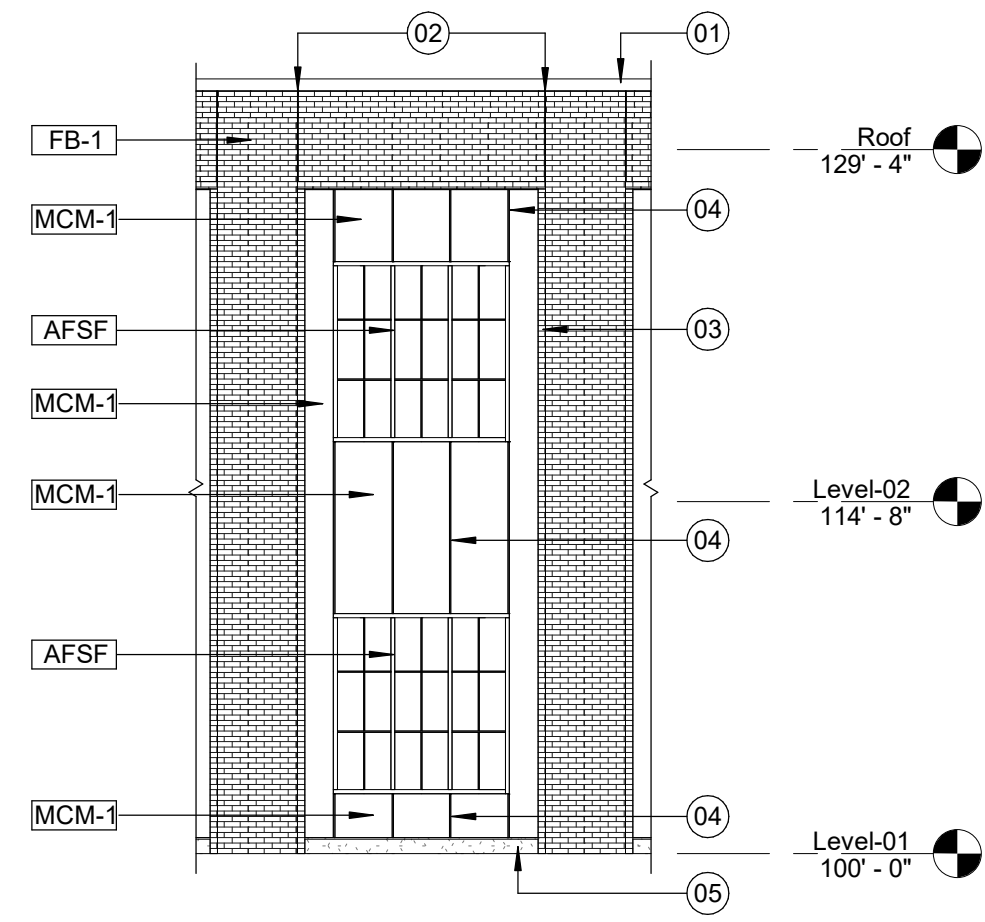


D12 BUILDING ELEVATION - TYPICAL
A2.1 SCALE: 1/8" = 1'-0"

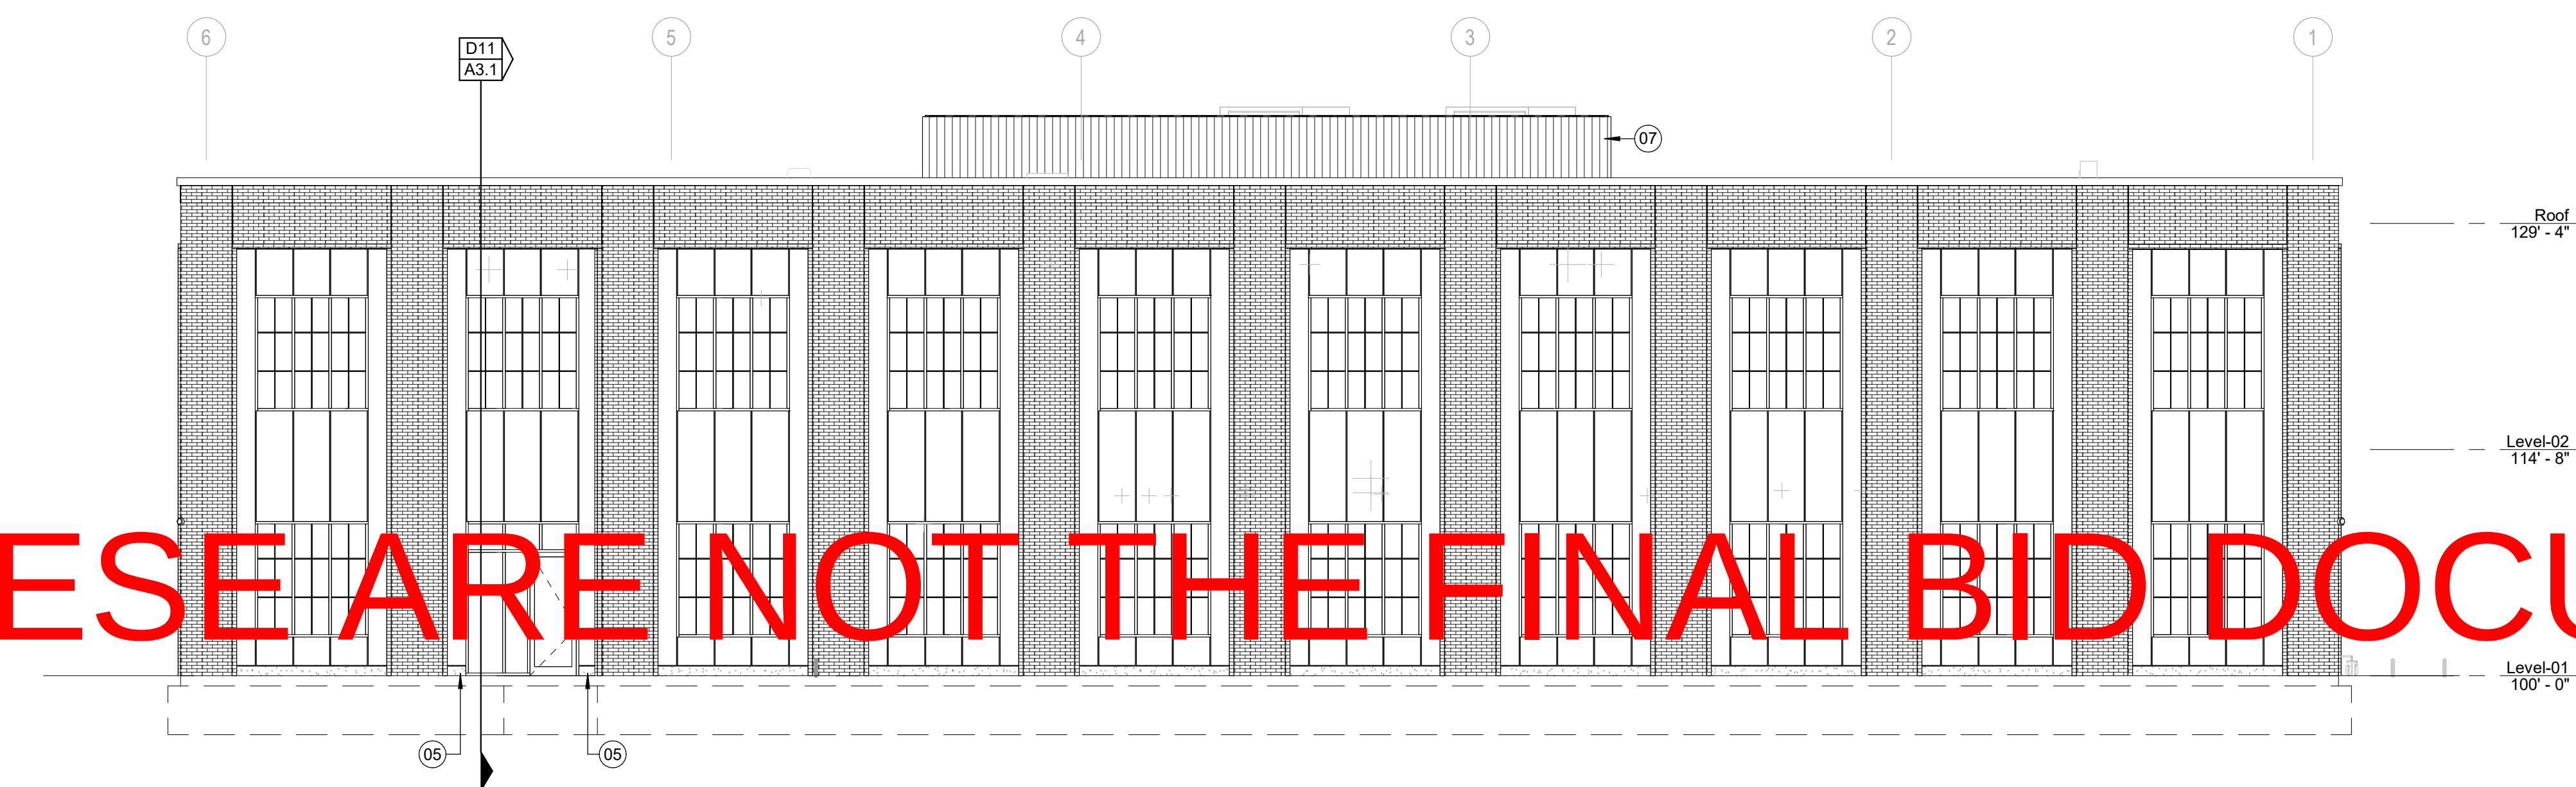

H1 BUILDING ELEVATION - NORTH
A2.1 SCALE: 1/8" = 1'-0"

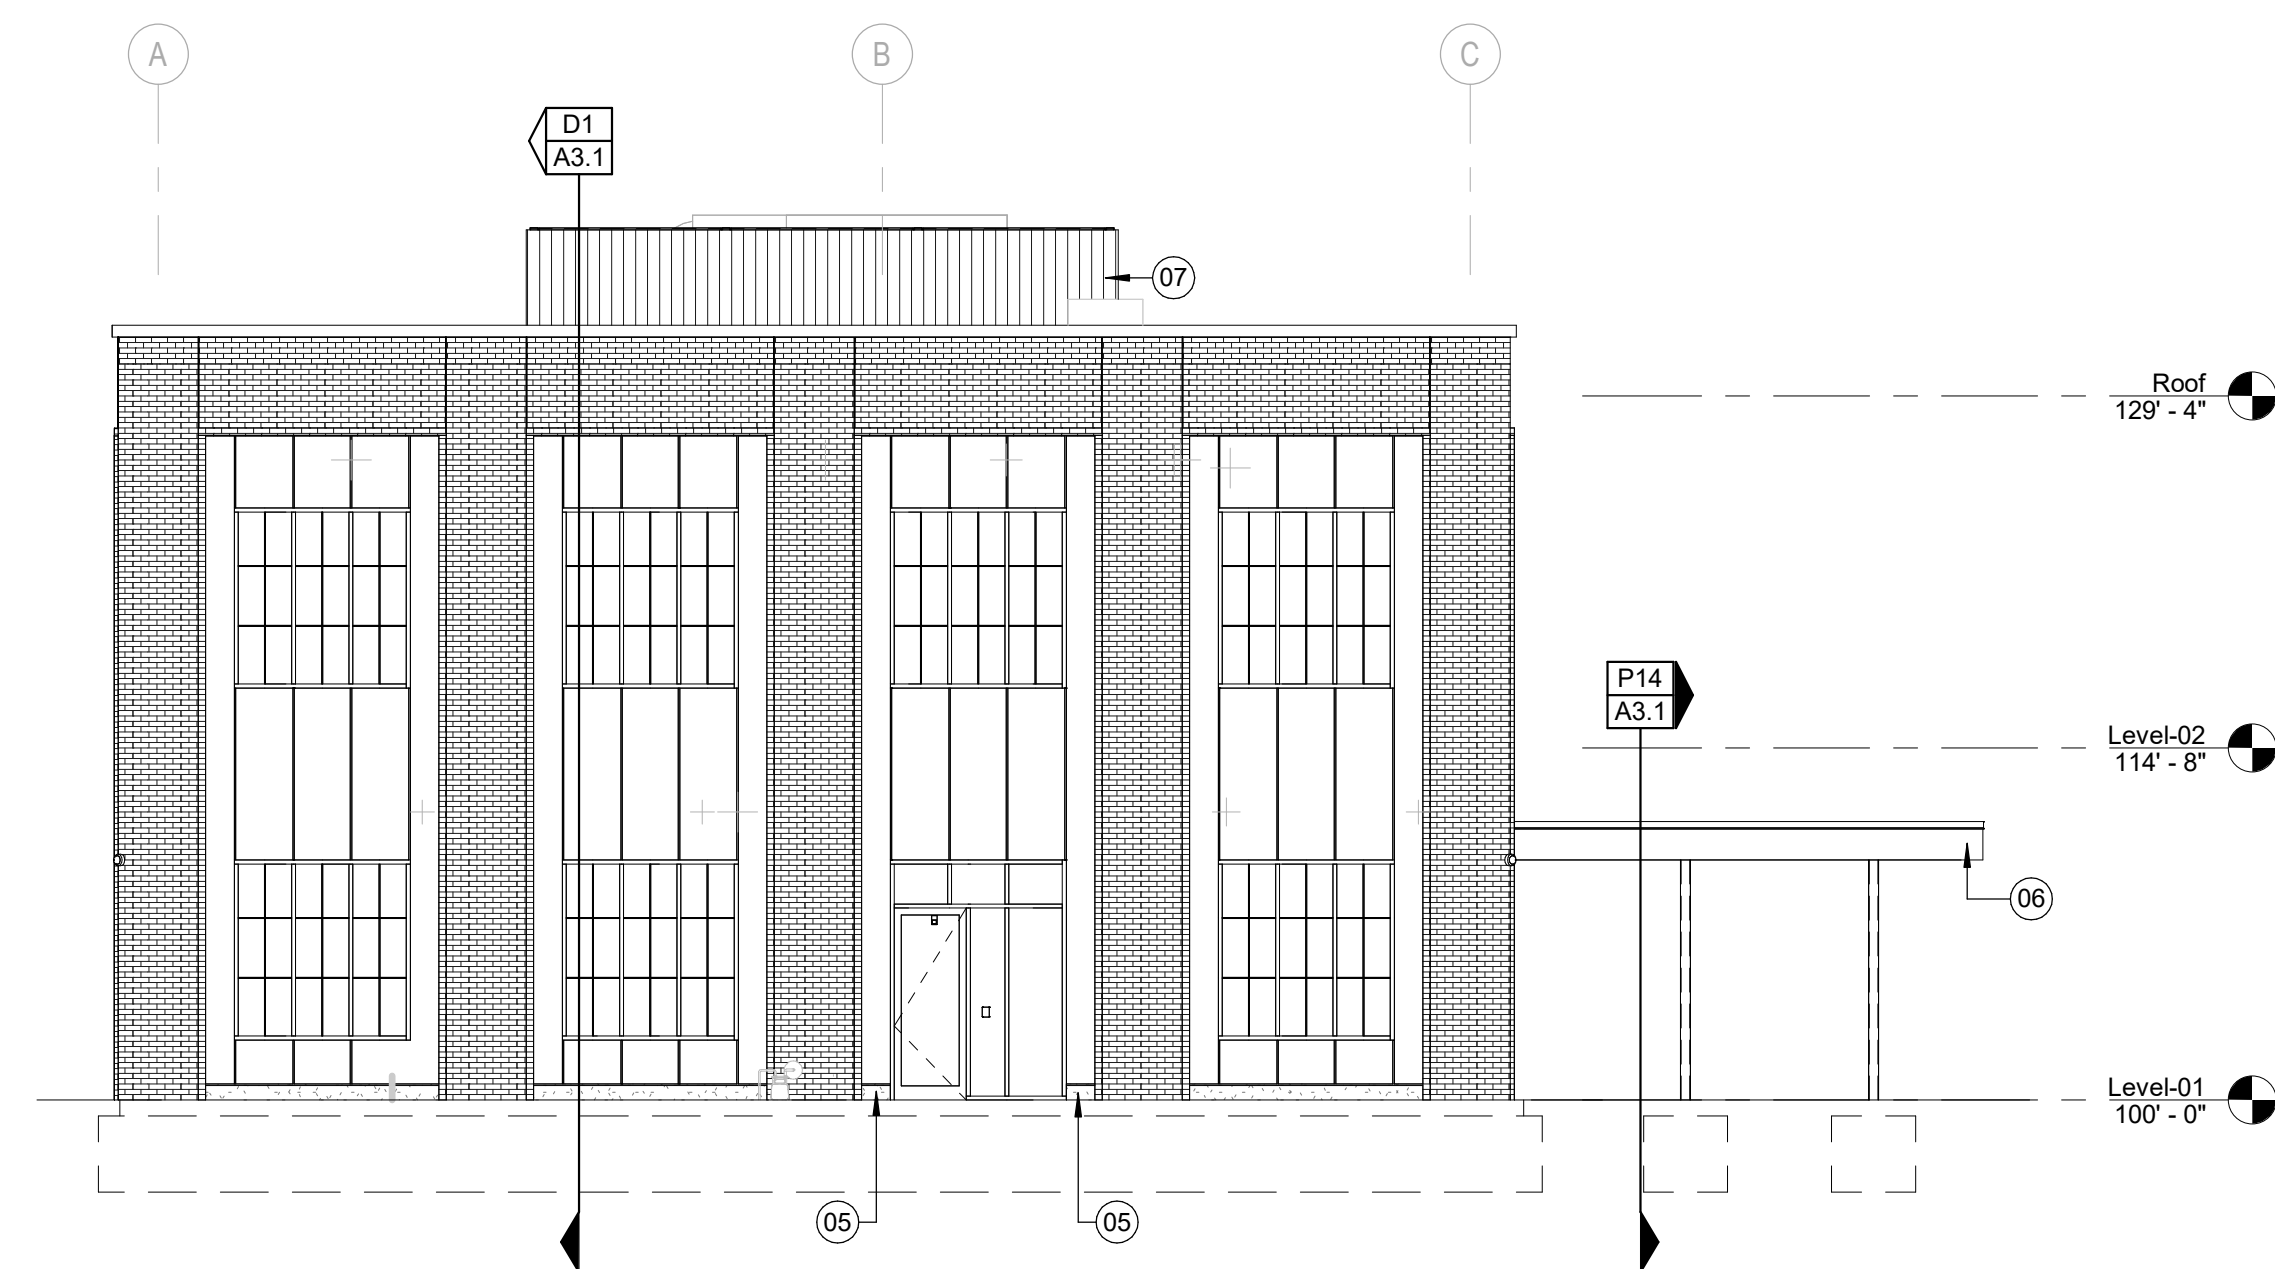

N1 BUILDING ELEVATION - WEST
A2.1 SCALE: 1/8" = 1'-0"

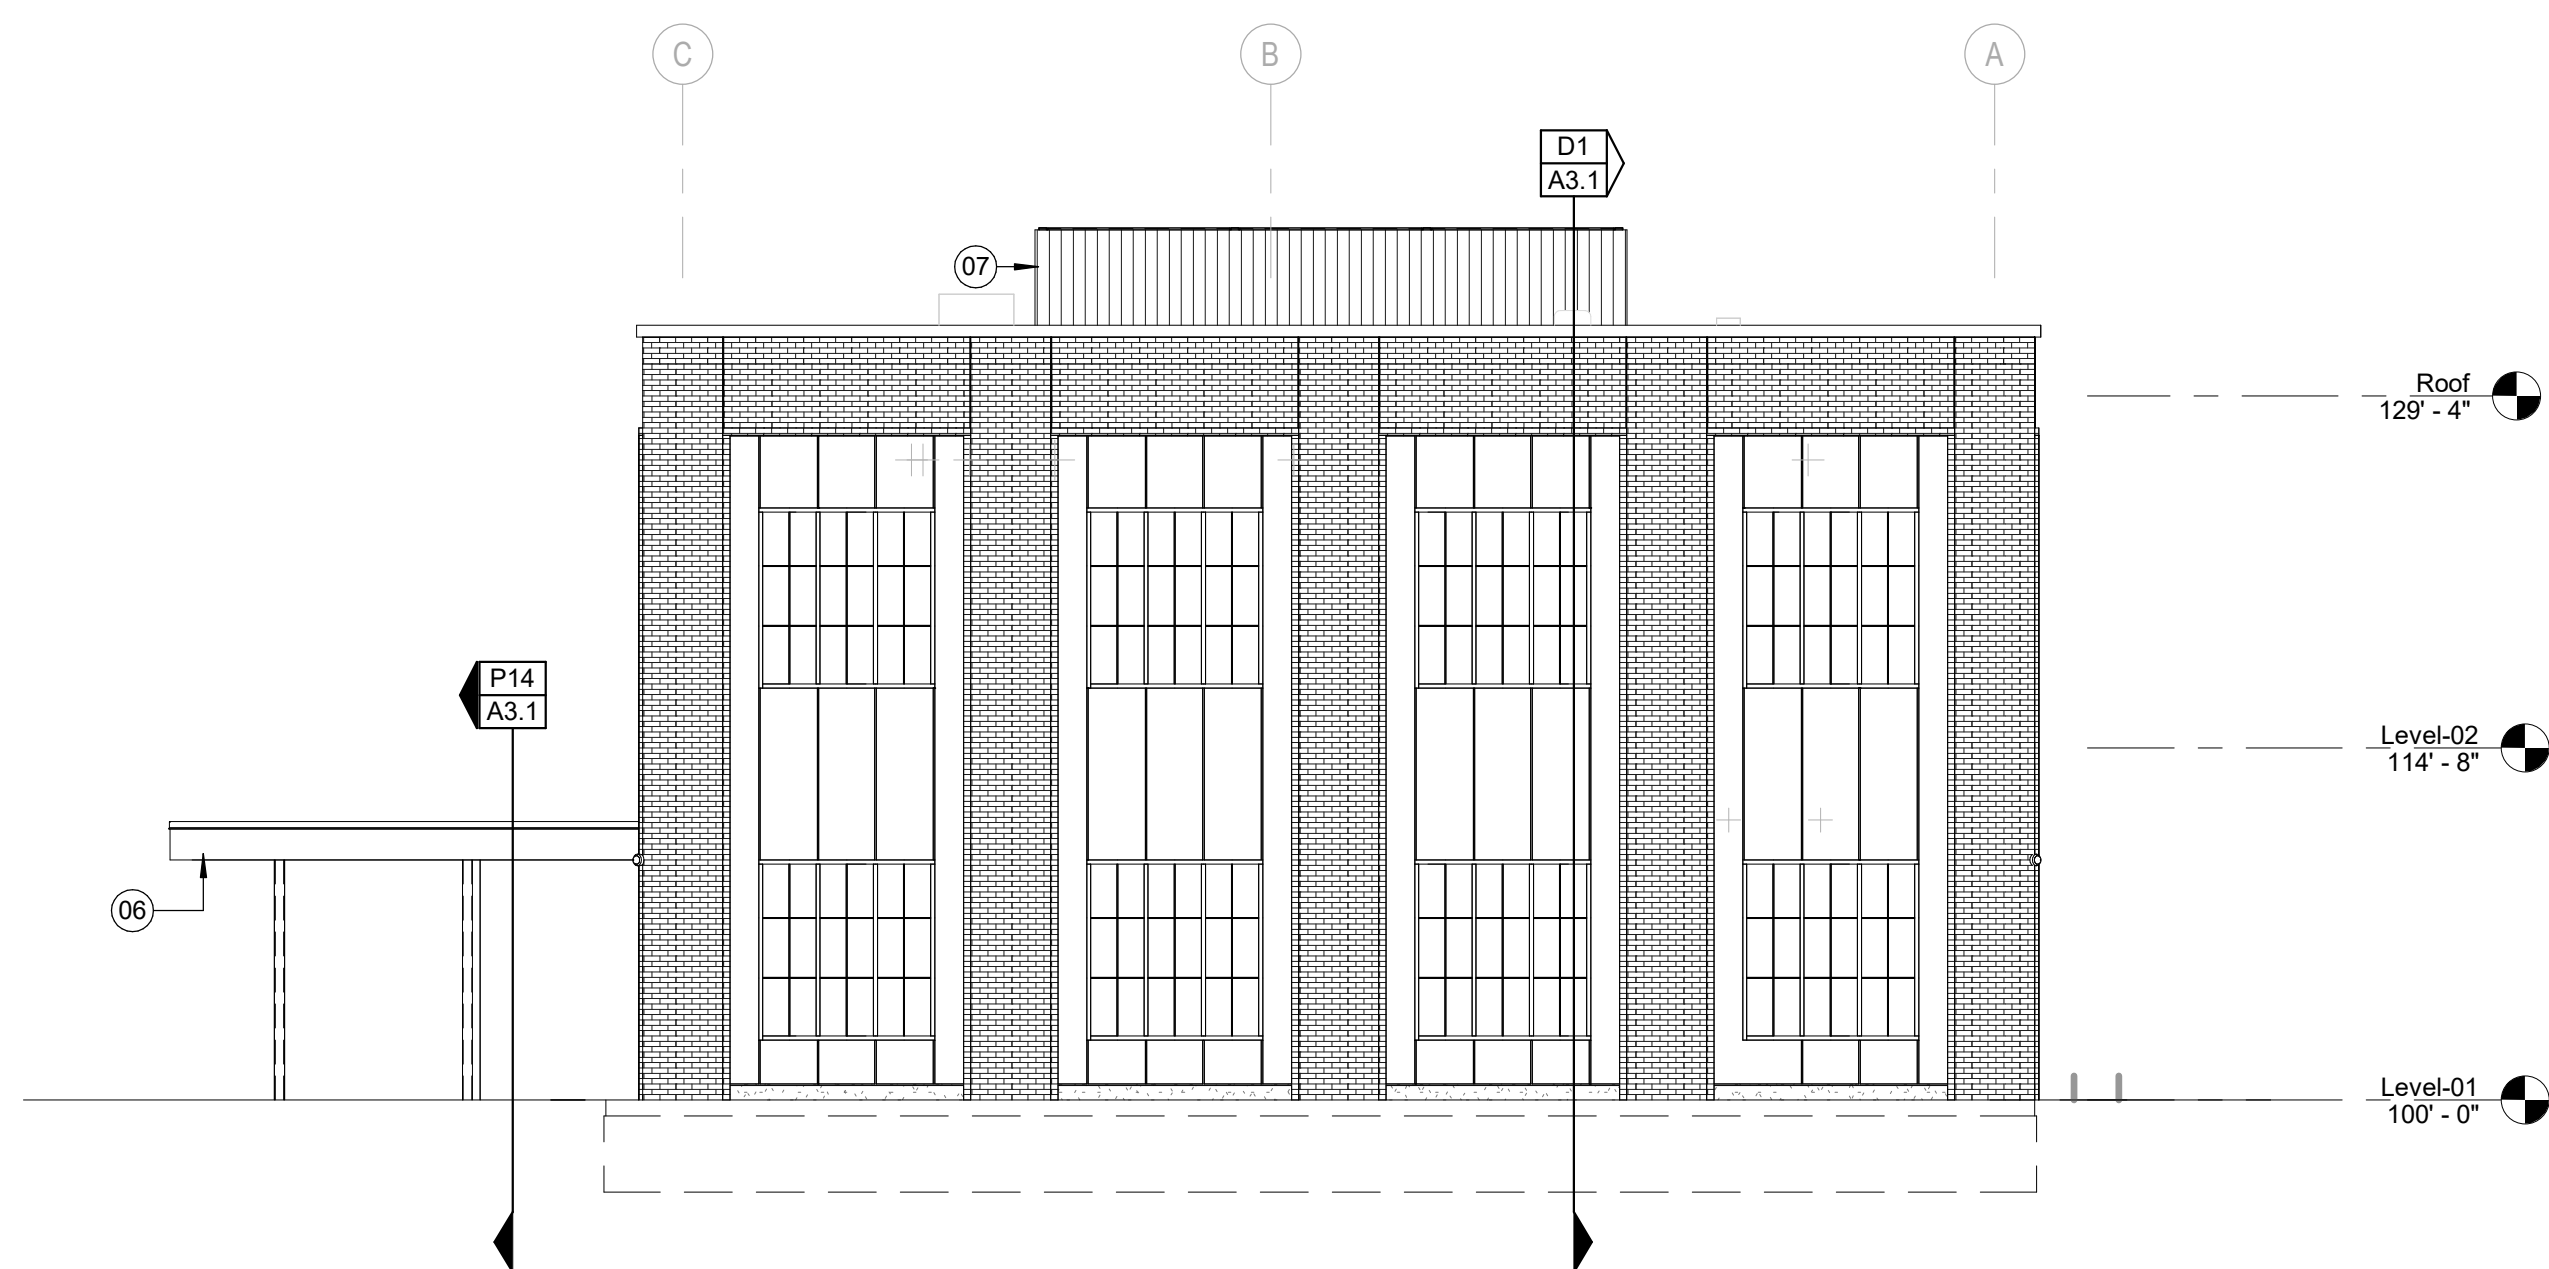

N8 BUILDING ELEVATION - EAST
A2.1 SCALE: 1/8" = 1'-0"

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE

REVISION	DATE
Project Number:	21064
Date:	March 10, 2023
COPYRIGHT © 2022	

EXTERIOR ELEVATIONS

A2.1

NOT FOR CONSTRUCTION

THESE ARE NOT THE FINAL BID DOCUMENTS - REFERENCE ONLY


ALLEY POYNER
MACCHIETTO
ARCHITECTURE












REVISION	DATE
Project Number:	21064
Date:	March 10, 2023
COPYRIGHT © 2022	

BUILDING / WALL SECTIONS

A3.1

NOT FOR CONSTRUCTION

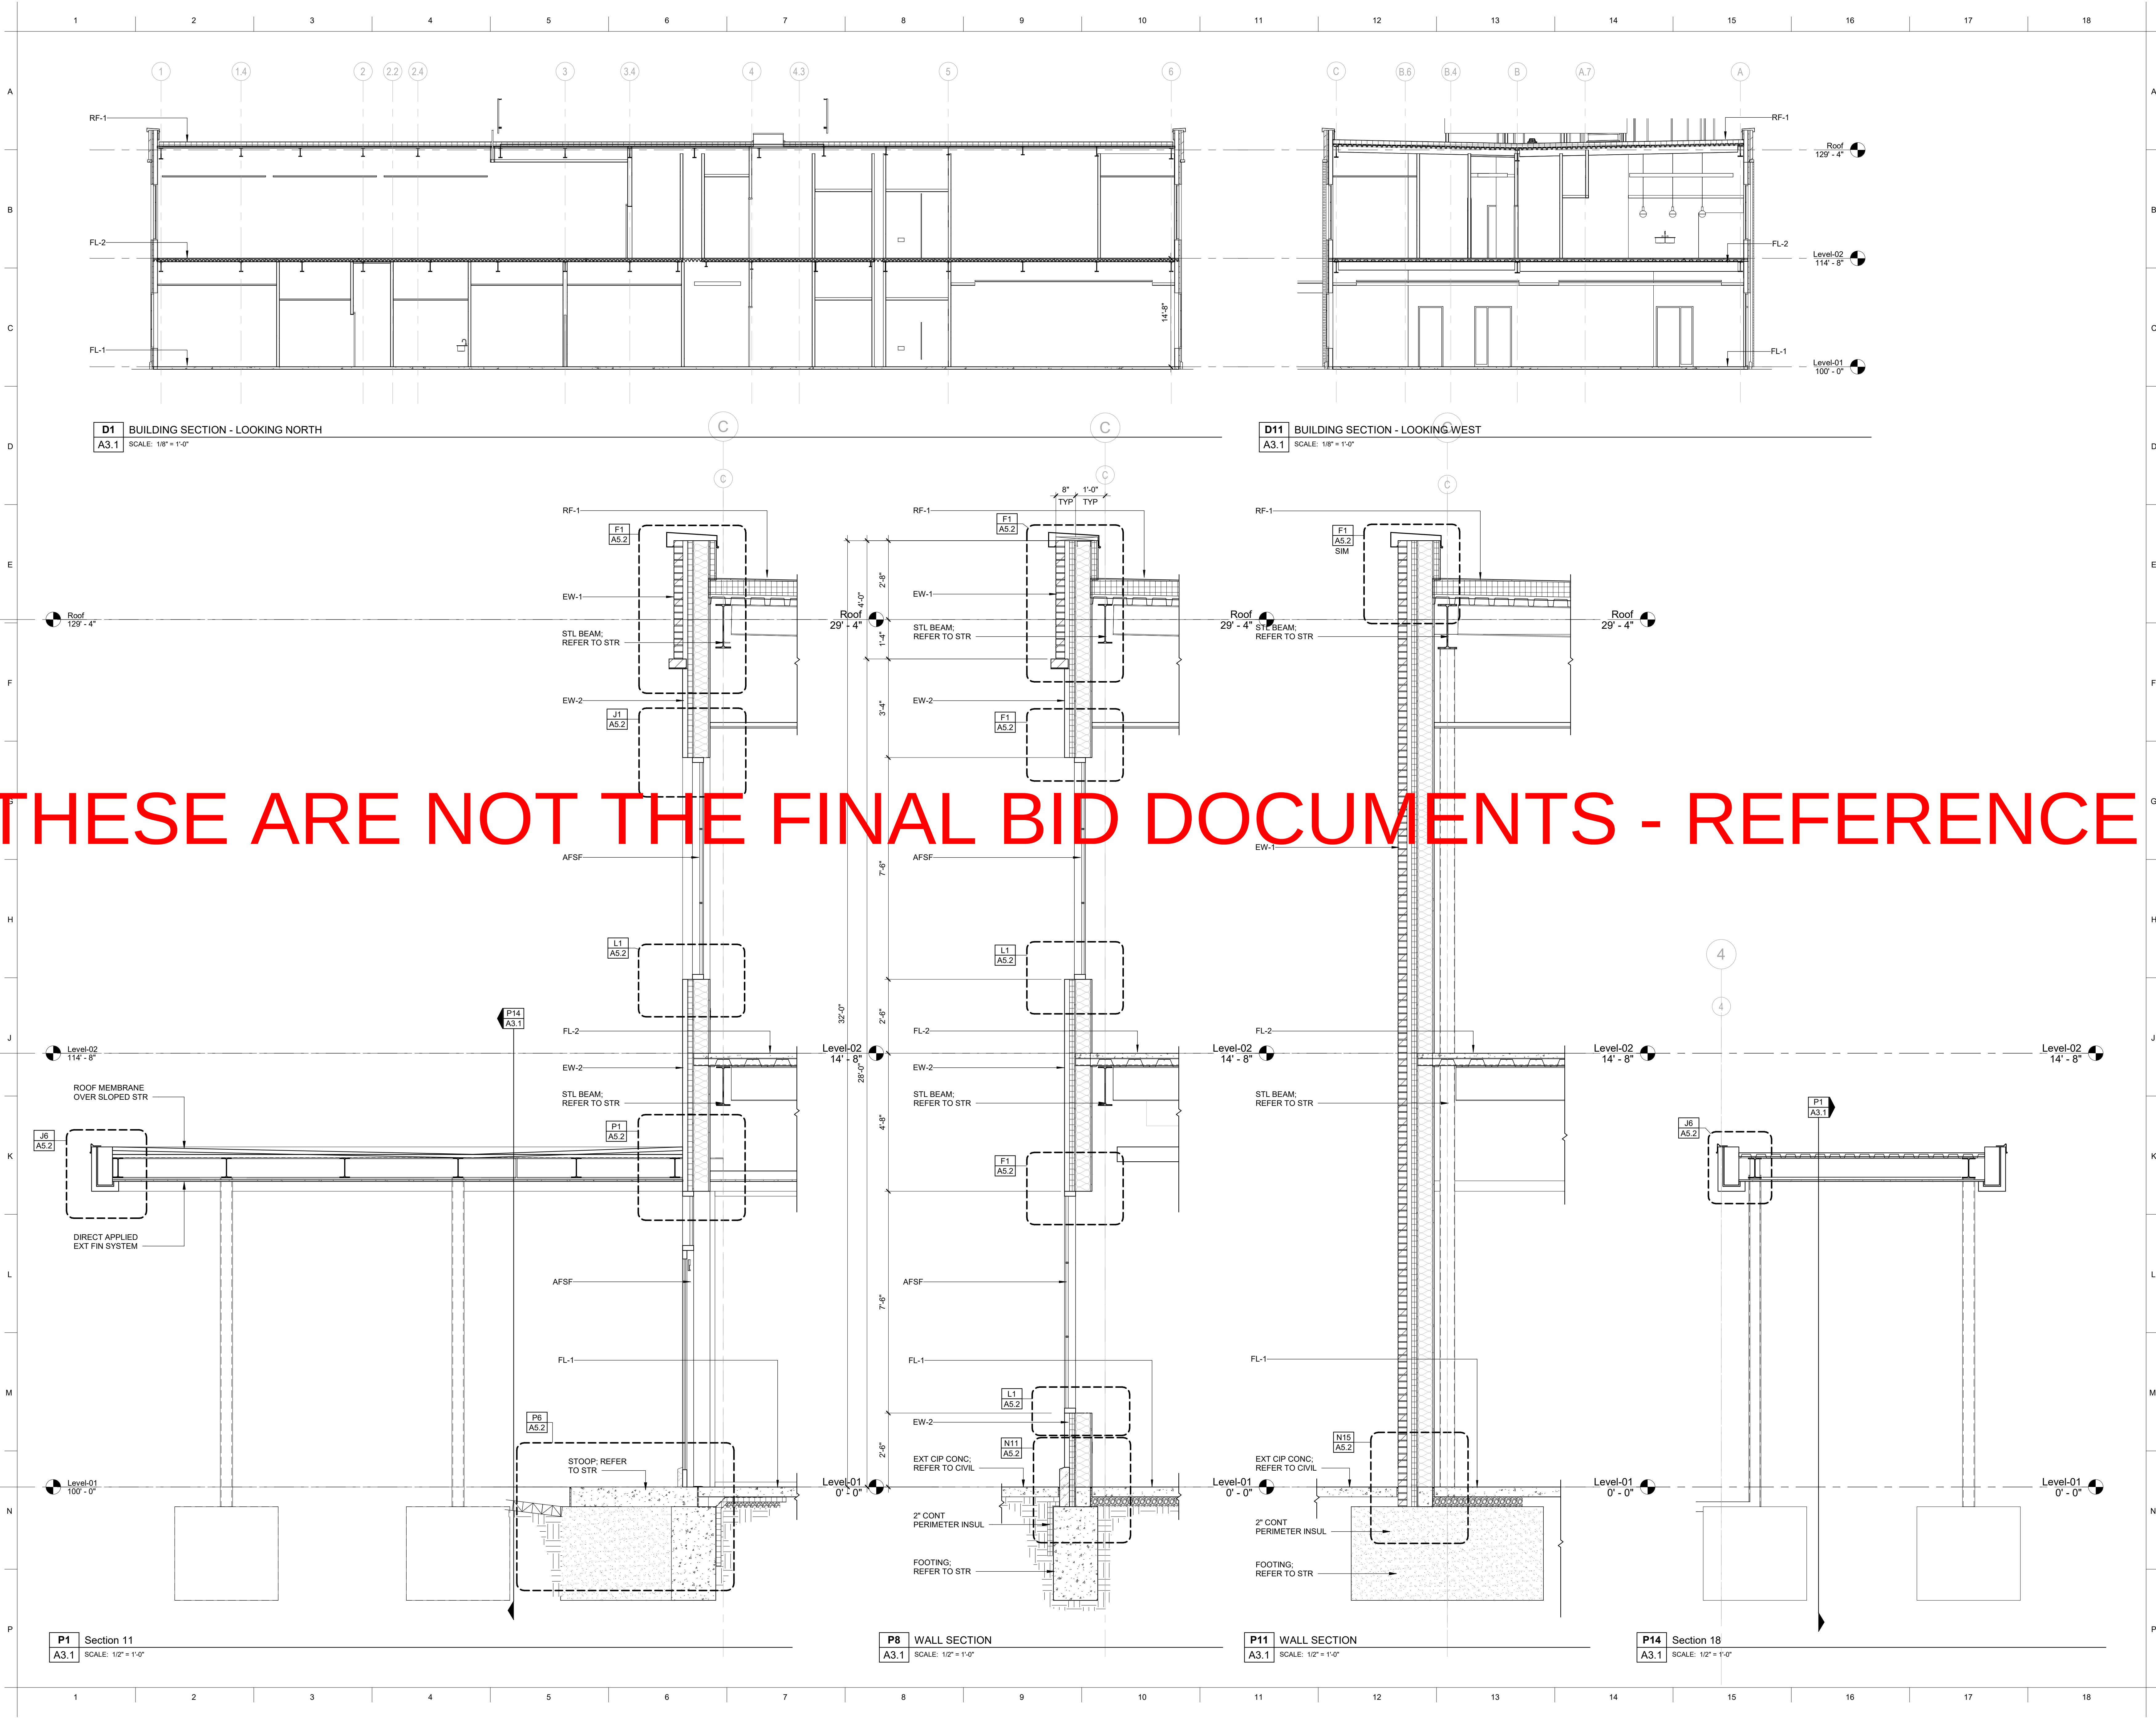

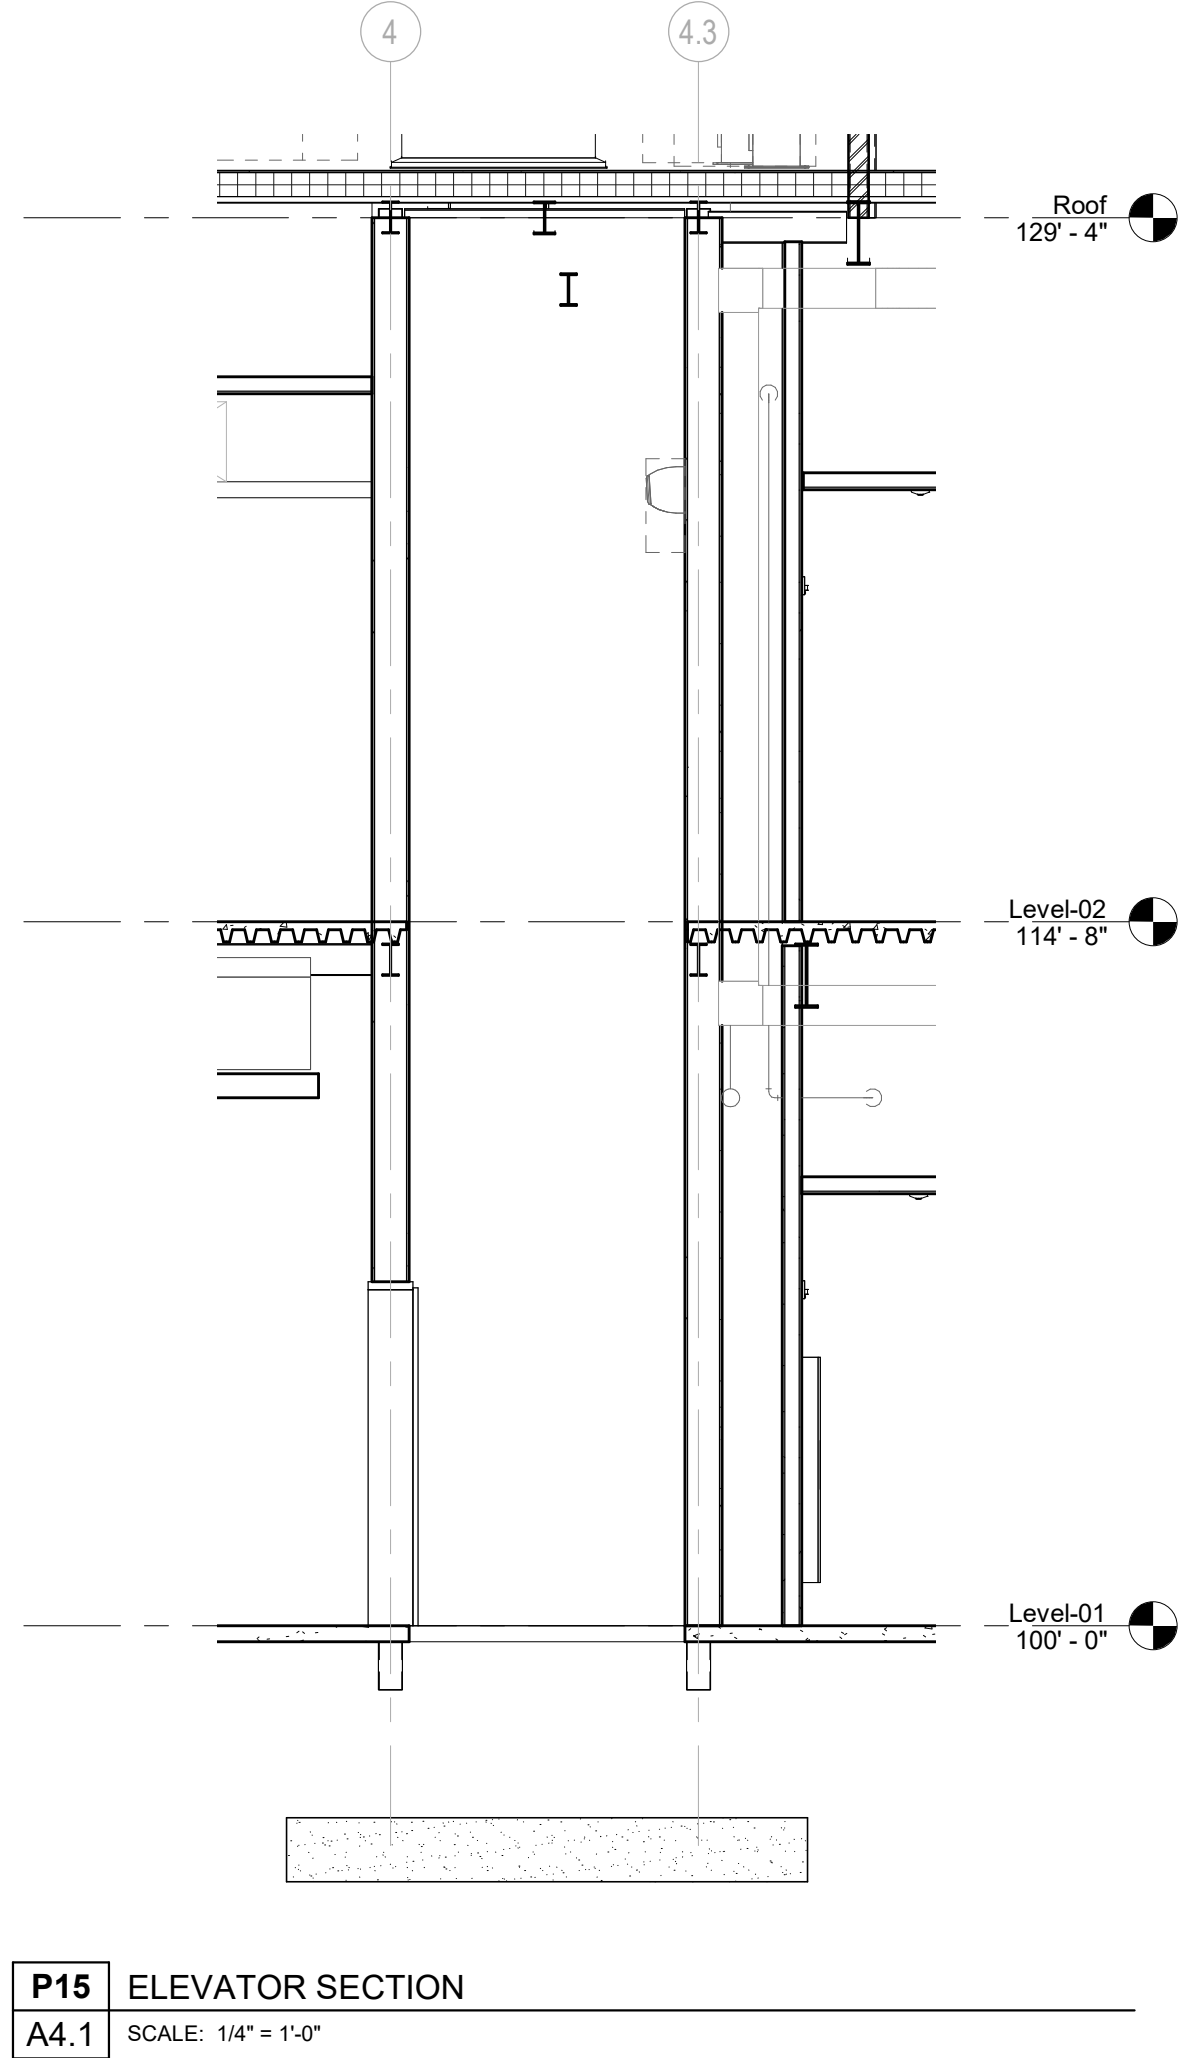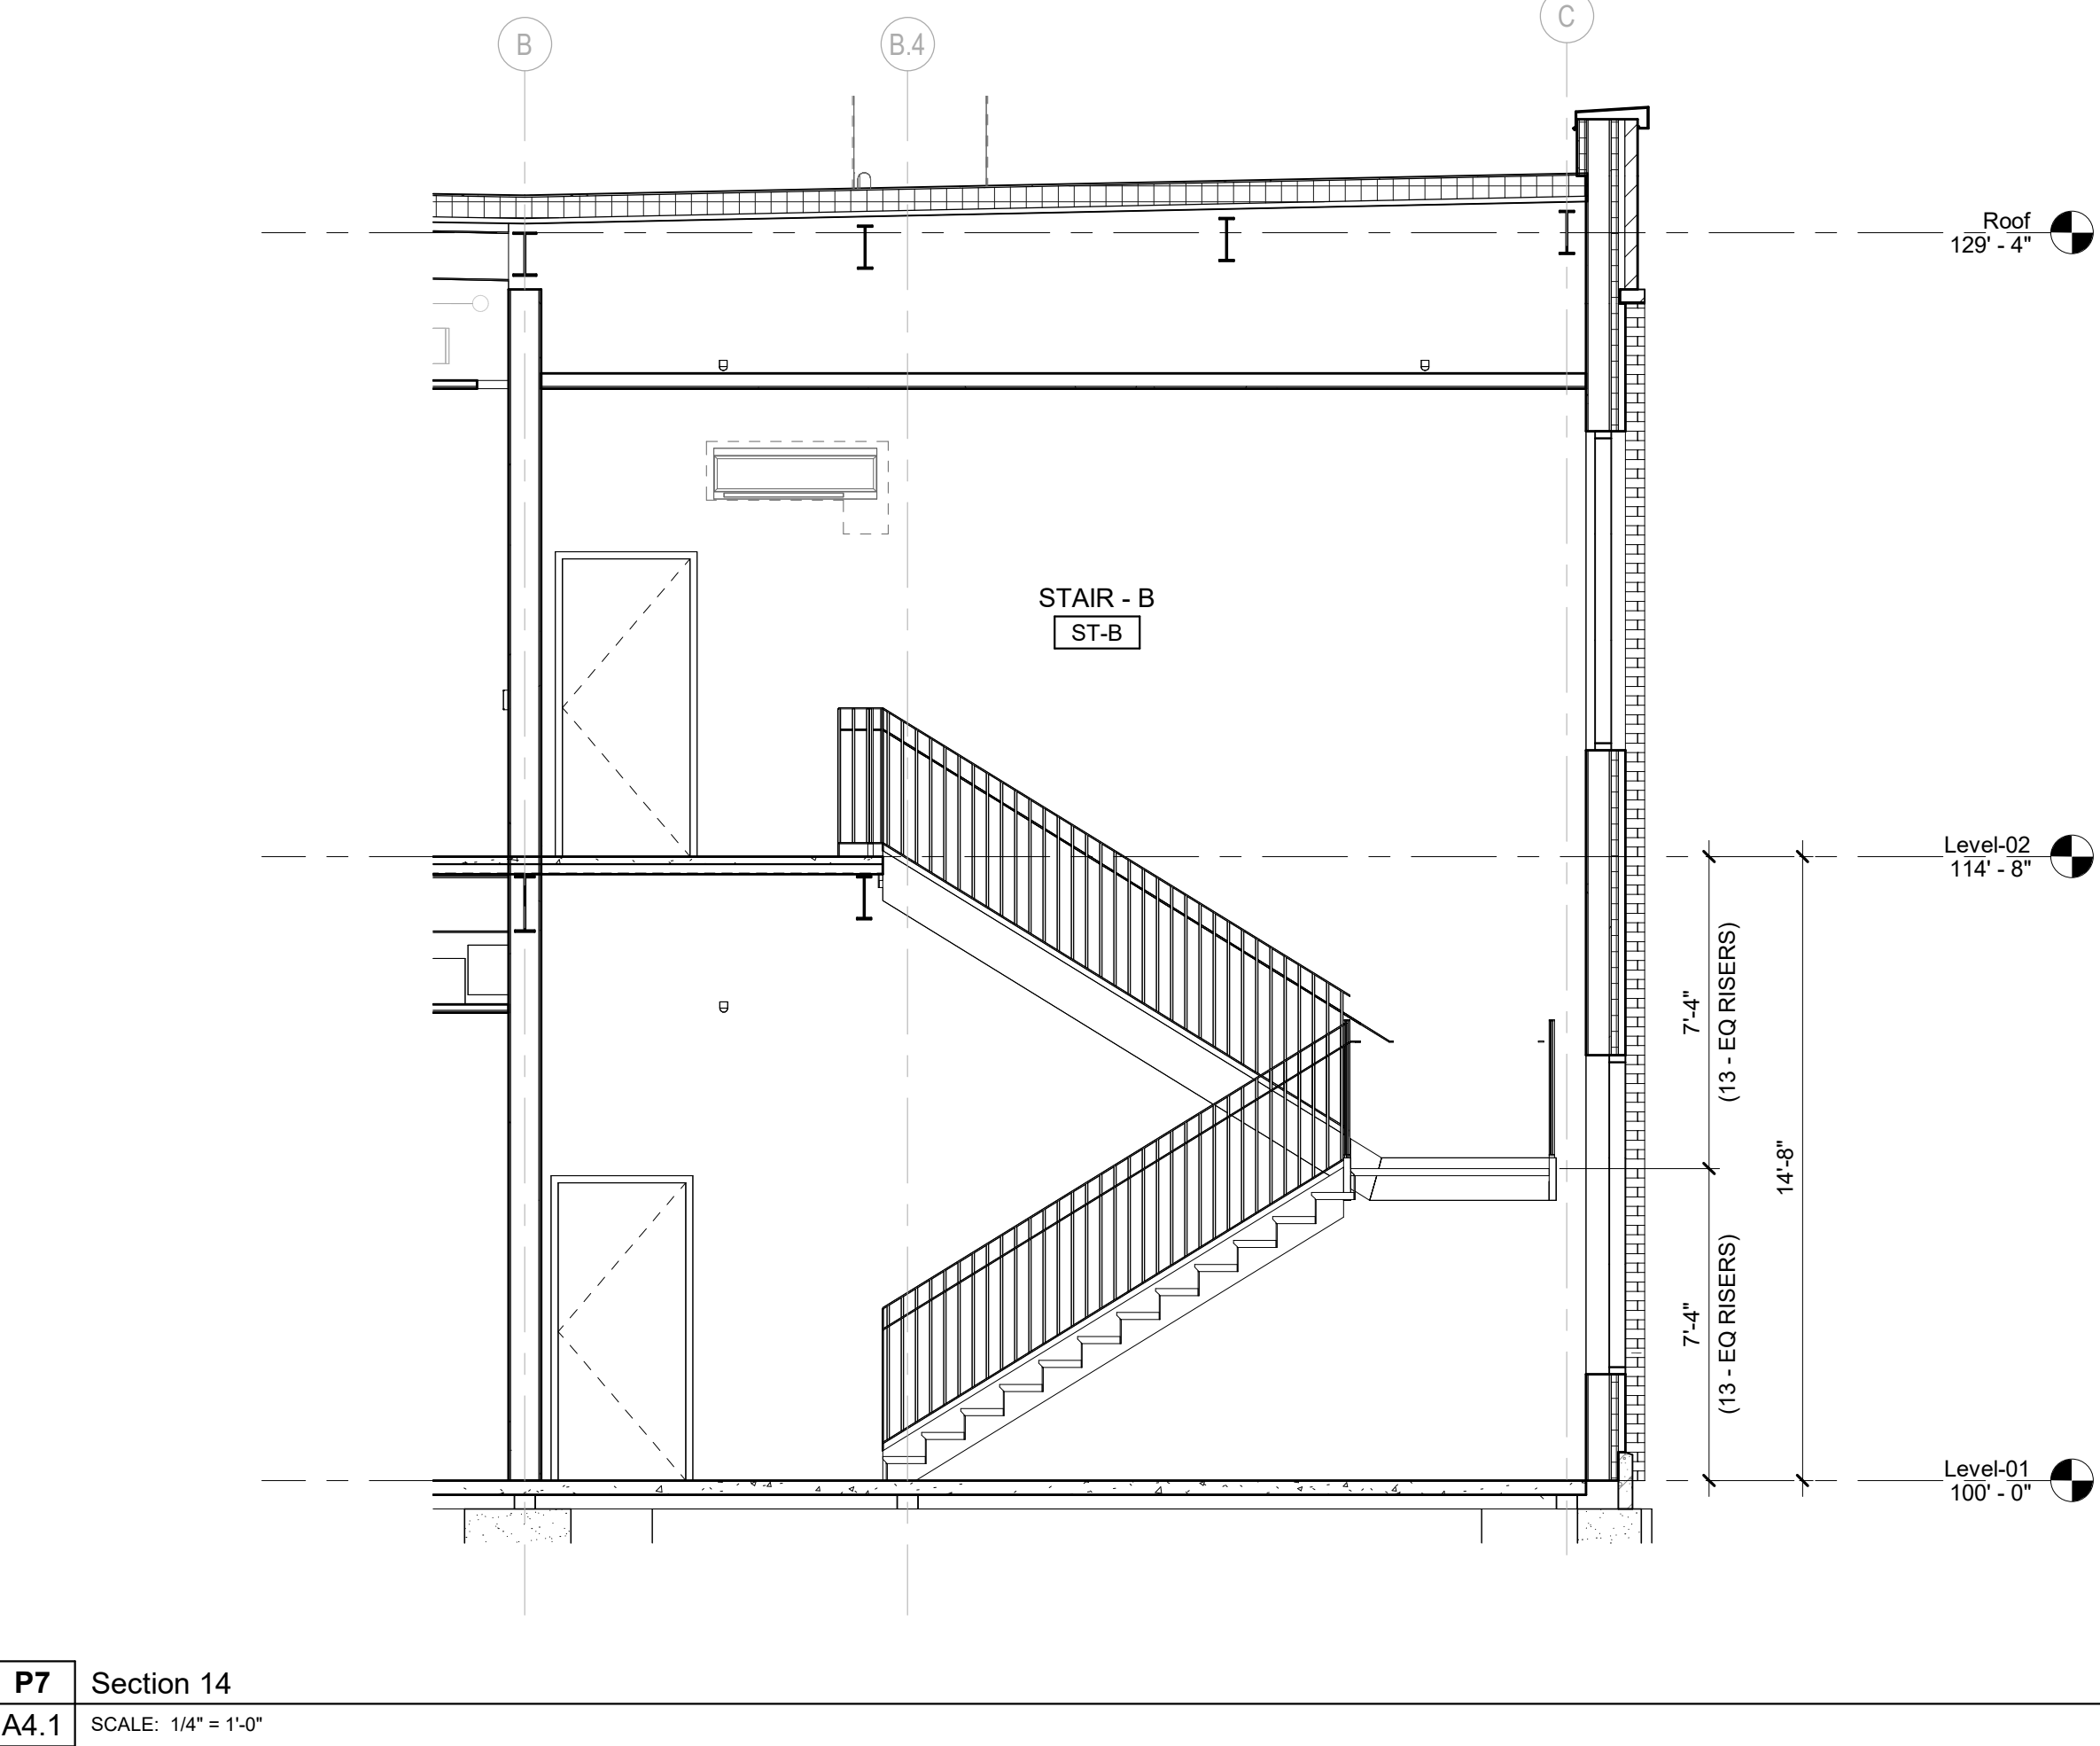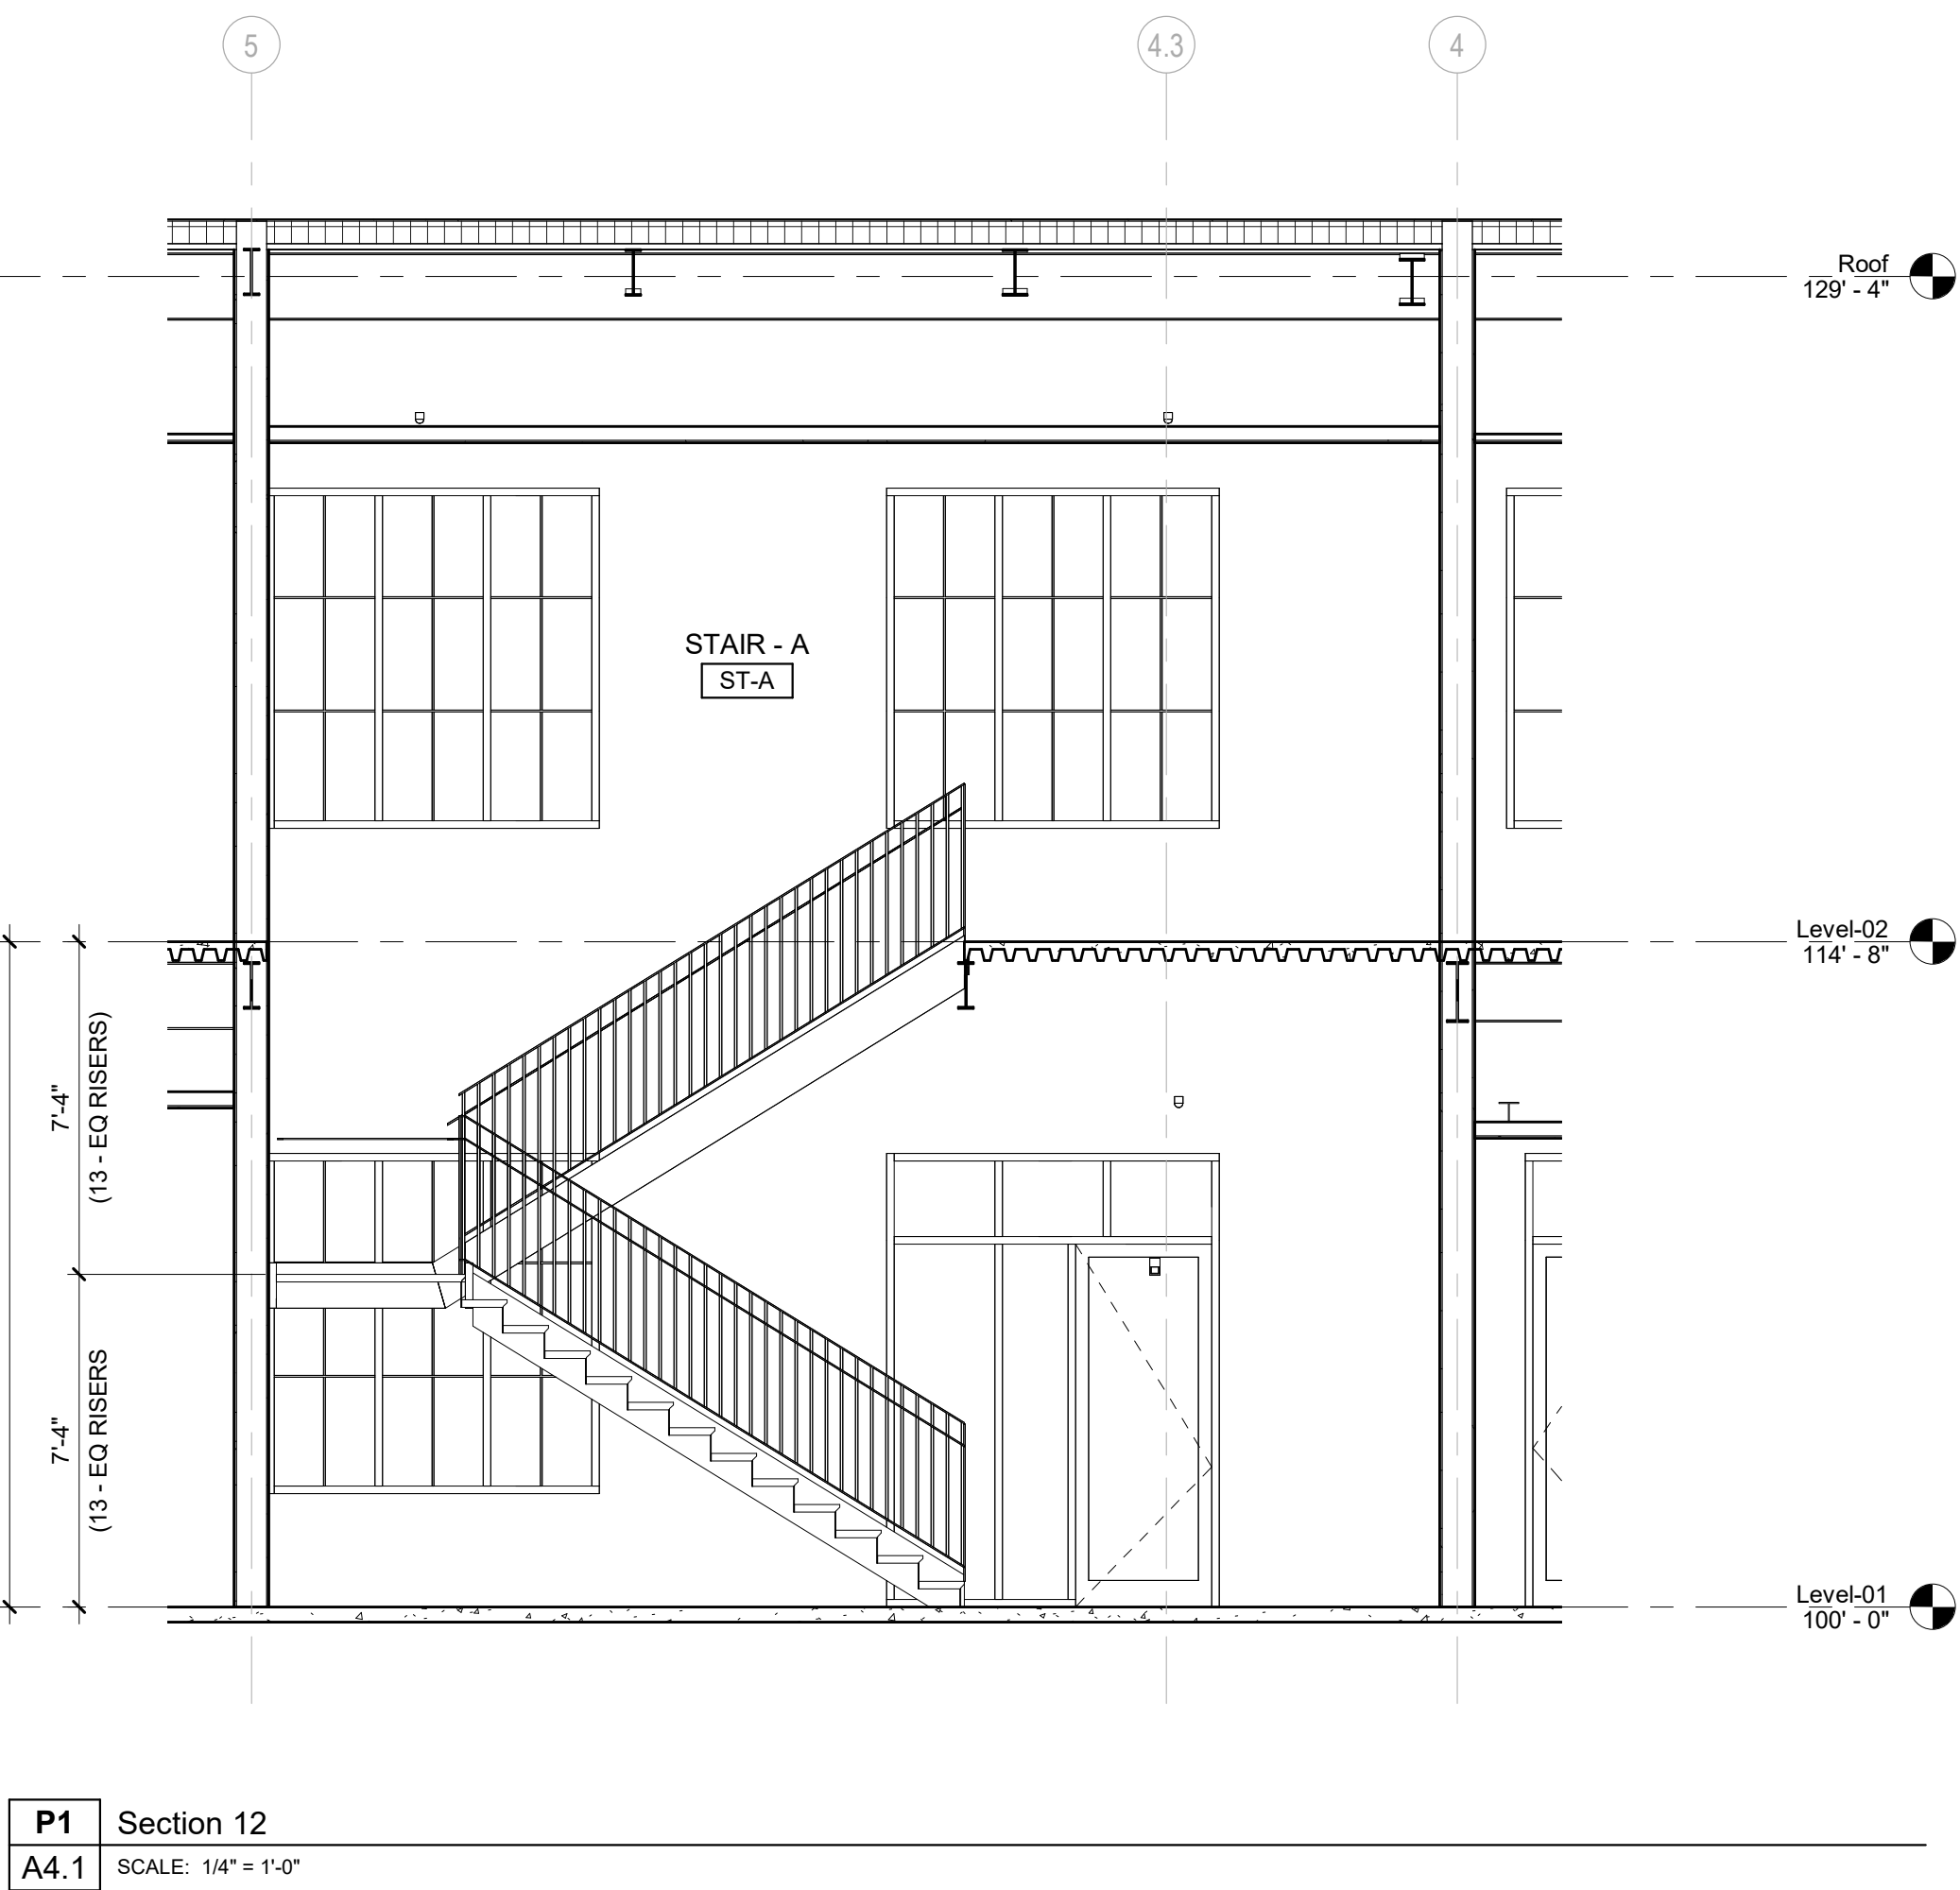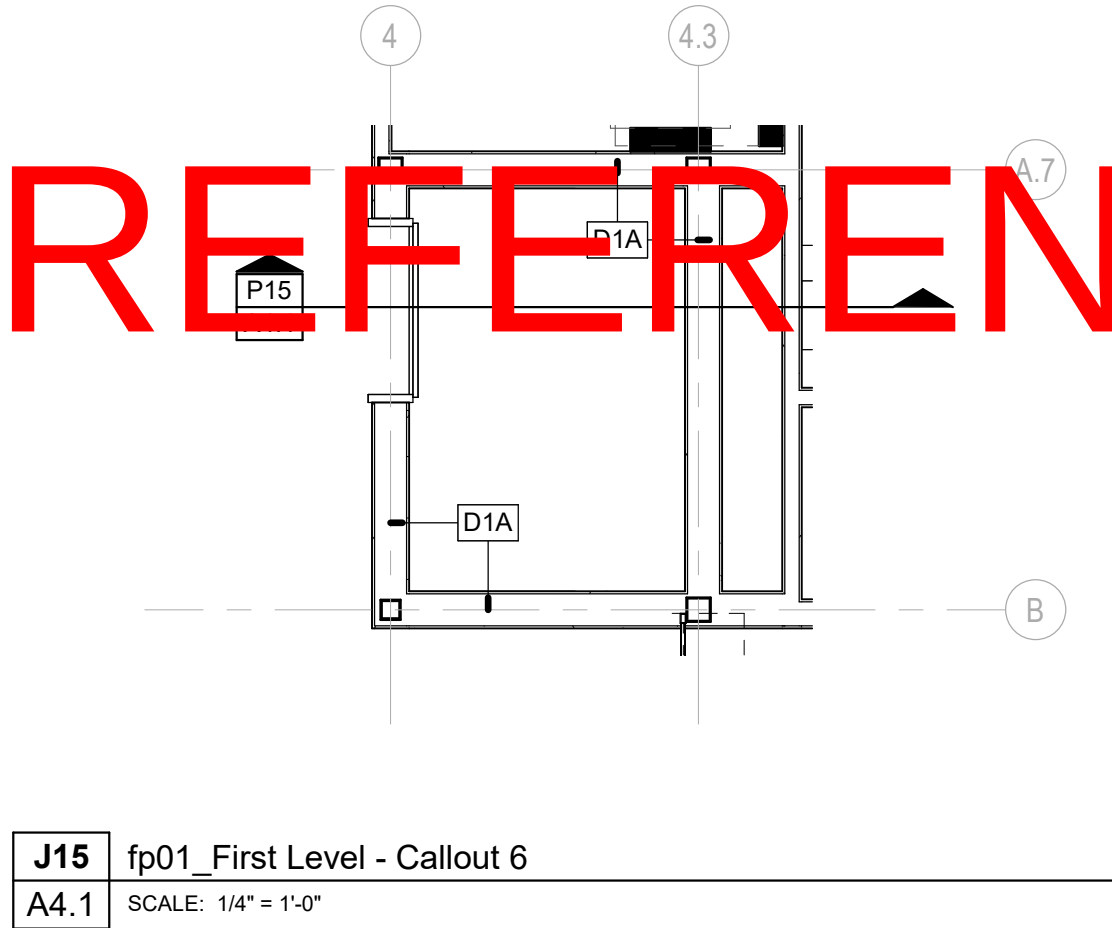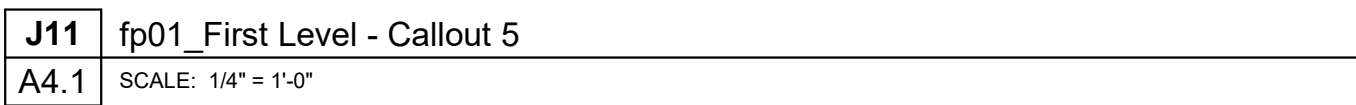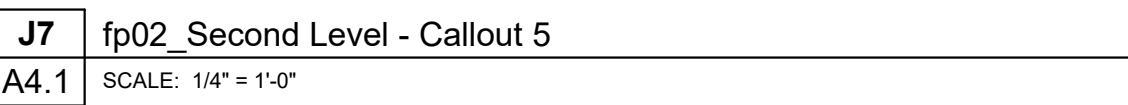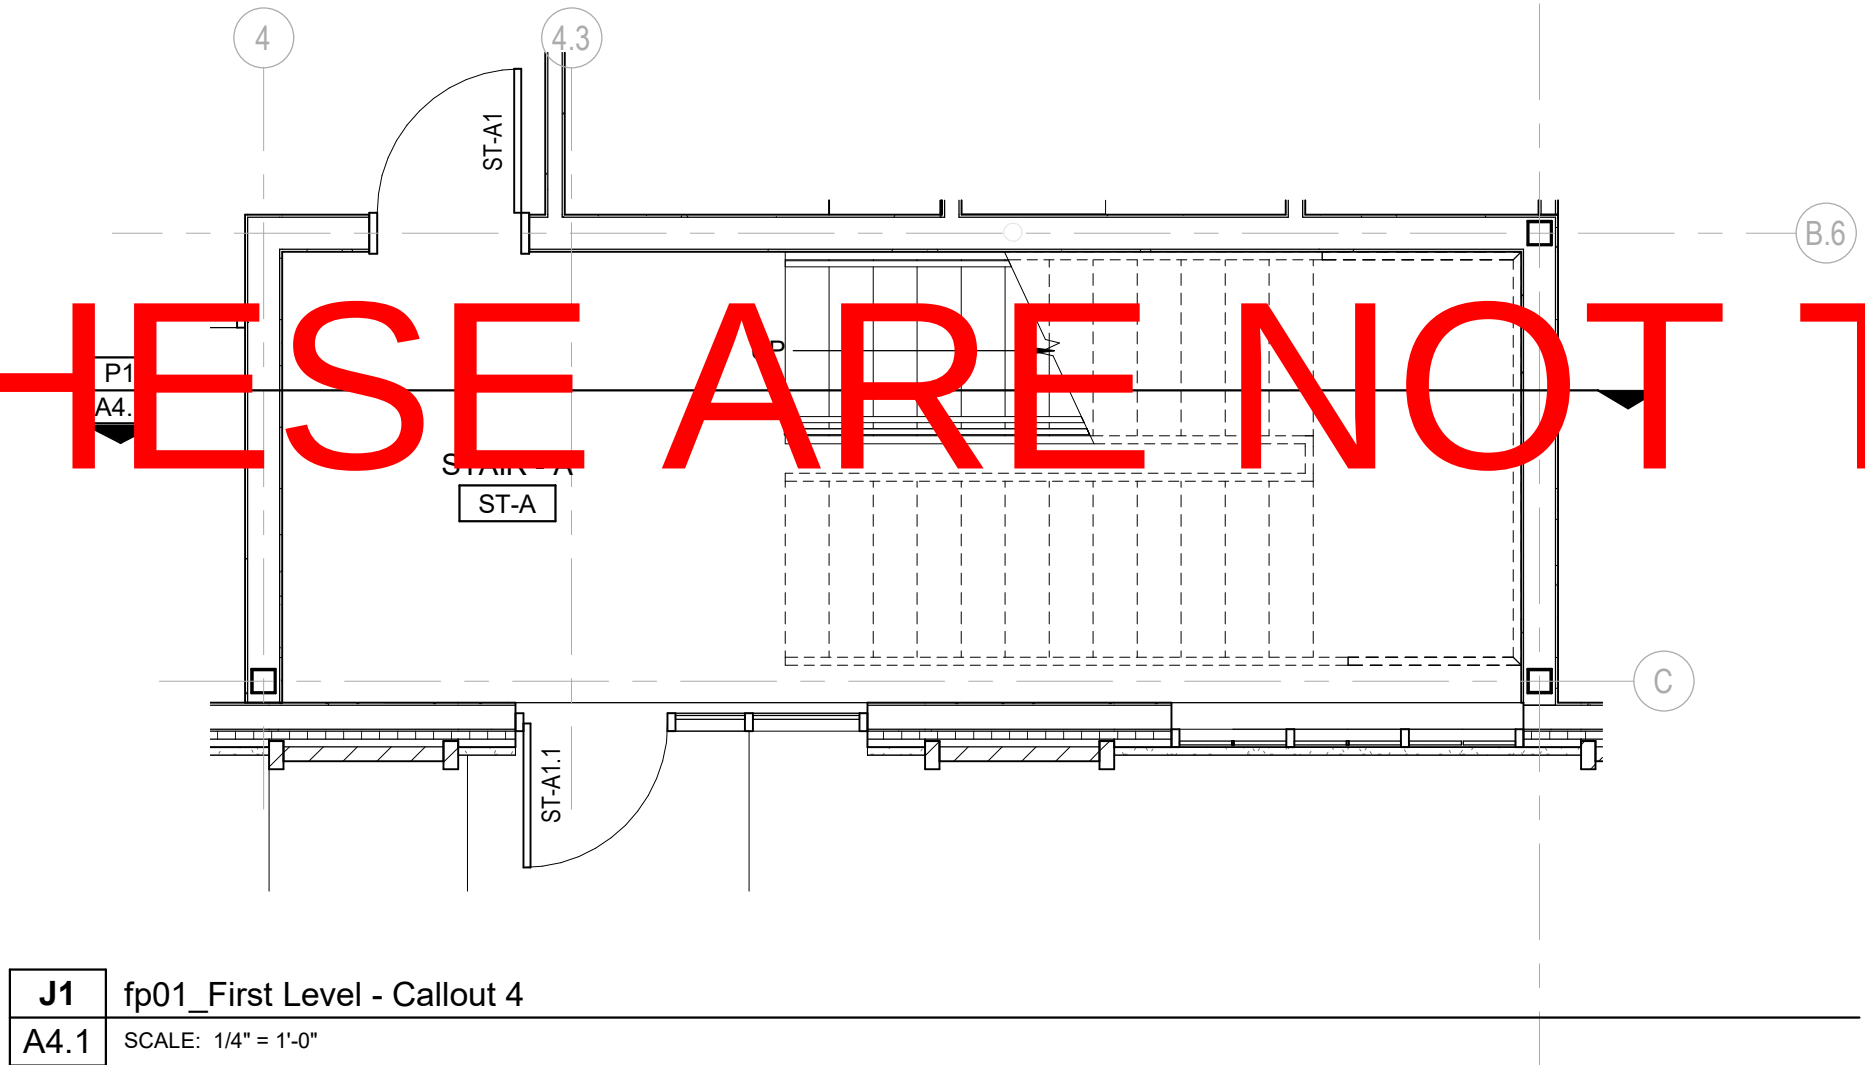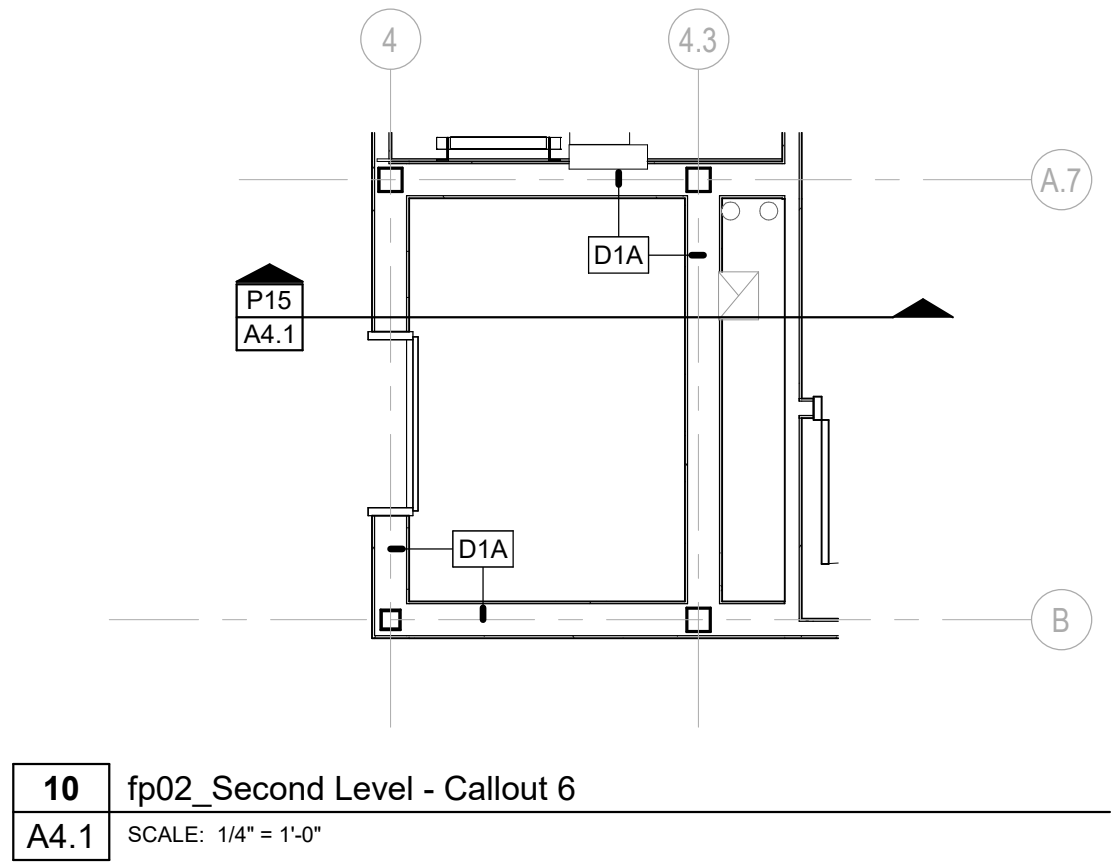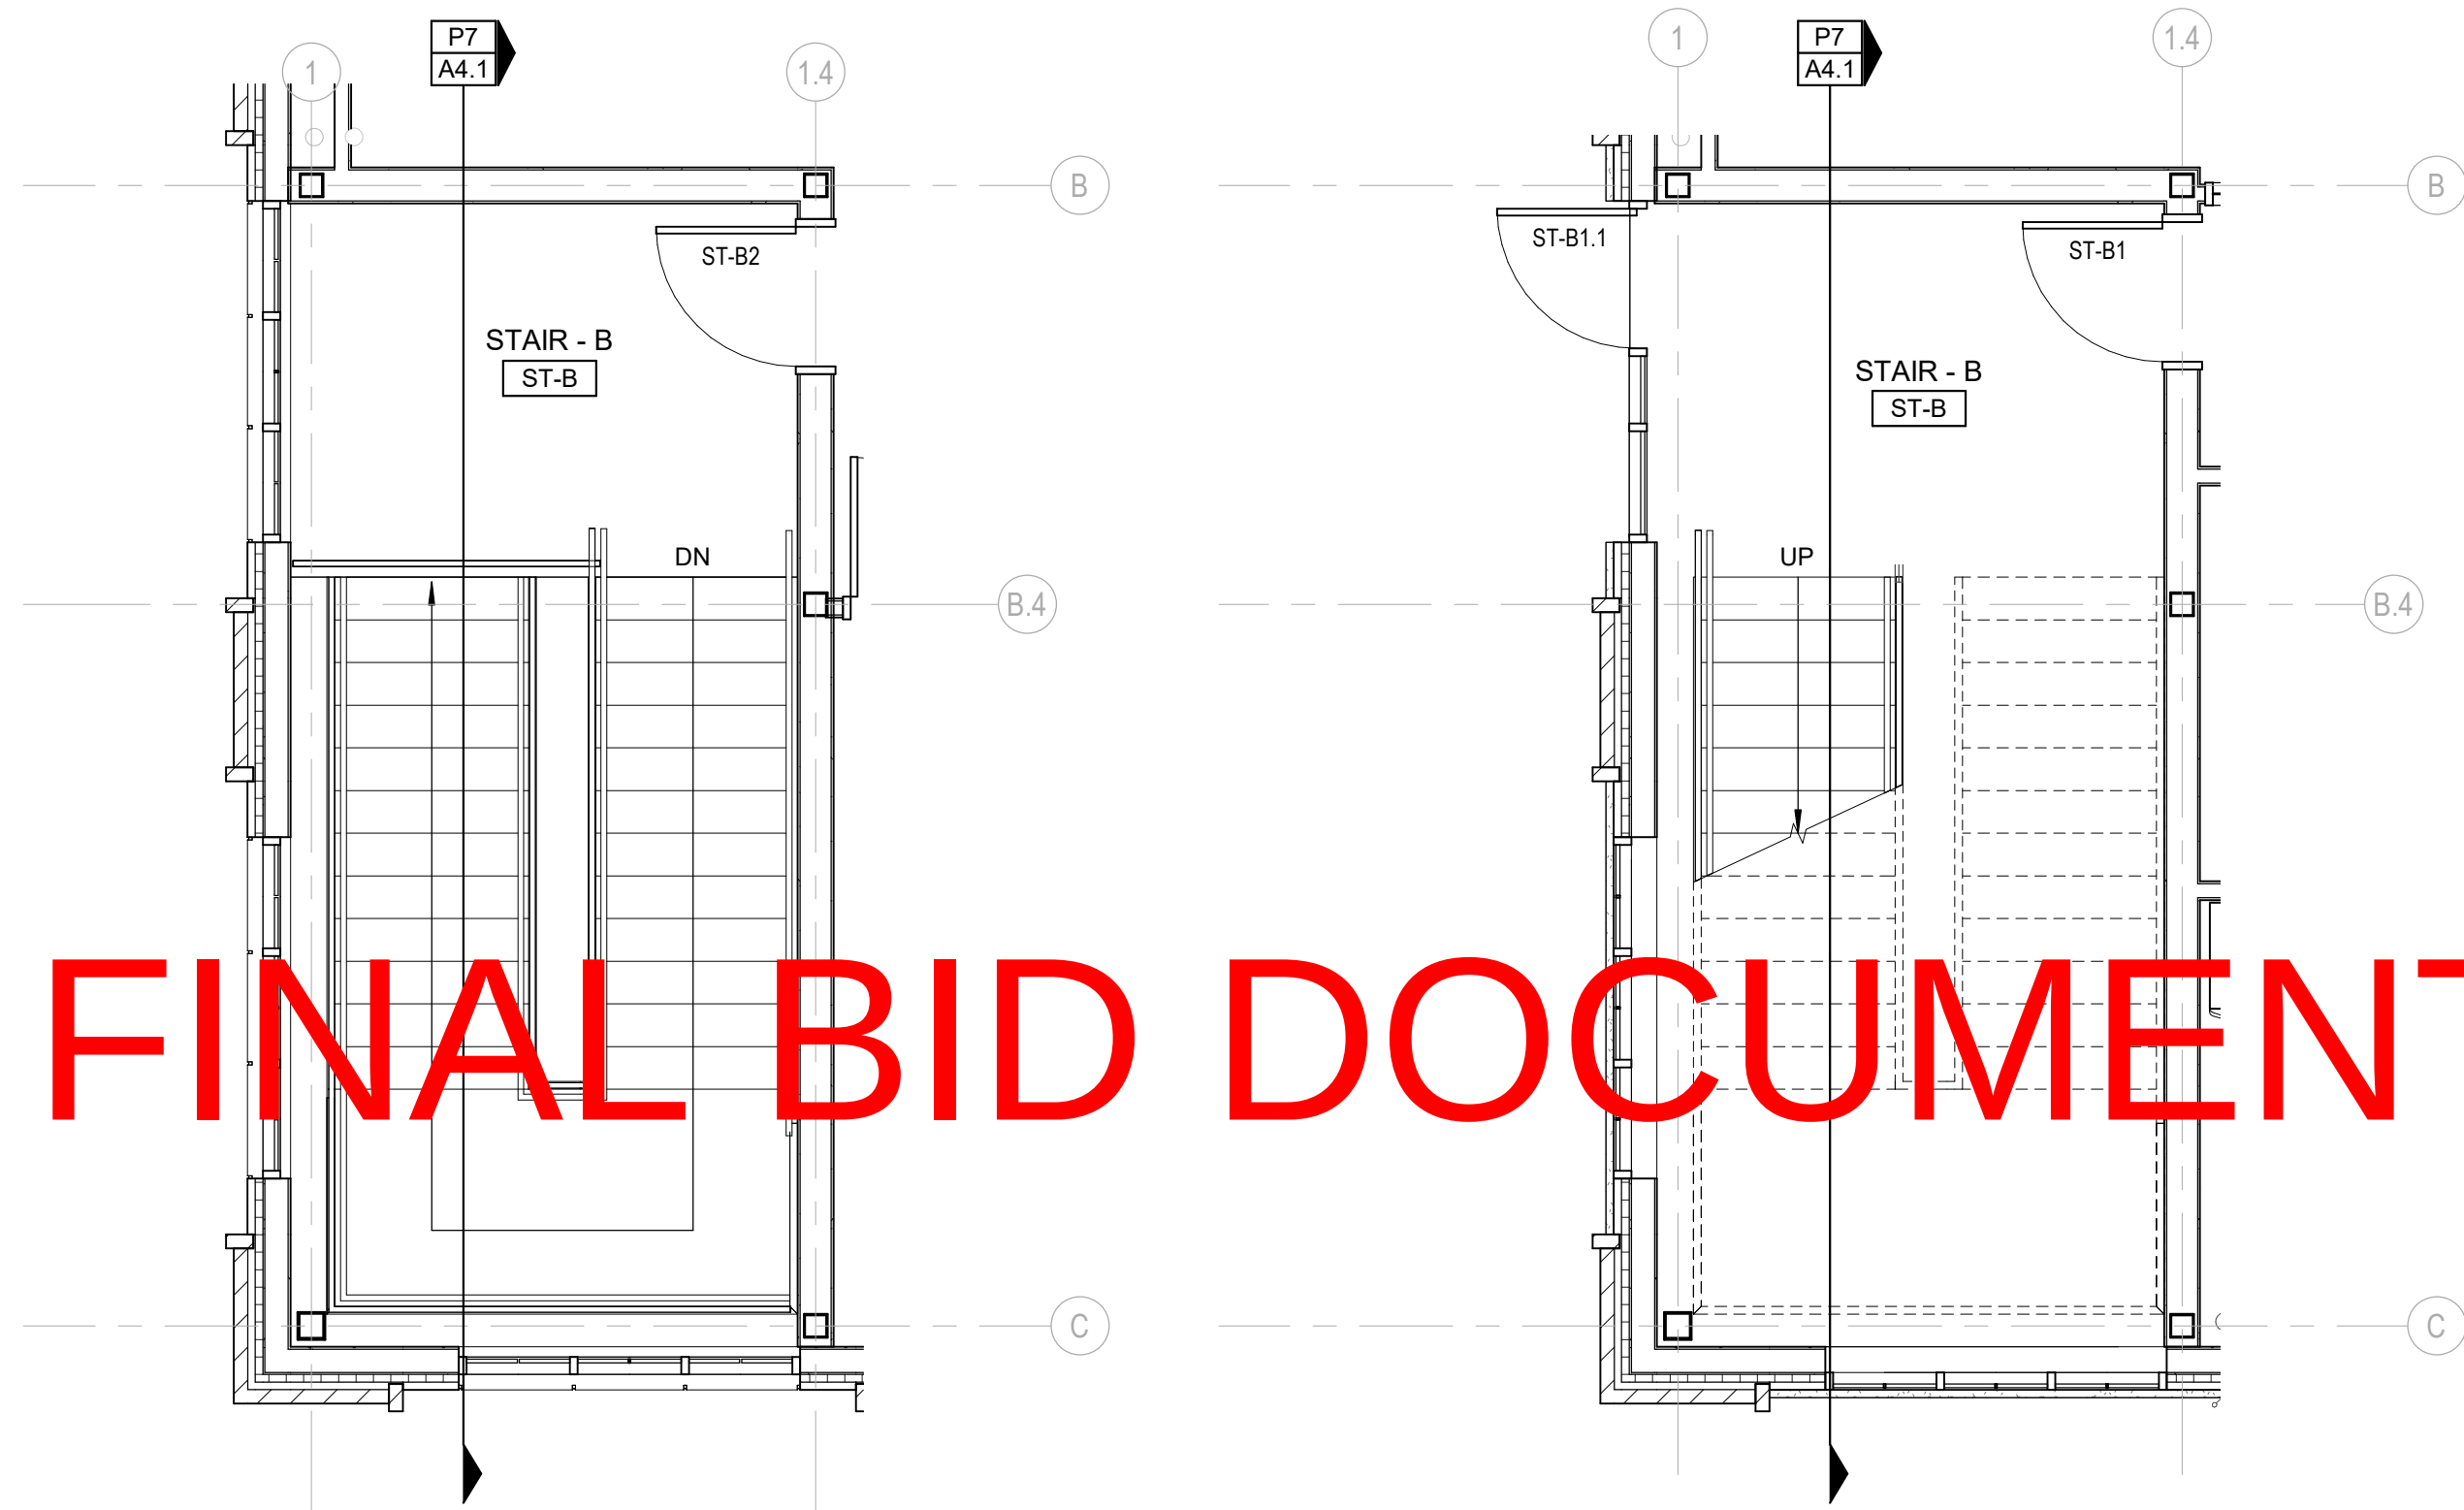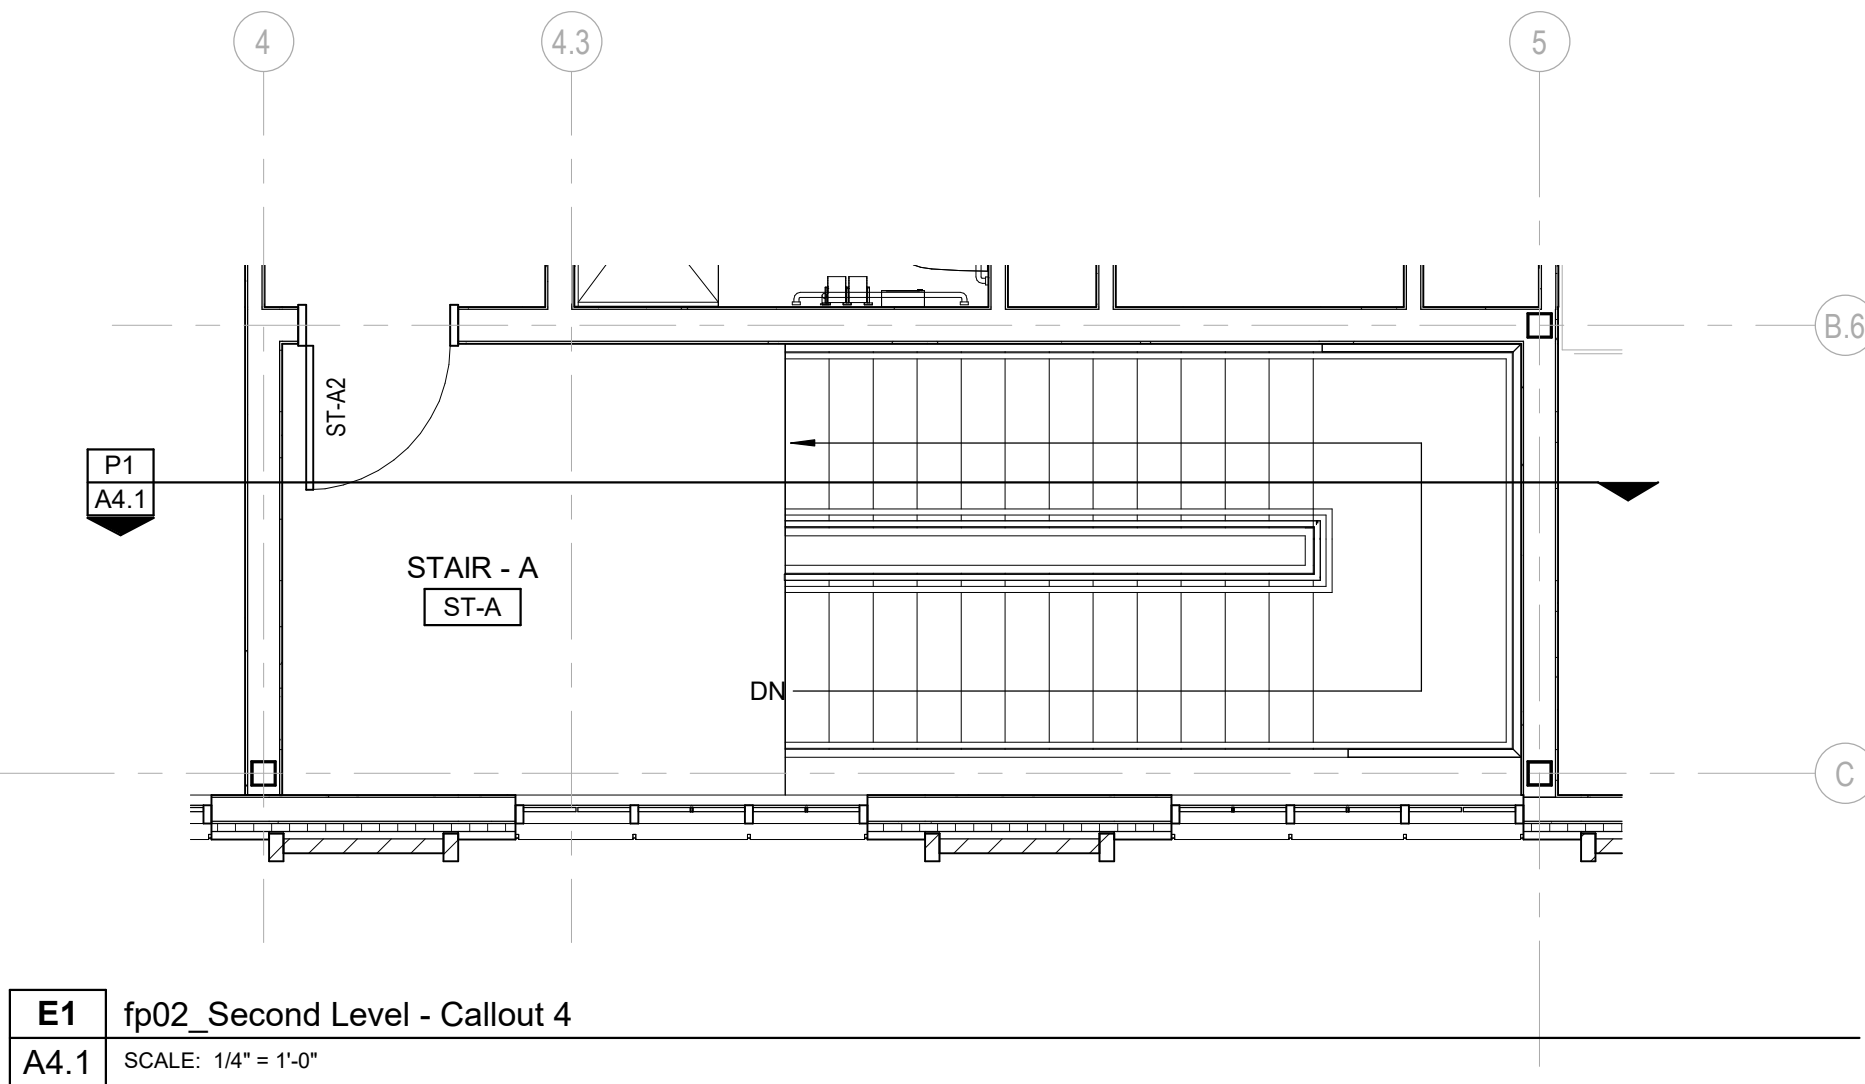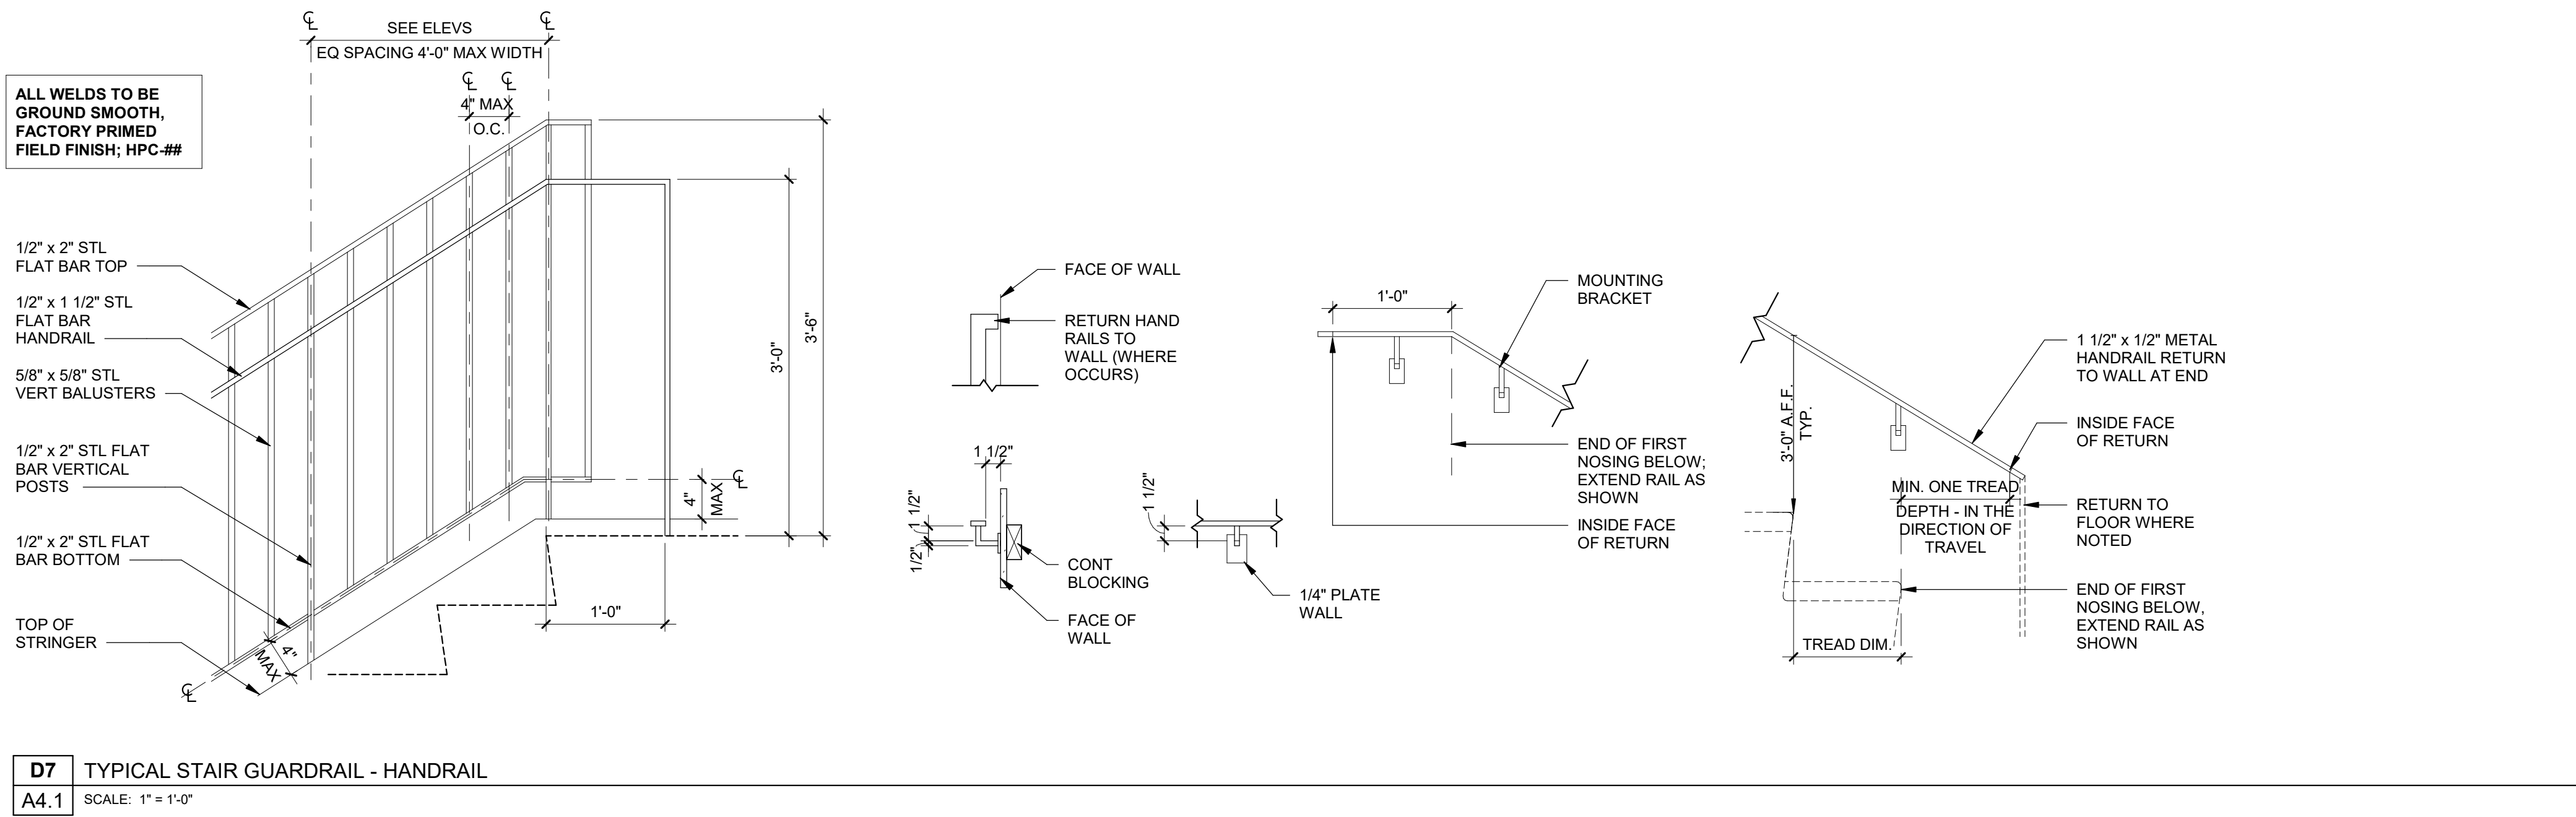

AGENCY APPROVAL


ALLEY POYNER
MACCHIETTO
ARCHITECTURE

REVISION	DATE
Project Number:	21064
Date:	March 10, 2023
COPYRIGHT © 2022	

VERTICAL CIRCULATION

A4.1

NOT FOR CONSTRUCTION

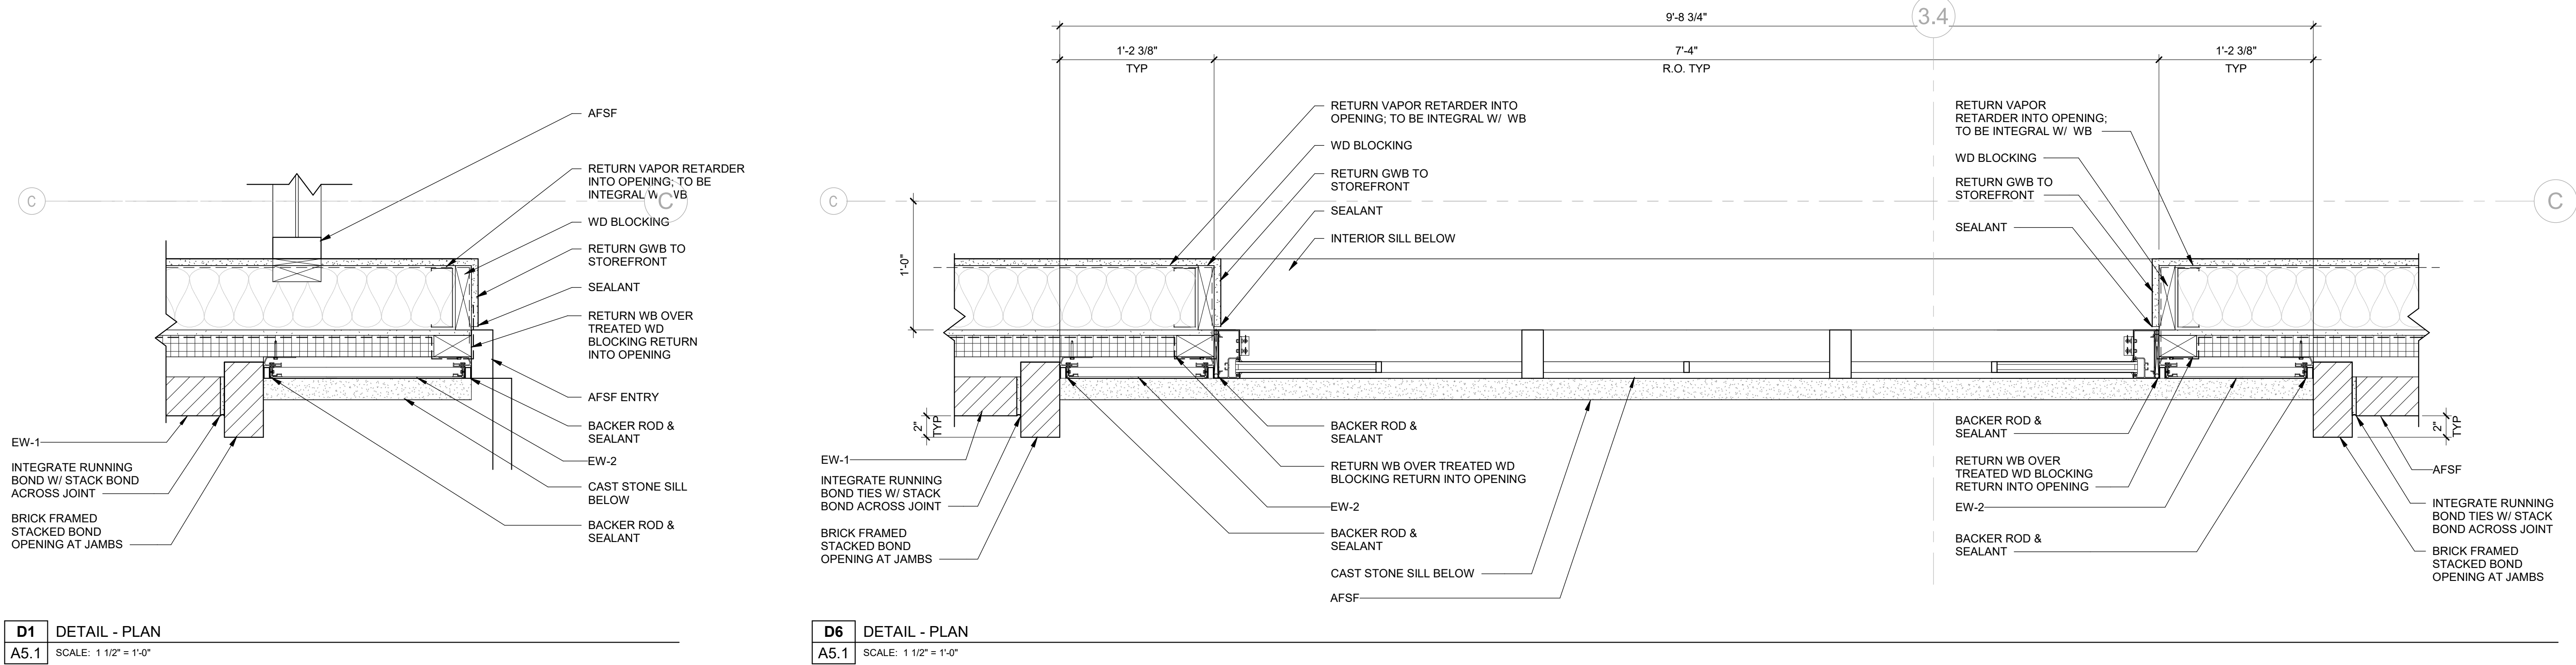

THESE ARE NOT THE FINAL BID DOCUMENTS - REFERENCE ONLY

AGENCY APPROVAL


ALLEY POYNER
MACCHIETTO
ARCHITECTURE

REVISION	DATE
Project Number:	21064
Date:	March 10, 2023
COPYRIGHT © 2022	

BUILDING DETAILS

A5.1

NOT FOR CONSTRUCTION

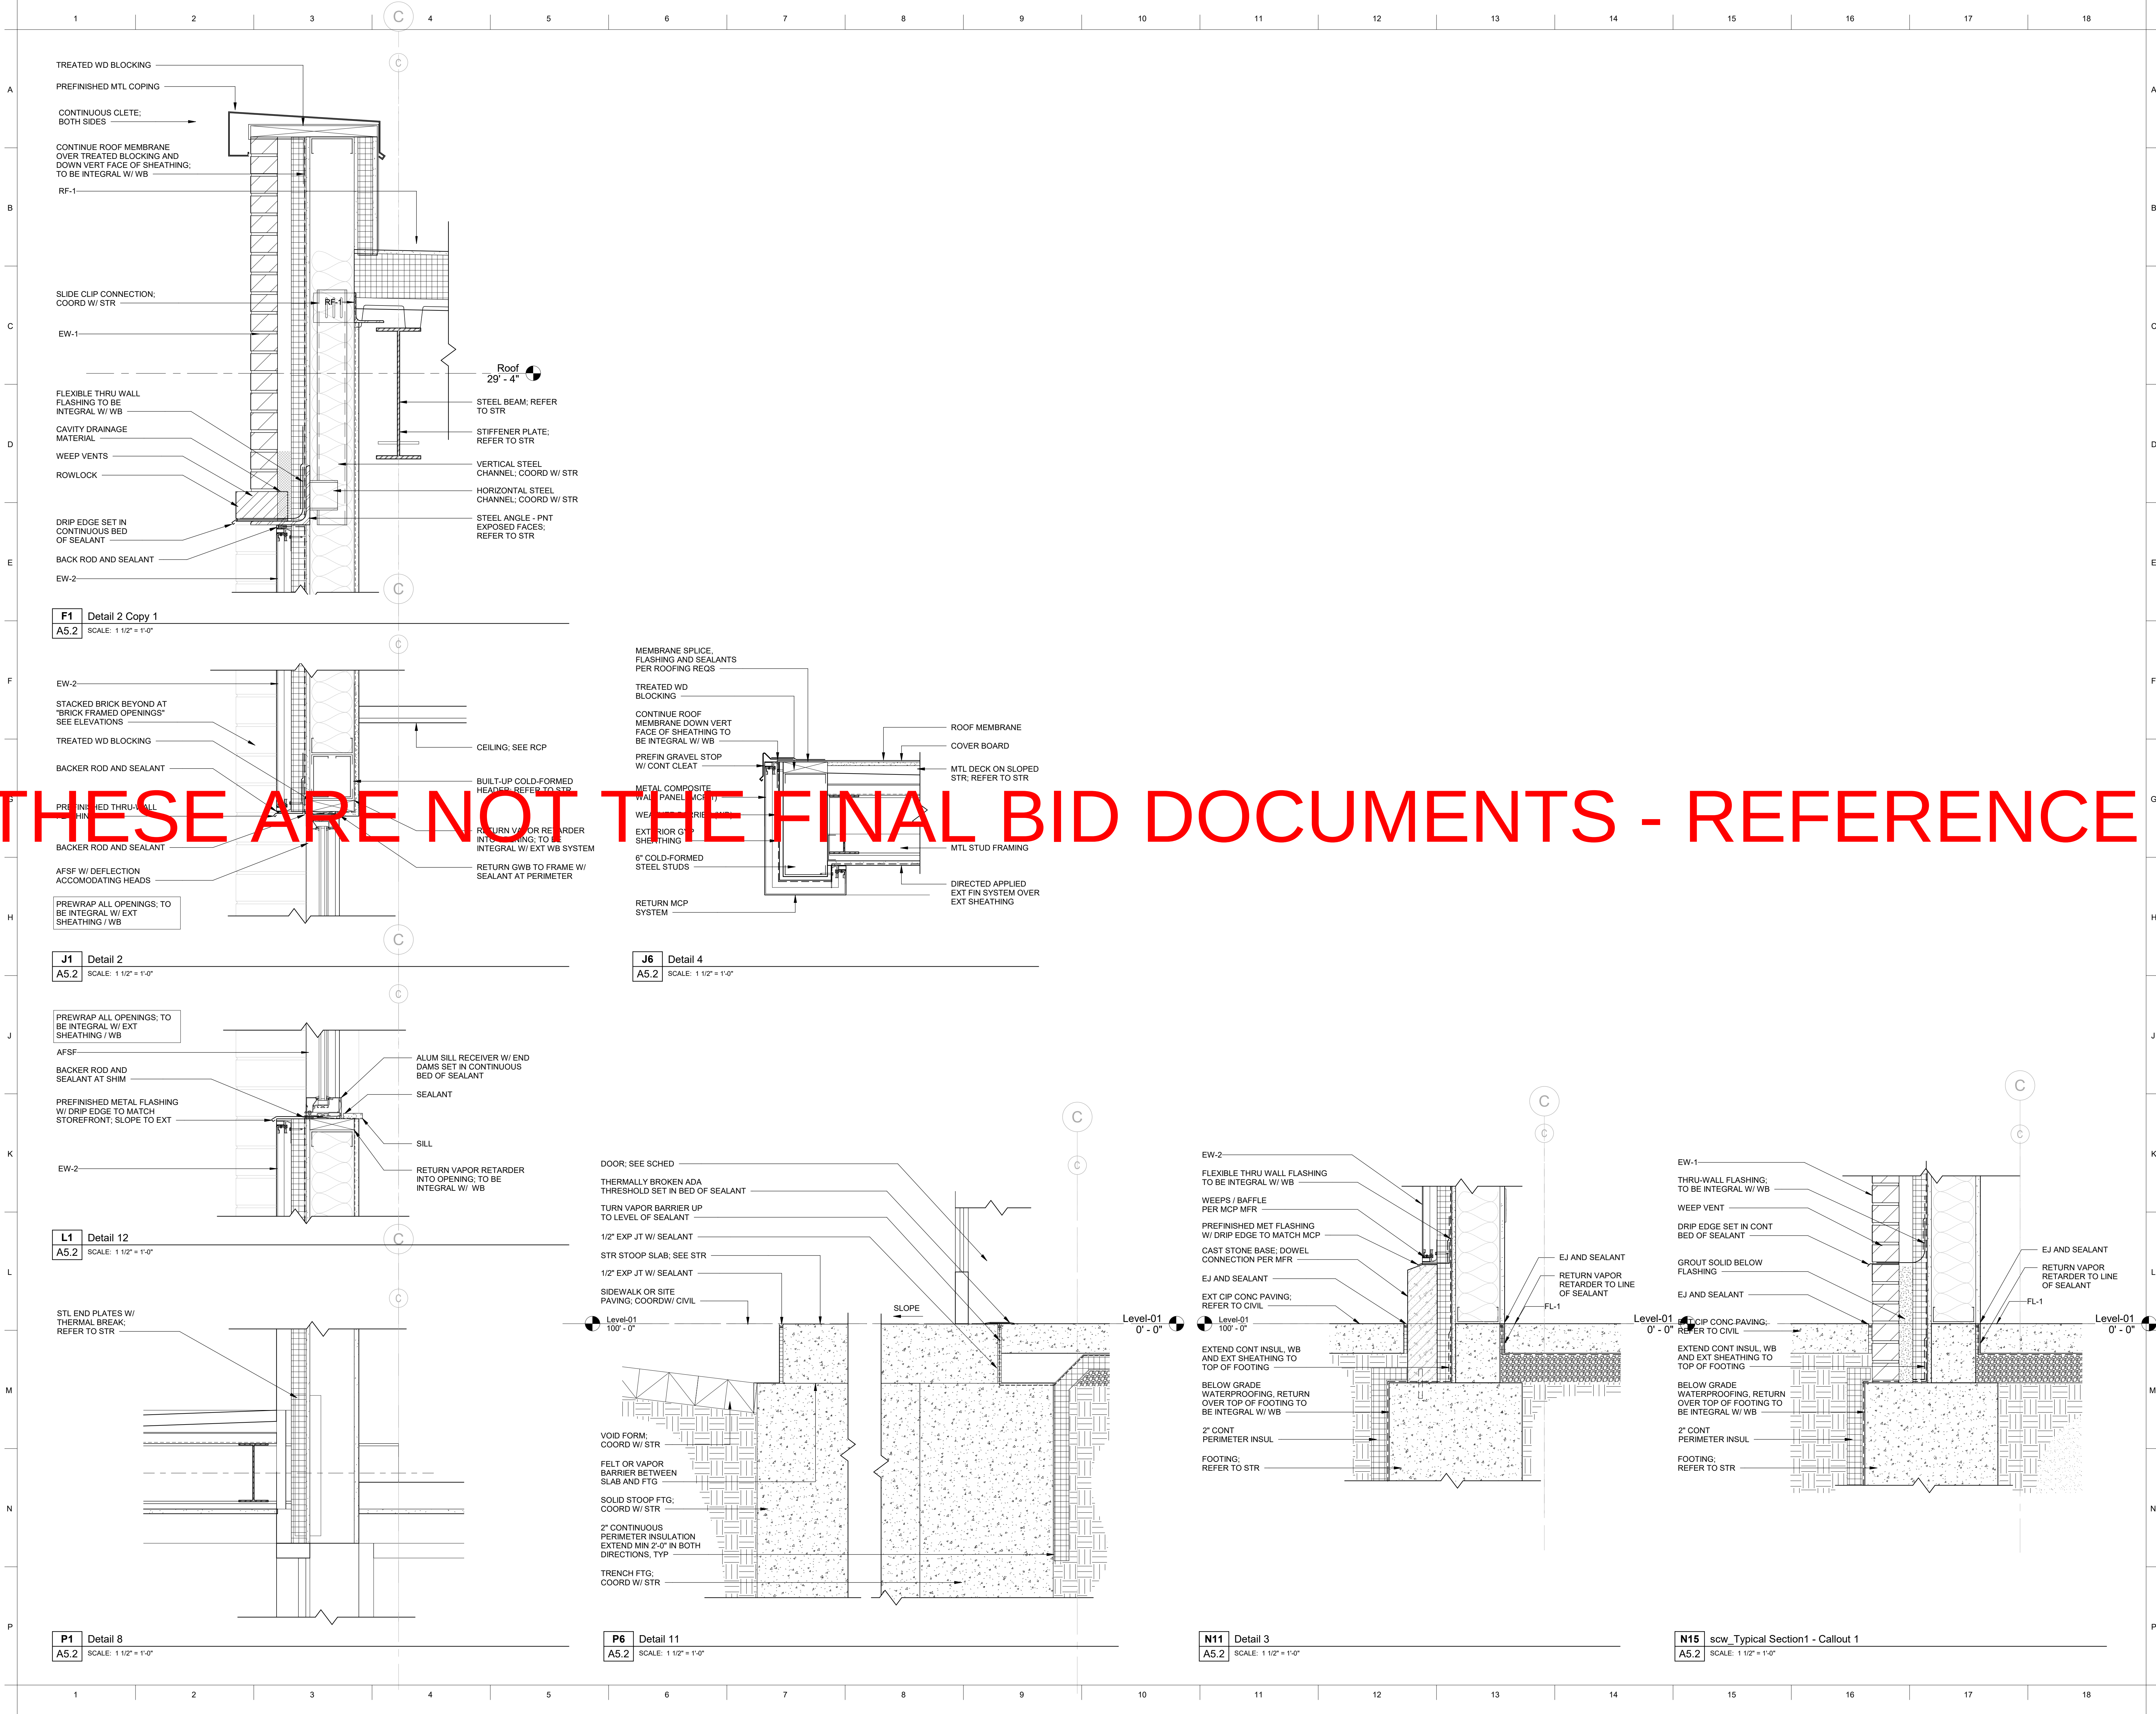

3/10/2023 1:09:22 PM

THESE ARE NOT THE FINAL BID DOCUMENTS - REFERENCE ONLY

SCHEDULE - DOOR AND FRAME - LEVEL 01														
NUMBER	TYPE	FRAME		TYPE	QTY	DOOR		MATERIAL	FINISH	FIRE RATING	HARDWARE SET #	DETAILS		COMMENTS
		MATERIAL	FINISH			WIDTH	HEIGHT					JAMB	SILL	
100		ALUM	ALUM	2	3'-3"	3'-0"	8'-0"	05 Aluminum (SF-1)	ALUM					
100.1		ALUM	ALUM	2	3'-0"	3'-0"	8'-0"	05 Aluminum (SF-1)	ALUM					
104		WD		SGL	3'-0"	7'-0"	7'-0"	WD						
105		HM		D1	SGL	3'-0"	8'-0"	WD						
106		HM		D1	SGL	3'-0"	8'-0"	WD						
108		HM		D1	SGL	3'-0"	7'-0"	WD						
109		HM		D1	SGL	3'-0"	7'-0"	WD						
110		HM		D1	SGL	3'-0"	7'-0"	WD						
111		HM		D1	Sgl	3'-0"	7'-0"	WD						
112		HM		D1	SGL	3'-0"	7'-0"	WD						
114		WD		D1	Sgl	3'-0"	7'-2 5/8"	WD						
115		WD		D1	Sgl	3'-0"	7'-2 5/8"	WD						
116		HM		D1	SGL	3'-0"	8'-0"	WD						
117		WD		D1	Sgl	3'-0"	7'-2 5/8"	WD						
118		WD		D1	Sgl	3'-0"	7'-2 5/8"	WD						
119		HM		D1	SGL	3'-0"	8'-0"	WD						
120		HM		D1	SGL	3'-0"	8'-0"	WD						
121		WD		SGL	4'-0"	7'-0"	7'-0"	WD						
122		HM		D1	Sgl	3'-0"	7'-0"	WD						
123		HM		D1	SGL	3'-0"	8'-0"	WD						
124		HM		D1	SGL	3'-0"	8'-0"	WD						
126		HM		D1	SGL	3'-0"	8'-0"	WD						
127		HM		D1	Sgl	3'-0"	7'-0"	WD						
127.1		HM		D1	SGL	3'-0"	8'-0"	WD						
128		HM		D1	SGL	3'-0"	8'-0"	WD						
129	--	STL	PRE	--	SGL	8'-0"	8'-0"	ALUM	PRE	--				
130		HM		D1	SGL	3'-0"	8'-0"	WD						
131		HM		D1	SGL	3'-0"	8'-0"	WD						
132		HM		D1	SGL	3'-0"	8'-0"	WD						
132.1	F3	05 Aluminum	ALUM	1	3'-0"	3'-0"	8'-0"	05 Aluminum (SF-1)	ALUM					
132.2	F3	05 Aluminum	ALUM	1	3'-0"	3'-0"	8'-0"	05 Aluminum (SF-1)	ALUM					
133		HM		D1	SGL	3'-0"	8'-0"	WD						
134		HM		D1	SGL	3'-0"	8'-0"	WD						
135		HM		D1	SGL	3'-0"	8'-0"	WD						
136		HM		D1	SGL	3'-0"	8'-0"	WD						
ST-A1		HM		D1	SGL	3'-0"	8'-0"	WD		60 MIN				
ST-A1.1	F4	05 Aluminum	ALUM	1	3'-0"	3'-0"	8'-0"	05 Aluminum (SF-1)	ALUM					
ST-B1		HM		D1	SGL	3'-0"	7'-0"	WD		60 MIN				
ST-B1.1	F4	05 Aluminum	ALUM	1	3'-0"	3'-0"	8'-0"	05 Aluminum (SF-1)	ALUM					

SCHEDULE - DOOR AND FRAME - LEVEL 02														
NUMBER	TYPE	FRAME		TYPE	QTY	DOOR		MATERIAL	FINISH	FIRE RATING	HARDWARE SET #	DETAILS		COMMENTS
		MATERIAL	FINISH			WIDTH	HEIGHT					JAMB	SILL	
137		05 Aluminum	ALUM	1	1	2'-10"	7'-10"	05 Aluminum (SF-1)	ALUM					
201														
202		HM		D1	SGL	3'-0"	8'-0"	WD						
203		HM		D1	SGL	3'-0"	8'-0"	WD						
204		HM		D1	SGL	3'-0"	8'-0"	WD						
205		HM		D1	SGL	3'-0"	8'-0"	WD						
206		HM		D1	SGL	3'-0"	8'-0"	WD						
207		HM		D1	SGL	3'-0"	8'-0"	WD						
212		HM		D1	SGL	3'-0"	8'-0"	WD						
213		WD		D1	Sgl	3'-4"	7'-2"	WD						
215		HM		D1	SGL	3'-0"	8'-0"	WD						
216		HM		D1	SGL	3'-0"	8'-0"	WD						
217		HM		D1	SGL	3'-0"	7'-0"	WD						
218		HM		D1	SGL	3'-0"	7'-0"	WD						
219		HM		D1	SGL	3'-0"	8'-0"	WD						
220		HM		D1	SGL	3'-0"	8'-0"	WD						
221		HM		D1	SGL	3'-0"	8'-0"	WD						
221A		HM		D1	SGL	3'-0"	8'-0"	WD						
221B		HM		D1	SGL	3'-0"	8'-0"	WD						
222.1		HM		D1	PR	3'-0"	8'-0"	HM						
223		HM		D1	SGL	3'-0"	8'-0"	WD						
224		HM		D1	SGL	3'-0"	8'-0"	WD						
ST-A2		HM		D1	SGL	3'-0"	8'-0"	WD		60 MIN				
ST-B2		HM		D1	SGL	3'-0"	7'-0"	WD		60 MIN				

GLAZING LEGEND

- FG-1 CLEAR FLOAT GLASS
IG-1 EXTERIOR INSULATED GLAZING (SOLARBAN 70XL)
① TEMPERED

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE

REVISION DATE
Project Number: 21064
Date: March 10, 2023
COPYRIGHT © 2022


DOOR AND FRAME
ELEVATIONS

A6.1

NOT FOR CONSTRUCTION

REFLECTED CEILING PLAN KEYED NOTES	
01	CONTINUOUS LED LIGHT AT PERIMETER; REFER TO ELEC

REFLECTED CEILING PLAN GENERAL NOTES

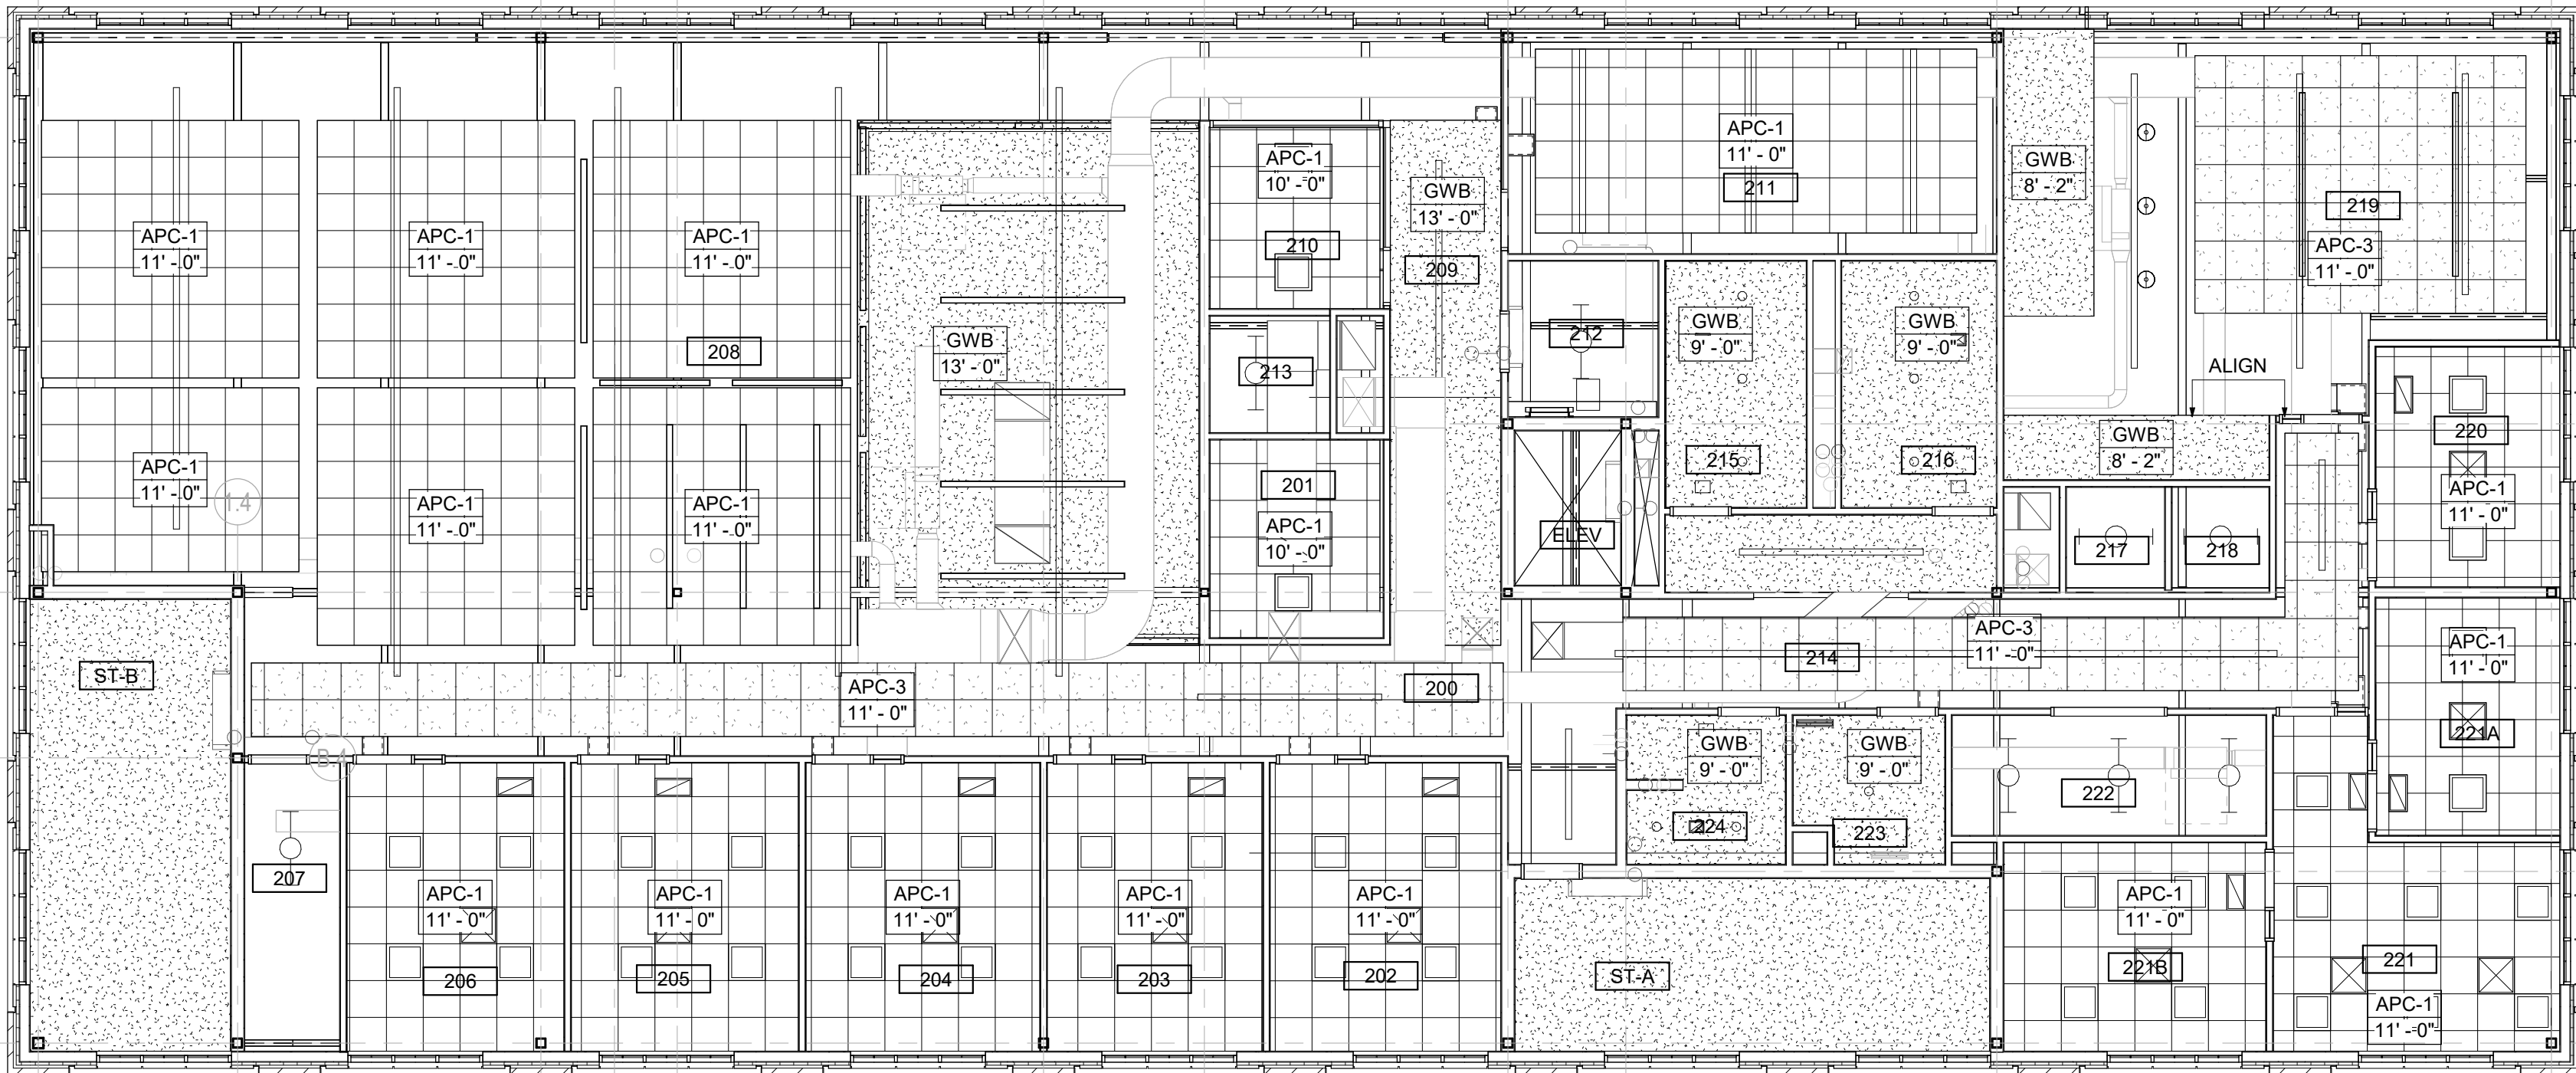

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE

REVISION	DATE
Project Number:	21064
Date:	March 10, 2023
COPYRIGHT © 2022	


REFLECTED CEILING PLAN -
FIRST LEVEL

A7.1

NOT FOR CONSTRUCTION

G2 REFLECTED CEILING PLAN LEVEL 02
SCALE: 1/8" = 1'-0"

P2 REFLECTED CEILING PLAN - LEVEL 01
A7.1 SCALE: 1/8" = 1'-0"



ENLARGED PLANS AND ELEVATIONS GENERAL NOTES

1. GENERAL NOTES APPLY TO ALL ENLARGED PLANS IN A8 SERIES, UON.
2. ALL EQUIPMENT, PLUMBING, AND FURNITURE SHOWN HALFTONE AND DASH ARE NOT IN CONTRACT.
3. SEE G SHEET SERIES FOR GENERAL BUILDING NOTES. SEE OVERALL FLOOR PLANS FOR ALL OTHER APPLICABLE NOTES.
4. SEE CP SHEET SERIES FOR REQ'D CODE CLEARANCES.
5. SEE A9 SHEET SERIES FOR ALL APPLICABLE SCHEDULES (TOILET ACCESSORY, APPLIANCE, FINISH, ETC).
6. TYPICAL @ ALL TOILETS
 - A. SLOPE FLOOR - 1/2" TO FLOOR DRAIN (FD)
 - B. "AP" DESIGNATES 24" x 24" ACCESS PANEL. BOTTOM AT 40" AFF

ENLARGED PLAN KEYED NOTES

AGENCY APPROVAL


ALLEY POYNER
MACCHIETTO
ARCHITECTURE

NOT FOR CONSTRUCTION


REVISION DATE
Project Number: 21064
Date: March 10, 2023
COPYRIGHT © 2022

ENLARGED PLANS &
INTERIOR ELEVATIONS


A8.1

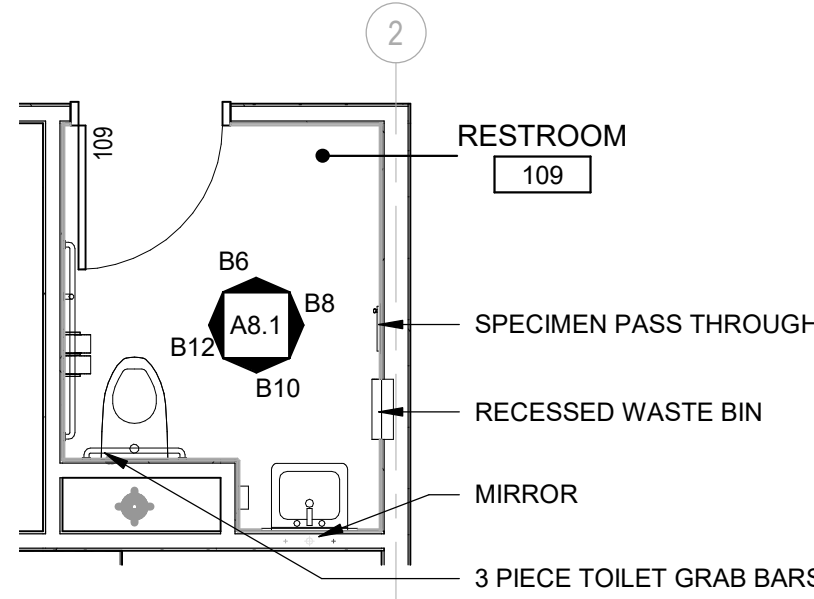


B2 ENLARGED PLAN - 109 RESTROOM
A8.1 SCALE: 1/4" = 1'-0"

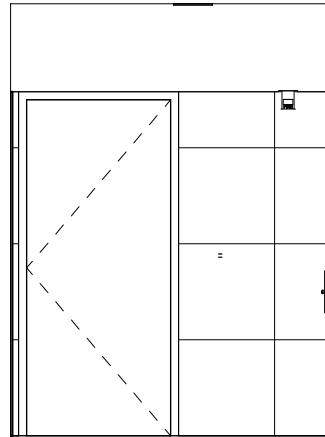


B6 ELEV - 109 RR NORTH
A8.1 SCALE: 1/4" = 1'-0"

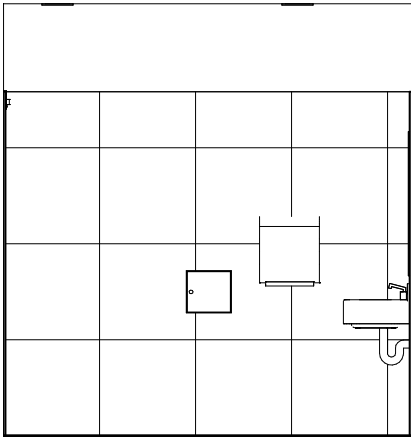


B8 ELEV - 109 RR EAST
A8.1 SCALE: 1/4" = 1'-0"

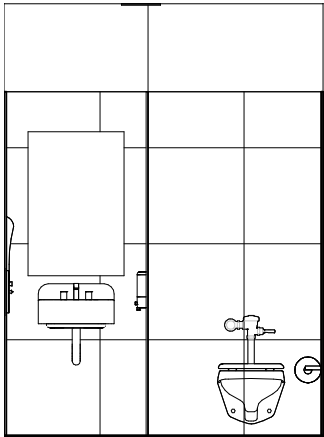


B10 ELEV - 109 RR SOUTH
A8.1 SCALE: 1/4" = 1'-0"

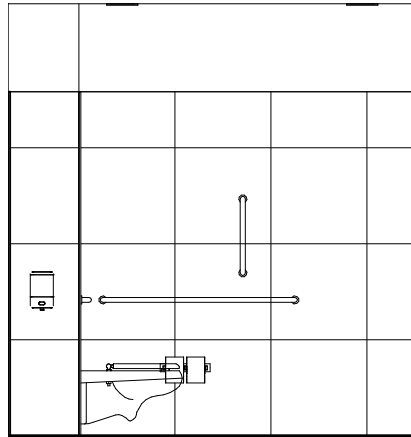


B12 ELEV - 109 RR WEST
A8.1 SCALE: 1/4" = 1'-0"

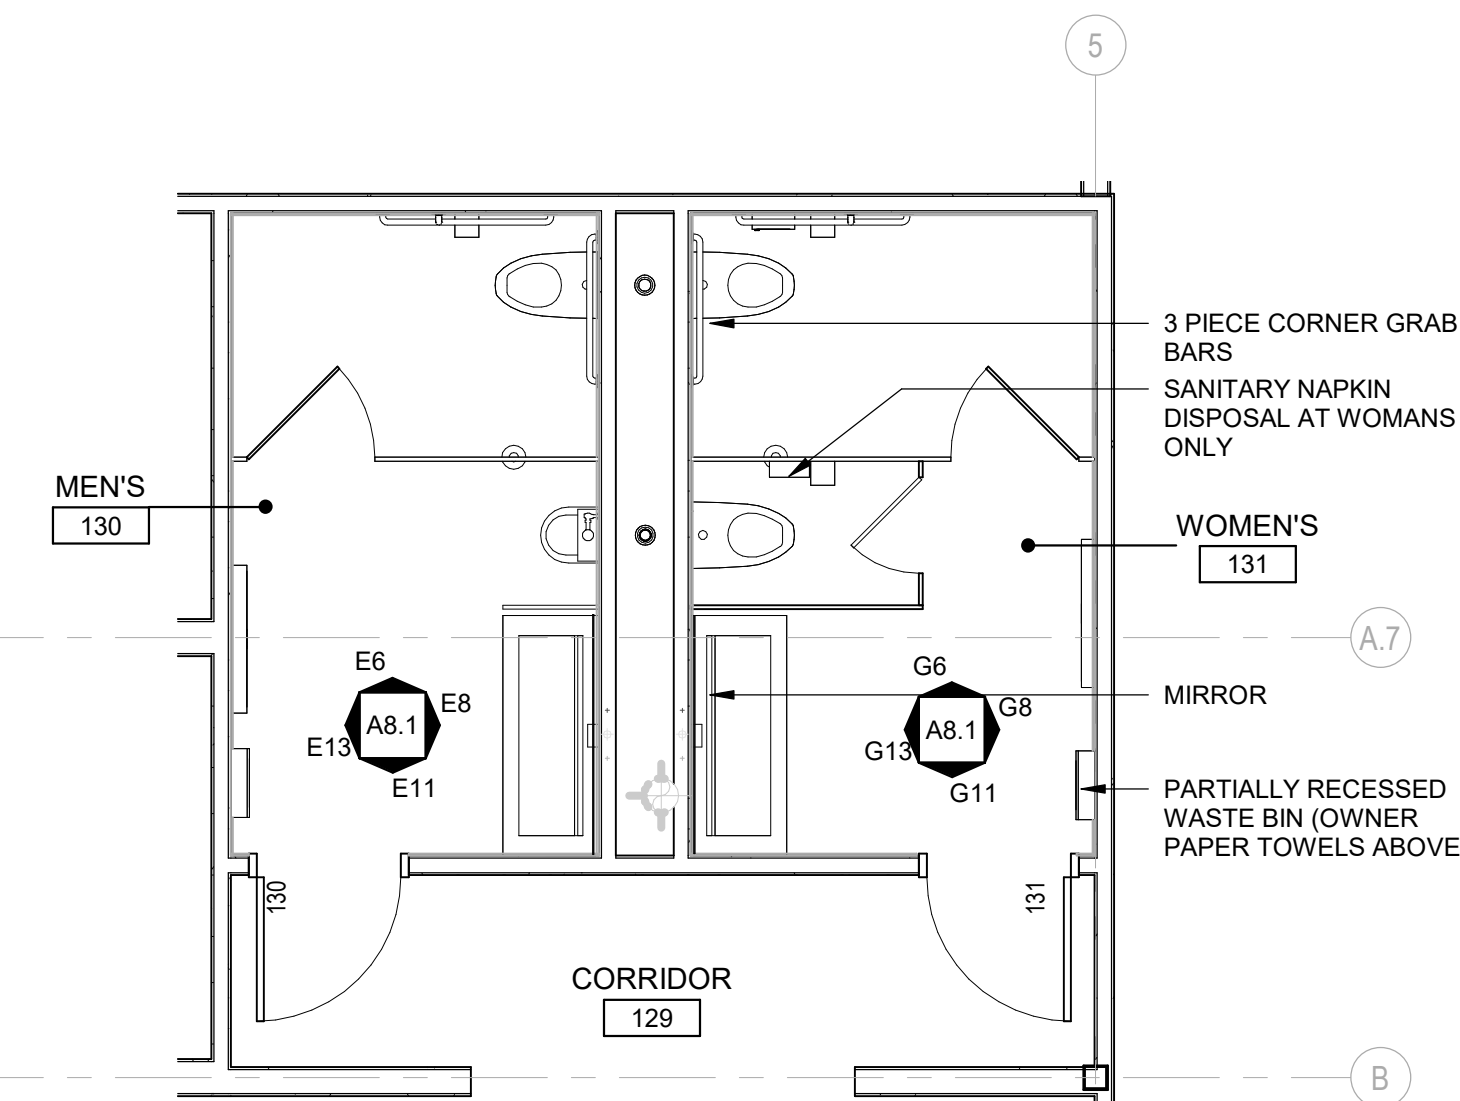


G2 ENLARGED PLAN - 130/131 RESTROOM (215/216 SIM)
A8.1 SCALE: 1/4" = 1'-0"

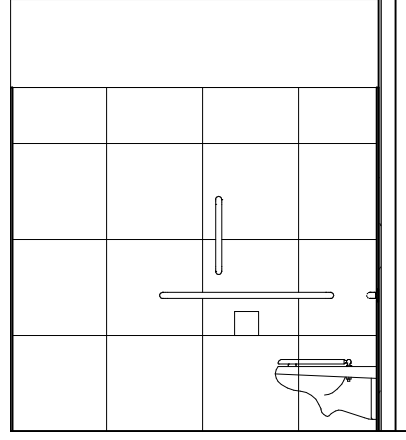


E6 ELEV - 130 MENS NORTH
A8.1 SCALE: 1/4" = 1'-0"

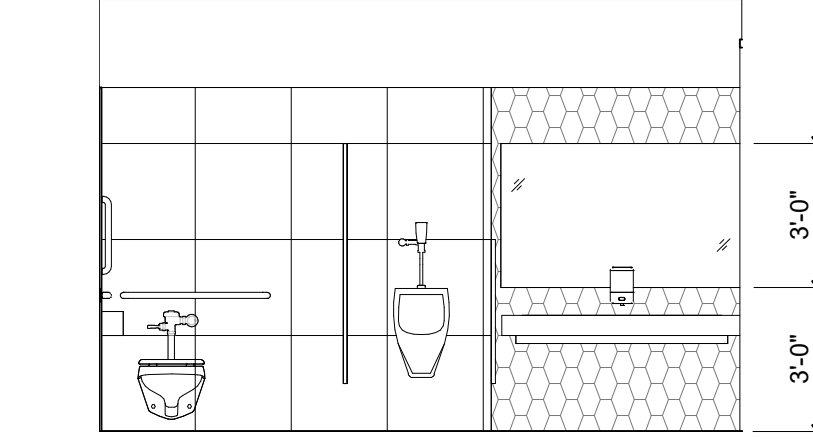

E8 ELEV - 130 MENS EAST
A8.1 SCALE: 1/4" = 1'-0"

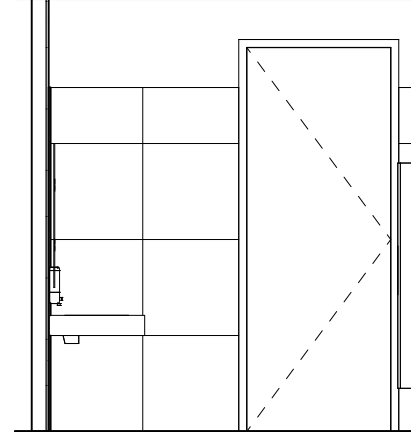

E11 ELEV - 130 MENS SOUTH
A8.1 SCALE: 1/4" = 1'-0"

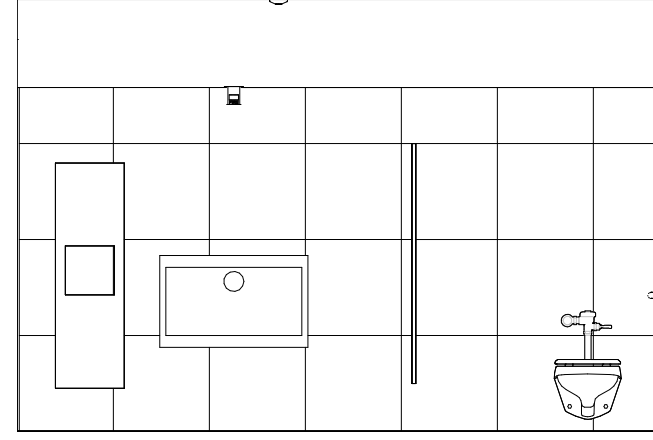

E13 ELEV - 130 MENS WEST
A8.1 SCALE: 1/4" = 1'-0"




G6 ELEV - 131 WOMENS NORTH
A8.1 SCALE: 1/4" = 1'-0"


G8 ELEV - 131 WOMENS EAST
A8.1 SCALE: 1/4" = 1'-0"

G11 ELEV - 131 WOMENS SOUTH
A8.1 SCALE: 1/4" = 1'-0"


G13 ELEV - 131 WOMENS WEST
A8.1 SCALE: 1/4" = 1'-0"

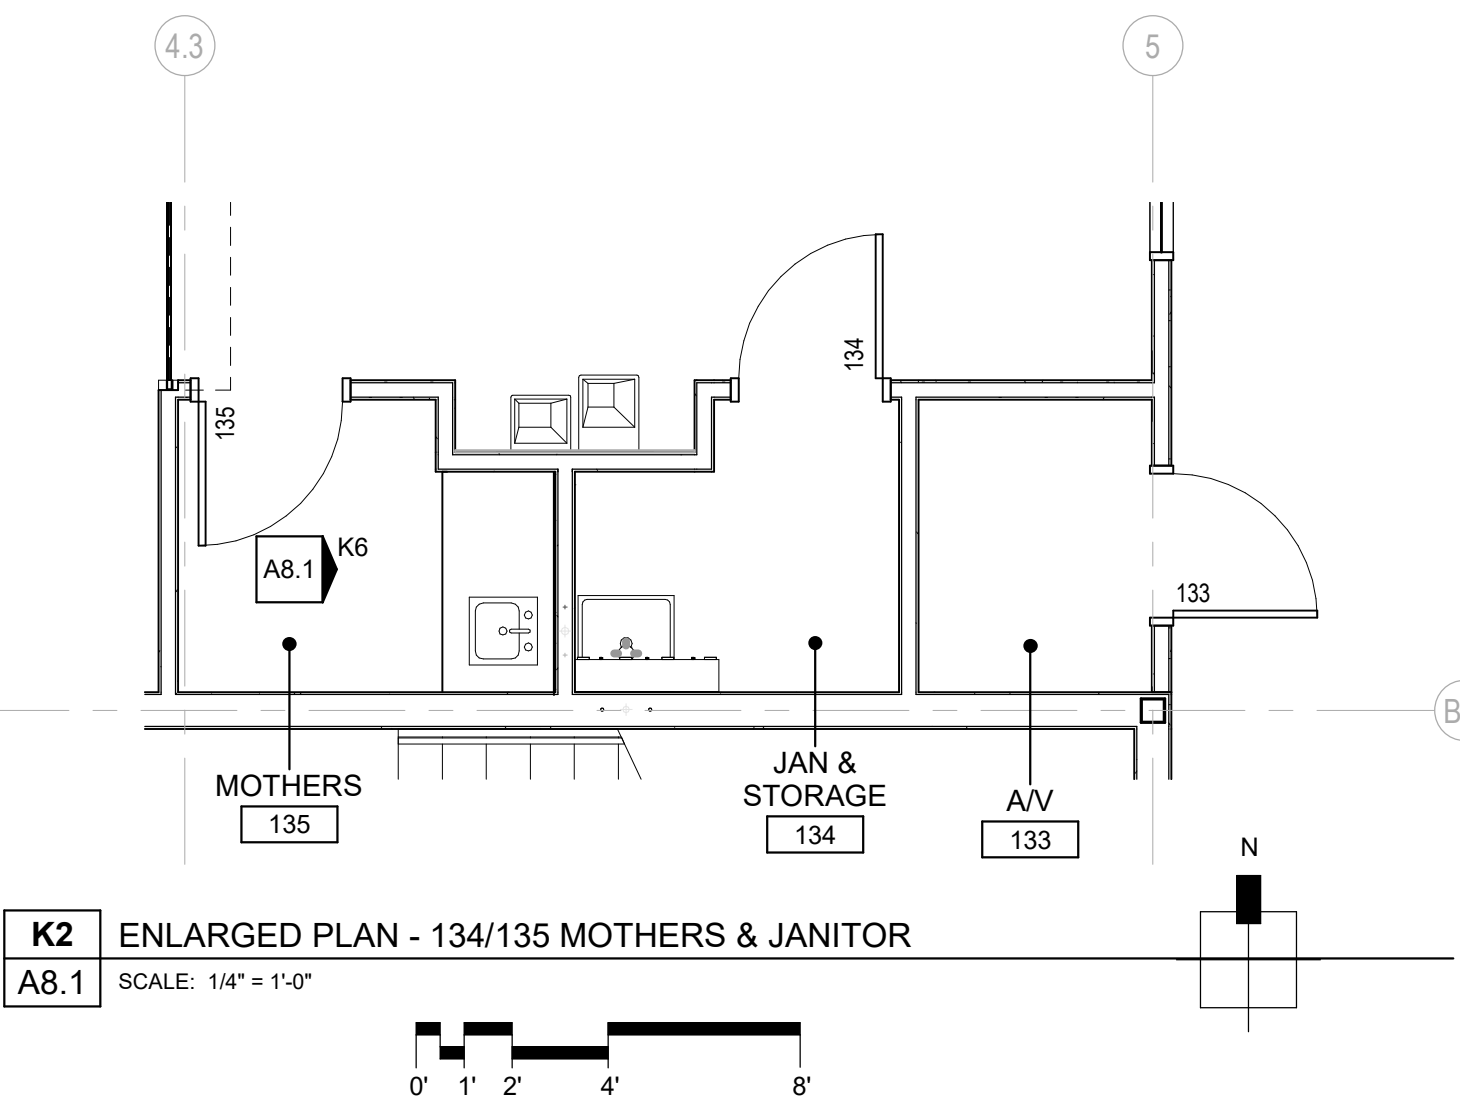


K2 ENLARGED PLAN - 134/135 MOTHERS & JANITOR
A8.1 SCALE: 1/4" = 1'-0"

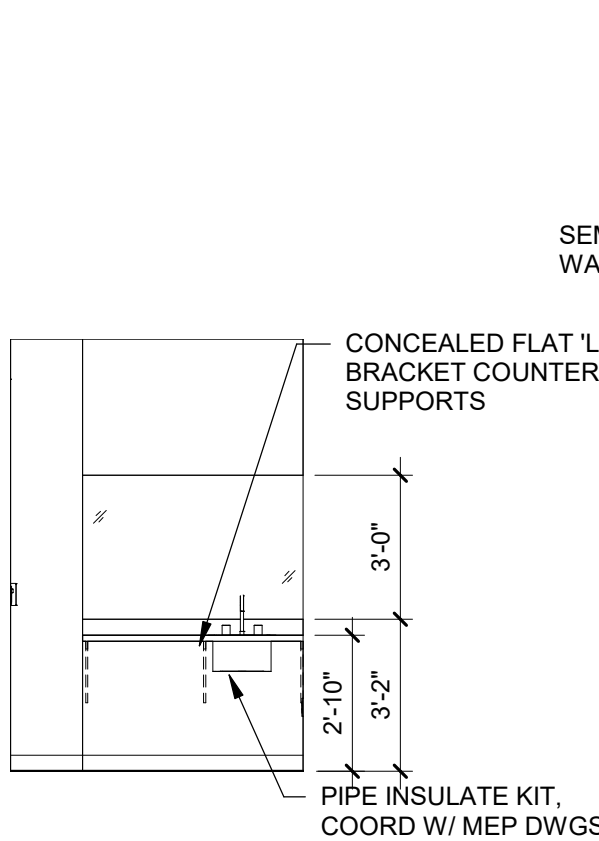


K6 ELEV - 135 MOTHERS EAST
A8.1 SCALE: 1/4" = 1'-0"

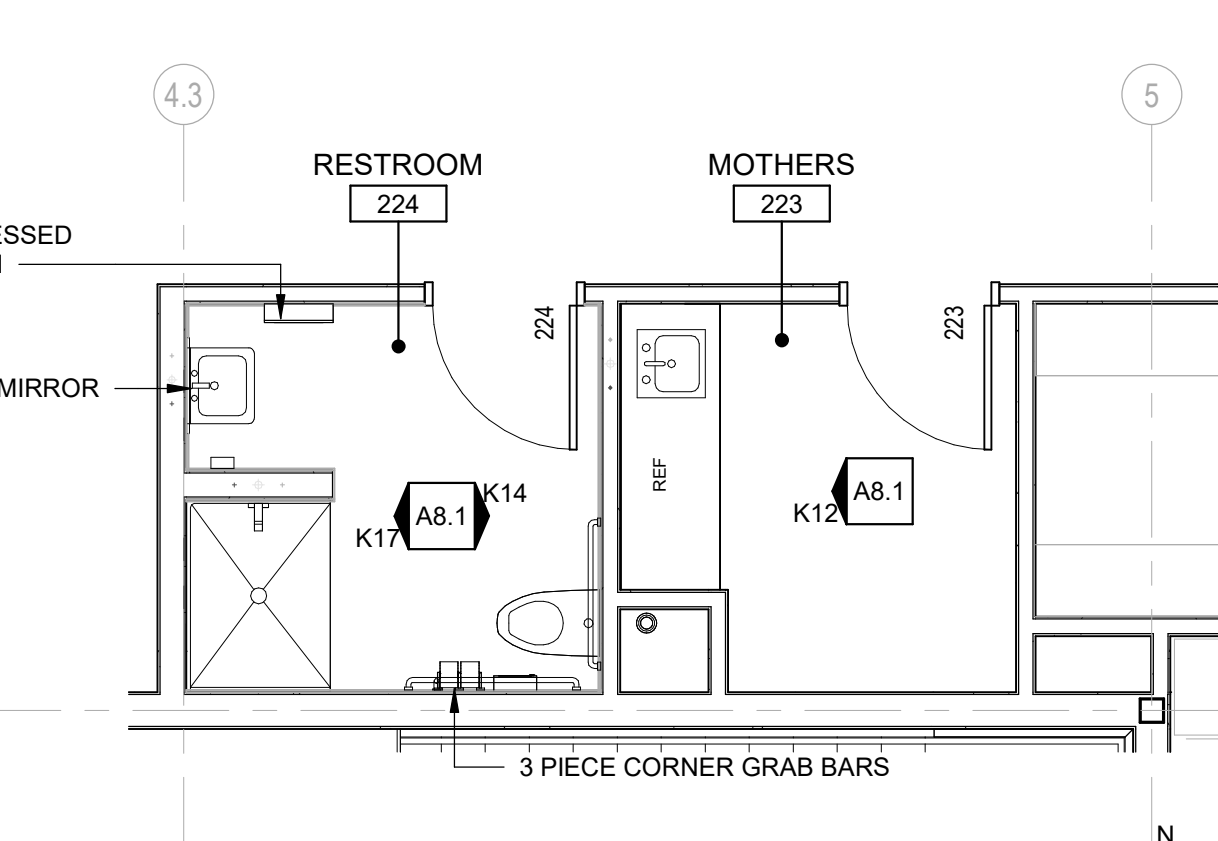


K8 ENLARGED PLAN - 223/224 MOTHERS & RESTROOM
A8.1 SCALE: 1/4" = 1'-0"

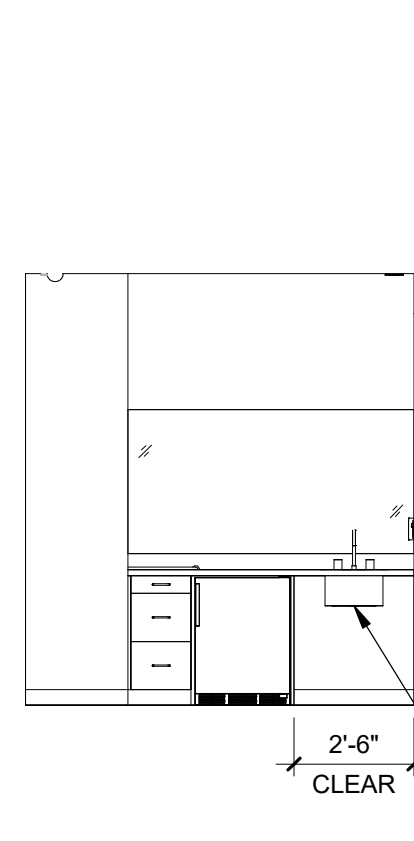


K12 ELEV - 223 MOTHERS WEST
A8.1 SCALE: 1/4" = 1'-0"

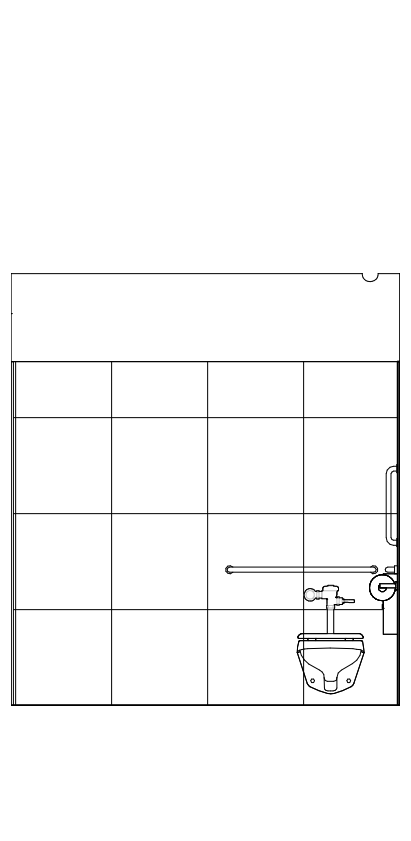


K14 ELEV - 224 RR EAST
A8.1 SCALE: 1/4" = 1'-0"

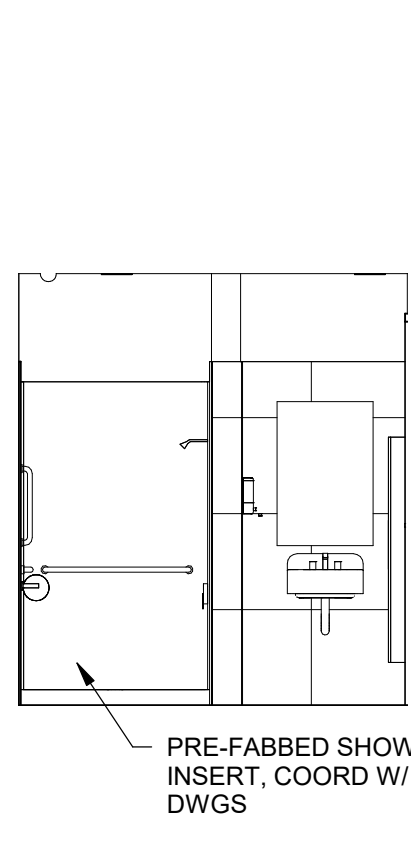


K17 ELEV - 224 RR WEST
A8.1 SCALE: 1/4" = 1'-0"

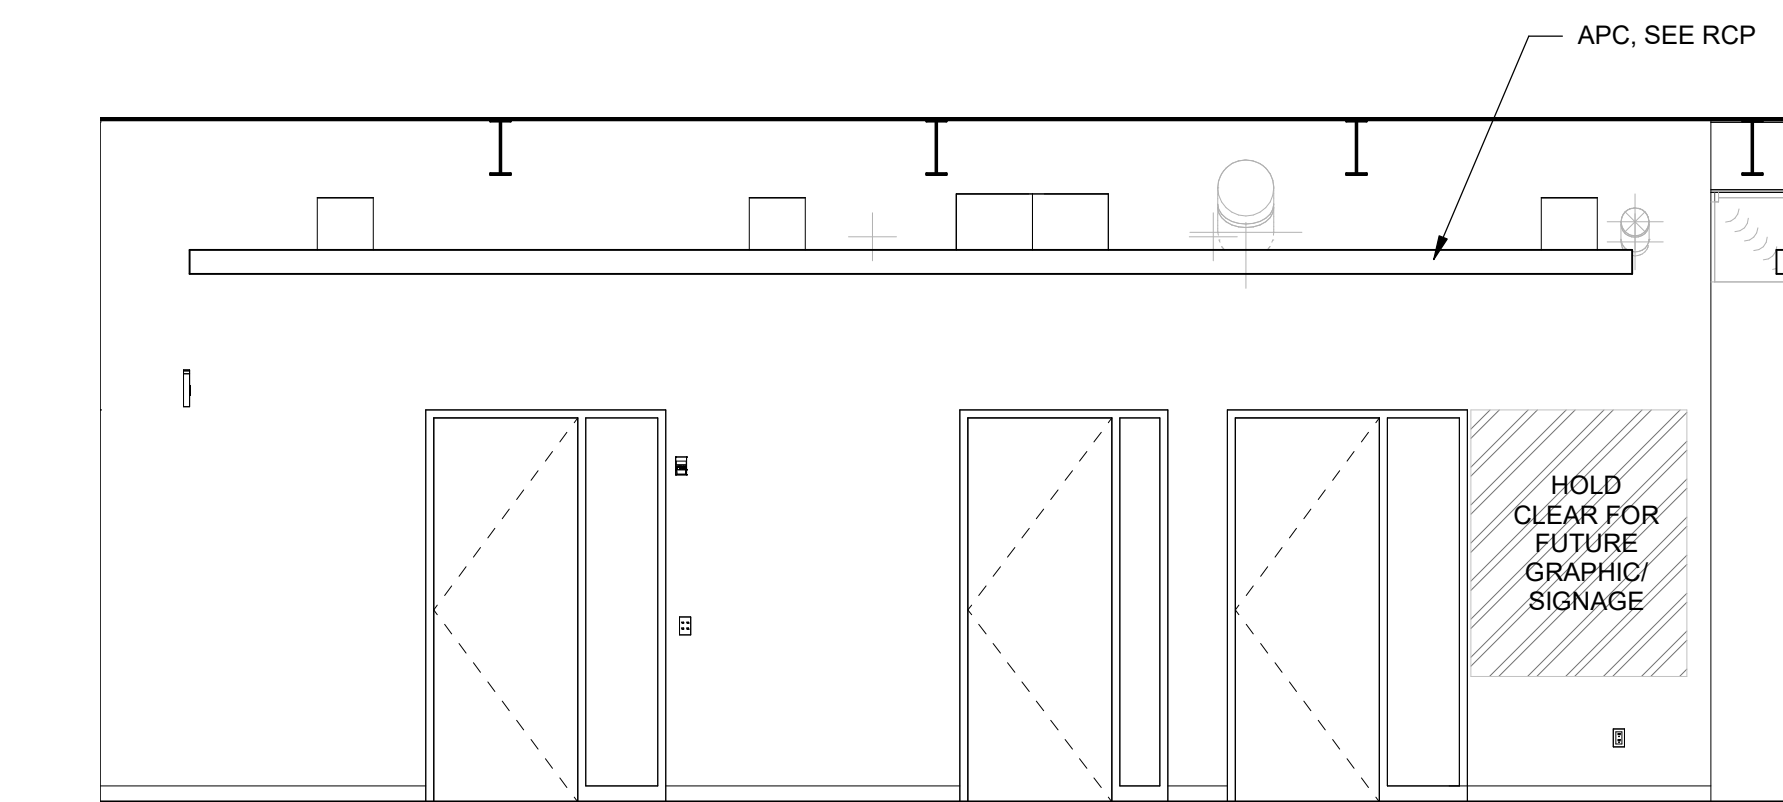

P2 ELEV - 102 CORRIDOR NORTH
A8.1 SCALE: 1/4" = 1'-0"

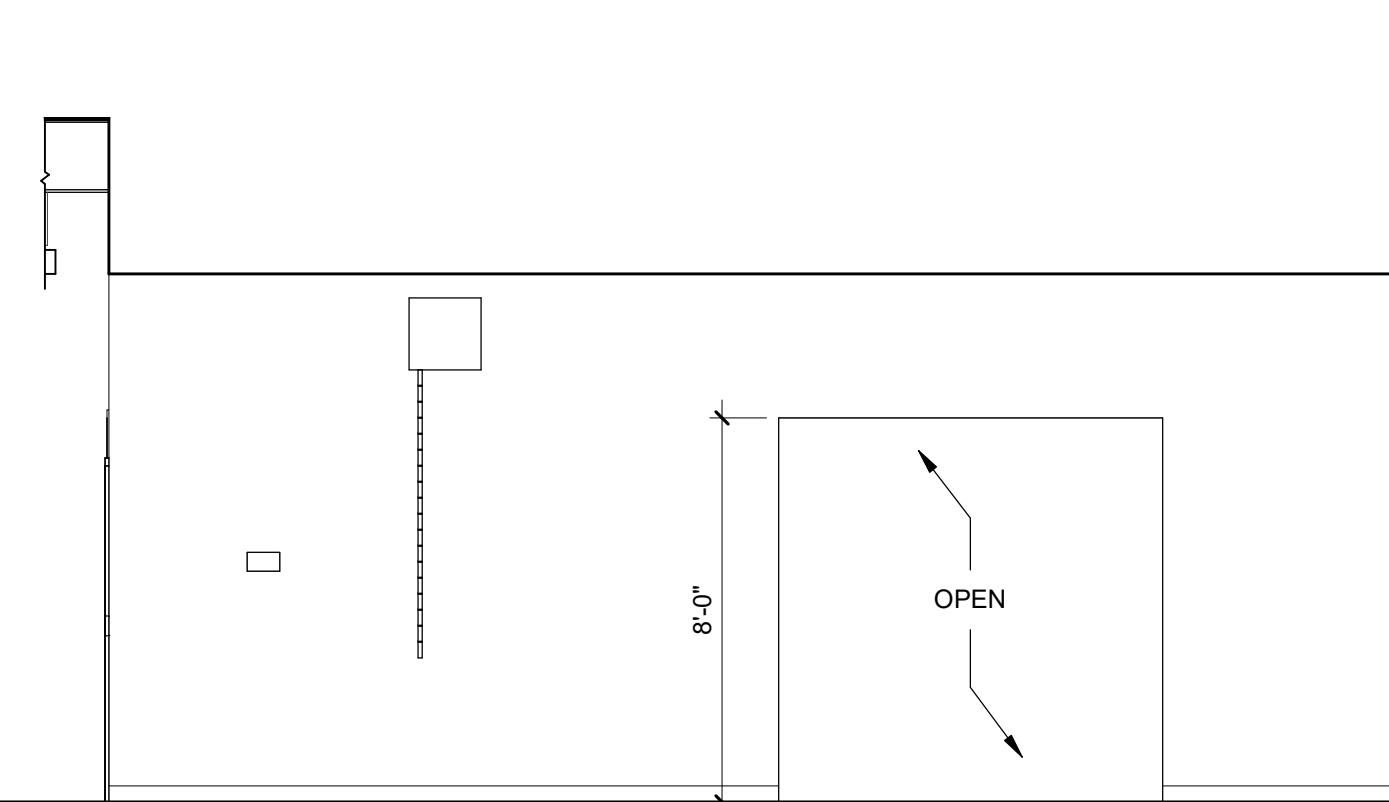


P8 ELEV - 129 CORRIDOR NORTH
A8.1 SCALE: 1/4" = 1'-0"

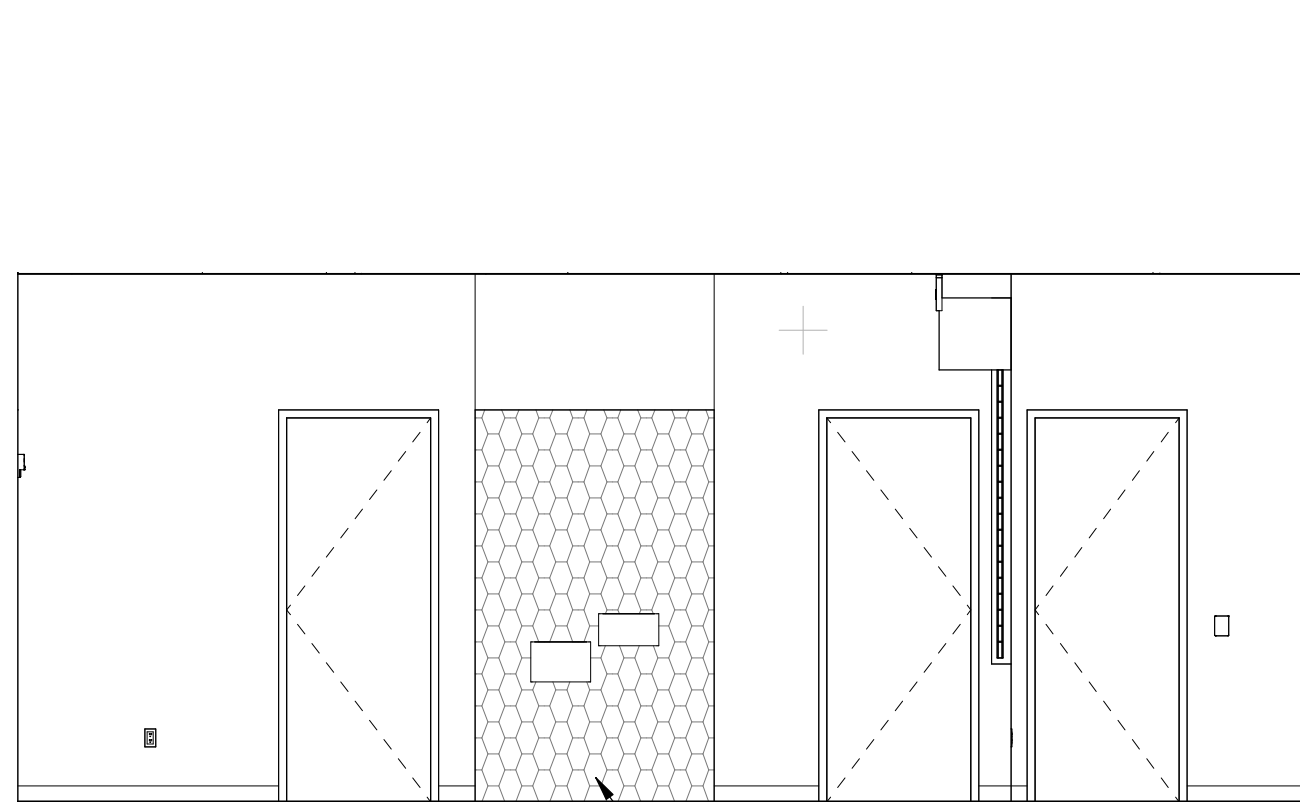


P12 ELEV - 129 CORRIDOR SOUTH
A8.1 SCALE: 1/4" = 1'-0"


SEE A8.1 FOR APPLICABLE GENERAL NOTES AND KEYED NOTES

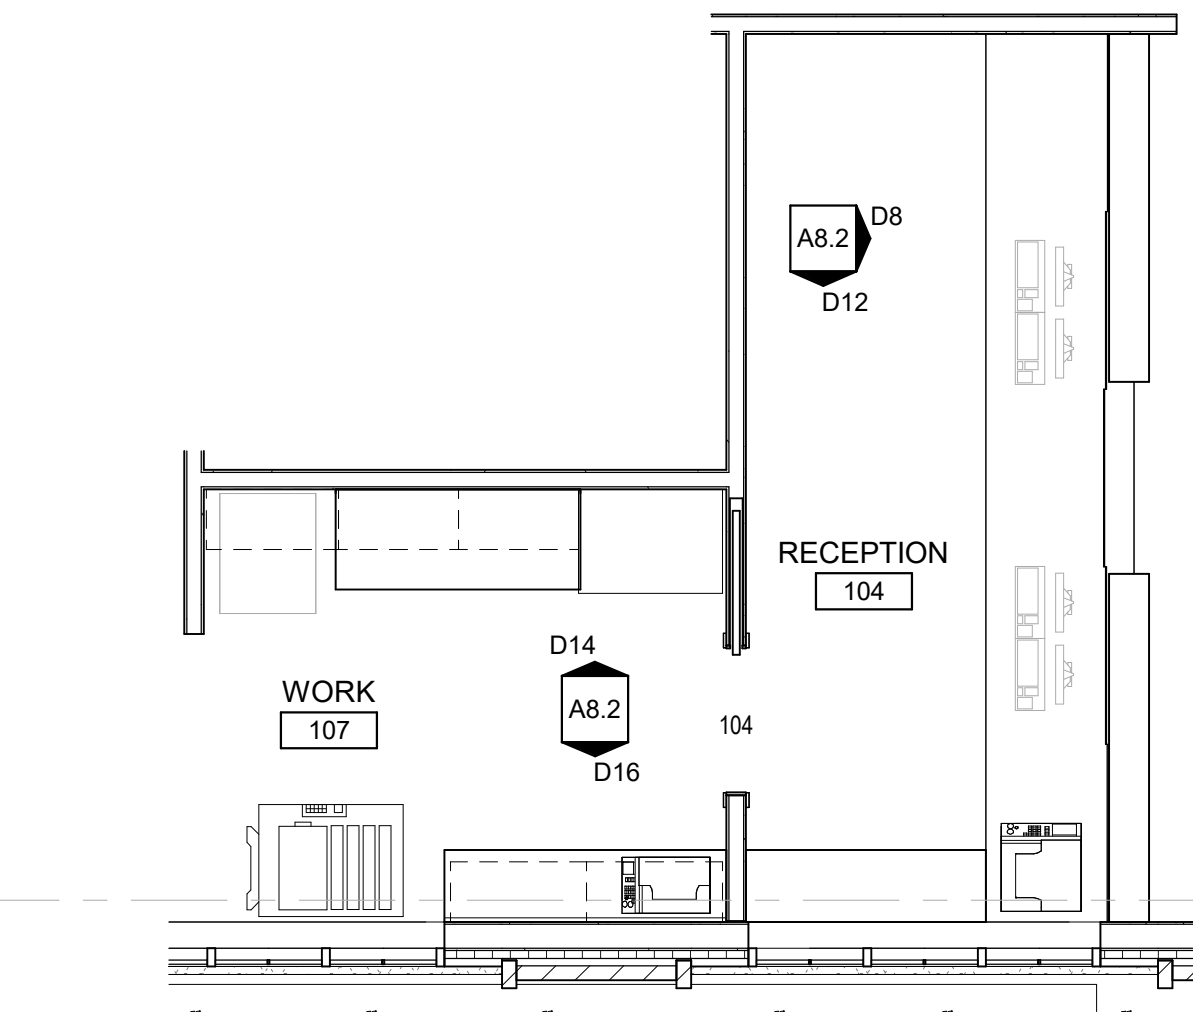


D1 ENLARGED PLAN - 104 RECEPTION
A8.2 SCALE: 1/4" = 1'-0"

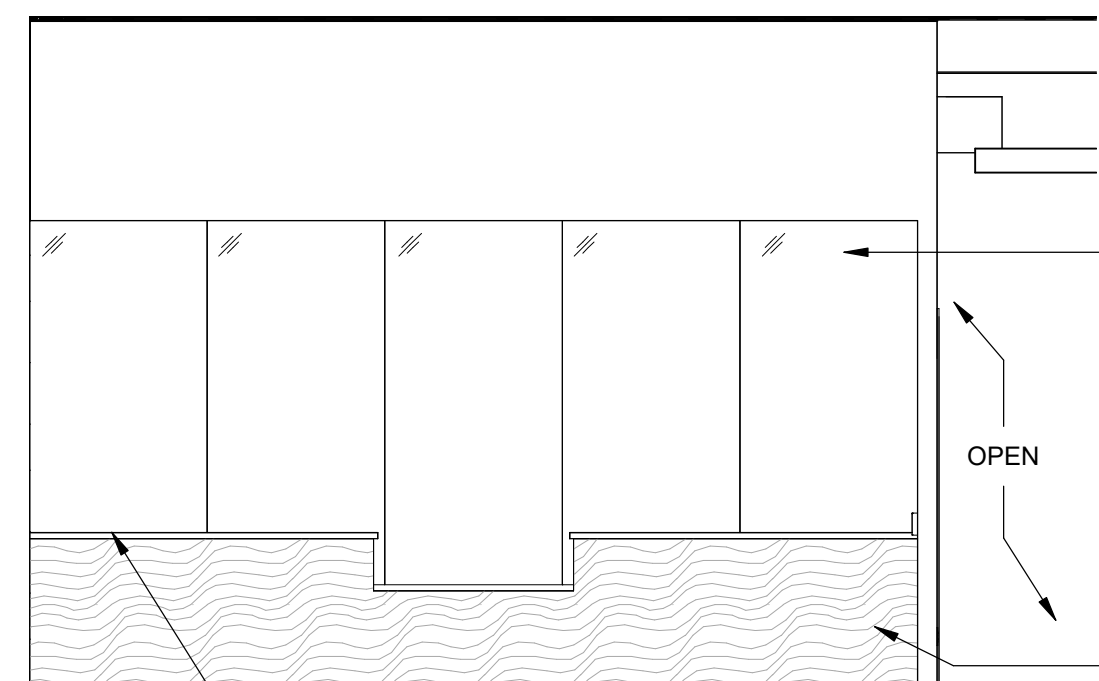


D5 ELEV - 104 RECEPTION FACE WEST
A8.2 SCALE: 1/4" = 1'-0"

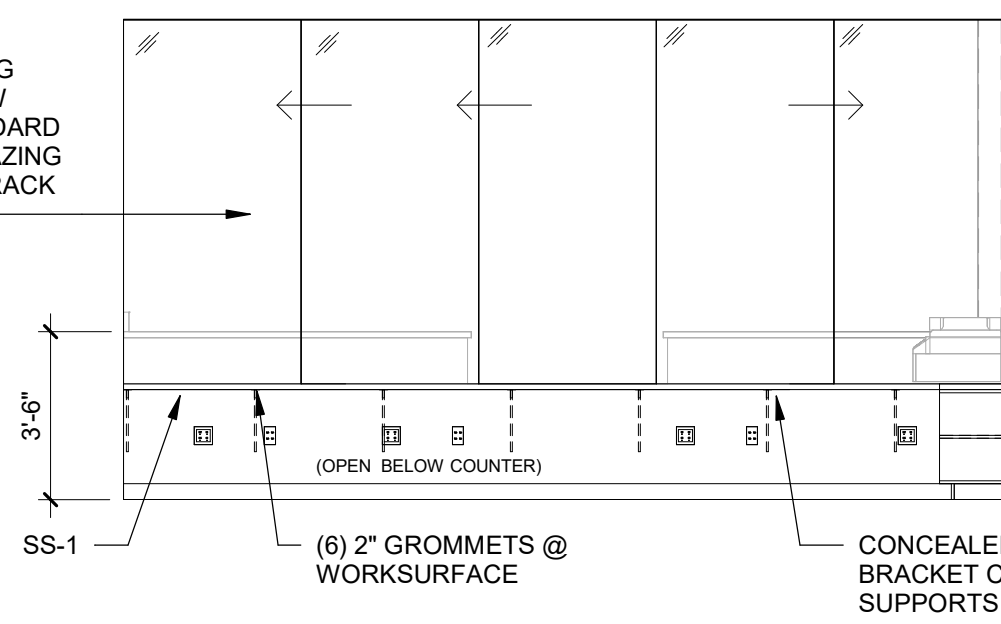


D8 ELEV - 104 RECEPTION EAST
A8.2 SCALE: 1/4" = 1'-0"

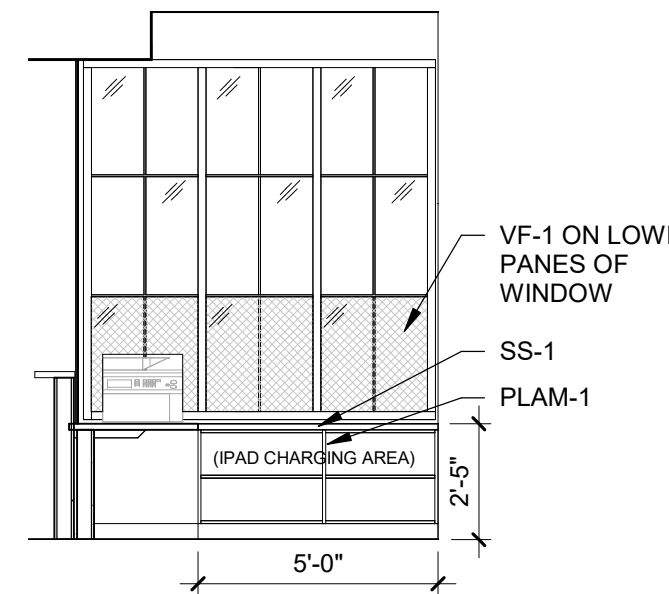


D12 ELEV - 104 RECEPTION SOUTH
A8.2 SCALE: 1/4" = 1'-0"

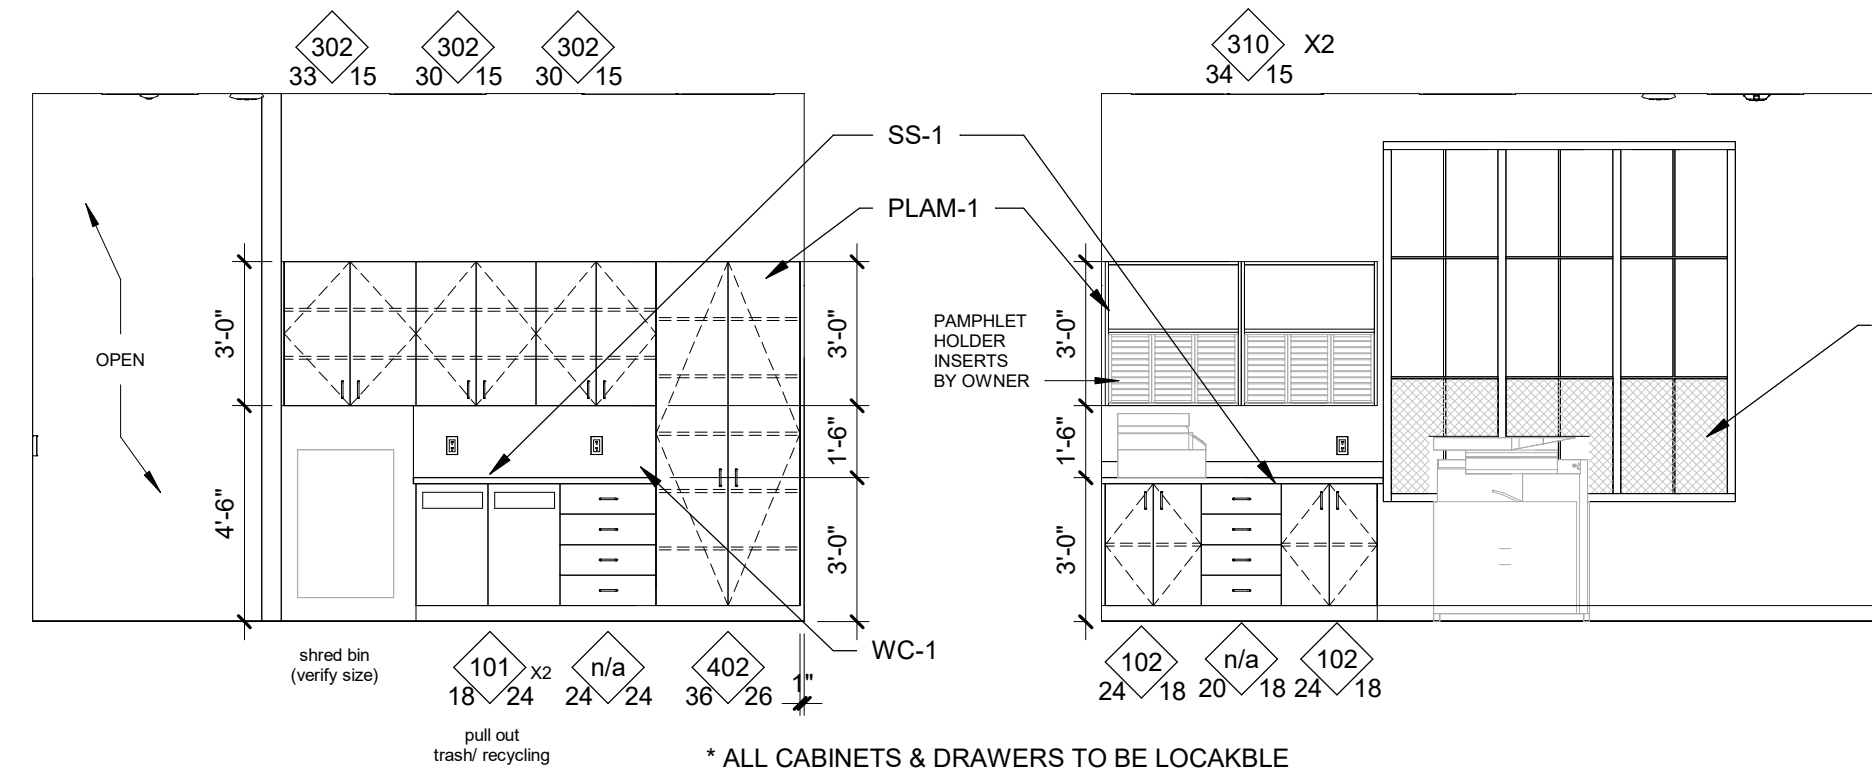


D14 ELEV - 107 WORK NORTH
A8.2 SCALE: 1/4" = 1'-0"

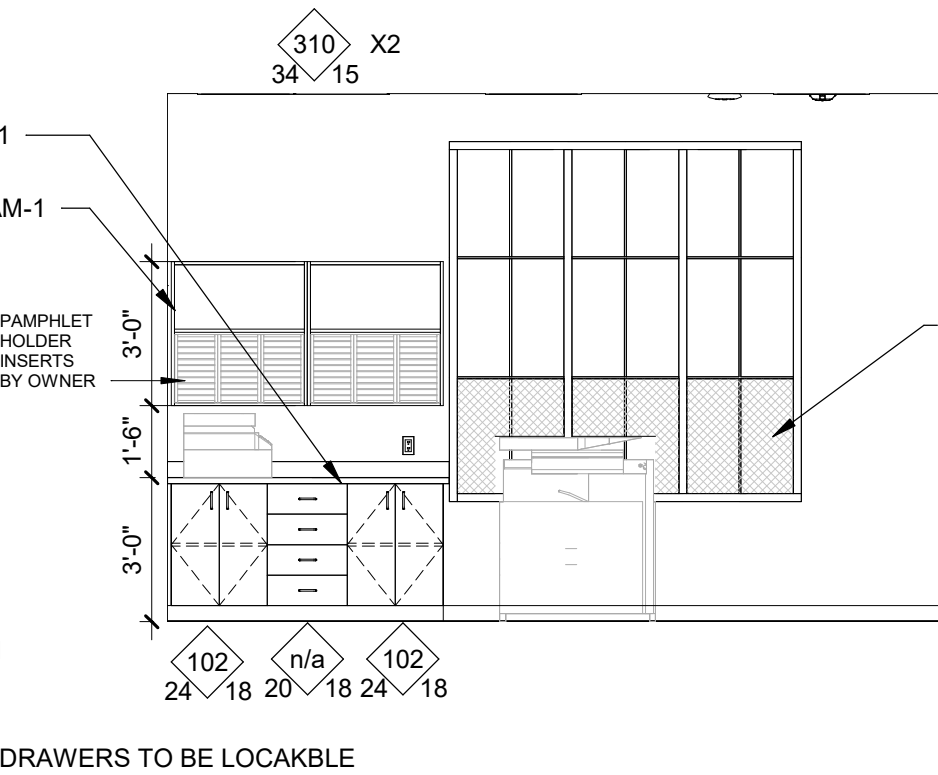


D16 ELEV - 107 WORK SOUTH
A8.2 SCALE: 1/4" = 1'-0"

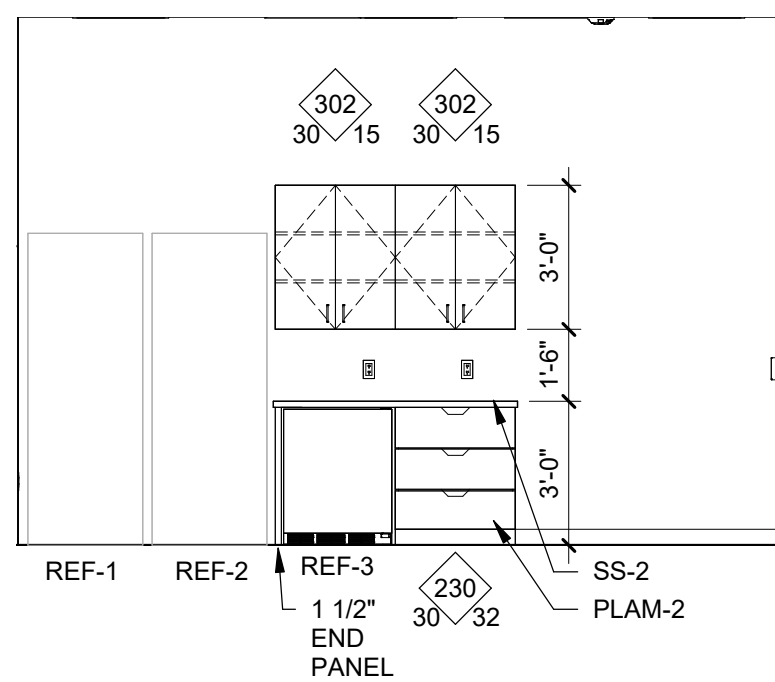


F5 ELEV - 108 LAB NORTH
A8.2 SCALE: 1/4" = 1'-0"

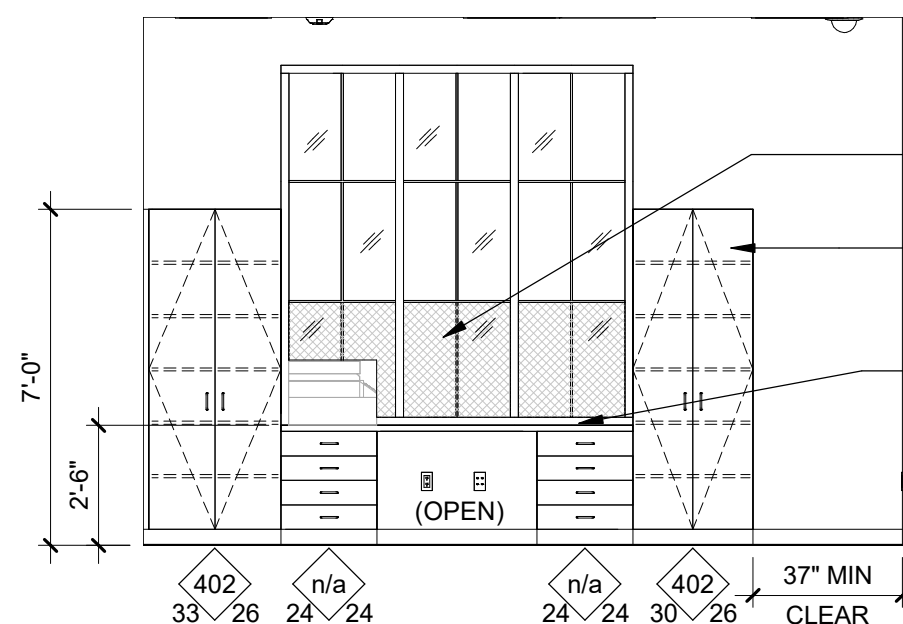


F8 ELEV - 108 LAB SOUTH
A8.2 SCALE: 1/4" = 1'-0"

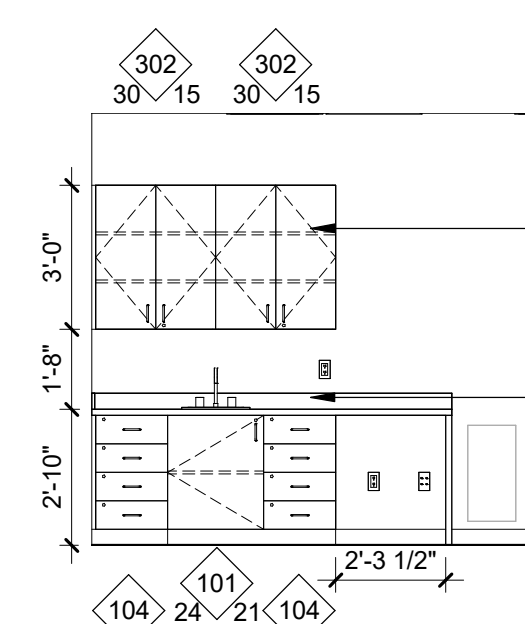


F12 ELEV - 114 CLINIC ROOM WEST
A8.2 SCALE: 1/4" = 1'-0"

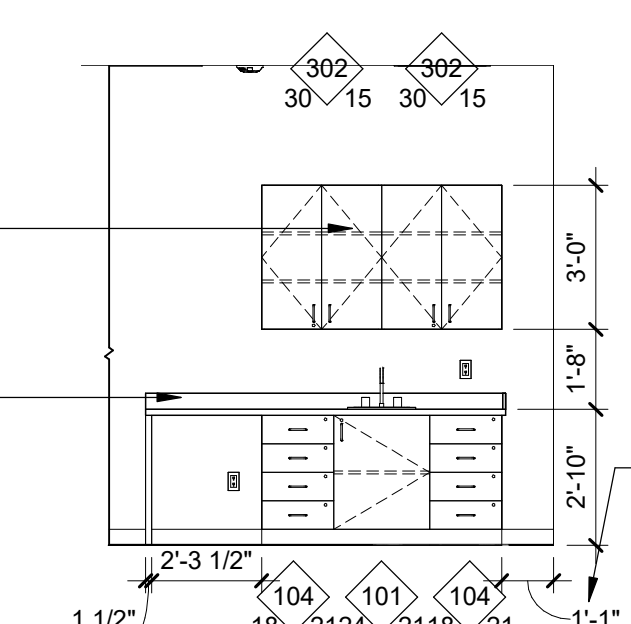


F14 ELEV - 115 CLINIC ROOM WEST
A8.2 SCALE: 1/4" = 1'-0"

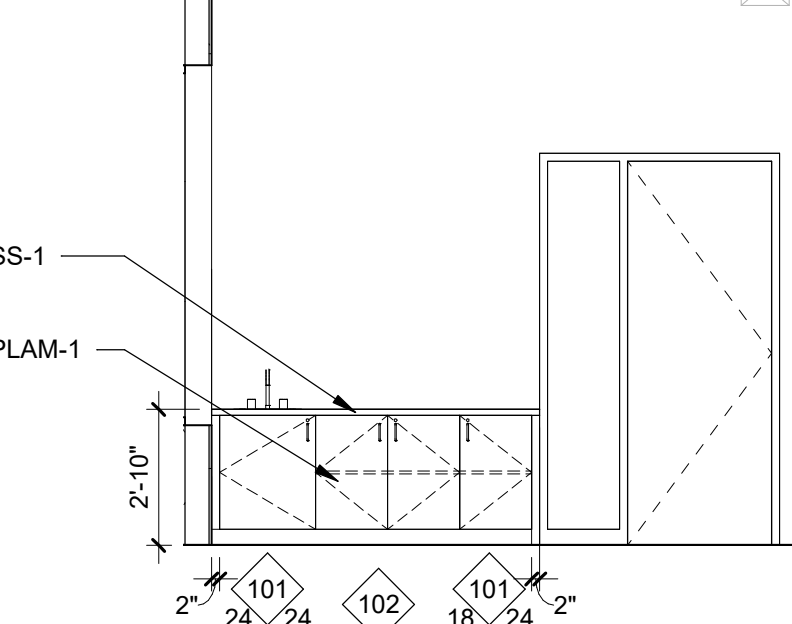


F16 ELEV - 127 CONFERENCE EAST
A8.2 SCALE: 1/4" = 1'-0"

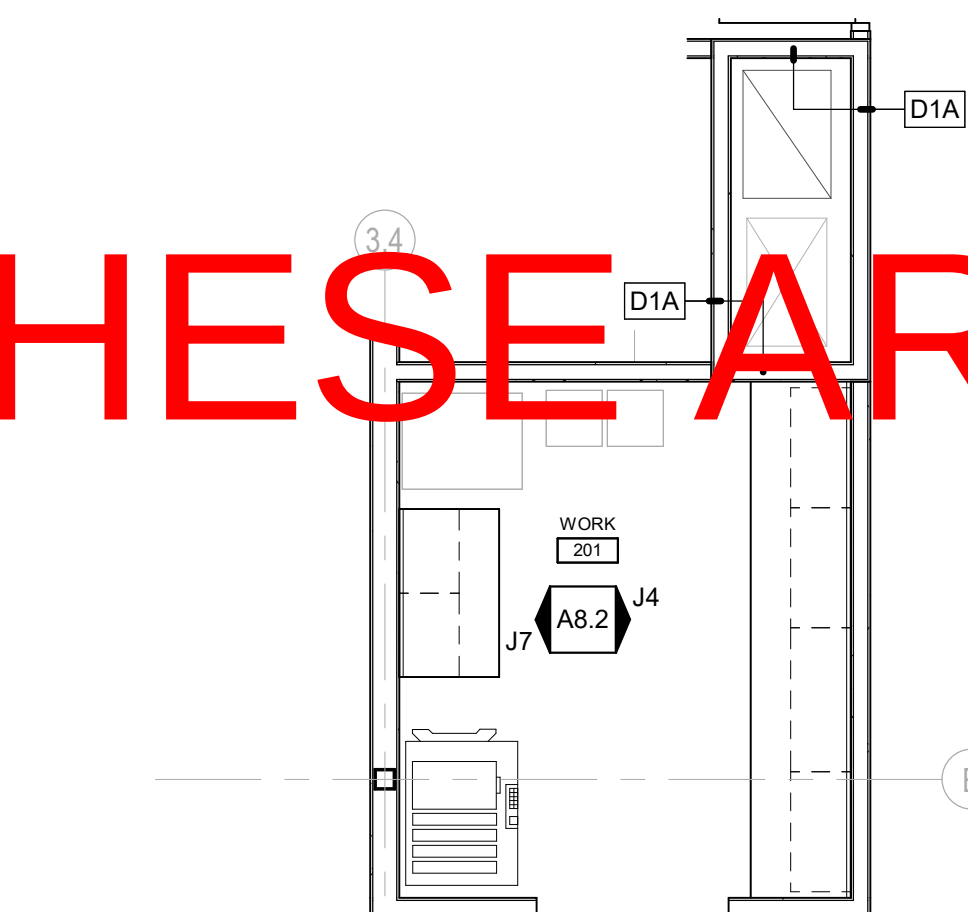


J1 ENLARGED PLAN - 201 WORK ROOM
A8.2 SCALE: 1/4" = 1'-0"

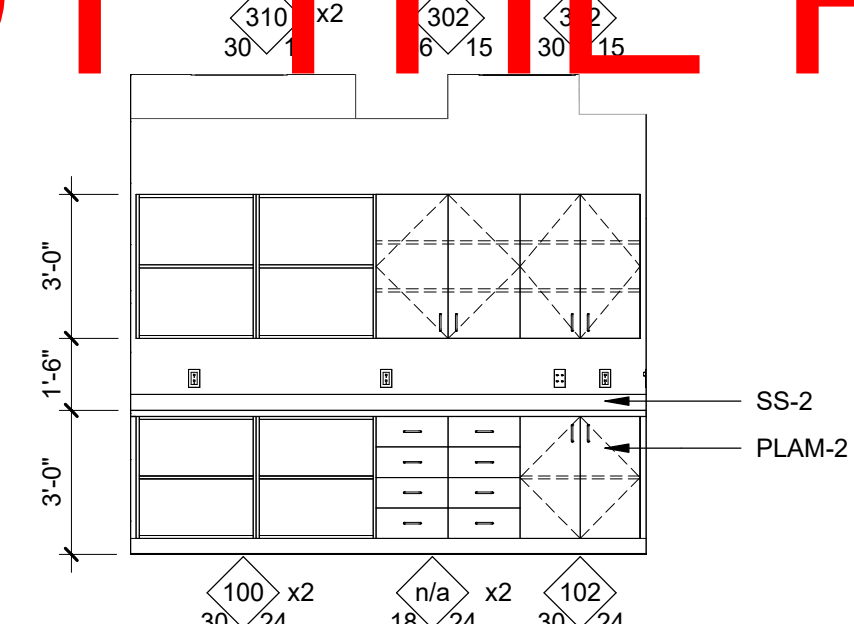


J4 ELEV - 201 WORK EAST
A8.2 SCALE: 1/4" = 1'-0"

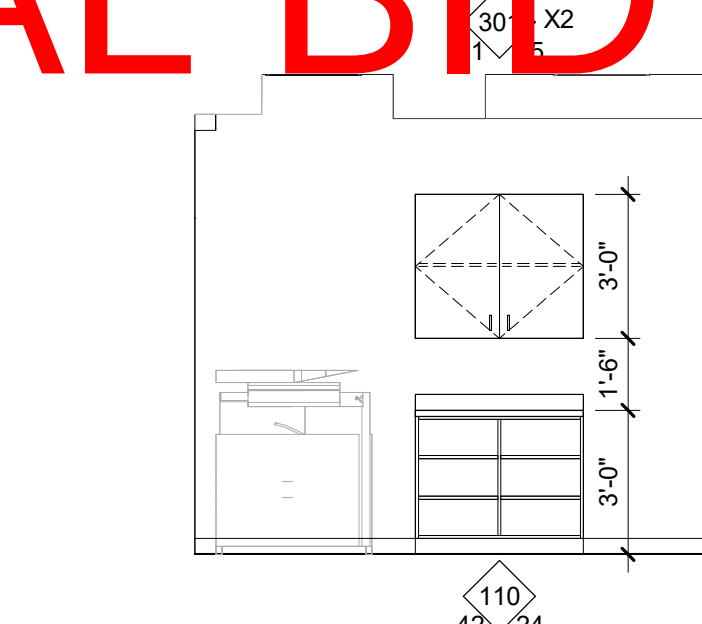


J7 ELEV - 201 WORK WEST
A8.2 SCALE: 1/4" = 1'-0"

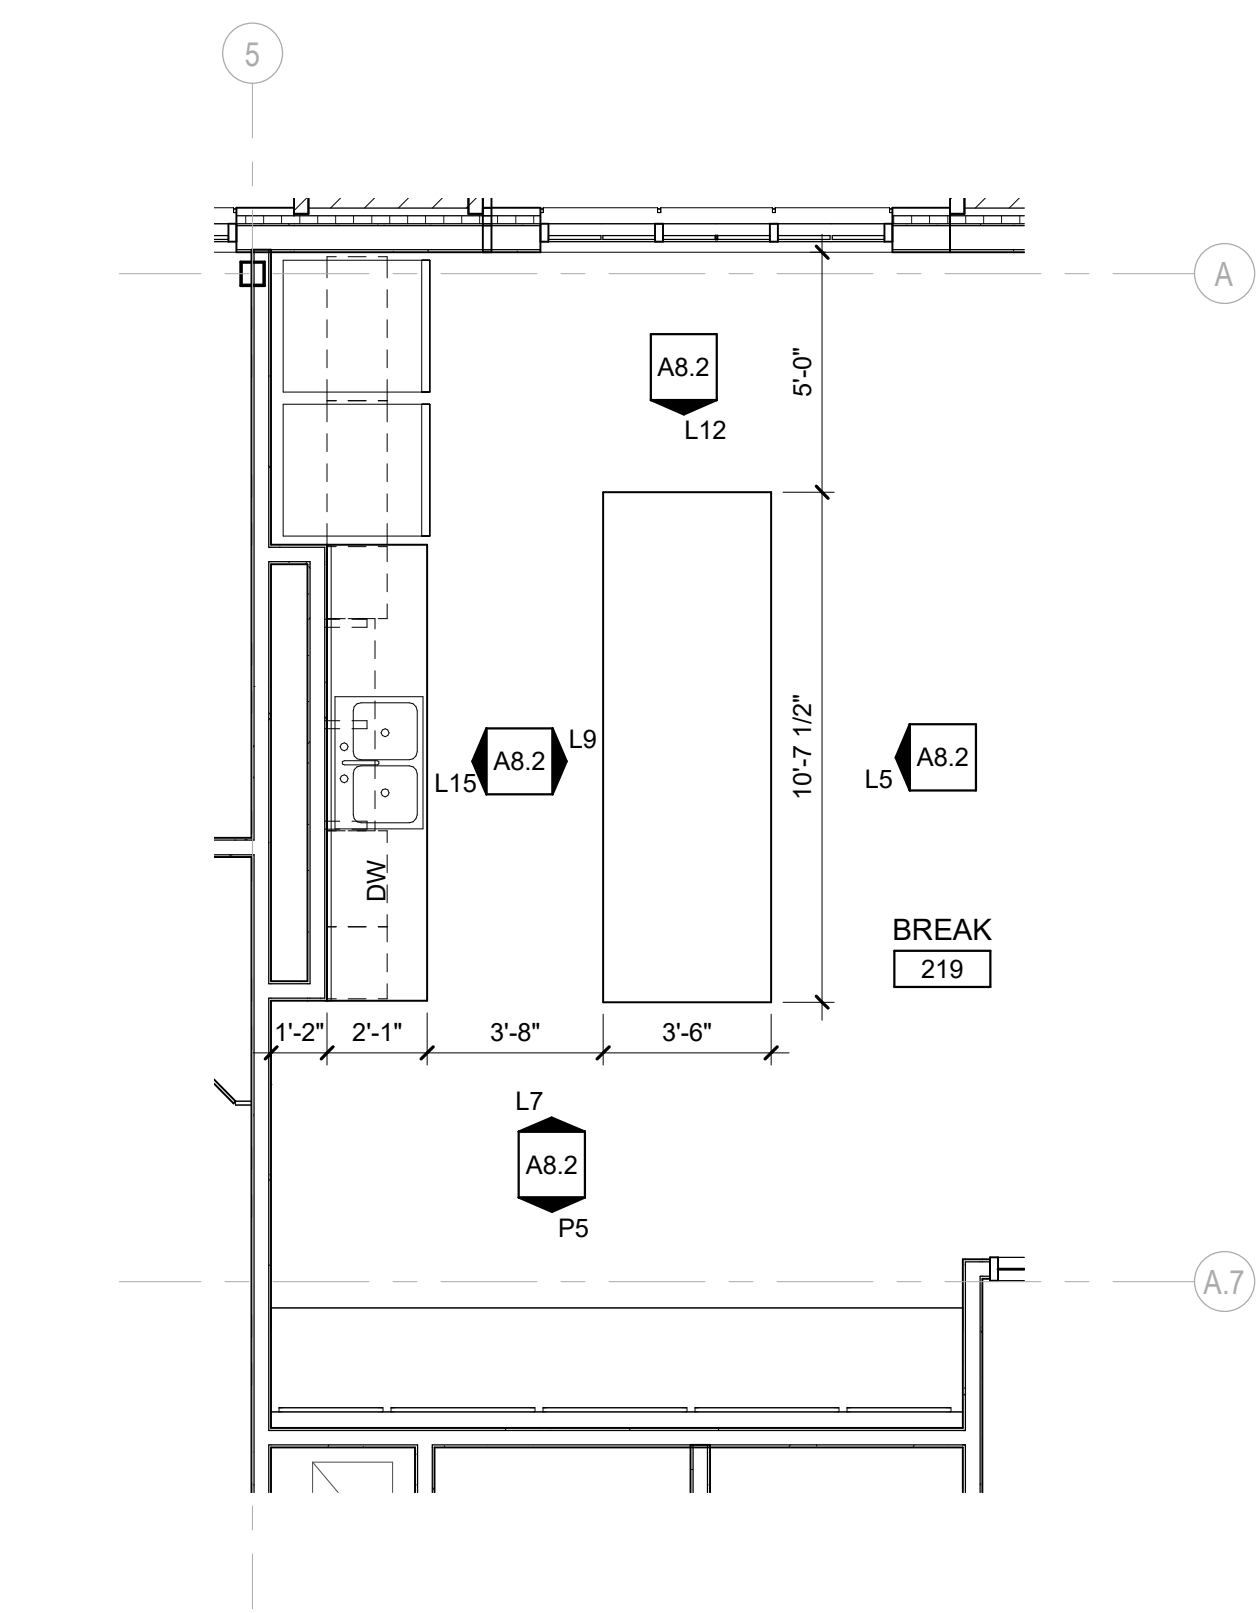


P1 ENLARGED PLAN - 219 BREAK
A8.2 SCALE: 1/4" = 1'-0"

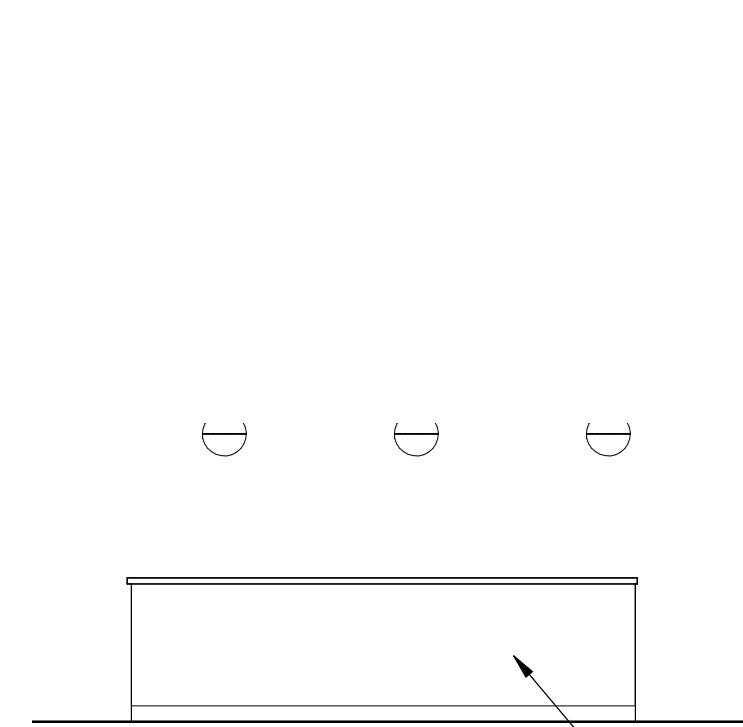


L5 ELEV - 218 BREAK ISLAND FRONT
A8.2 SCALE: 1/4" = 1'-0"

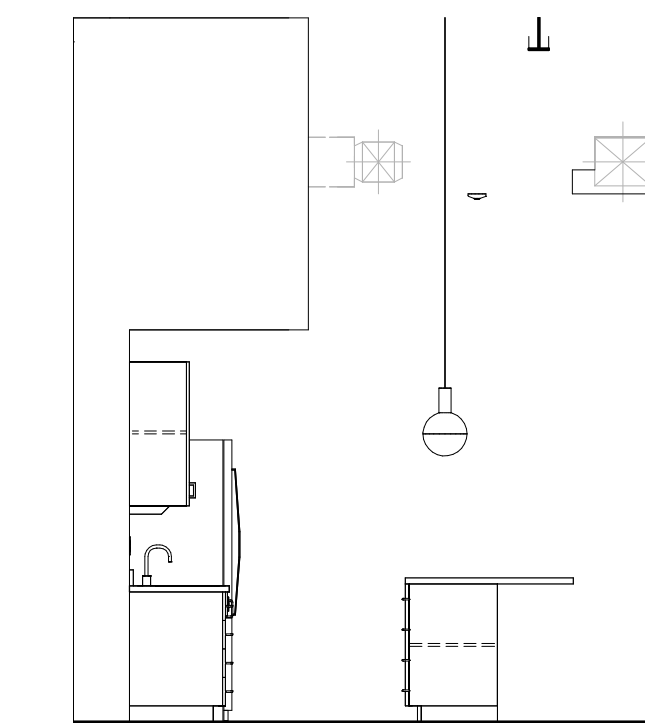


L7 ELEV - 218 BREAK ISLAND SOUTH
A8.2 SCALE: 1/4" = 1'-0"

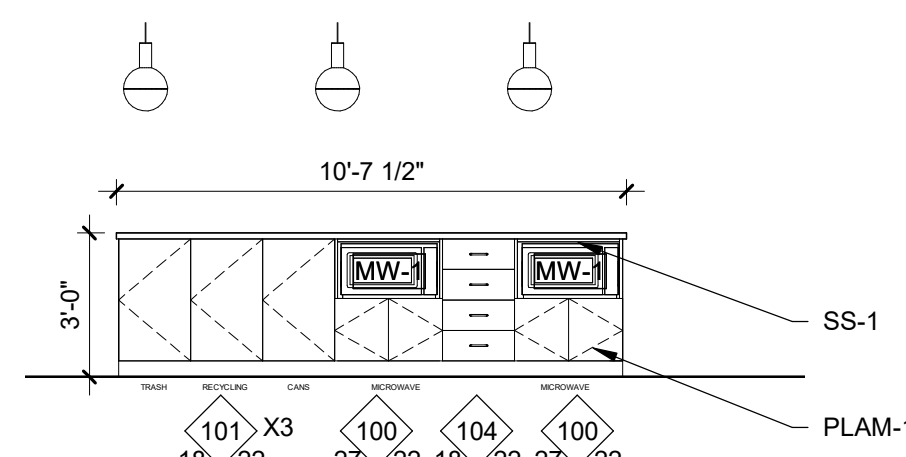


L9 ELEV - 218 BREAK ISLAND INTERIOR EAST
A8.2 SCALE: 1/4" = 1'-0"

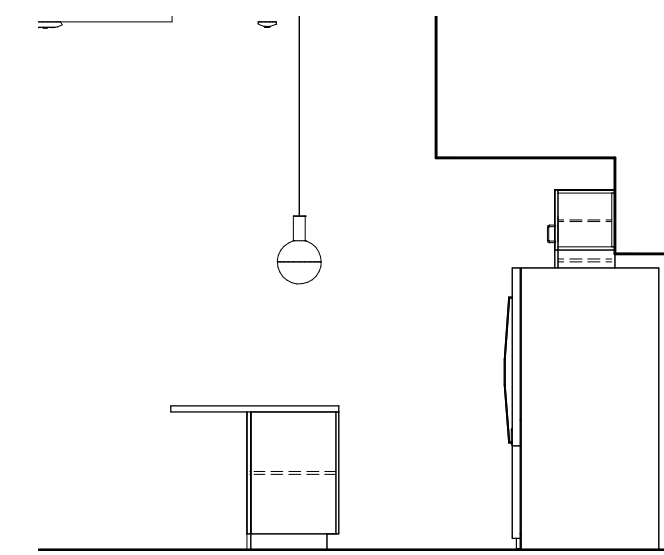

L12 ELEV - 218 BREAK ISLAND NORTH
A8.2 SCALE: 1/4" = 1'-0"

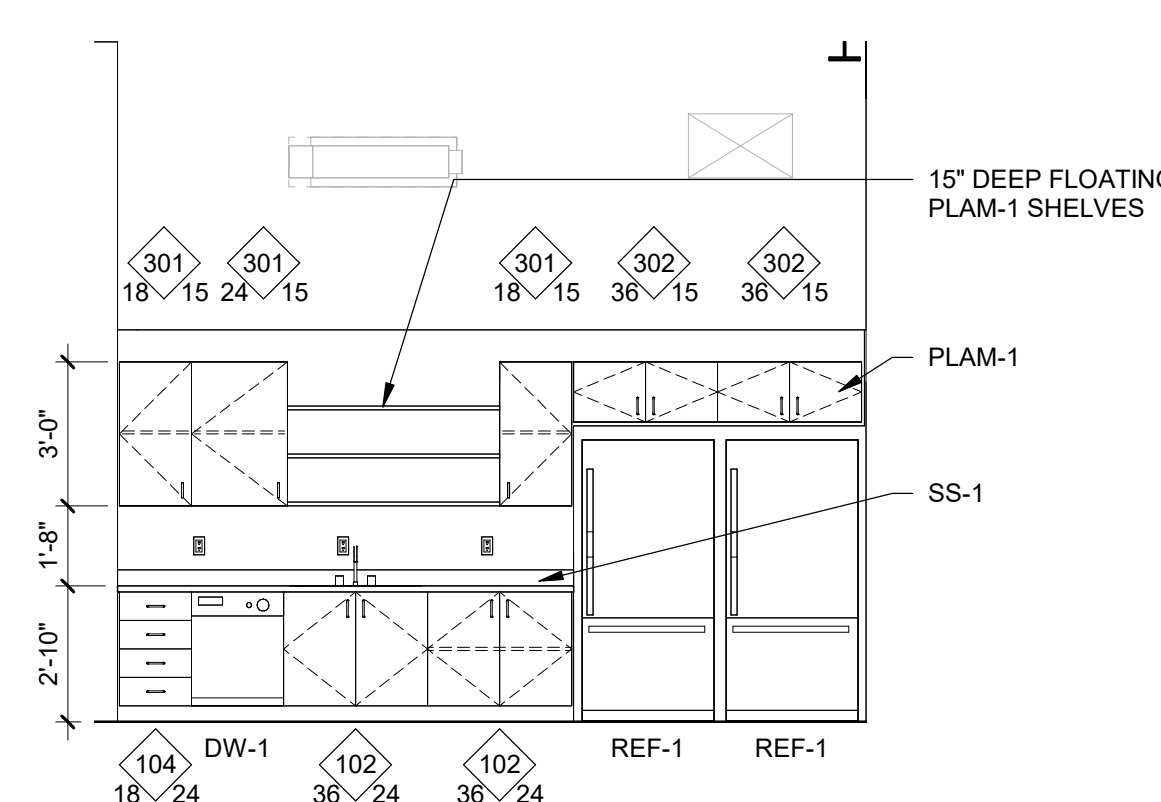

L15 ELEV - 218 BREAK WEST
A8.2 SCALE: 1/4" = 1'-0"

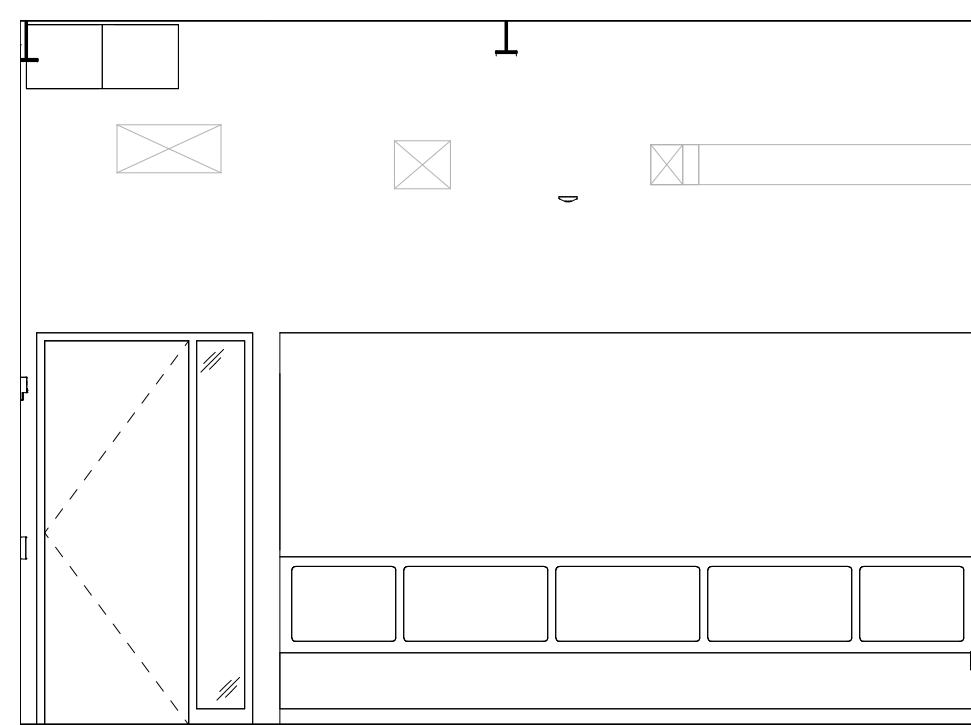

P5 ELEV - 218 BREAK SOUTH
A8.2 SCALE: 1/4" = 1'-0"

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE

REVISION DATE
Project Number: 21064
Date: March 10, 2023
COPYRIGHT © 2022

ENLARGED PLANS &
INTERIOR ELEVATIONS

A8.2

NOT FOR CONSTRUCTION

3/10/2023 1:09:39 PM

NOT FOR CONSTRUCTION

SCHEDULE - ROOM FINISH										
#	ROOM NAME	FLOOR FINISH	BASE	WALL FINISH				CEILING FINISH		REMARKS
				NORTH	EAST	SOUTH	WEST			
100	VESTIBULE	CPT-1	RB-1	PNT-1	PNT-1	PNT-1	PNT-1	APC-1		
101	ENTRY	CT-1	--	--	PNT-1	PNT-1	PNT-1	EXPOSED PNT-3/ PNT-3/ APC-3		
102	CORRIDOR	CT-1	--	PNT-1/ AWP-1 (50%)	PNT-1	PNT-1	PNT-1	EXPOSED PNT-3/ PNT-3/ APC-3		
103	WAITING	CT-1/ CPT-3	RB-1	--	PNT-1	PNT-1	PNT-2/ WP-1	EXPOSED PNT-3/ PNT-3/ APC-3		
104	RECEPTION	CPT-2	RB-1	PNT-2	PNT-1	PNT-2	PNT-1	EXPOSED PNT-3/ PNT-3/ APC-3		
105	INTAKE	CPT-2	RB-1	PNT-1	PNT-1	PNT-1	PNT-1	APC-1		
106	CORRIDOR	RF-1	RB-1	PNT-1	PNT-1	PNT-1	PNT-1	APC-1		
107	WORK	CPT-3	RB-1	PNT-1	PNT-1	PNT-1	PNT-1	APC-1		
108	LAB	RF-1	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	APC-1		
109	RESTROOM	CT-1	--	PNT-1	PNT-1	PNT-1	PNT-1	APC-1		
110	STORAGE	RF-1	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	APC-1		
111	NURSES	CPT-2	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	APC-1		
112	BIO	RF-1	RF-1 COVED 4"	FRP-1	FRP-1	FRP-1	FRP-1	EXPOSED PNT-3		
113	VITALS	RF-1	RB-1	PNT-1	PNT-1	PNT-1	PNT-1	APC-1		
114	CLINIC ROOM	RF-1/ RF-2	RB-2	PNT-1/ AWP-1 (30%)	PNT-1	PNT-1	PNT-1	APC-1		
115	CLINIC ROOM	RF-1/ RF-3	RB-2	PNT-1	PNT-1/ AWP-1 (30%)	PNT-1	PNT-1	APC-1		
116	MECH/ FIRE/ WATER SERVICES	CONC-1	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	EXPOSED PNT-3		
117	CLINIC ROOM	RF-1/ RF-4	RB-2	PNT-1/ AWP-1 (30%)	PNT-1	PNT-1	PNT-1	APC-1		
118	CLINIC ROOM	RF-1/ RF-5	RB-2	PNT-1	PNT-1	PNT-1/ AWP-1 (30%)	PNT-1	APC-1		
119	CONFERENCE	CPT-3	RB-1	PNT-1	PNT-1	PNT-1	PNT-1	APC-1		
120	WORKSTATIONS	CPT-2/ CPT-3	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	APC-1		
121	LOUNGE	CPT-2	RB-2	PNT-1	PNT-1/ AWP-1 (30%)	PNT-1/ AWP-1 (30%)	PNT-1	APC-1		
122	OFFICE	CPT-4	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	APC-1		
123	OFFICE	CPT-4	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	APC-1		
124	INTAKE	CPT-2	RB-1	PNT-1	PNT-1	PNT-1	PNT-1	APC-1		
125	CORRIDOR	CT-1	--	PNT-1	PNT-1	--	PNT-1/ AWP-1 (50%)	EXPOSED PNT-3/ PNT-3/ APC-3		
126	TELECOM	CONC-1	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	EXPOSED PNT-3		
127	CONFERENCE	CPT-3	RB-1	PNT-4	PNT-4/ AWP-1 (50%)	PNT-4	PNT-4	APC-1		
128	ELECTRICAL	CONC-1	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	EXPOSED PNT-3		
129	CORRIDOR	CT-1	--	PNT-1	PNT-1	--	PNT-3	PNT-3		
130	MENS	CT-1	--	CT-2	CT-2/ CT-3	CT-2	CT-2	PNT-3		
131	WOMENS	CT-1	--	CT-2	CT-2	CT-2	CT-2/ CT-3	PNT-3		
132	TRAINING	CPT-4/ CPT-5	RB-1	PNT-4	PNT-4	PNT-4/ AWP-1 (50%)	PNT-1	APC-1		
133	A/V	CONC-1	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	EXPOSED PNT-3		
134	JAN & STORAGE	CONC-1	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	EXPOSED PNT-3		
135	MOTHERS	CT-1	RB-1	PNT-2	PNT-2	PNT-2	PNT-3	EXPOSED PNT-3/ APC-3		
200	HALL	CPT-2	RB-2	PNT-4	PNT-4	PNT-4	PNT-4	EXPOSED PNT-3/ APC-3		
201	WORK	CPT-3	RB-2	PNT-4	PNT-4	PNT-4	PNT-4	APC-1		
202	CONFERENCE	CPT-3	RB-2	PNT-1	PNT-1	PNT-1	PNT-1/ AWP-1 (50%)	APC-1		
203	OFFICE	CPT-4	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	APC-1		
204	OFFICE	CPT-4	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	APC-1		
205	OFFICE	CPT-4	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	APC-1		
206	OFFICE	CPT-4	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	APC-1		
207	STORAGE	CONC-1	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	EXPOSED PNT-3		
208	OPEN WORKSTATIONS	CPT-4/ CPT-5	RB-2	PNT-4	PNT-4/ AWP-1 (50%)	PNT-4	PNT-4	EXPOSED PNT-3/ PNT-3/ APC-1		
209	HALL	CPT-4	RB-2	PNT-4	PNT-4	PNT-4	PNT-4	PNT-3		
210	CONFERENCE	CPT-3	RB-2	PNT-4	PNT-4	PNT-4	PNT-4	APC-1		
211	CONFERENCE	CPT-3	RB-2	PNT-4	PNT-4/ AWP-1 (50%)	PNT-4	PNT-4	APC-1		
212	ELEC / TELECOM	CONC-1	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	EXPOSED PNT-3		
213	STORAGE	CPT-5	RB-2	PNT-4	PNT-4	PNT-4	PNT-4	EXPOSED PNT-3		
214	CORRIDOR	CPT-4	RB-2	PNT-4	PNT-4	PNT-4	PNT-4	EXPOSED PNT-3/ APC-3		
215	MENS	CT-1	--	CT-2	CT-2/ CT-3	CT-2	CT-2	PNT-3		
216	WOMENS	CT-1	--	CT-2	CT-2	CT-2	CT-2/ CT-3	PNT-3		
217	STOR	CONC-1	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	EXPOSED PNT-3		
218	STOR	CONC-1	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	EXPOSED PNT-3		
219	BREAK	PNT-5	RB-2	PNT-4	PNT-4	PNT-4	PNT-4	EXPOSED PNT-3/ PNT-3/ APC-3		
220	OFFICE	CPT-4	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	APC-1		
221	WORKSTATIONS	CPT-5/ CPT-4	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	APC-1		
221A	OFFICE	CPT-4	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	APC-1		
221B	OFFICE	CPT-4	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	APC-1		
222	STORAGE	CPT-4	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	EXPOSED PNT-3		
223	MOTHERS	CT-1	RB-1	PNT-2	PNT-2	PNT-2	PNT-2	PNT-3		
224	RESTROOM	CT-1	--	PNT-1	PNT-1	PNT-1	PNT-1	PNT-3		
ELEV	ELEVATOR	CPT-1	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	SEE SPEC		
STAIR	STAIR	RF-1	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	EXPOSED PNT-3		
STAIR B	STAIR B	RST-1	RB-2	PNT-1	PNT-1	PNT-1	PNT-1	EXPOSED PNT-3		

SCHEDULE - TOILET ACCESSORY								
MARK	DESCRIPTION	MANUFACTURER	MODEL	OFOI	OFCI	CFCI	REMARKS	
TA-1	GRAB BARS (3 PARTS - 42"X 36" X 18")	BOBRICK	B-5806			X		
TA-2	MIRROR	BOBRICK	B-165 SERIES			X		
TA-3	WAST RECEPTACLE	BOBRICK	B-39617			X		
TA-4	B-505 Recessed Specimen Pass-Thru Cabinet	Bobrick	B-505			X		
TA-5	MOP HOOK					X		
TA-6	DIAPER CHANGING STATION	--	--	X				
TA-7	PAPER TOWEL DISPENSER	--	--	X				
TA-8	SANITARY NAPKIN DISPOSAL	--	--	X				
TA-10	TOILET TISSUE DISPENSER	--	--	X				
TA-X	SOAP DISPENSER	-	-	X				

TOILET ACCESSORIES GENERAL NOTES

- GENERAL NOTES:
1. SEE G SHEET SERIES FOR TOILET MOUNTING HEIGHTS/LOCATIONS.
2. ALL TOILET ACCESSORIES TO BE PROVIDED AND INSTALLED BY CONTRACTOR.

REMARKS:

A. ...
B. ...

SCHEDULE - APPLIANCE									
MARK	DESCRIPTION	MANUFACTURER	MODEL	OFOI	OFCI	CFCI	REMARKS	Type	Comments
DW-1	DISHWASHER					X		KE	
MW-1	MICROWAVE					X		KE	
REF-1	REFRIGERATOR - STANDARD					X		KE	
REF-2	REFRIGERATOR - UNDER COUNTER	SUMMIT APPLIANCES	AL55			X		KE	

ROOM FINISH SCHEDULE REMARKS

- A. REMARK A...
B. REMARK B...
C. REMARK C...

EDIT


ROOM FINISH GENERAL NOTES

- ALL JOINTS ARE TO BE CAULKED AT DISSIMILAR MATERIALS INCLUDING, BUT NOT LIMITED TO, DOOR FRAMES TO WALLS, BACKSPASH TO WALL, AND MULLION COVERS TO WALLS.
- PAINT ALL EXPOSED VERTICAL FACES ON GWB BULKHEADS/SOFFITS TO MATCH ADJACENT WALL, UON. PAINT ALL EXPOSED HORIZONTAL FACES ON GWB BULKHEADS/SOFFITS AS SCHED, UON.
- REFER TO INTERIOR ELEVATIONS AND FINISH PLANS FOR SPECIAL CONDITIONS AND CLARIFICATIONS CONCERNING FINISH MATERIAL LOCATIONS. REPORT ANY DISCREPANCIES TO ARCHITECT.
- DIFFUSERS AND FRESH AIR INTAKES TO BE PAINTED TO MATCH ADJACENT WALL OR CEILING COLOR, UON.
- SEE RCP FOR CEILING FINISH TYPE, CEILING HEIGHTS AND MATERIAL LOCATIONS.
- SEE FLOORING TRANSITION DETAILS FOR MORE INFORMATION ON FLOORING MATERIAL TRANSITIONS.
- IN EXPOSED STRUCTURE AREAS WHEN NOTED TO PAINT THE EXPOSED CEILING, PAINT ALL EXPOSED SYSTEMS INCLUDING, BUT NOT LIMITED TO, STRUCTURAL COMPONENTS, MECHANICAL COMPONENTS, AND ELECTRICAL COMPONENTS.
- GENERAL CONTRACTOR SHALL FURNISH AND INSTALL WALL BASE AROUND MILLWORK, UON.
- SEE FINISH PLAN FOR ROLLERSHADE LOCATIONS. WHERE MOTORIZED SHADES OCCUR, COORD W/ INSTALLER AND ELEC PRIOR TO INSTALL.
- SEE FINISH PLAN FOR DRAPERY LOCATIONS, COORD W/ TRACK LOCATIONS AS INDICATED ON RCP.
- WHERE CT BASE OCCURS, CUT FROM FINISHED SIDE OF CT AS SCHED. PLACE CUT SIDE @ FLOOR AND FINISHED SIDE UP. GROUT JOINTS ON BASE AND FLOOR TILE TO ALIGN.
- FLOORING PATTERNS NOT SHOWN ON FINISH PLANS ARE TO BE CENTERED IN ROOM, UON.
- SEE FINISH PLANS FOR CODE REQ'D SIGNAGE LOCATIONS, REFERENCE G SHEET SERIES FOR TYPICAL SIGNAGE REQUIREMENTS.
- CHANGES IN FLOOR SURFACE LEVELS GREATER THAN 1/4 INCH IN HEIGHT AND NOT MORE THAN 1/2 INCH MAX IN HEIGHT SHALL BE BEVELED WITH A SLOPE NOT STEEPER THAN 1:2. CHANGES IN LEVEL GREATER THAN 1/2 INCH SHALL BE RAMPED. NOTIFY ARCHITECT OF THESE OCCURANCES AND VERIFY TRANSITION TYPE.


SCHEDULE - FINISH						
MARK	DESCRIPTION	MANUFACTURER	STYLE	COLOR / FINISH	SIZE	REMARKS
APC-1	ACOUSTICAL PANEL CEILING	ARMSTRONG	ULTIMA, 9/16" BEVELED	WHITE	24" X 24"	USE COORDINATING 9/16" WHITE GRID
APC-2	ACOUSTICAL PANEL CEILING	ARMSTRONG	CLEAN ROOM CEILING	WHITE	24" X 24"	
APC-3	ACOUSTIC PANEL CEILING	BASIS OF DESIGN - FRASCH	BOX BAFL	TBD FROM STANDARD OFFERING	25" X 25" X 12" H	CONTACT BRENNA W/ TRIO ESSE CONTRACT
APW-1	ACOUSTIC PANEL WALL ACCENT		PROVIDE \$30/ SF MATERIAL COST ALLOWANCE			
CONC-1	SEALED CONCRETE					
CPT-1	CARPET TILE - WALK OFF		PROVIDE \$42/ SY MATERIAL COST ALLOWANCE			INSTALL
CPT-2	CARPET TILE		PROVIDE \$30/ SY MATERIAL COST ALLOWANCE			INSTALL
CPT-3	CARPET TILE		PROVIDE \$30/ SY MATERIAL COST ALLOWANCE			
CPT-4	CARPET TILE		PROVIDE \$30/ SY MATERIAL COST ALLOWANCE			
CPT-5	CARPET TILE		PROVIDE \$40/ SY MATERIAL COST ALLOWANCE			
CT-1	FLOOR TILE	DALTILE	MODERNIST	(WHITE)	24" X 24" TILE	INSTALL WITH SMALLEST RECOMMENDED GROUT JOINT
CT-1.1	CERAMIC TILE BASE					
CT-2	WALL TILE		PROVIDE \$5/ SF MATERIAL COST ALLOWANCE			INSTALL
CT-3	ACCENT TILE		PROVIDE \$10/ SF MATERIAL COST ALLOWANCE			INSTALL
FRP-1	FIBERGLASS REINFORCED PLASTIC WALL PANEL		PEBBLE EMBOSSED	WHITE		
GT-1	GROUT					
GT-1	GROUT					
HDWR-1	HARDWARE - CABINETS		(ROUNDED EDGE PULLS)			
PLAM-1	PLASTIC LAMINATE					
PLAM-2	PLASTIC LAMINATE					
PNT-1	PAINT - WALL	N/A		(GRAY)	N/A	
PNT-2	PAINT - WALL	N/A		(ACCENT COLOR)	N/A	
PNT-3	PAINT - CEILING	N/A		(WHITE)	N/A	
PNT-4	PAINT - WALL	N/A		(WHITE)	N/A	
PNT-5	PAINT - WALL	N/A		(GRAY)	N/A	
RB-1	RUBBER BASE		MILLWORK PROFILE BASE		4" H	
RB-2	RUBBER BASE		STANDARD COVE PROFILE		4" H	
RF-1	RESILIENT SHEET FLOORING - RUBBER			(GRAY)		
RF-2	RESILIENT SHEET FLOORING - RUBBER			(ACCENT COLOR)		
RF-3	RESILIENT SHEET FLOORING - RUBBER			(ACCENT COLOR)		
RF-4	RESILIENT SHEET FLOORING - RUBBER			(ACCENT COLOR)		
RF-5	RESILIENT SHEET FLOORING - RUBBER			(ACCENT COLOR)		
RF-6	RESILIENT FLOORING - LVT		PROVIDE \$7/ SF MATERIAL COST ALLOWANCE			
RS-1	ROLLERSHADE - ELECTRIC		DUAL BLACKOUT AND 1-3% OPACITY			PROVIDE AT ALL WINDOWS WITHIN TRAINING ROOM
RS-2	ROLLERSHADE - MANUAL		1% OPACITY			PROVIDE AT ALL SOUTH EXTERIOR WINDOWS AND INTERIOR GLAZING OVER 24" AT CONFERENCE ROOMS
RS-3	ROLLERSHADE - MANUAL		3% OPACITY			PROVIDE AT ALL OTHER EXTERIOR WINDOWS
RST-1	RUBBER STAIR TREAD, RISER AND LANDINGS	TARKETT	ROUND RAISED DESIGN	TBD		PROVIDE COORDINATING RUBBER AT LANDINGS
SS-1	SOLID SURFACE - QUARTZ					
SS-2	SOLID SURFACE					
TP-1	TOILET PARTITION		HDPE			
UPHOL-1	UPHOLSTERY		PROVIDE \$50/YD MATERIAL ALLOWANCE			
VF-1	VINYL FILM					PROVIDE AT FIRST FLOOR WINDOWS AS SHOWN IN ELEVATIONS
WC-1	WALLCOVERING - TACKABLE	KOROSEAL	TAC-WALL	TBD FROM STANDARD OFFERING		
WD-1	WOOD (DOORS)	--	PLAIN SLICED WHITE OAK	CLEAR SEAL		
WP-1	WALL PANEL	BASIS OF DESIGN - SOELBERG	3D WALL PANELS - MARE	FROSTY WHITE	1 1/8" THICK, 48" x 96"	

Additional Architectural and Interior Finish Narrative
General


- STEEL AND DECORATIVE METALS**
 - Exposed structure will be a primary feature. Care should be taken to organize ductwork, conduits, cable trays, fixtures and other ceiling elements otherwise hidden from view.
 - Refer to Structural framing plans for layout concepts. At areas with exposed structure, deck and structural elements will be painted. Where steel is exposed to exterior elements, it shall be hot dipped galvanized when possible and protected with a high-performance coating.
- SIGNAGE**
 - Exterior signage
 - (2) PCH Logo Corner sign on building
 - Vinyl Address Letter @ main entry
 - Interior Signage
 - All rooms, standard code required signage
 - Offices - 6x8 standard sign w/ 2" clear insert area
 - Directional signage at corridors

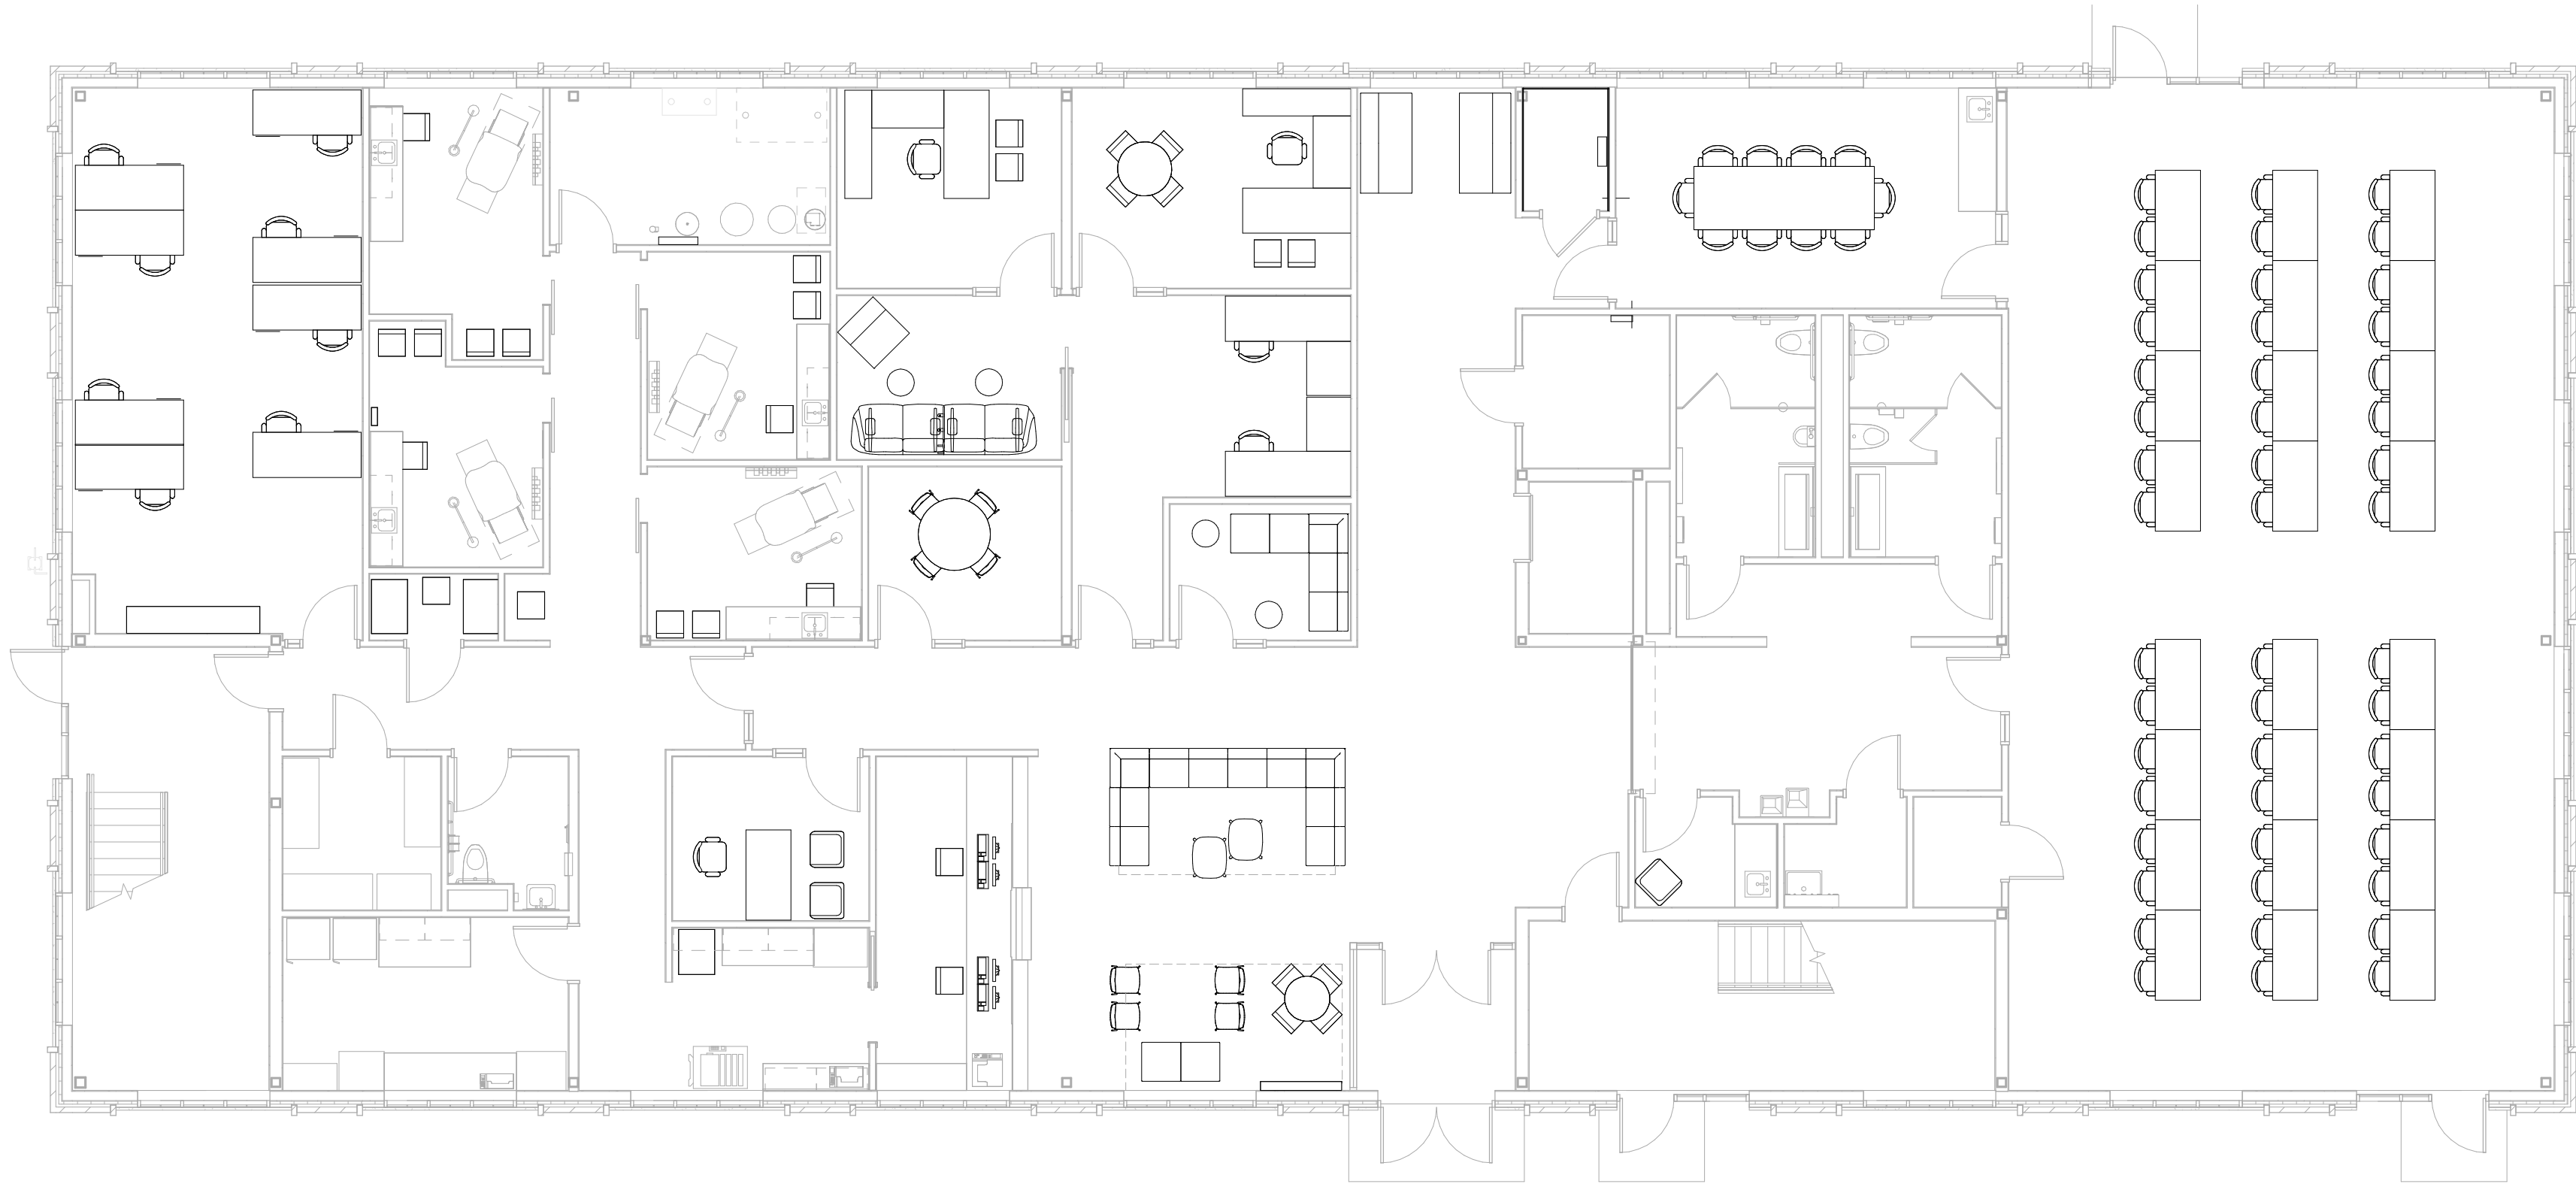

G2 FINISH PLAN - LEVEL 02
A10.0 SCALE: 1/8" = 1'-0"

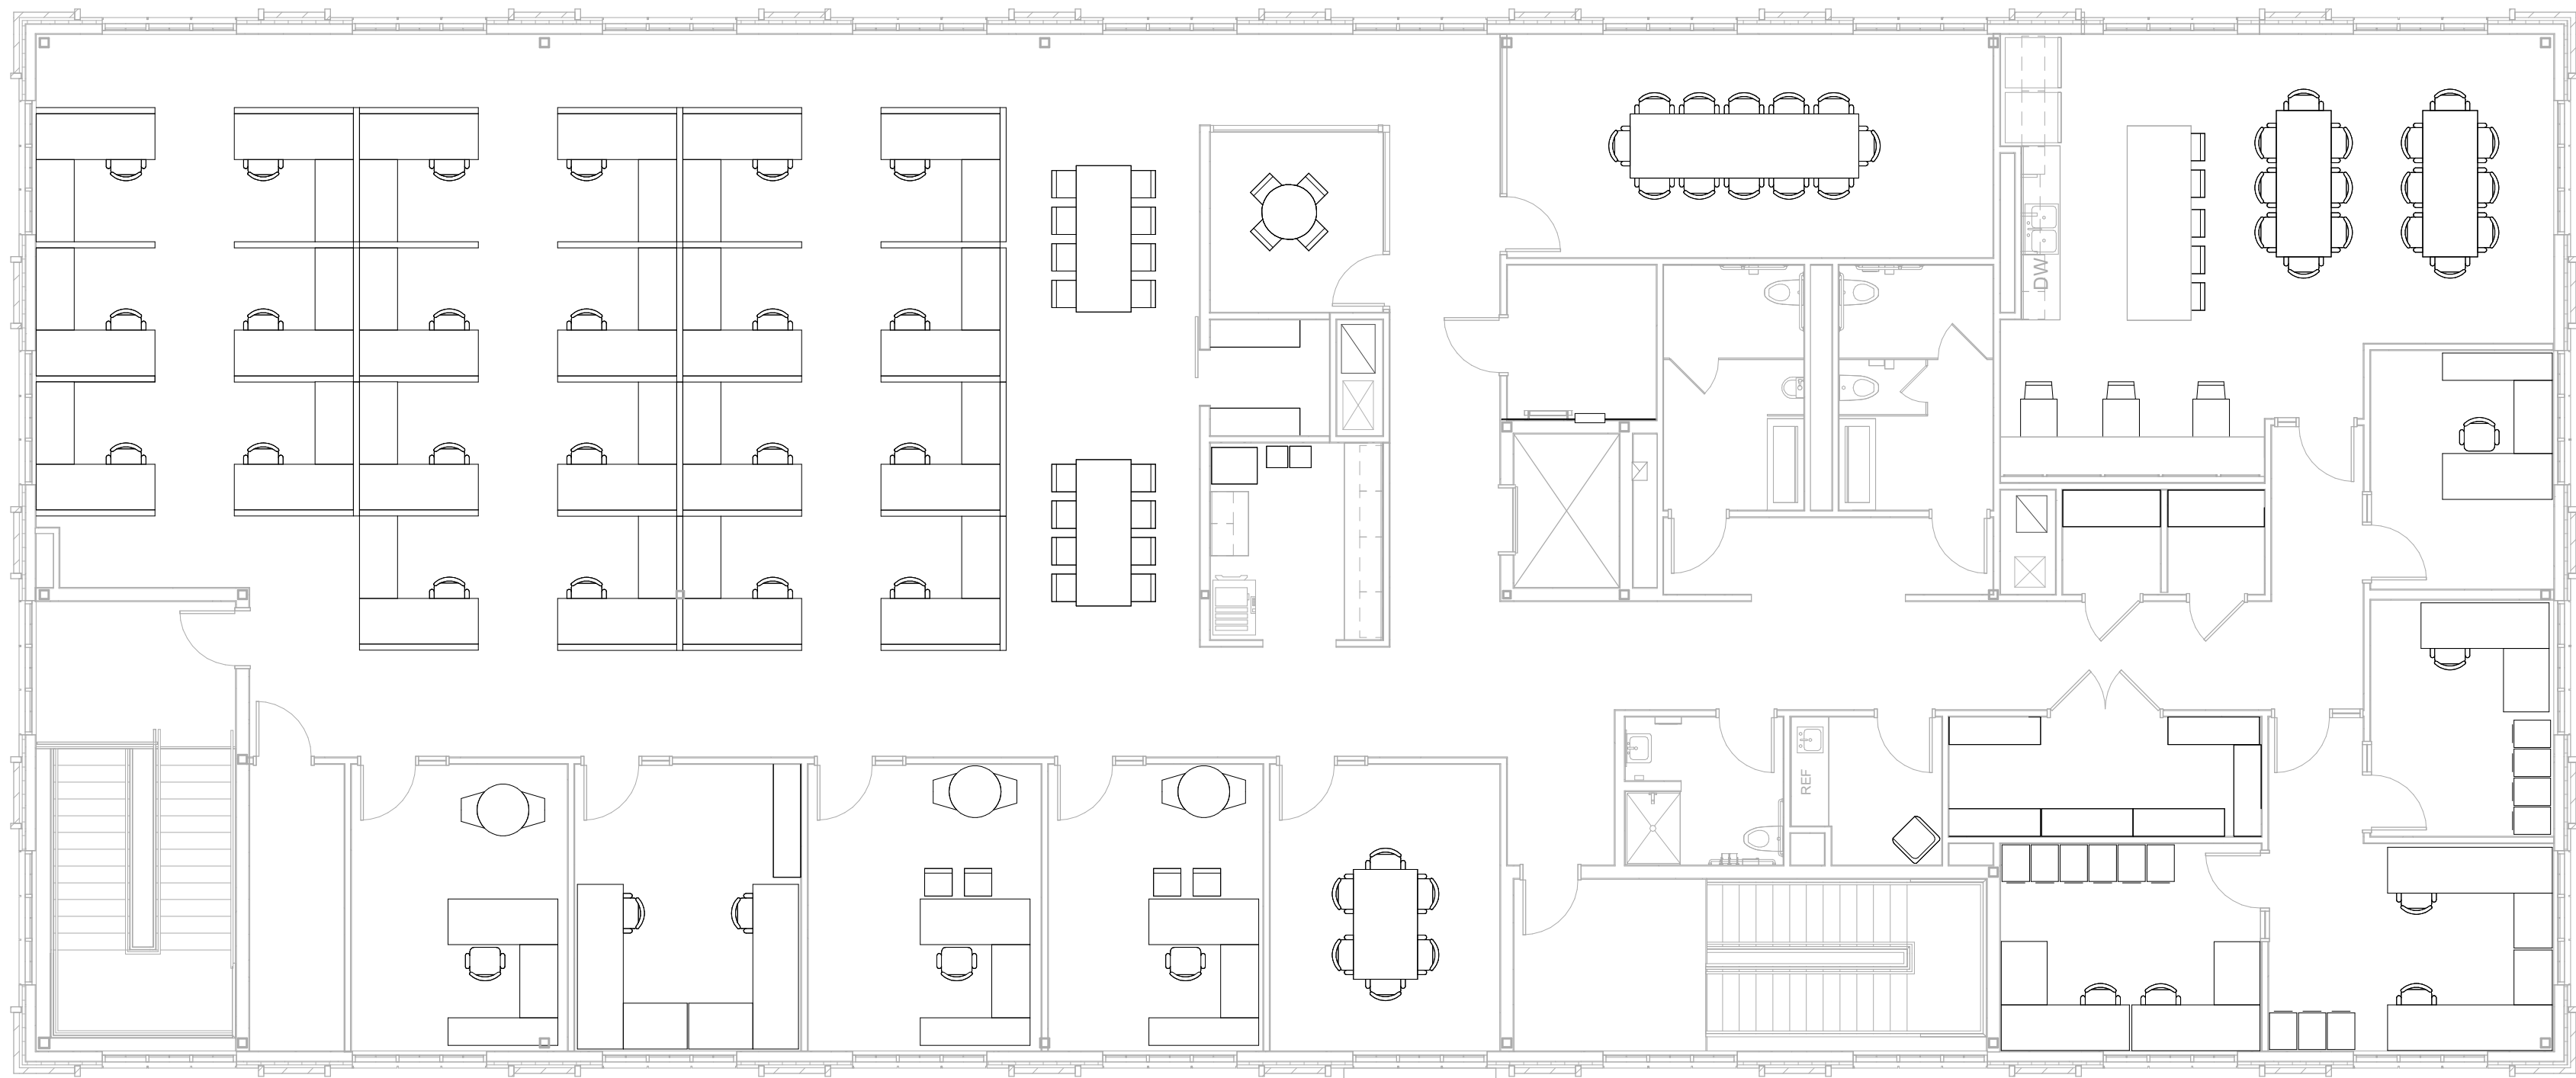

P2 FINISH PLAN - LEVEL 02
A10.0 SCALE: 1/8" = 1'-0"



AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE

REVISION	DATE
Project Number:	21064
Date:	March 10, 2023
COPYRIGHT © 2022	

FURNITURE PLANS

A10.0

NOT FOR CONSTRUCTION


3/10/2023 1:29:07 AM

STRUCTURAL NOTES, GENERAL

1. CODE: References to the "code" in each section shall be as follows:
- Building Code: IBC 2015 with local amendments
Risk Category: II
- Other Applicable Codes as Referenced in the Building Code:
Concrete Code: ACI 318, ACI 301
Steel Code: AISC 360, Specification for steel buildings, AISC 341 Seismic Provisions
Minimum Design Loads for Building: ASCE 7
Masonry Code: ACI 530
Cold Formed Steel: AISI S100/52

2. STRUCTURAL DESIGN LOADS:
- ROOF LIVE LOADS:
Flat and Sloped Roofs: ____ PSF
- FLOOR LIVE LOADS:
Mechanical and Electrical Rooms: ____ PSF
Stairs (including landings) & Elev. Lobbies: ____ PSF
- HANDRAILS and GUARDS:
Concentrated Load: 200#; applied in any direction
Uniform Load: ASCE 7, applied in any direction
- GRAB BARS: 250#; applied in any direction
- SNOW:
Ground Snow Load: 25 PSF
Flat-Roof Snow Load (P_f): PSF
Rain on snow surcharge: N/A
- Drifting Snow Loads: As shown on plans
- Snow Exposure Factor: C_e = 1.0
Thermal Factor: C_t = 1.0
Importance Factor: I = 1.0
- WIND:
Wind Speed (Ultimate): 115 MPH
Wind Speed (Allowable): 89 MPH
Exposure Category: B
Internal Pressure Coefficient: ± 0.18

Hip Roof Component & Cladding Pressure (psf)					
Surface	Zone	10	50	100	500
Roof	1	-39	-34.5	-31.1	-31.1
	2e	-52.1	-42.2	-38.0	-33.7
	2i	-67.9	-52.4	-45.7	-39.0
	3	-52.1	-42.2	-38.0	-33.7
	All	23.2	16	16.0	16.0
	1	-47.4	-52.7	-52.7	-52.7
Overhang	2e	-60.6	-52.7	-26.5	-65.3
	2i	-76.4	-67.9	-64.2	-60.6
	3	-76.4	-58.0	-50.1	-42.1
	4	-33.7	-30.5	-29.1	-25.8
Wall	5	-41.6	-35.1	-32.3	-25.8
	4 & 5	31.1	27.8	26.4	23.2

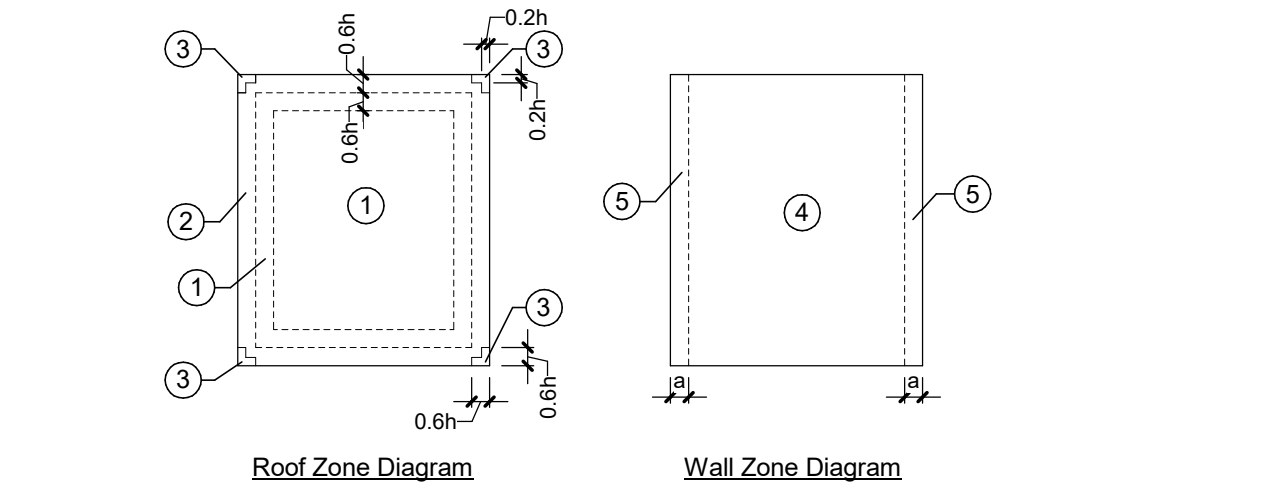

- Components & Cladding Pressure Notes:
1. All pressure values are based on the design wind speed and exposure category.
 2. Positive values indicate wind pressure acting on the exterior of the building. Negative values indicate wind suction acting on the exterior of the building.
 3. Negative values are based on the design wind speed and exposure category.
 4. All values are based on the design wind speed and exposure category.
- SEISMIC:
- Spectral Response Accelerations: S_s = 0.092; S₁ = 0.045
Site Class: B
Design Spectral Response Accelerations: S_{DS} = 0.154; S₁ = 0.104
Importance Factor: 1.00
Basic Seismic Design Category: B
Steel Ordinary Concentrically Braced Frames
Design Base Shear: --- kips (Each Direction)
Seismic Response Coefficient: C_s = 0.0xxx
Response Modification Factor: R = 3.25
Analysis Procedure Used: Equivalent Lateral Force Procedure

3. FOUNDATION DESIGN CRITERIA:
- Foundation design based on the following Geotechnical Engineering Report completed by TD2, Omaha, NE, dated June 24, 2022, TD2 Project Number 2213-153:
- Continuous Wall Footings: 1500 PSF
 - Isolated Column Footings: 1500 PSF

Note: All Footing Excavations shall be inspected and approved by the Geotechnical Engineer prior to placing concrete.

4. EXCAVATION AND BACKFILL:
- A. All earthwork operations shall be completed in accordance with the Geotechnical Exploration Report.
- B. Protect all excavations from damage due to water or freezing temperatures.
- C. All Footing excavations shall be inspected and approved by the Geotechnical Engineer prior to placing concrete.
- D. See Civil Drawings, Geotechnical Exploration Report, and Specifications for additional requirements.

5. GENERAL NOTES:
- A. All work shall comply with requirements of the Building Code, with recommendations of manufacturers, and with recognized workmanship and material standards.
- B. Comply with all applicable codes, ordinances, and regulations including those promulgated and enforced by OSHA. The structural design represented by the drawings and specifications is based on interaction of the various components, materials, and systems shown or required by the drawings and specifications. The contractor shall determine the need for and provide all required bracing, shoring, or other means to ensure stability and safety until all work required by the contract documents is complete. When and where necessary to comply with these requirements, the contractor shall provide appropriate additional temporary or permanent connections, shoring, and/or bracing or, in the alternative, shall make appropriate modifications of specified connections and/or members. Where additions to or modifications of specified requirements are proposed, they shall be submitted to the Architect for review and approval. Such review and approval will be only for compliance with the structural and architectural design intent for the work. The adequacy for construction phase stability and safety is the responsibility of the contractor.
- C. Adapt requirements of details, sections, plans, and notes at all locations of which conditions are similar.
- D. The structural drawings are to be read in view of all other drawings and all specifications. Coordinate all work shown with all other work.
- E. Shop drawings for any part of the work shall show the interface with and provisions for related other work including such adaptations of requirements given as may be necessary.
- F. Contractor shall cross check dimensions and elevations between architectural, mechanical, and structural plans and notify Architect of any variance before contractor begins work.
- G. Lateral shoring of existing utilities and tunnels is the responsibility of the Contractor. See Site and AR plans for locations of existing utilities and tunnels and minimum locations of shoring. Notify Architect immediately if existing conditions conflict with drawings.

6. MECHANICAL, ELECTRICAL, AND PIPING SYSTEMS WORK:
- A. See "Structural Steel Work Notes" for maximum allowable concentrated loads from steel roof deck.
- B. Secondary framing, bridging, or other means shall be provided to distribute loads to structural members. Such framing, bridging, or other means shall be shown on the shop drawings for the work of the mechanical, electrical and piping systems.
- C. For limitations on excavations, see "Cast-In-Place Concrete Notes" regarding Footing Work.
- D. Location and design weight of Mechanical Units are indicated on the Framing Plans. If the units are heavier or located differently than indicated, notify the Architect/Engineer. Revisions to the framing may be required.

7. SPECIAL INSPECTION:
- A. Special Inspection in accordance with the Building Code will be performed per the special inspection schedules on sheet S0.1.
- B. Special Inspections shall be hired and paid for by the owner. Retest expenses for failed inspections will be charged to the contractor.
- C. The Contractor shall provide the Special Inspector sufficient notification to allow the required inspections to be made without delaying the construction schedule. The Contractor shall confirm that all inspections have been completed and approved by the Special Inspector prior to proceeding with Work.
8. ABBREVIATIONS:
- | | | | | | |
|--------|---------------------|--------|-------------------------------|--------|------------------------|
| ARCH. | Architect | E.O.R. | Structural Engineer of Record | REIN. | Reinforcing |
| B.O. | Bottom Of | EA. | Each | RECD | Slab on Grade |
| B.O.S. | Bottom of Steel | EXIST. | Existing | S.O.G. | Slab on Grade |
| BOTT. | Bottom | EXP. | Expansion | SIM. | Similar |
| BRG. | Bearing | F.V. | Field Verify | STD. | Standard |
| B.TWN. | Between | F.V. | Field Verify | T.O. | Top Of |
| CL. | Clear | F.T.G. | Footing | T.O.F. | Top of Footing |
| COL. | Column | H.D.G. | Hot-Dipped Galvanized | T.O.S. | Top to Steel |
| CONC. | Concrete | H.S. | Headed Studs | T.O.W. | Top of Wall |
| CONT. | Continuous | HORIZ. | Horizontal | TYP. | Typical |
| COORD. | Coordinate | JST. | Joint | U.N.O. | Unless Noted Otherwise |
| D.B.A. | Deformed Bar Anchor | JT. | Joint | V.W.A. | Verify with Architect |
| DBL. | Double | o.c. | On Center | VERT. | Vertical |
| DET. | Detail | PL | Plate | w/ | With |

CAST-IN-PLACE CONCRETE WORK

1. MATERIALS:
- Concrete:
- | Location: | 28-Day Strength | Slump (*) | Max. Aggregate | Air Entrainment | Design Density |
|--|-----------------|-----------|----------------|-----------------|----------------|
| Footings and all other concrete not noted below: | 4000 PSI | 4"-6" | 1" | 5%-7% | 145 PCF |
| Interior slab-on-grade and Foundation Walls: | 4000 PSI | 4"-6" | 1" | N.A. | 145 PCF |
| Slabs-on-Metal Deck | 4000 PSI | 4"-6" | 3/4" | N.A. | 145 PCF |
| Exterior slabs-on-grade | 3500 PSI | 4"-6" | 1" | 5%-7% | 145 PCF |
- (*) Slump may be increased as needed to make installation easier provided the increased slump is due to the use of proper admixture selection. All submitted concrete mixes shall indicate the use of such admixtures. Water may not be added in the field.
- Other Materials:
- Reinforcing Bars: ASTM A615 Grade 60, deformed.
- Deformed Bar Anchors: ASTM A496, with a minimum tensile strength of 80 ksi.
- Welded Wire Fabric: ASTM A1064, flat sheet type.
- Anchor Bolts: ASTM F1554 (GR. 36), Headed Type, U.N.O.
- Weldable Reinforcing Bars: ASTM A706 Grade 60, deformed.

2. CONTINUITY:
- All reinforcing shall be continuous unless noted otherwise. Continuity at corners and intersections shall be achieved using corner bars and contact lap splices; see typical detail. Continuity at other locations may be achieved using contact lap splices shown on approved shop drawings. Location of lap splices shall be shown on the shop drawings. Unless noted otherwise, the following lap splices shall be used: (All lap splices are class B splices)
- | Location: | #3 | #4 | #5 | #6 | #7 | #8 | #9 | #10 | #11 |
|---------------------------|-----|--------|-----|-----|-----|-----|------|------|------|
| 3000 & 3500 PSI Concrete: | | | | | | | | | |
| - Top Bars (*) | 21" | 28" | 35" | 46" | 71" | 93" | 118" | 146" | 184" |
| - Other Bars: | 16" | 22"(*) | 27" | 35" | 55" | 71" | 91" | 115" | 142" |
| 4000 & 4500 PSI Concrete: | | | | | | | | | |
| - Top Bars (*) | 16" | 19" | 25" | 36" | 61" | 80" | 102" | 129" | 159" |
| - Other Bars: | 16" | 16"(*) | 19" | 28" | 47" | 62" | 78" | 99" | 123" |
- (*) Top bars are horizontal reinforcing where more than 12" of concrete is cast in the member below the reinforcing.

3. GENERAL:
- A. Coordinate work with all other work.
- B. All reinforcing shall be continuous; see notes above. All reinforcing, anchor bolts, and other embedded items shall be secured in place prior to placing concrete.
- C. Construction joints shall be keyed joints, unless noted otherwise, with reinforcing continuous through the joint. Construction joints shall be located in a manner not to affect the strength of the concrete. Concrete on one side of construction joints shall not be placed less than 24 hours after placement of concrete on the opposite side of the construction joint.
- D. Straight dowels may be wet set in plastic concrete and vibrated if continuous special inspection is provided. Dowels with hooks must be secured before pouring concrete.
- E. Minimum clear cover from reinforcing to surfaces of concrete shall be as follows:
1. Concrete cast against and permanently exposed to earth: 3"
 2. Concrete exposed to earth or weather: 1 1/2" (5# and smaller)
2" (6# and larger)
 3. Concrete not exposed to weather or in contact with earth: 3/4"
- Clear distance between parallel bars in a layer shall be as shown on the plans with minimum of 2 1/2".

4. FOOTING WORK:
- A. Pipes and other work which require trenching adjacent to pad footings and parallel to continuous footings shall not be located below lines extending downward from the bottom edges of the footing at a 45-degree angle from the horizontal. Pipes and other work perpendicular to continuous footings may be located beneath the footing. Footing elevations may be lowered if approved on the footing shop drawings.
5. SLAB-ON-GRADE WORK:
- A. Coordinate slab-on-grade work with all other work. Provide thickened slabs, depressed slabs, equipment pads, blockouts, etc. as needed. See Arch. plans for elevations and locations.
- B. Saw cut control joints in slab to a depth equal to 1/3 the slab thickness.
- C. Slabs-on-grade Requirements U.N.O. on the plans:
1. Thickness: 4" Minimum
 2. Reinforcing: 6#xW1.4xW1.4 w.w.f.
 3. Control Joints: 10'-0" o.c. maximum each way, unless noted otherwise.
- D. At contractor's option, where slab is not exposed, reinforcing may be synthetic fibrillated polypropylene fibers engineered and designed for use in concrete, complying with ASTM C1116, Type III. Uniformly disperse in concrete mix at Manufacturer's recommended rate, but not less than 1.5 lbs/CY.
- E. Separate S.O.G. w/ 3/8" expansion joint material from all columns and walls. Differential movement could occur between foundations and slab-on-grade.
- F. All slabs-on-grade shall have a 10 mil Class A Vapor Retarder or 15 mil Class A Vapor Barrier directly beneath the slab.
- G. Provide 4" minimum granular fill below the vapor retarder to provide a capillary break and a durable working surface. Granular fill shall be clean, crushed, well draining material with less than 25% passing the No. 100 sieve and free of clay or organic material.
- H. (Fill and subgrade shall be compacted to the following minimums:
- Cohesive Soils: 90% of maximum dry density at a moisture content between -1% and +5%, per ASTM D1557, Modified Proctor
- Cohesionless Soils: Compact cohesionless soil under floor slabs with vibratory equipment. 7" maximum depth.)

6. CONCRETE SLABS ON METAL DECK:
- A. Place concrete slab over metal deck with the minimum thickness described on the plans. The top of the slab shall be placed level to the elevation shown on the plans. Because beams will deflect during erection and concrete placement more concrete will be required than theoretically estimated using a uniform slab thickness. Electrical boxes placed in slab must be shimmed to account for beam and deck deflection.
- B. Openings in Slabs:
1. Some, but not necessarily all, openings are shown on the Structural Drawings. Contractor shall coordinate location and size of all openings with other work (Mech., Elec., etc.).
 2. Openings in concrete slabs up to 10" in diameter / width may be core drilled or saw cut as long as only one deck flute is interrupted. Openings greater than 10" and not specifically framed or detailed on the drawings must be brought to the attention of the structural engineer.
 3. Multiple small openings spaced closer than 12" edge to edge shall be considered one opening and must meet the requirements listed in above.
- C. Do not support piping in excess of 250 lb from slab-on-metal deck. Any location where larger loads occur supplemental framing shall be provided to transfer the loading to the steel framing members. All plumbing attachments to slabs and structure shall be designed by the plumbing contractor's engineer.

STRUCTURAL STEEL WORK

1. MATERIALS:
- Wide Flange Beams and Tee Shapes: ASTM A992, Grade 50
Angles, Channels, Plates, and Bars: ASTM A36
Steel Tubes: ASTM A500, Grade C
Steel Pipes: ASTM A53, Type E or S, Grade B
Headed Studs: ASTM A109, Grade 1015
Anchor Bolts: ASTM F1554 (GR. 36), Headed Type, U.N.O.
Non-High Strength Bolts: ASTM A307
High Strength Bolts: ASTM A325 bearing type connections, U.N.O.
Welding Electrodes: E70
Deformed Bar Anchors: ASTM A496, with a minimum tensile strength of 80 ksi.
2. STRUCTURAL STEEL:
- A. All steel work shall comply with the Building Code and Steel Code.
- B. Provide structural steel work as shown on the drawings and submit shop drawings for the same. Where the design of members or connections are not specifically noted, provide such in accordance with the latest AISC specifications and submit the design with the shop drawings for approval.
- C. Steel shall be fabricated to achieve the elevations, slopes, and geometry shown on the Architectural and Structural Drawings. Structural steel shall provide a uniform surface for the attachment of metal deck.
- D. All structural steel shapes, plates, bolts, etc. exposed to weather shall be galvanized.
- E. All touch-up all field welding work of galvanized members w/ ZRC Cold Galvanizing.
- F. All bolted connections shall be "snug-tight" unless noted otherwise on structural details.
3. METAL FLOOR DECK:
- A. "2VLJ" or approved Equal with the following minimum section properties:
- | | |
|---------------|-------------|
| Depth: | See plans |
| Thickness: | See plans |
| Finish: | Galvanized |
| Yield Stress: | 60 KSI min. |
- B. All metal floor deck work shall comply with SDI - Steel Deck Institute "Specifications and Commentary for Composite Steel Floor Deck".
- C. Metal floor deck shown on the drawings shall be used in 3 or more span condition, unless noted or detailed otherwise.
- D. Metal floor deck shall be attached as follows, unless noted otherwise on the drawings:
1. Fasten deck to supports with 5/8" diameter puddle welds at each flute and at 18" o.c. where deck is parallel to supports, unless noted otherwise.
 2. Fasten side laps of individual sheets together between supports with #10 Tek screws at a spacing of 18" o.c. maximum between supports.
- E. Openings in Slab-on-Metal Deck. See "Concrete Slabs on Metal Deck" in "Cast-in-place Concrete Work".
- F. All suspended slab edge angle locations must be coordinated with architectural drawings whether indicated in the plans and details or not.

4. METAL ROOF DECK:
- A. All metal roof deck work shall comply with SDI - Steel Deck Institute "Specifications and Commentary for Steel Roof Deck".
- B. Metal Roof Deck Properties:
1. "1.5B" with the following minimum section properties:

Depth:	See plans
Thickness:	See plans
Finish:	Primed, U.N.O. (Galvanized)
Yield Stress:	55 KSI min.

C. Metal roof deck shown on the drawings shall be used in 3 or more span condition.

D. Metal roof deck shall be attached as follows, unless noted otherwise on the drawings:

1. OPTION #1

 - a. Fasten deck to steel supports with 5/8" diameter puddle welds at pattern shown on the drawings.
 - b. Where deck is parallel to steel, attach deck to steel with 5/8" diameter puddle welds at 12" o.c., unless noted otherwise.
 - c. Fasten side laps of individual sheets together with #10-16 Tek screws at 18" o.c. line weld between supports as noted on plans.

2. OPTION #2

 - a. Powder Actuated Fasteners may be used, provided the capacity meets or exceeds the diaphragm capacity of the welded option. The Contractor shall submit the following information:
 1. Justification of fastener diaphragm capacity.
 2. Plan showing fastener type for each area based on substrate thickness that is being attached to.
 3. Plan showing joint chord or beam flange thickness.

- E. All edges and openings in deck shall be supported. Unless noted or approved otherwise, provide support in accordance with the following:
- Openings less than 8": Add a 2'-0" (min.) wide x 3'-0" long piece of deck nested on top of deck. Screw flutes together with #10 screws at 6" centers. Opening may be cut through the center of the deck.
- Openings greater than 8" in either direction: Support edges of openings with steel framing supported by the steel joists or beams as shown in the typical detail. The steel deck shall be welded to the framing with the welds at 12" centers.
- F. Each connection point to metal deck may support up to 25 pounds.
- G. Mechanical equipment, piping, ductwork, etc. shall be supported from the Structural Framing.
5. OPEN WEB JOISTS:
- A. All steel joist work shall comply with SJI - Steel Joist Institute - "Standard Specifications for Open Web Steel Joists".
- B. Steel joists are designated on the drawings using Steel Joist Institute designations. Provide special joist designs as specifically noted on the plans or details.
- C. Steel joists shall be designed for a minimum net uplift of {15} psf unless noted otherwise and without a 1/3 stress increase.
- D. Joist Bridging:
1. All bridging shall be continuous. Bridging may be terminated where necessary (e.g. for mechanical work) provided diagonal cross bridging is provided at each adjacent joist space. Bridging shall not be interrupted at two adjacent joist spaces.
 2. Where diagonal cross bridging is used, provide horizontal bridging at first joist space adjacent to walls.
- E. Do not place concentrated loads in excess of 100 lbs. between panel points of steel joists unless web members are installed in accordance with the typical detail. Joist reinforcing details assumes rod web members. If angle web members are provided the joist manufacturer shall provide an alternate detail of equivalent strength on the shop drawings.
- F. Joist locations shall be shown on the shop drawings. Any deviations in locations for those shown on the drawings shall be highlighted.
- G. All steel joists shall be designed for a minimum of 25% shear reversal. Snowdrifts have been accounted for in the standard joist designations shown on the plans.

6. ARCHITECTURALLY EXPOSED STRUCTURAL STEEL (AESS):
- A. All steel exposed to view in public areas shall be considered architecturally exposed structural steel (AESS). Steel exposed to view in non-public spaces or enclosed within ceilings/finishes does not require AESS level of fabrication or installation.
- B. Refer to the "ARCHITECTURALLY EXPOSED STRUCTURAL STEEL" table for specific requirements for steel labeled as AESS.
- C. AESS 1 category shall be used for steel unless noted otherwise below:
1. All steel framing, assemblies and connections located within 12'-0" from top of first floor shall meet the requirements of AESS 2.

STRUCTURAL COLD-FORMED METAL FRAMING WORK

1. GENERAL:
- A. All members within this section are considered cold-formed lightgauge framing. Cold-formed lightgauge framing is a delegated design submittal and shall be designed by a Professional Engineer licensed in the state where the project is being built. Sealed calculations shall accompany the cold formed metal framing shop drawings. See specifications for additional requirements.
- B. Structural cold-formed metal framing is all exterior walls, canopies, and soffits. See Specification Section 05 4000 for the balance of information.
- C. Structural lightgauge framing member minimum yield strengths:
- 16 gage and thinner: 33 KSI
 - 16 gage and thicker: 50 KSI
 - Minimum yield strengths apply to all studs, tracks, flat straps, gussets, and other framing members, unless specifically noted otherwise.
- D. Connection material noted on the plans shall be by "The Steel Network, Inc." of Raleigh, North Carolina [www.steelnetwork.com / 1-888-474-4876] or Approved equivalent.
2. WALLS:
- A. Maximum spacing of wall framing shall be 24" o.c.; minimum gage shall be 18. Stud width shall be 1 5/8" and track width shall be 1 1/4".
- B. Metal stud wall panels may be prefabricated. Prefabricated frames shall be square, with components attached in a manner to prevent racking during fabrication, transportation, and lifting. Provisions to lift the panel should be included in the frame's design and construction.
- C. Field cutting of steel members shall be by saw or shear. Torch cutting is not permitted.
- D. Attach lightgauge framing that is continuous along other Work as follows, unless noted otherwise on the Drawings:
1. Continuous bottom wall track along concrete or masonry. Use (1)-Hilti 0.157 dia. "X-U" universal knurled shank fastener at 16" o.c. [1 1/2" embedment], unless noted or detailed otherwise.
 2. Knurled wall track or soffit track along HSS Steel Tubes or Structural Steel: Use (1)-Hilti 0.157 dia. "X-U" universal knurled shank fastener at 16" o.c., unless noted or detailed otherwise.
- E. Install load-bearing studs or girt between the underside of wall bottom track and the surface of a supporting concrete foundation wall or slab where a gap larger than 1/8" is occurring to ensure a uniform and level bearing surface for the lightgauge wall. Studs shall be seated squarely (within 1/16") against the web of the top and bottom track. Studs shall be plumb, aligned, and secured to the continuous runner tracks with (1)-#12-14 TEK screw through each flange.
- F. All exterior wall studs shall be laterally braced in their weak axis with Dietrich SPAZZER 5400 bridging (or Approved Equal) at 4'-0" o.c. max. and installed per manufacturer's instructions. Where OSB or Gypsum sheathing is not attached to wall, provide lateral bracing of both flanges using straps.
- G. At track butt joints, abutting pieces of track shall be securely anchored to a common stud. Where splicing of wall track is necessary between stud spacings, a piece of wall stud shall be placed in the adjoining track sections and fastened to the track flanges at both sides of the wall with (3)-#12-14 TEK screws on each side of the joint (unless otherwise indicated in the delegated design).
- H. Provide slip connections at the top of the walls unless noted otherwise on the plans.

3. ROOF:
- A. All roof framing shall be cold-formed metal framing. Cold-formed metal framing is a delegated design submittal and shall be designed by a Professional Engineer licensed in the state where the project is being built. Sealed calculations shall accompany the cold formed metal framing shop drawings. See specifications for additional requirements.
- B. Structural cold-formed metal framing is all exterior walls, canopies, and soffits. See Specification Section 05 4000 for the balance of information.
- C. Structural lightgauge framing member minimum yield strengths:
- 16 gage and thinner: 33 KSI
 - 16 gage and thicker: 50 KSI
 - Minimum yield strengths apply to all studs, tracks, flat straps, gussets, and other framing members, unless specifically noted otherwise.
- D. Connection material noted on the plans shall be by "The Steel Network, Inc." of Raleigh, North Carolina [www.steelnetwork.com / 1-888-474-4876] or Approved equivalent.
2. WALLS:
- A. Maximum spacing of wall framing shall be 24" o.c.; minimum gage shall be 18. Stud width shall be 1 5/8" and track width shall be 1 1/4".
- B. Metal stud wall panels may be prefabricated. Prefabricated frames shall be square, with components attached in a manner to prevent racking during fabrication, transportation, and lifting. Provisions to lift the panel should be included in the frame's design and construction.
- C. Field cutting of steel members shall be by saw or shear. Torch cutting is not permitted.
- D. Attach lightgauge framing that is continuous along other Work as follows, unless noted otherwise on the Drawings:
1. Continuous bottom wall track along concrete or masonry. Use (1)-Hilti 0.157 dia. "X-U" universal knurled shank fastener at 16" o.c. [1 1/2" embedment], unless noted or detailed otherwise.
 2. Knurled wall track or soffit track along HSS Steel Tubes or Structural Steel: Use (1)-Hilti 0.157 dia. "X-U" universal knurled shank fastener at 16" o.c., unless noted or detailed otherwise.
- E. Install load-bearing studs or girt between the underside of wall bottom track and the surface of a supporting concrete foundation wall or slab where a gap larger than 1/8" is occurring to ensure a uniform and level bearing surface for the lightgauge wall. Studs shall be seated squarely (within 1/16") against the web of the top and bottom track. Studs shall be plumb, aligned, and secured to the continuous runner tracks with (1)-#12-14 TEK screw through each flange.
- F. All exterior wall studs shall be laterally braced in their weak axis with Dietrich SPAZZER 5400 bridging (or Approved Equal) at 4'-0" o.c. max. and installed per manufacturer's instructions. Where OSB or Gypsum sheathing is not attached to wall, provide lateral bracing of both flanges using straps.
- G. At track butt joints, abutting pieces of track shall be securely anchored to a common stud. Where splicing of wall track is necessary between stud spacings, a piece of wall stud shall be placed in the adjoining track sections and fastened to the track flanges at both sides of the wall with (3)-#12-14 TEK screws on each side of the joint (unless otherwise indicated in the delegated design).
- H. Provide slip connections at the top of the walls unless noted otherwise on the plans.

4. METAL ROOF DECK:
- A. All metal roof deck work shall comply with SDI - Steel Deck Institute "Specifications and Commentary for Steel Roof Deck".
- B. Metal Roof Deck Properties:
1. "1.5B" with the following minimum section properties:

Depth:	See plans
Thickness:	See plans
Finish:	Primed, U.N.O. (Galvanized)
Yield Stress:	55 KSI min.

C. Metal roof deck shown on the drawings shall be used in 3 or more span condition.

D. Metal roof deck shall be attached as follows, unless noted otherwise on the drawings:

1. OPTION #1

 - a. Fasten deck to steel supports with 5/8" diameter puddle welds at pattern shown on the drawings.
 - b. Where deck is parallel to steel, attach deck to steel with 5/8" diameter puddle welds at 12" o.c., unless noted otherwise.
 - c. Fasten side laps of individual sheets together with #10-16 Tek screws at 18" o.c. line weld between supports as noted on plans.

2. OPTION #2

 - a. Powder Actuated Fasteners may be used, provided the capacity meets or exceeds the diaphragm capacity of the welded option. The Contractor shall submit the following information:
 1. Justification of fastener diaphragm capacity.
 2. Plan showing fastener type for each area based on substrate thickness that is being attached to.
 3. Plan showing joint chord or beam flange thickness.

AESS Category Matrix					
Category		AESS 4	AESS 3	AESS 2	AESS 1
Id	Characteristics	Showcase Elements	Feature Elements in close view	Feature Elements not in close view	Basic Elements
1.1	Surface preparation to SSPC-SP 6	X	X	X	X
1.2	Sharp edges ground smooth	X	X	X	X
1.3	Continuous weld appearance	X	X	X	X
1.4	Standard Structural bolts	X	X	X	X
1.5	Weld spatters removed	X	X	X	X
2.1	Visual samples	X	X	Optional	
2.2	One-half standard fabrication tolerances	X	X	X	
2.3	Fabrication marks not apparent	X	X	X	
2.4	Welds uniform and smooth	X	X	X	
3.1	Mill marks removed	X	X		
3.2	Butt and plug welds ground smooth and filled	X	X		
3.3	HSS weld seam oriented for reduced visibility	X	X		
3.4	Cross sectional abutting surface aligned	X	X		
3.5	Joint gap tolerances minimized	X	X		
3.6	All welded connections	Optional	Optional		
4.1	HSS seam not apparent	X			
4.2	Welds contoured and blended	X			
4.3	Surfaces filed and sanded	X			
4.4	Weld show-through minimized	X			

- User Notes:
- 1.1 Prior to blast cleaning, grease and oil are removed by solvent cleaning to meet SSPC-SP1.
 - 1.2 Rough surfaces are deburred and ground smooth. Sharp edges resulting from flame cutting, grinding and especially shearing are softened.
 - 1.3 Intermitent welds are made continuous, either with additional welding, caulking or body filler. For corrosive environments, all joints are seal welded. Seams of hollow Structural sections are acceptable as produced.
 - 1.4 All bolt heads in connections are on the same side, as specified, and consistent from one connection to another.
 - 1.5 Weld spatter, slivers, surface discontinuities are removed. Weld projection up to 1/16 in. (2 mm) is acceptable for butt and plug welded joints.
 - 2.1 Visual samples are either a 3-D rendering, a physical sample, a first-off inspection, a scaled mock-up or a fullscale mock-up, as specified in the contract documents.
 - 2.2 These tolerances are one-half of those for standard Structural steel as specified in this Code.
 - 2.3 Member markings during the fabrication and erection processes are not visible.
 - 3.1 All mill marks are not visible in the finished product.
 - 3.2 Caulking or body filler is acceptable.
 - 3.3 Seams are oriented away from view or as indicated in the contract documents.
 - 3.4 The matching of abutting cross sections is required.
 - 3.5 This characteristic is similar to 2.2 above. A clear distance between abutting members of 1/8 in. (3 mm) is required.
 - 3.6 Hidden bolts may be considered.
 - 4.1 HSS seams are treated so they are not apparent.
 - 4.2 In addition to a contoured and blended appearance, welded transitions between members also are contoured and blended.
 - 4.3 The steel surface imperfections are filed and sanded.
 - 4.4 Weld show-through on the back side of a welded element can be minimized by hand grinding the back side surface. The degree of weld-through is a function of weld size and material.

EXTERIOR VENEER LINTELS

1. All veneer shall be supported at the head of openings.
2. All openings in brick veneer shall have a lintel at the head of the opening. Unless noted otherwise, use a galvanized steel angle bearing 8" at each end on a 4"x8" 16oz. Copper plate or (2)-layers of roofing felt as follows:
- Openings up to 4'-0": L4x4x5/16" angle
 - Openings wider than 4'-0" and up to 6'-8": L6x4x5/16" angle
 - Openings wider than 6'-8": See Plans
- Any opening that can not be made in accordance with the requirements above and are not detailed on the Structural Drawings, shall be brought to the attention of the Architect/Engineer for determination of lintel size.

POST INSTALLED ANCHORS

1. MATERIALS:
- Concrete:
- Adhesive Anchors: Hilti "HY200" Safeset, Hilti

2010 AISC 360 TABLE N5.4-1 Inspection Tasks Prior to Welding		
Inspection Tasks Prior to Welding	QC	QA
Welding procedure specifications (WPSs) available	P	P
Manufacturer certifications for welding consumables available	P	P
Material identification (type/grade)	O	O
Welder identifications system (1)	O	O
Fit-up of groove welds (including joint geometry)		
- Joint preparation		
- Dimensions (alignment, root opening, root face, bevel)	O	O
- Cleanliness (condition of steel surfaces)		
- Backing type and fit (if applicable)		
Configuration and finish of access holes	O	O
Fit-up of fillet welds		
- Dimensions (alignment, gaps at root)	O	O
- Cleanliness (condition of steel surfaces)		
- Tacking (tack weld quality and location)		
Check welding equipment	O	---
(1) The fabricator or erector, as applicable, shall maintain a system by which a welder who has welded a joint or member can be identified. Stamps, if used, shall be the low-stress type.		

2010 AISC 360 TABLE N5.4-2 Inspections During Welding		
Inspections During Welding	QC	QA
Use of qualified welders	O	O
Control and handling of welding consumables		
- Packaging	O	O
- Exposure control		
No welding over cracked tack welds	O	O
Environmental conditions		
- Wind speed within limits	O	O
- Precipitation and temperature		
WPS followed		
- Travel speed		
- Selected welding materials	O	O
- Shielding gas type/flow rate		
- Preheat applied		
- Interpass temperature maintained (min./max.)		
- Proper position (F, V, H, OH)		
Welding techniques		
- Interpass and final cleaning	O	O
- Each pass within profile limitations		
- Each pass meets quality requirements		

2010 AISC 360 TABLE N5.4-3 Inspection Tasks After Welding		
Inspection Tasks After Welding	QC	QA
Welds cleaned	O	O
Size, length and location of welds	P	P
Welds meet visual acceptance criteria		
- Crack prohibition		
- Weldbase-metal fusion	P	P
- Crater cross section		
- Weld profiles		
- Weld size		
- Undercut		
- Porosity		
Arc strikes	P	P
k-area (1)	P	P
Backing removed and weld tabs removed (if required)	P	P
Repair activities	P	P
Document acceptance or rejection of welded joint or member	P	P
(1) When welding of doubler plates, continuity plates or stiffeners has been performed in the k-area, visually inspect the web k-area for cracks within 3 in. (75 mm) of the weld.		

2010 AISC 360 TABLE N5.6-1 Inspection Tasks Prior to Bolting		
Inspection Tasks Prior to Bolting	QC	QA
Manufacturer's certifications available for fastener materials.	O	P
Fasteners marked in accordance with ASTM requirements.	O	O
Proper fasteners selected for the joint detail (grade, type, bolt length if threads are to be excluded from shear plane)	O	O
Proper bolting procedure selected for joint detail.	O	O
Connecting elements, including the appropriate laying surface condition and hole preparation, if specified, meet applicable requirements.	O	O
Pre-installation verification testing by installation personnel observed and documented for fastener assemblies and methods used.	P	O
Proper storage provided for bolts, nuts, washers and other fastener components.	O	O

2010 AISC 360 TABLE N5.6-2 Inspection Tasks During Bolting		
Inspection Tasks During Bolting	QC	QA
Fastener assemblies, of suitable condition, placed in all holes and washers (if required) are positioned as required	O	O
Joint brought to the snug-tight condition prior to the pretensioning operation	O	O
Fastener component not turned by the wrench prevented from rotating	O	O
Fasteners are pretensioned in accordance with the RCSC Specification progressing systematically from the most rigid point toward the free edges	O	O

2010 AISC 360 TABLE N5.6-3 Inspection Tasks After Bolting		
Inspection Tasks After Bolting	QC	QA
Document acceptance or rejection of bolted connections	P	P

2010 AISC 360 TABLE N6.1 INSPECTION OF STEEL ELEMENTS OF COMPOSITE CONSTRUCTION PRIOR TO CONCRETE PLACEMENT		
Inspection of Steel Elements of Composite Construction Prior to Concrete Placement	QC	QA
Placement and installation of steel deck	P	P
Placement and installation of steel headed stud anchors.	P	P
Document acceptance or rejection of steel elements.	P	P

AISC SPECIAL INSPECTION NOTES:	
O - Observe these items on a random basis. Operations need not be delayed pending these inspections.	
P - Perform these tasks for each steel element.	
QC - Quality Control performed by the Steel Fabricator and Erector.	
QA - Quality Assurance performed by the Special Inspector.	

2015 IBC TABLE 1705.2.3 REQUIRED SPECIAL INSPECTIONS OF OPEN-WEB STEEL JOISTS AND JOISTS GIRDERS			
TYPE	CONTINUOUS SPECIAL INSPECTION	PERIODIC SPECIAL INSPECTION	REFERENCED STANDARD (a)
1. Installation of open-web steel joists and joist girders:			
a. End connections - welding or bolted.	--	X	SJI specifications listed in Section 2207.1.
b. Bridging - horizontal or diagonal.	--	--	
1. Standard bridging	--	X	SJI specifications listed in Section 2207.1.
2. Bridging that differs from the SJI specifications listed in Section 2207.1.		X	

For SI: 1 inch = 25.4 mm.
(a) Where applicable, see also Section 1705.12. Special inspections for seismic resistance.

2015 IBC TABLE 1705.6 REQUIRED SPECIAL INSPECTIONS AND TESTS OF SOILS			
TYPE	CONTINUOUS	PERIODIC	
1. Verify materials below shallow foundations are adequate to achieve the design bearing capacity.	-	X	
2. Verify excavations are extended to proper depth and have reached proper material.	-	X	
3. Perform classification and testing of compacted fill materials.	-	X	
4. Verify use of proper materials, densities and lift thicknesses during placement and compaction of compacted fill.	X	-	
5. Prior to placement of compacted fill, inspect subgrade and verify that site has been prepared properly.	-	X	

2015 IBC TABLE 1705.3 REQUIRED SPECIAL INSPECTIONS AND TESTS OF CONCRETE CONSTRUCTION					
	TYPE	CONTINUOUS SPECIAL INSPECTION	PERIODIC SPECIAL INSPECTION	REFERENCED STANDARD	IBC REFERENCE
1.	Inspect reinforcement, including prestressing tendons, and verify placement.	--	X	ACI 318 Ch. 20, 25.2, 25.3, 26.6, 1-26.6.3	1908.4
2.	Reinforcing bar welding:				
a.	Verify weldability of reinforcing bars other than ASTM A706.	--	X	AWS D1.4	--
b.	Inspect single-pass fillet welds, maximum 5/16", and	X	X	ACI 318: 26.6.4	
c.	Inspect all other welds.	X			
3.	Inspect anchors cast in concrete.	--	X	ACI 318: 17.8.2	--
4.	Inspect anchors post-installed in hardened concrete:				
a.	Where anchors are installed in horizontally or vertically oriented holes to resist tensile tension loads.	X	X	ACI 318: 17.8.2.4	--
b.	Where anchors are installed in horizontally oriented holes to resist tensile tension loads.	X	X	ACI 318: 17.8.2	--
5.	Verify use of required design mix.	--	X	ACI 318: Ch. 19, 26.4.3, 26.4.4	1904.1, 1904.2, 1908.2, 1908.3
6.	Prior to concrete placement, fabricate specimens for strength tests, perform slump and air content tests, and determine the temperature of the concrete.	X	--	ASTM C172 ASTM C311 ACI 318: 26.4, 26.12	1908.10
7.	Inspect concrete and shotcrete placement for proper application techniques.	X	-	ACI 318: 26.5	1908.6, 1908.7, 1908.8
8.	Verify maintenance of specified curing temperature and techniques.	--	X	ACI 318: 26.5.3-26.5.5	1908.9
9.	Inspect prestressed concrete for:				
a.	Application of prestressing forces; and	X	--	ACI 318: 26.10	--
b.	Grouting of bonded prestressing tendons.	X			
10.	Inspect erection of precast concrete members.	--	X	ACI 318: Ch. 26.8	--
11.	Verify in-situ concrete strength, prior to stressing of tendons in post-tensioned concrete and prior to removal of shores and forms from beams and structural slabs.	--	X	ACI 318: 26.11.2	--
12.	Inspect formwork for shape, location and dimensions of the concrete member being formed.	--	X	ACI 318: 26.11.1, 2(b)	--

For SI: 1 inch = 25.4 mm.
(a) Where applicable, see also Section 1705.12. Special inspections for seismic resistance.
(b) Specific requirements for special inspection shall be included in the research report for the anchor issued by an approved source in accordance with 17.8.2 in ACI 318, or other qualification procedures. Where specific requirements are not provided, special inspection requirements shall be specified by the registered design professional and shall be approved by the building official prior to the commencement of the work.

THESE ARE NOT THE FINAL BID DOCUMENTS - REFERENCE ONLY

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE

DESIGN DEVELOPMENT

NOT FOR CONSTRUCTION


△ REVISION DATE
Project Number: 21064
Date: March 10, 2023
COPYRIGHT © 2022

SPECIAL INSPECTION




TD2 PROJECT # 748-749

S0.2

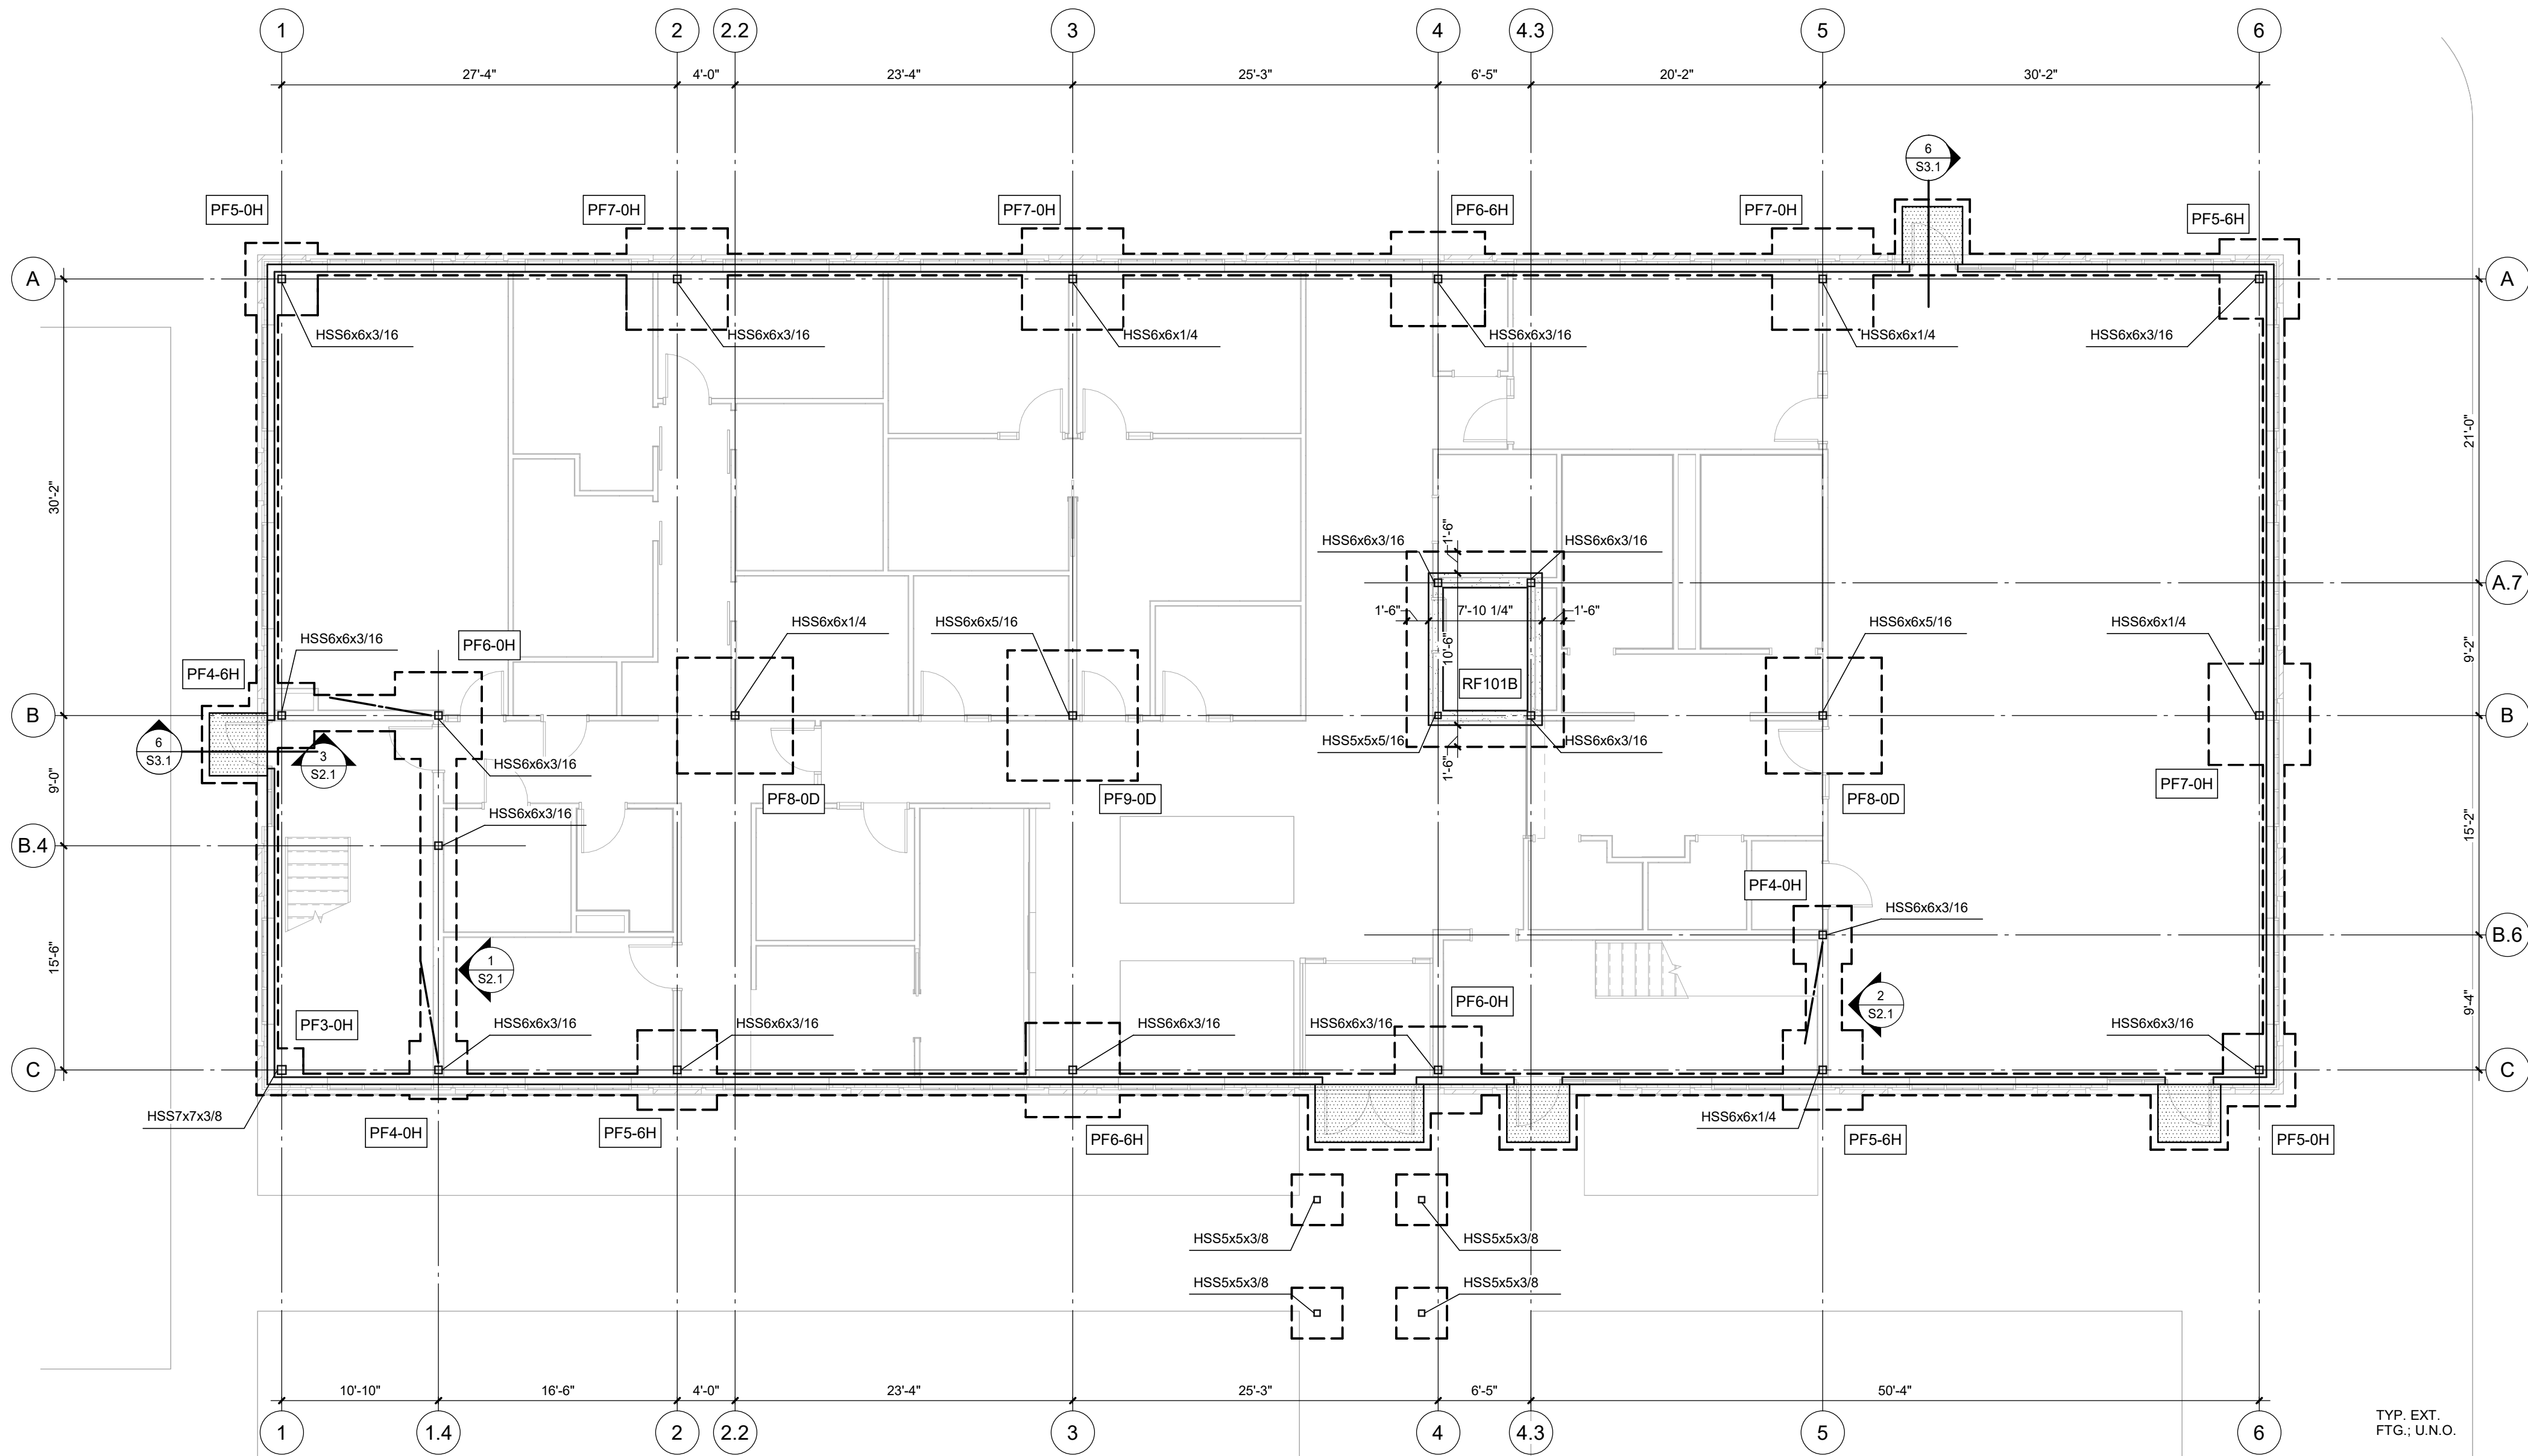

THESE ARE NOT THE FINAL BID DOCUMENTS - REFERENCE ONLY

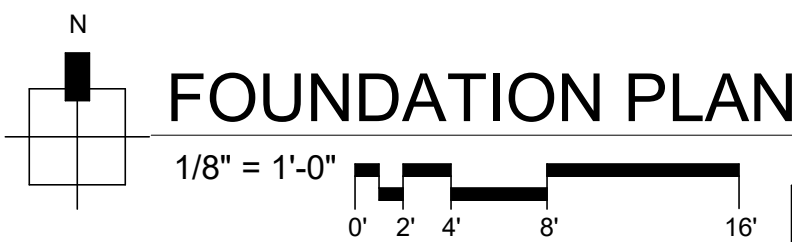

FOOTING SCHEDULE						
MARK	SIZE			REINFORCING	REMARKS	
	W	L	D			
CF1-6H	1'-6"	CONT.	3'-2"	(1)-#8 TOP & BOTT.		
CF2-6H	2'-6"	CONT.	3'-2"	(2)-#6s TOP & BOTT. w/ #4 TIES AT 48"o.c.		
PF3-0H	3'-0"	3'-0"	3'-2"	(3)-#4s E.W. TOP & BOTT.		
PF3-6H	3'-6"	3'-6"	3'-2"	(4)-#4s E.W. TOP & BOTT.		
PF4-0H	4'-0"	4'-0"	3'-2"	(4)-#4s E.W. TOP & BOTT.		
PF4-6H	4'-6"	4'-6"	3'-2"	(5)-#4s E.W. TOP & BOTT.		
PF5-0H	5'-0"	5'-0"	3'-2"	(5)-#4s E.W. TOP & BOTT.		
PF5-6H	5'-6"	5'-6"	3'-2"	(6)-#4s E.W. TOP & BOTT.		
PF6-0H	6'-0"	6'-0"	3'-2"	(6)-#5s E.W. TOP & BOTT.		
PF6-6H	6'-6"	6'-6"	3'-2"	(7)-#5s E.W. BOTT. & BOTT.		
PF7-0H	7'-0"	7'-0"	3'-2"	(7)-#5s E.W. TOP & BOTT.		
PF8-0D	8'-0"	8'-0"	2'-0"	(8)-#6s E.W. TOP & BOTT.		
PF9-0D	9'-0"	9'-0"	2'-0"	(8)-#7s E.W. TOP & BOTT.		
RF101B	SEE PLAN	SEE PLAN	1'-4"	#5s AT 12"o.c. EACH WAY TOP AND BOTTOM	ELEVATOR PIT SLAB / FOOTING	

ALLEY POYNER
MACCHIETTO
ARCHITECTURE

DESIGN DEVELOPMENT

REVISION DATE
Project Number: 21064
Date: March 10, 2023
COPYRIGHT © 2022


FOUNDATION PLAN



TD2 PROJECT # 748-749

S1.1

NOT FOR CONSTRUCTION

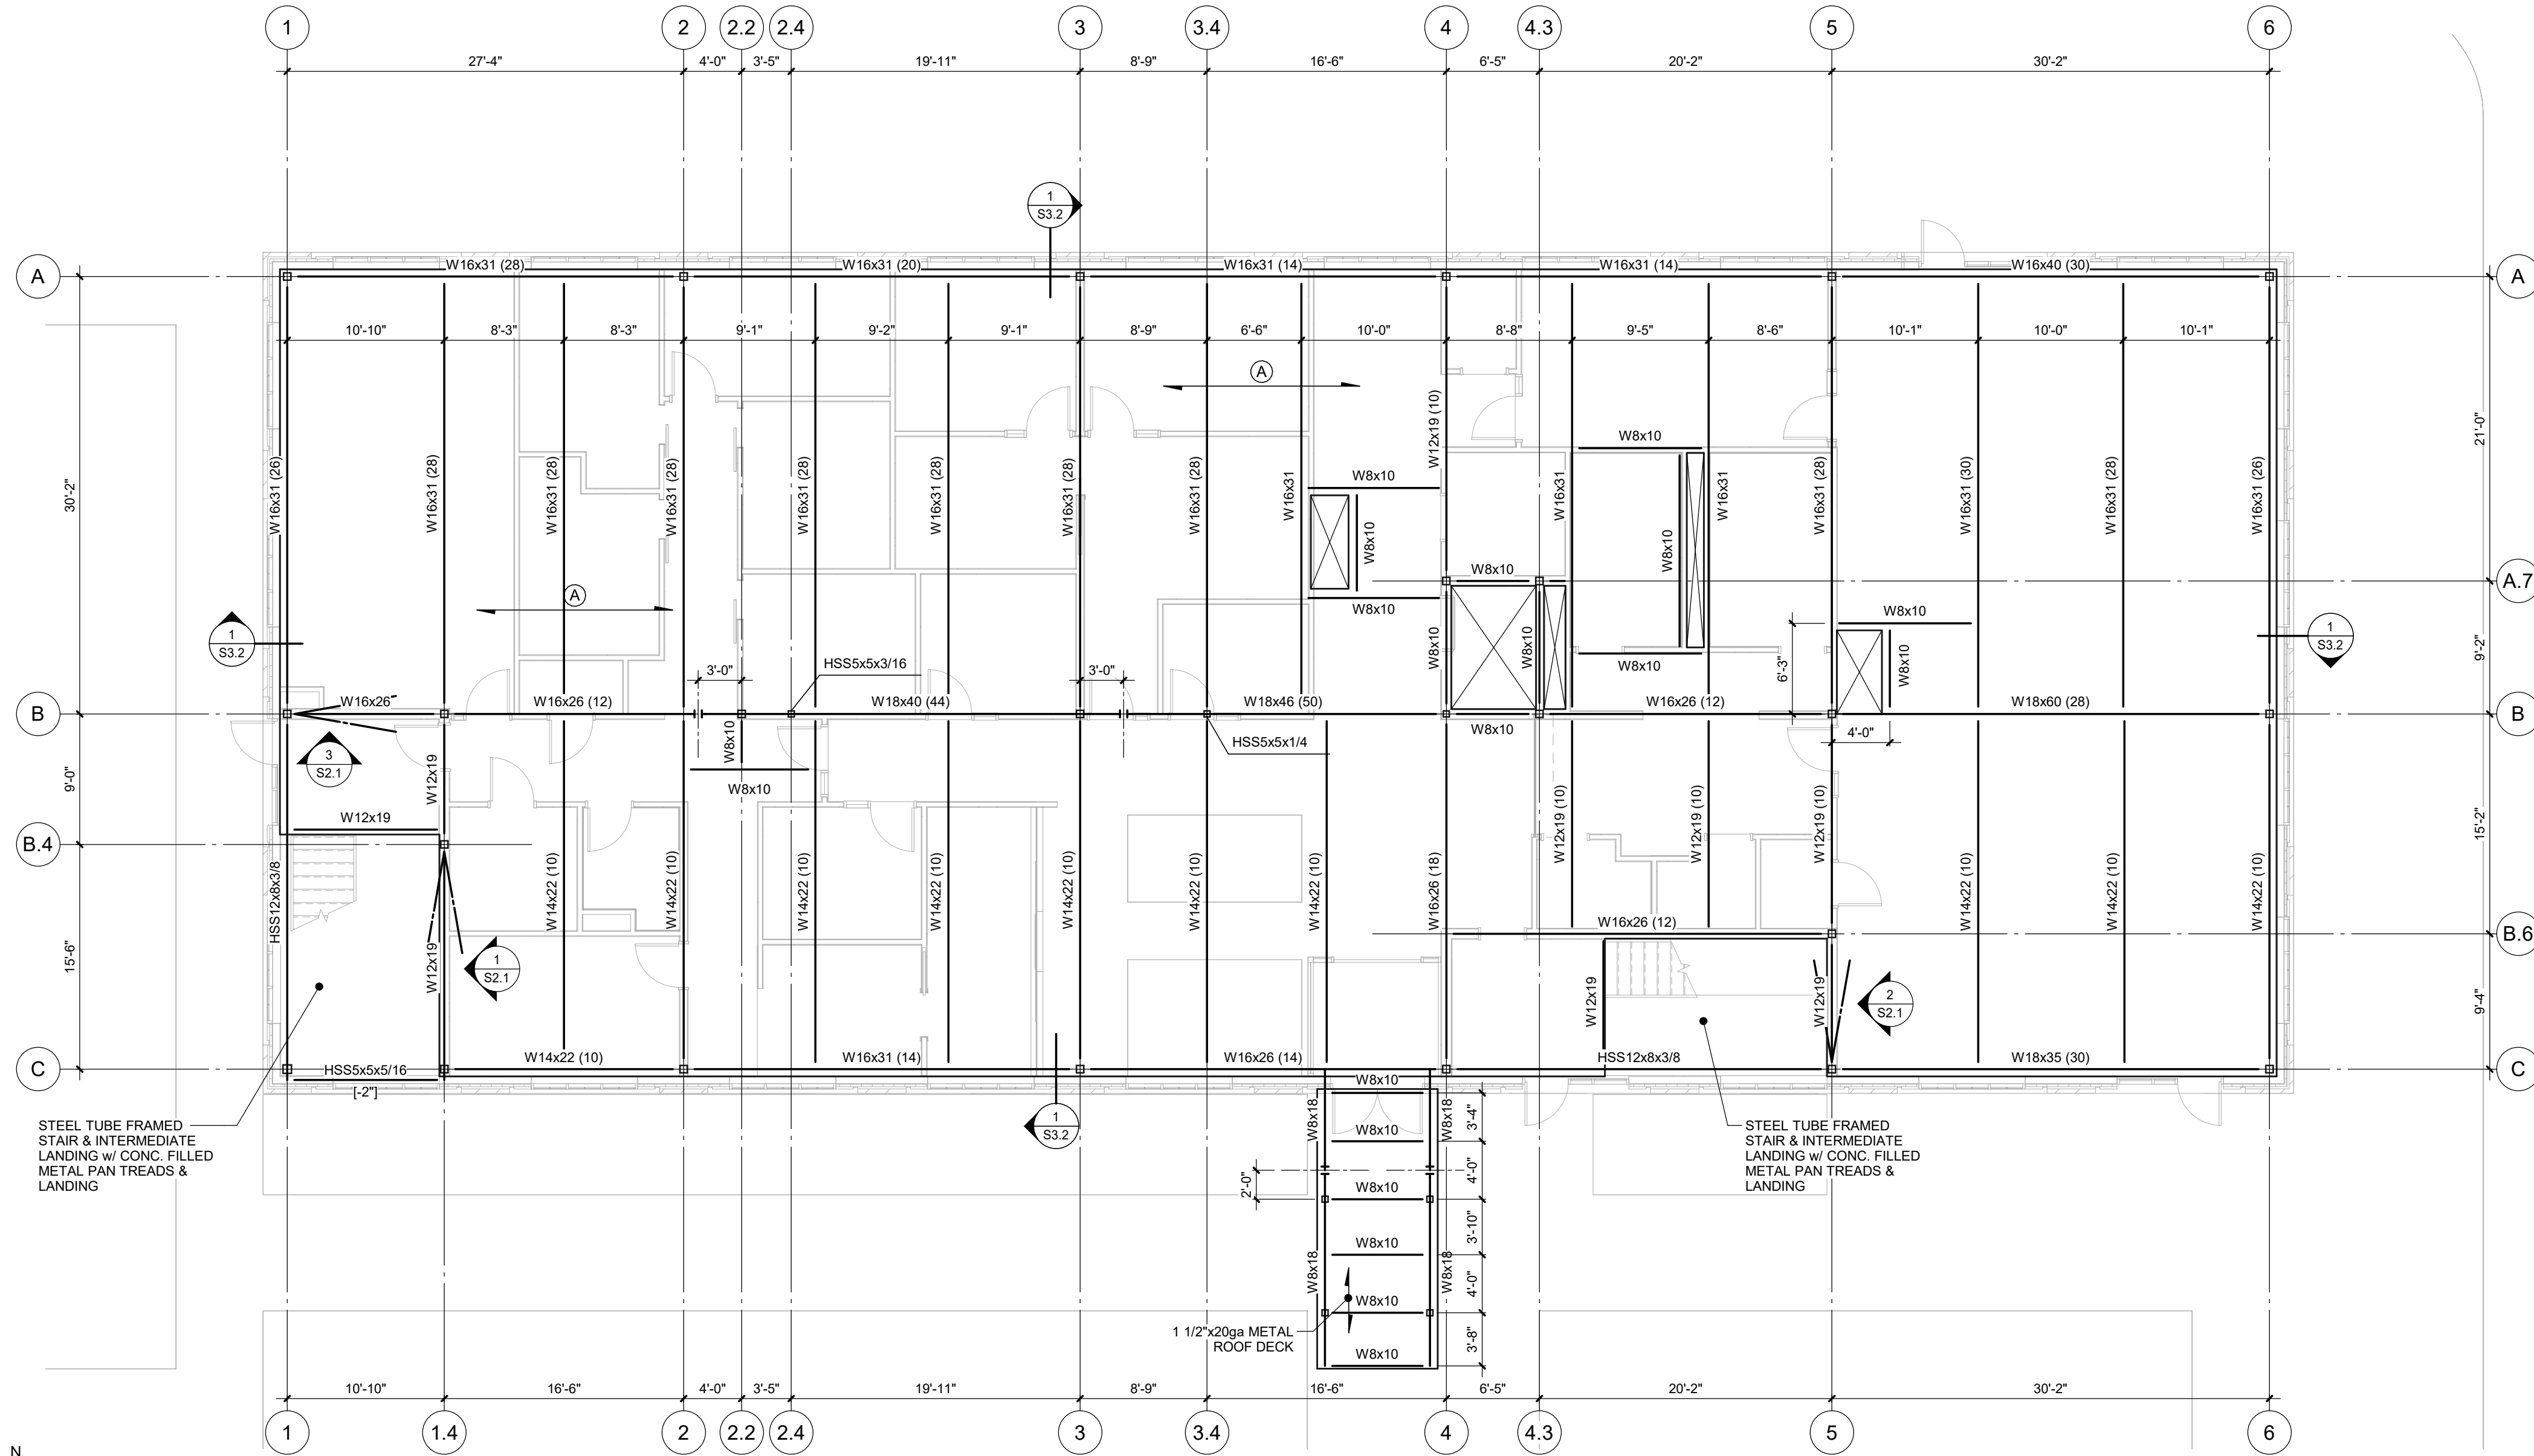

SECOND FLOOR FRAMING PLAN

- SECTION FLOOR FRAMING NOTES:
- SEE STRUCTURAL NOTES ON SHEET S0.0.
 - COORDINATE AND VERIFY ALL DIMENSIONS WITH ARCHITECTURAL DRAWINGS AND EXIST. CONDITIONS.
 - TOP OF STEEL ELEVATION = $114'2\frac{1}{2}"$ UNLESS NOTED OTHERWISE AS SPECIFIC ELEVATIONS THUS:
A. MEMBERS INDICATED AS $14' \times 4'$ AFTER THE BEAM MARK DESIGNATES A DIFFERENTIAL TOP OF STEEL ELEVATION, OR MEMBERS ARE NOTED THUS: $(T.O.S. = x' \times x')$
 - INDICATES SPAN DIRECTION OF 2 1/2" CONCRETE SLAB ON 3"-18ga. VULCRAFT "3VL" GALVANIZED COMPOSITE METAL DECK (5 1/2" TOTAL THICKNESS).
REINFORCE SLAB-ON-METAL DECK WITH 8x6 - W4.0 x W4.0 W.W.F. CHAISED 1" CLEAR ABOVE THE TOP OF METAL DECK. AT SPICES, W.W.F. SHALL BE LAPPED (2) MESH SPACES.
W.W.F. SHALL BE SECURED IN CORRECT LOCATION PRIOR TO CONCRETE SLAB PLACEMENT.
- PROVIDE 44% 4'-0" LONG AT 24% c. CENTERED OVER STEEL GIRDERS PER ____ TYP.
- SEE PLAN FOR LOCATIONS WHERE ADDITIONAL REBAR IS REQUIRED.
- AT OPENINGS THRU THE SLAB-ON-DECK, REINFORCE THE SLAB PER DETAIL ____.
 - HEADED STUD (H.S.) REQUIREMENTS:
A. STUD SIZE: 3/4"x4" x 4' 3/4" LONG
B. SEE THE BEAM MARK FOR THE NUMBER or SPACING OF HEADED STUDS REQUIRED ON THE BEAM.
C. INSTALL HEADED STUDS AT A UNIFORM SPACING ALONG THE BEAM, TYPICAL.
- AT BEAMS PERPENDICULAR TO THE DECK SPAN, WHERE THE NUMBER OF STUDS DOES NOT ALLOW FOR UNIFORM SPACING IN THE DECK FLUTES, START BY INSTALLING STUDS AT A UNIFORM SPACING ALONG THE ENTIRE BEAM, THEN INSTALL 1/2 OF THE REMAINING STUDS AT AN OVERALL 6" o.c. STUD SPACING AT EACH END OF THE BEAM.
D. SEE DETAIL ____ FOR HEADED STUD DETAILS.
 - STEEL BEAM-TO-BEAM FRAMING CONNECTIONS:
a) SEE ____ FOR BEAM-TO-BEAM SPICE CONNECTION, TYPICAL. BEAM SPICES ARE INDICATED: ____
b) SEE ____ FOR BEAM-TO-BEAM FRAMED CONNECTIONS, TYPICAL UNLESS NOTED OTHERWISE.
c) SEE ____ FOR BEAM-TO-BEAM CONNECTION WHERE LOCATED AT OR NEAR A STEEL COLUMN, TYPICAL.
 - STEEL BEAM-TO-COLUMN FRAMING CONNECTIONS:
a) SEE ____ WHERE BEAM IS FRAMING OVER THE TOP OF A TUBE COLUMN, TYPICAL.
b) SEE ____ WHERE BEAM IS FRAMING INTO THE SIDE OF A TUBE COLUMN, TYPICAL.

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE

DESIGN DEVELOPMENT

REVISION	DATE
Project Number:	21064
Date:	March 10, 2023
COPYRIGHT © 2022	


SECOND FLOOR FRAMING
PLAN



TD2 PROJECT # 748-749

S1.2

NOT FOR CONSTRUCTION

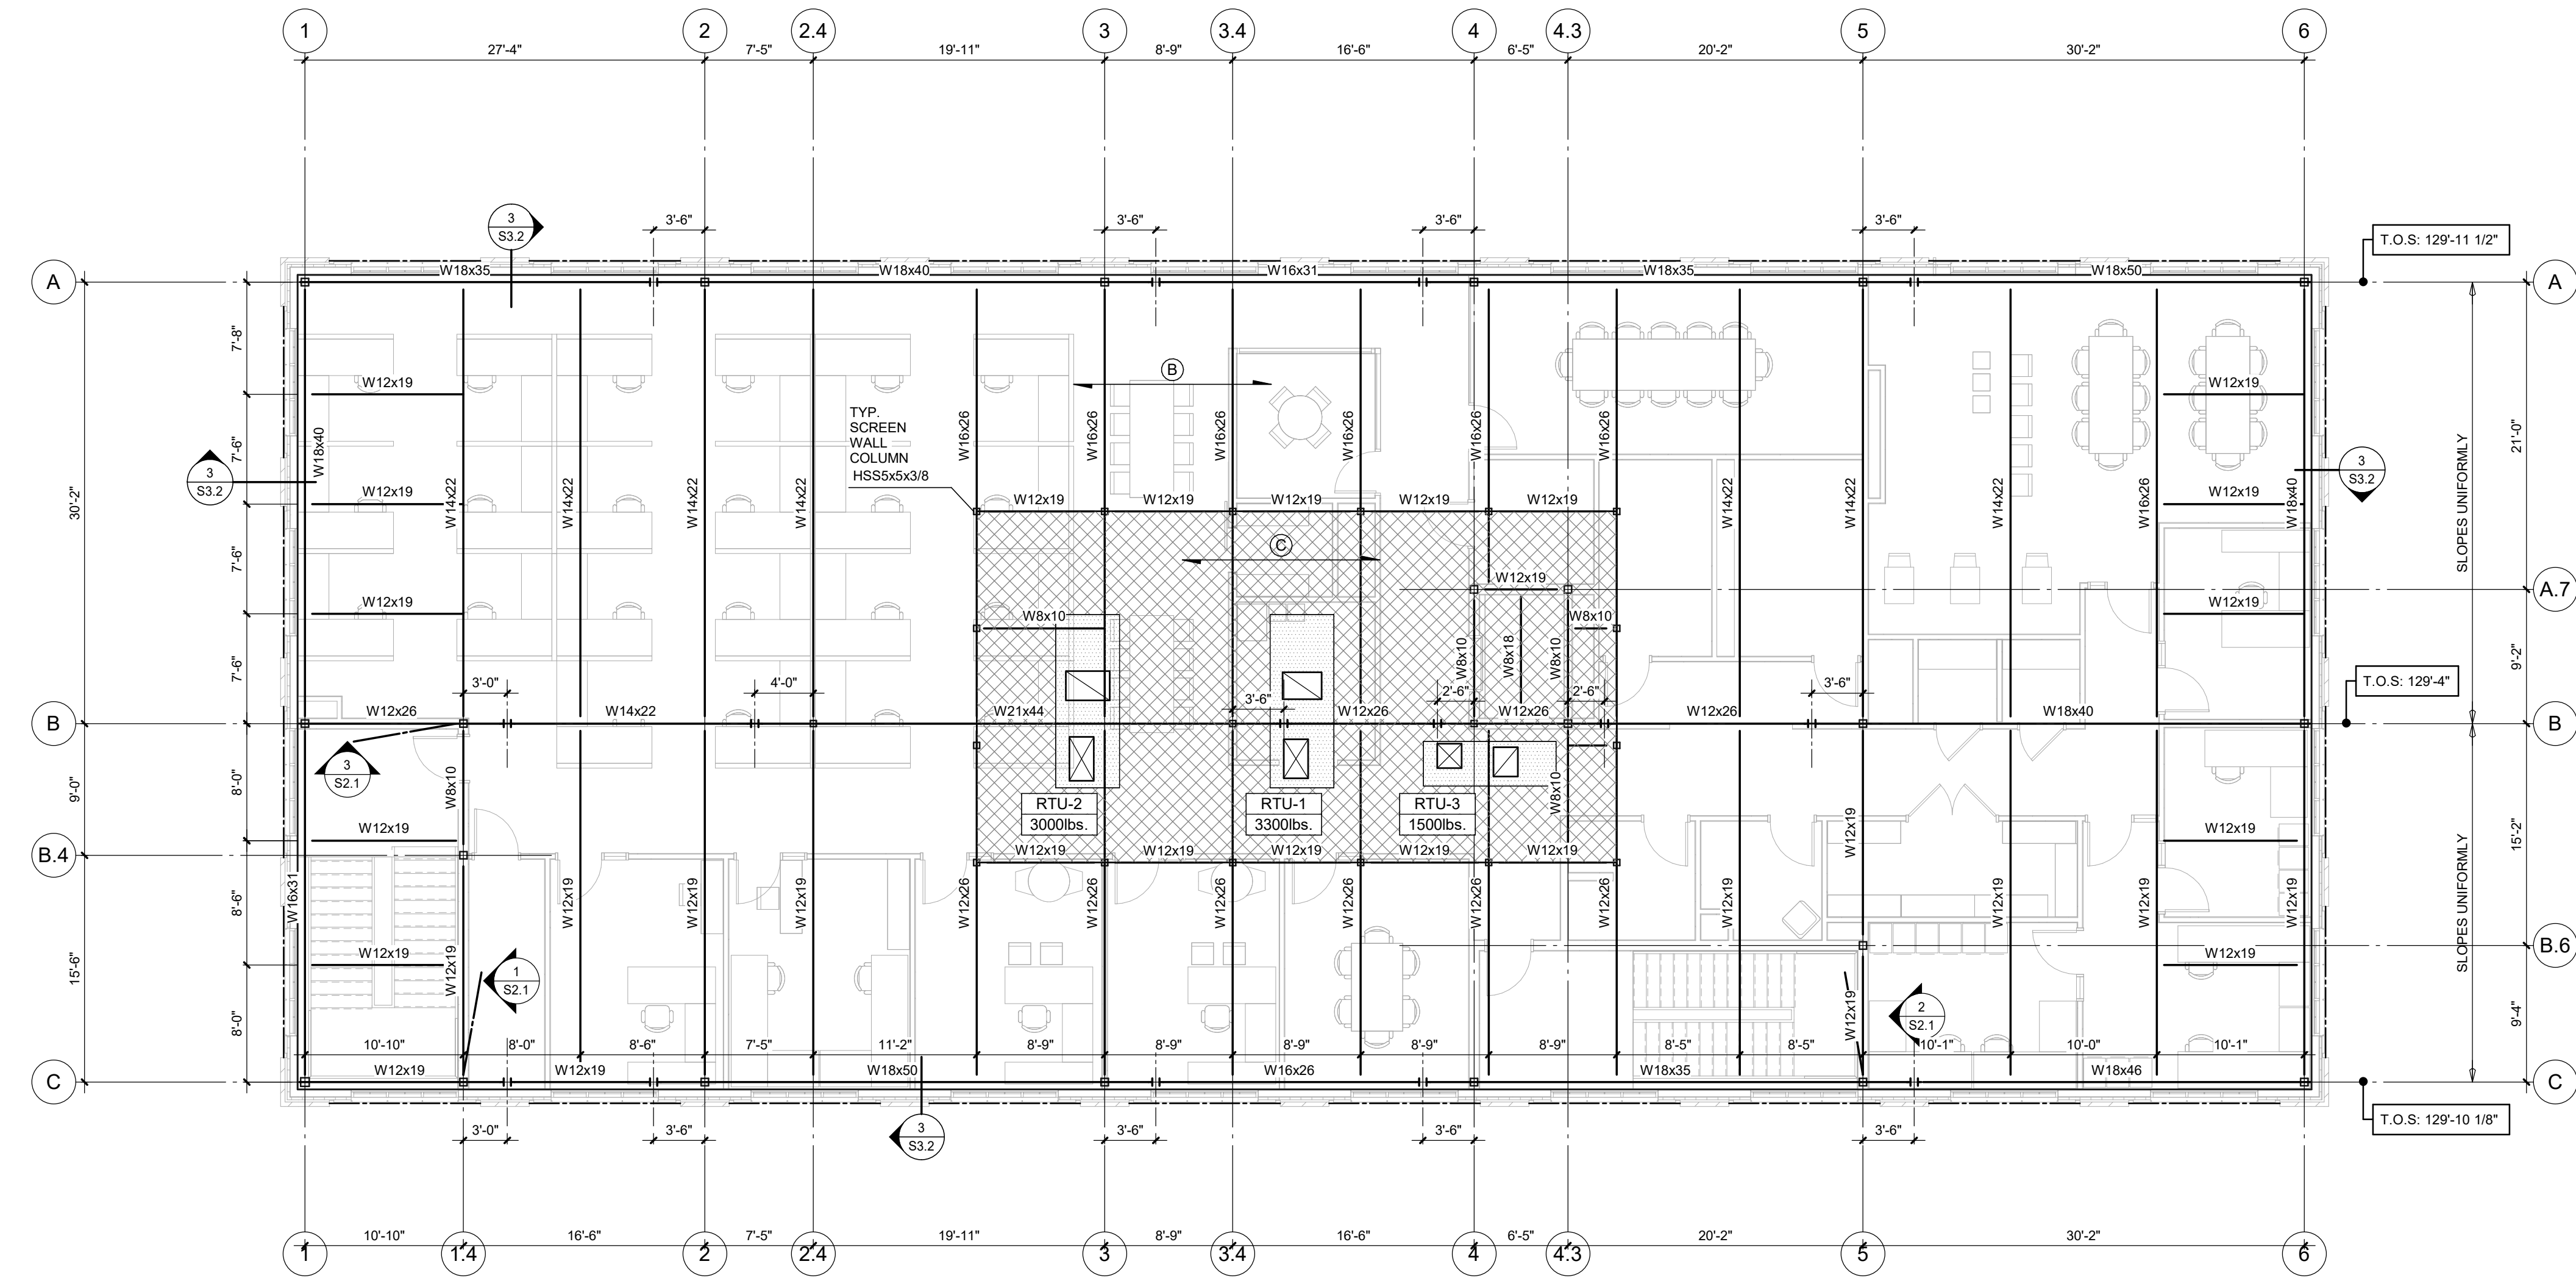

ROOF FRAMING PLAN

- ROOF FRAMING PLAN NOTES:
- SEE STRUCTURAL NOTES ON SHEET 50.0.
 - COORDINATE ALL DIMENSIONS WITH ARCHITECTURAL DRAWINGS AND LIST CONDITIONS.
 - SEE PLANS FOR TOP OF STEEL BEAM / ROOF DECK BEARING ELEVATIONS AT GRIDLINES.
A. SLOPE STRUCTURAL STEEL FRAMING UNIFORMLY BETWEEN ELEVATIONS GIVEN AT GRIDLINES.
B. MEMBERS INDICATED AS [H- X-X'] AFTER THE BEAM MARK DESIGNATES A DIFFERENTIAL TOP OF STEEL ELEVATION FROM THE DECK BEARING. OR MEMBERS ARE NOTED THUS: [T.O.S. = X'-X"]
 - (B) : INDICATES SPAN DIRECTION OF 3'-18ga. PRIME-PAINTED VULCRAFT 3" ROOF DECK.

(C) : INDICATES SPAN DIRECTION OF 3" CONCRETE SLAB ON 3'-18ga. VULCRAFT 3" GALVANIZED COMPOSITE METAL DECK (6" TOTAL THICKNESS).

REINFORCE SLAB-ON-METAL DECK WITH #6 - W4.0 x W4.0 W.W.F. CHAISED 1" CLEAR ABOVE THE TOP OF METAL DECK. AT SPLICES, W.W.F. SHALL BE LAPPED (2) MESH SPACES. W.W.F. SHALL BE SECURED IN CORRECT LOCATION PRIOR TO CONCRETE SLAB PLACEMENT. PROVIDE #4x4'-0" LONG AT 24" c. CENTERED OVER STEEL ORDERS PER TYP. SEE PLAN FOR LOCATIONS WHERE ADDITIONAL REBAR IS REQUIRED. AT OPENINGS THRU THE SLAB-ON-DECK, REINFORCE THE SLAB PER DETAIL.
 - ROOF TOP EQUIPMENT NOTES:
a. RTU-X : ROOF TOP EQUIPMENT DESIGNATION
XXXlbs : TOTAL MAXIMUM WEIGHT OF UNIT, CURB, AND ACCESSORIES; POUNDS
NOTE: SIZE, WEIGHT, AND LOCATION OF ROOF TOP UNITS SHALL BE CONFIRMED BY CONTRACTOR.
b. REFER TO MECHANICAL DRAWINGS FOR ACTUAL LOCATION OF ROOF TOP UNITS.
c. ALL ROOF FRAMING SHALL BE COORDINATED W/ MECHANICAL WORK.
d. AT THE POINT WHERE ROOFTOP UNIT CURBS ARE BEARING ON THE ROOF DECK OVER THE STEEL BEAM THE METAL DECK SHALL BE STRENGTHENED PER DETAIL.
e. AT OPENINGS THRU THE ROOF DECK, REINFORCE THE ROOF DECK PER DETAIL.
 - STEEL BEAM-TO-BEAM FRAMING CONNECTIONS:
a) SEE : FOR BEAM-TO-BEAM SPLICE CONNECTION, TYPICAL. BEAM SPLICES ARE INDICATED: ---
b) SEE : FOR BEAM-TO-BEAM FRAMED CONNECTIONS, TYPICAL UNLESS NOTED OTHERWISE.
c) SEE : FOR BEAM-TO-BEAM CONNECTION WHERE LOCATED AT OR NEAR A STEEL COLUMN, TYPICAL.
 - STEEL BEAM-TO-COLUMN FRAMING CONNECTIONS:
a) SEE : WHERE BEAM IS FRAMING OVER THE TOP OF A TUBE COLUMN, TYPICAL.
b) SEE : WHERE BEAM IS FRAMING INTO THE SIDE OF A TUBE COLUMN, TYPICAL.
 - : INDICATES AN L/8x1/2 STEEL ANGLE FOR THE BRICK UNTEL.
--- : STEEL ANGLE SHALL BE HUNG FROM THE STEEL ROOF FRAMING PER DETAILS 4/S3.2.

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE

DESIGN DEVELOPMENT

REVISION	DATE
Project Number:	21064
Date:	March 10, 2023

COPYRIGHT © 2022


ROOF FRAMING PLAN



TD2 PROJECT # 748-749

S1.3

NOT FOR CONSTRUCTION

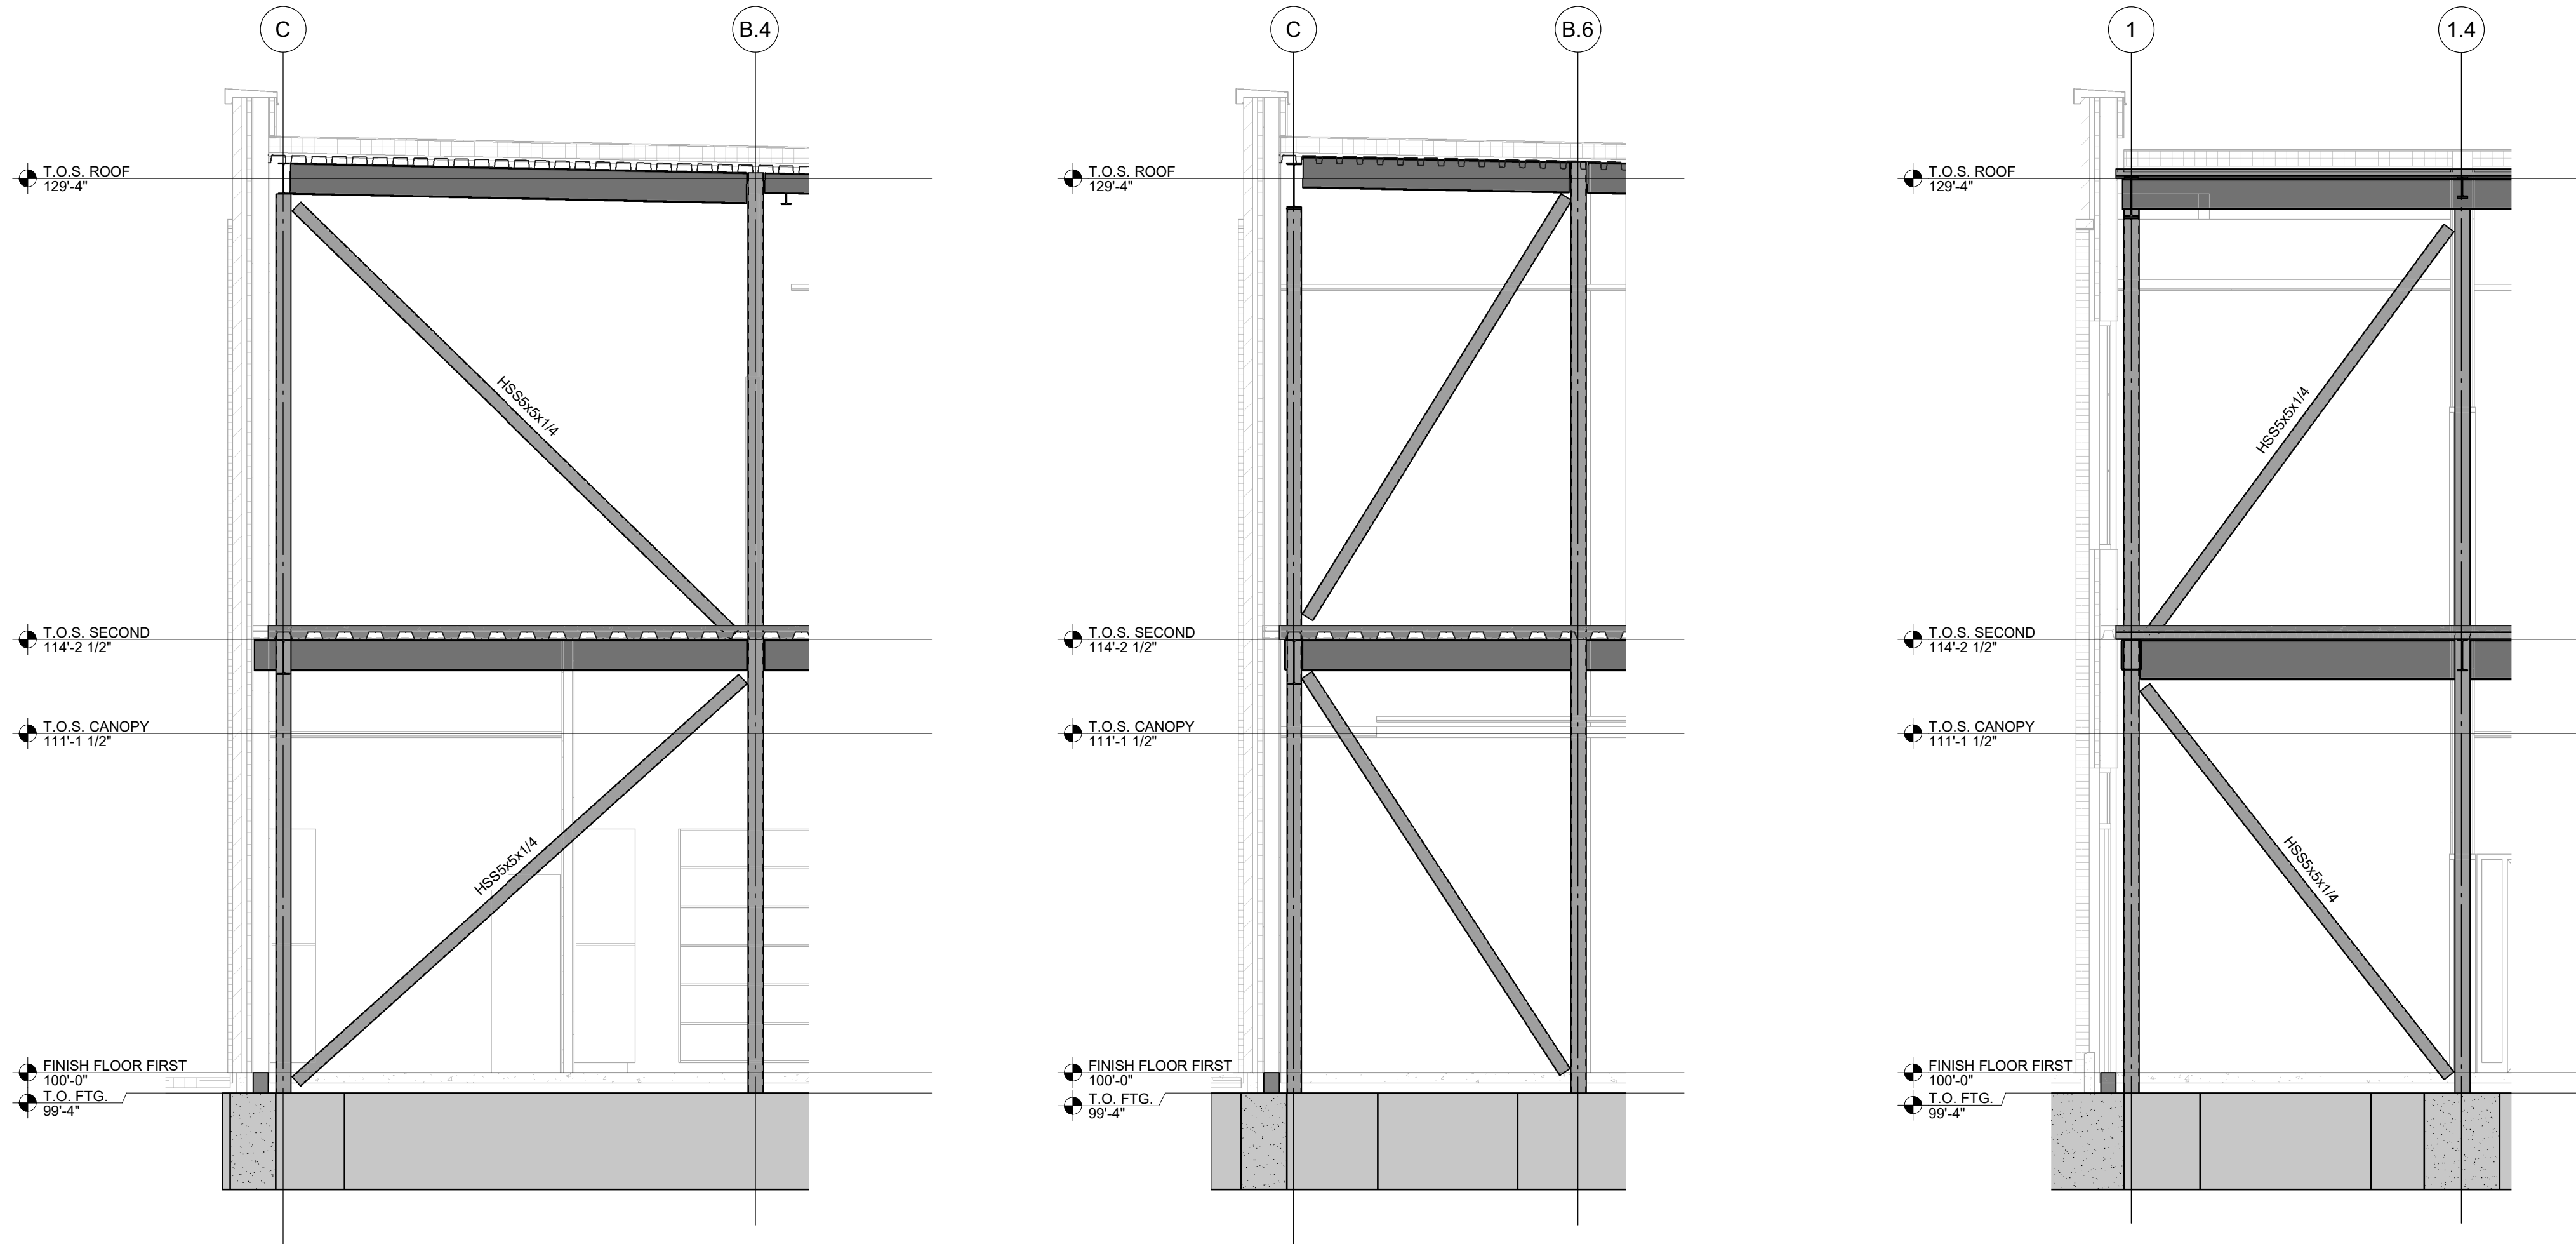

1 BRACE ELEVATION
1/4" = 1'-0"

2 BRACE ELEVATION
1/4" = 1'-0"

3 BRACE ELEVATION
1/4" = 1'-0"

THESE ARE NOT THE FINAL BID DOCUMENTS - REFERENCE ONLY

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE

DESIGN DEVELOPMENT

REVISION	DATE
Project Number:	21064
Date:	March 10, 2023
COPYRIGHT © 2022	




BRACE ELEVATIONS



TD2 PROJECT # 748-749

S2.1

NOT FOR CONSTRUCTION

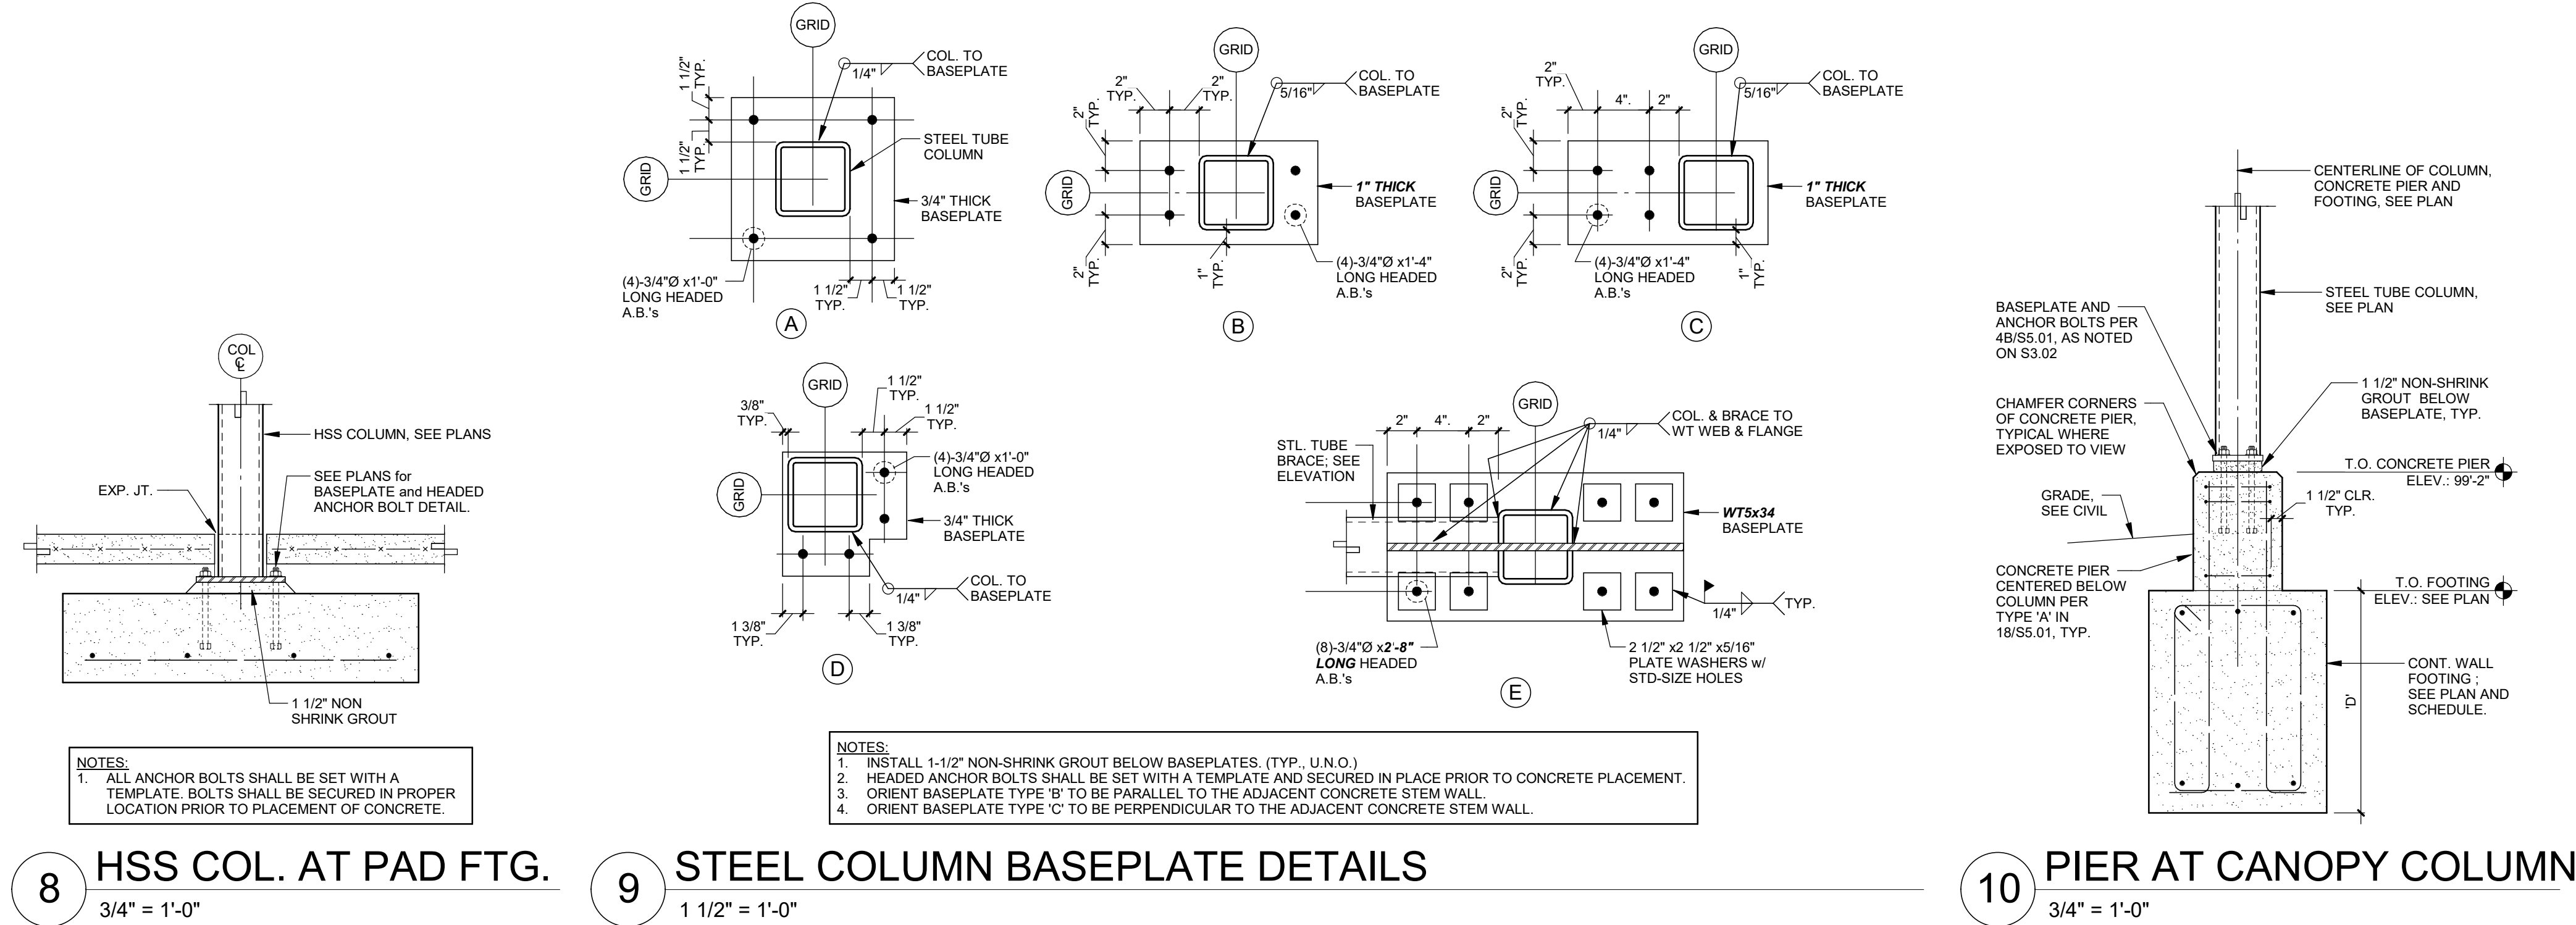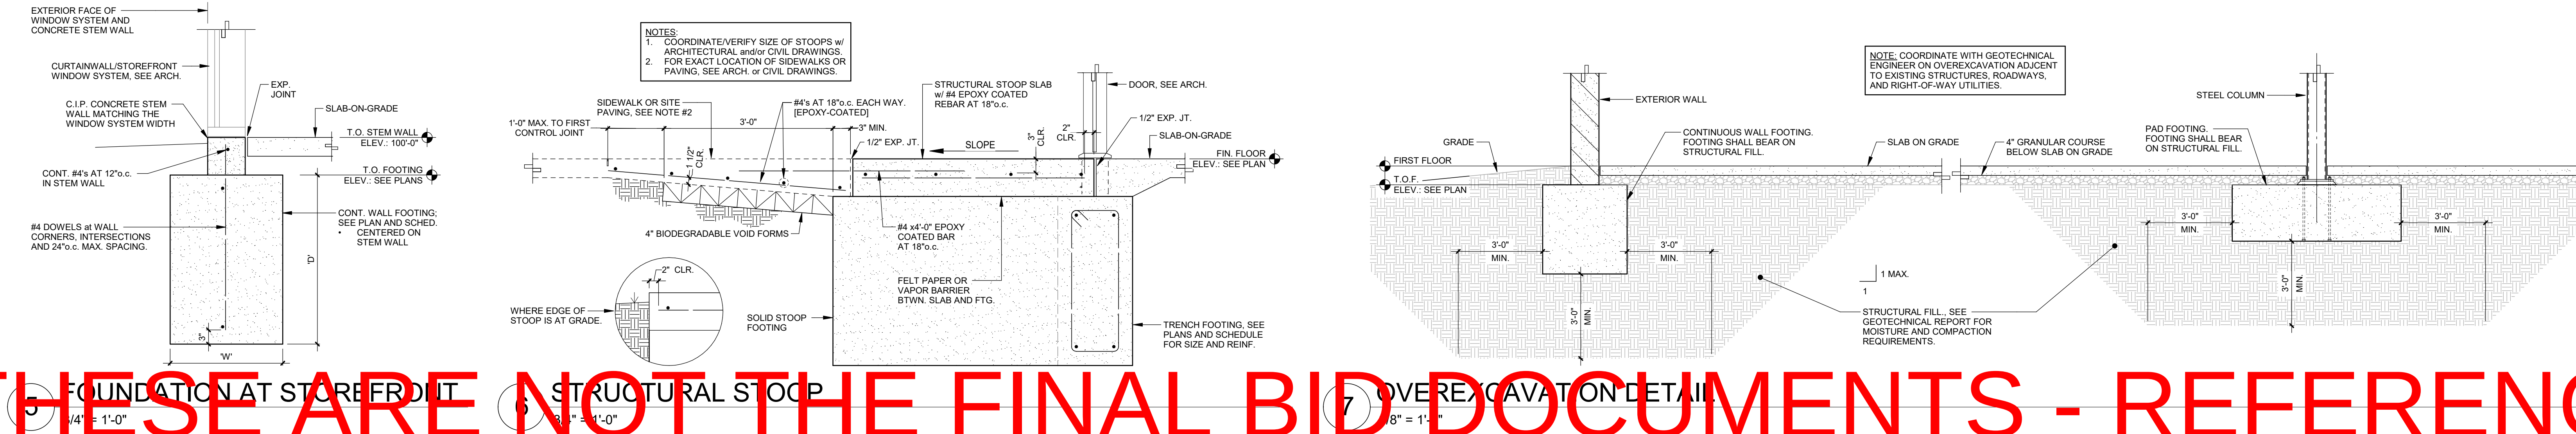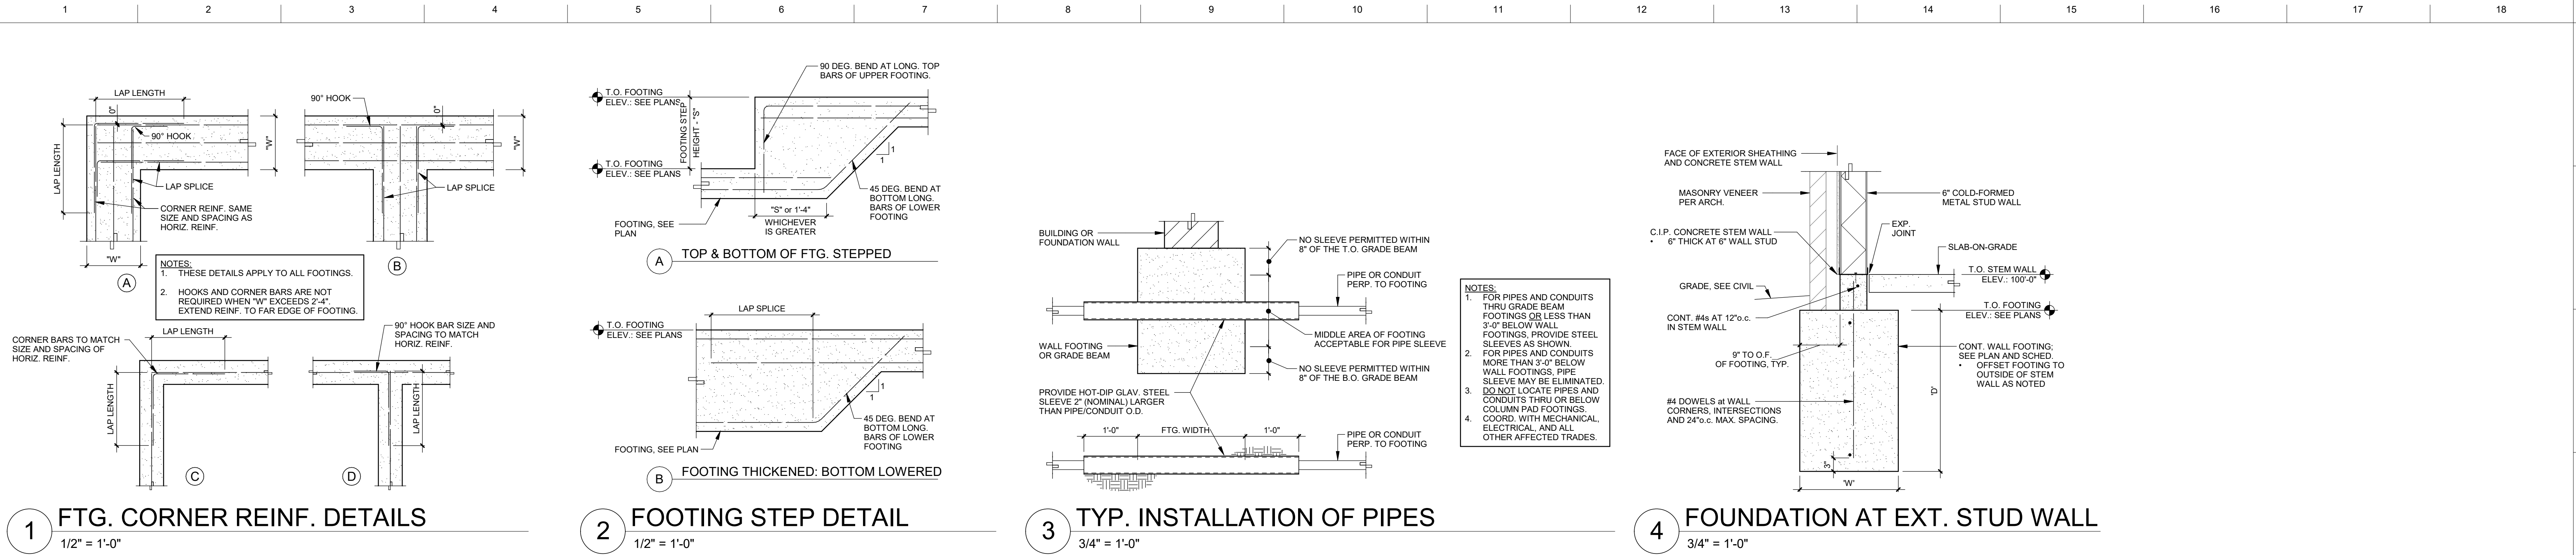

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE

DESIGN DEVELOPMENT

NOT FOR CONSTRUCTION


REVISION	DATE
Project Number:	21064
Date:	March 10, 2023
COPYRIGHT © 2022	

STRUCTURAL SECTIONS




TD2 PROJECT # 748-749


S3.1

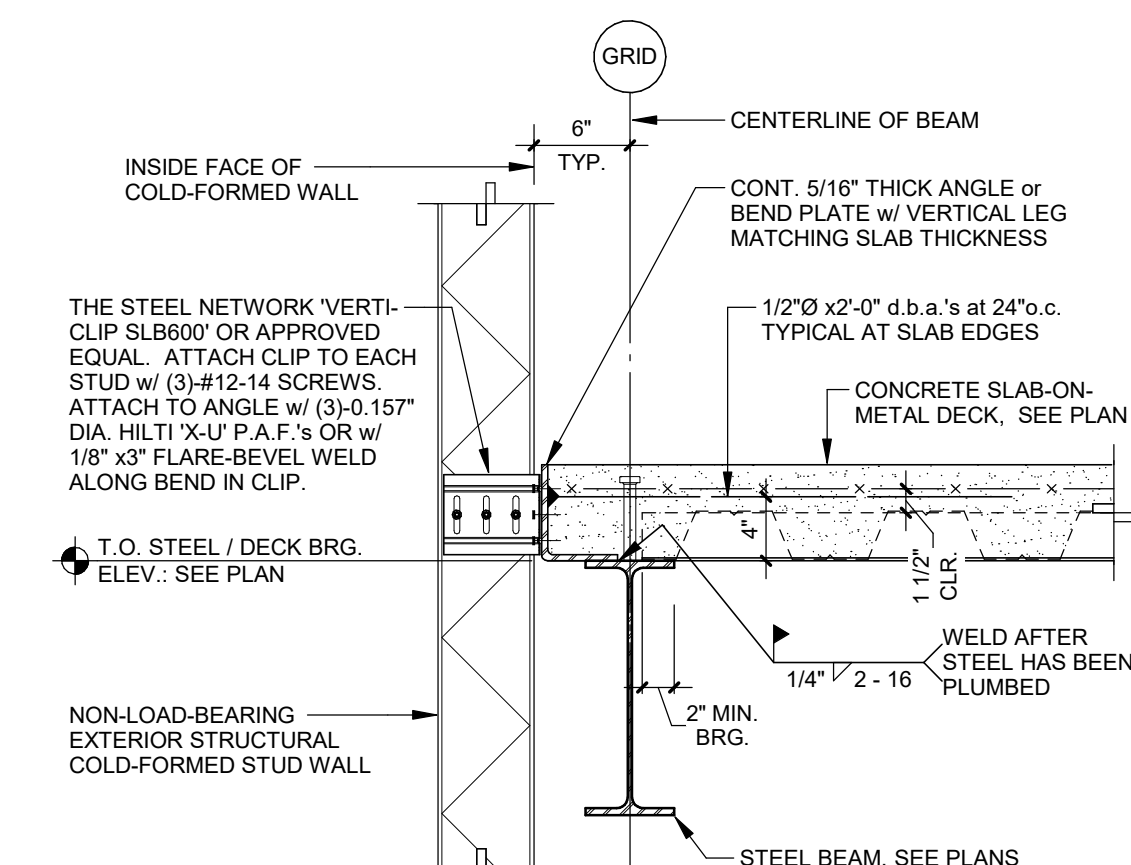


1 EXT. EDGE OF SLAB-ON-DECK
1" = 1'-0"

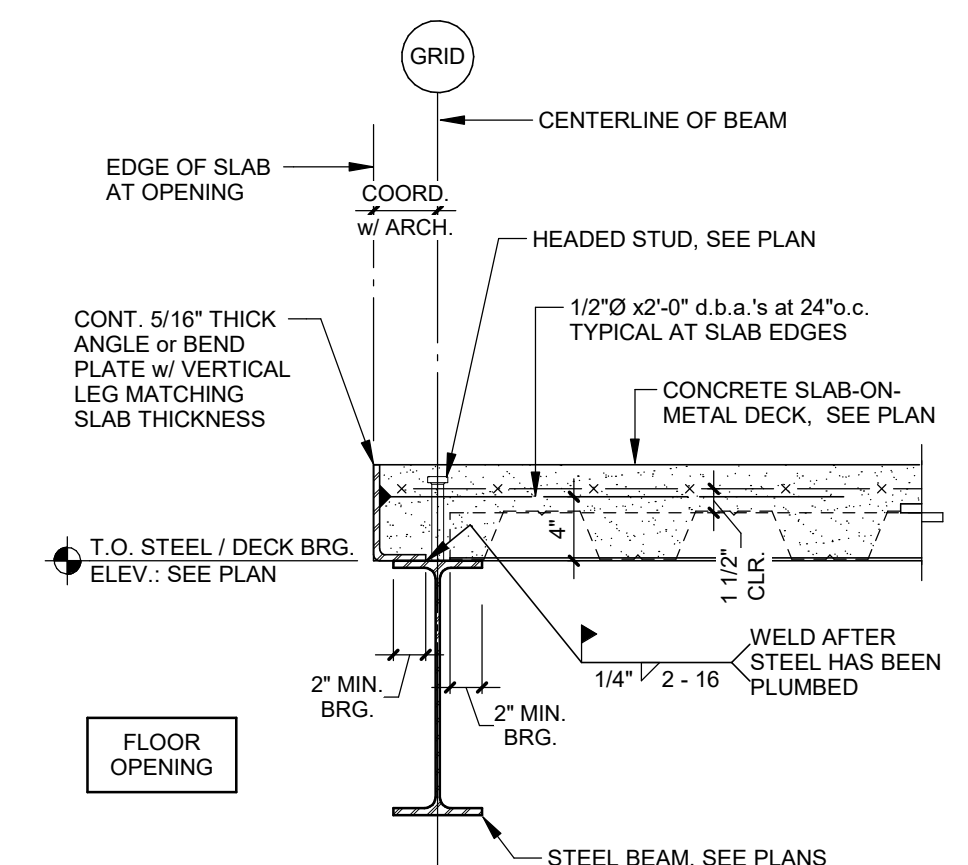


2 EXT. EDGE OF SLAB-ON-DECK
1" = 1'-0"

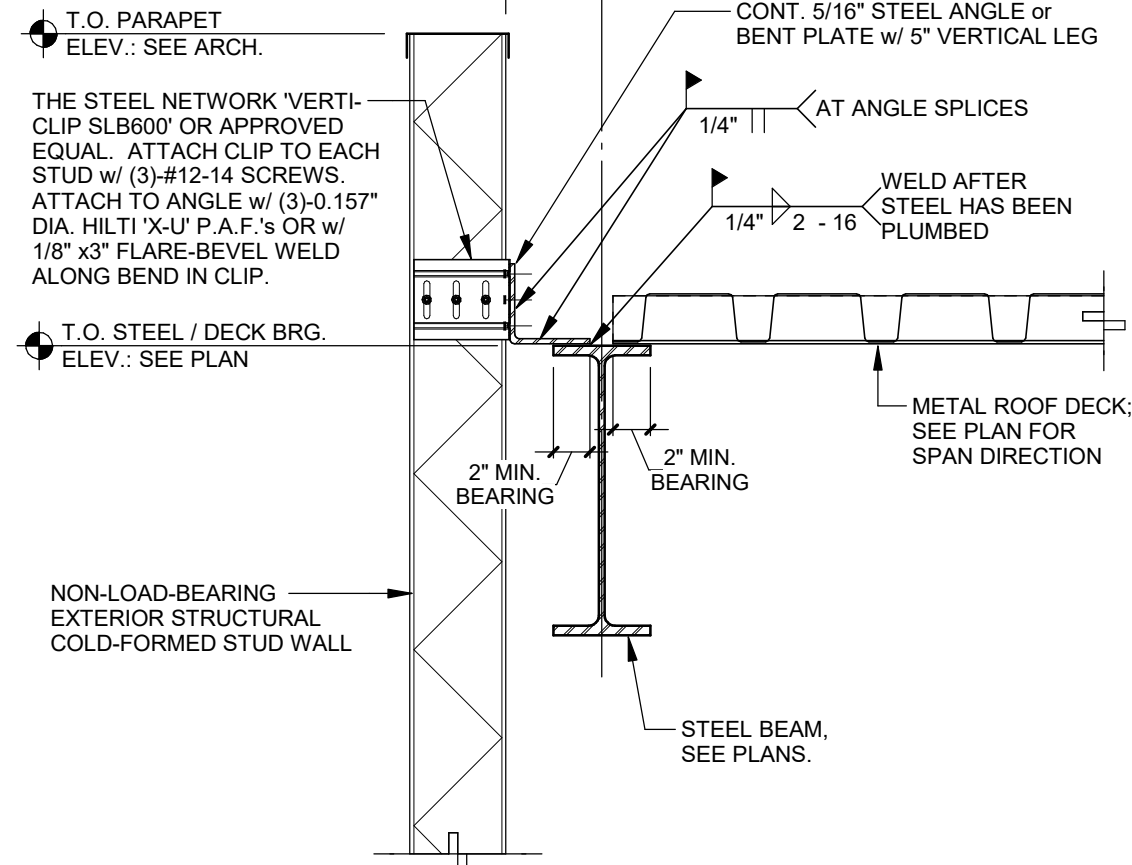


3 EXT. EDGE OF ROOF DECK
1" = 1'-0"

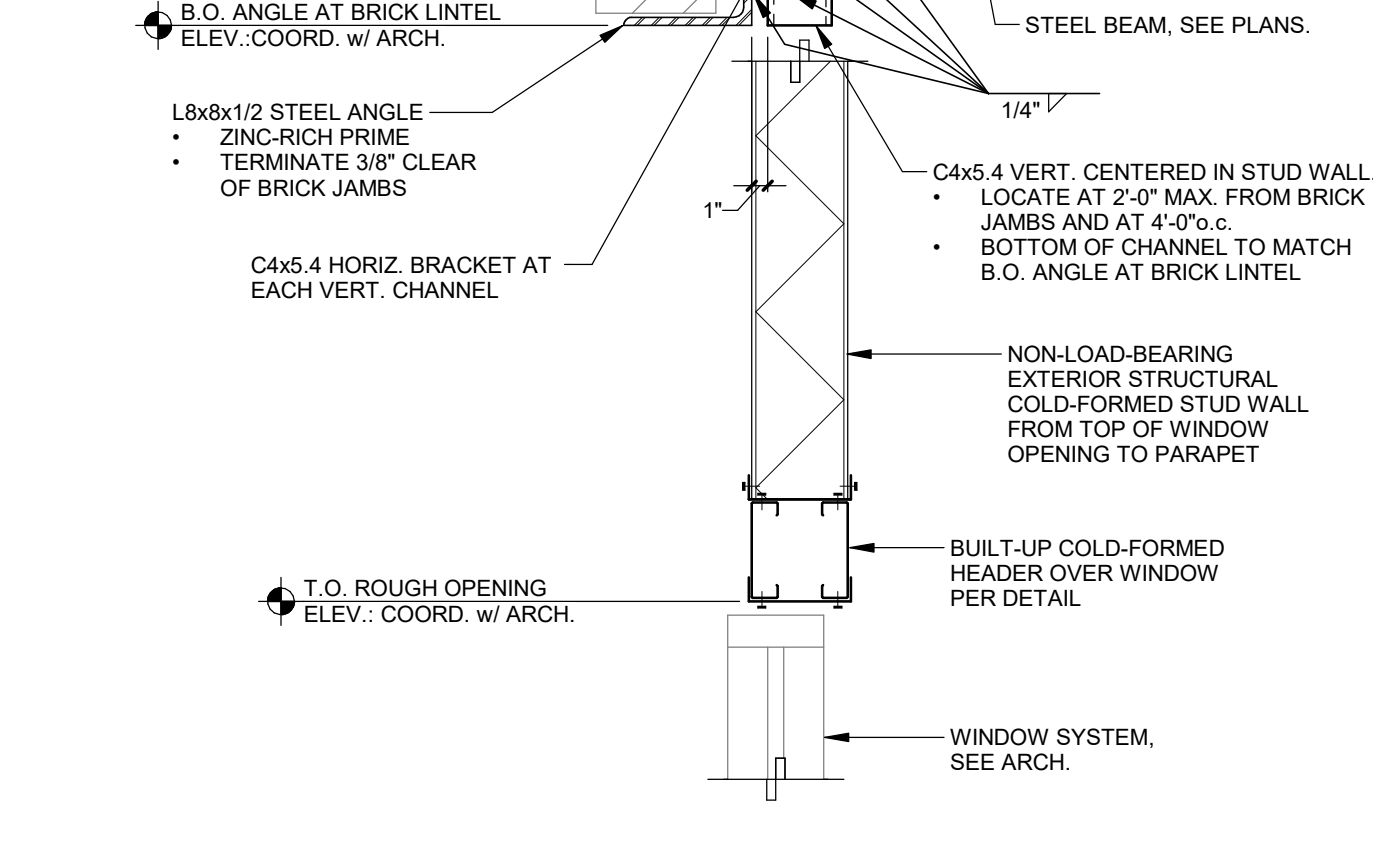


4 STEEL WALL FRAMING DETAIL:
BRICK OPENING
1" = 1'-0"

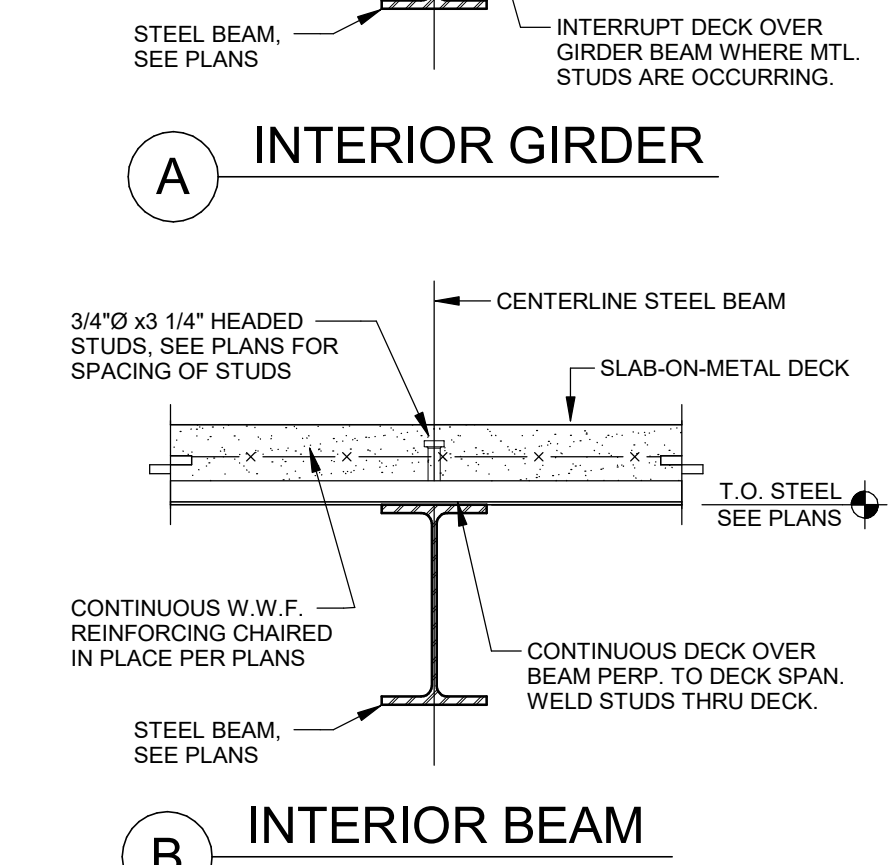


5 HEADED STUD DETAIL
1" = 1'-0"

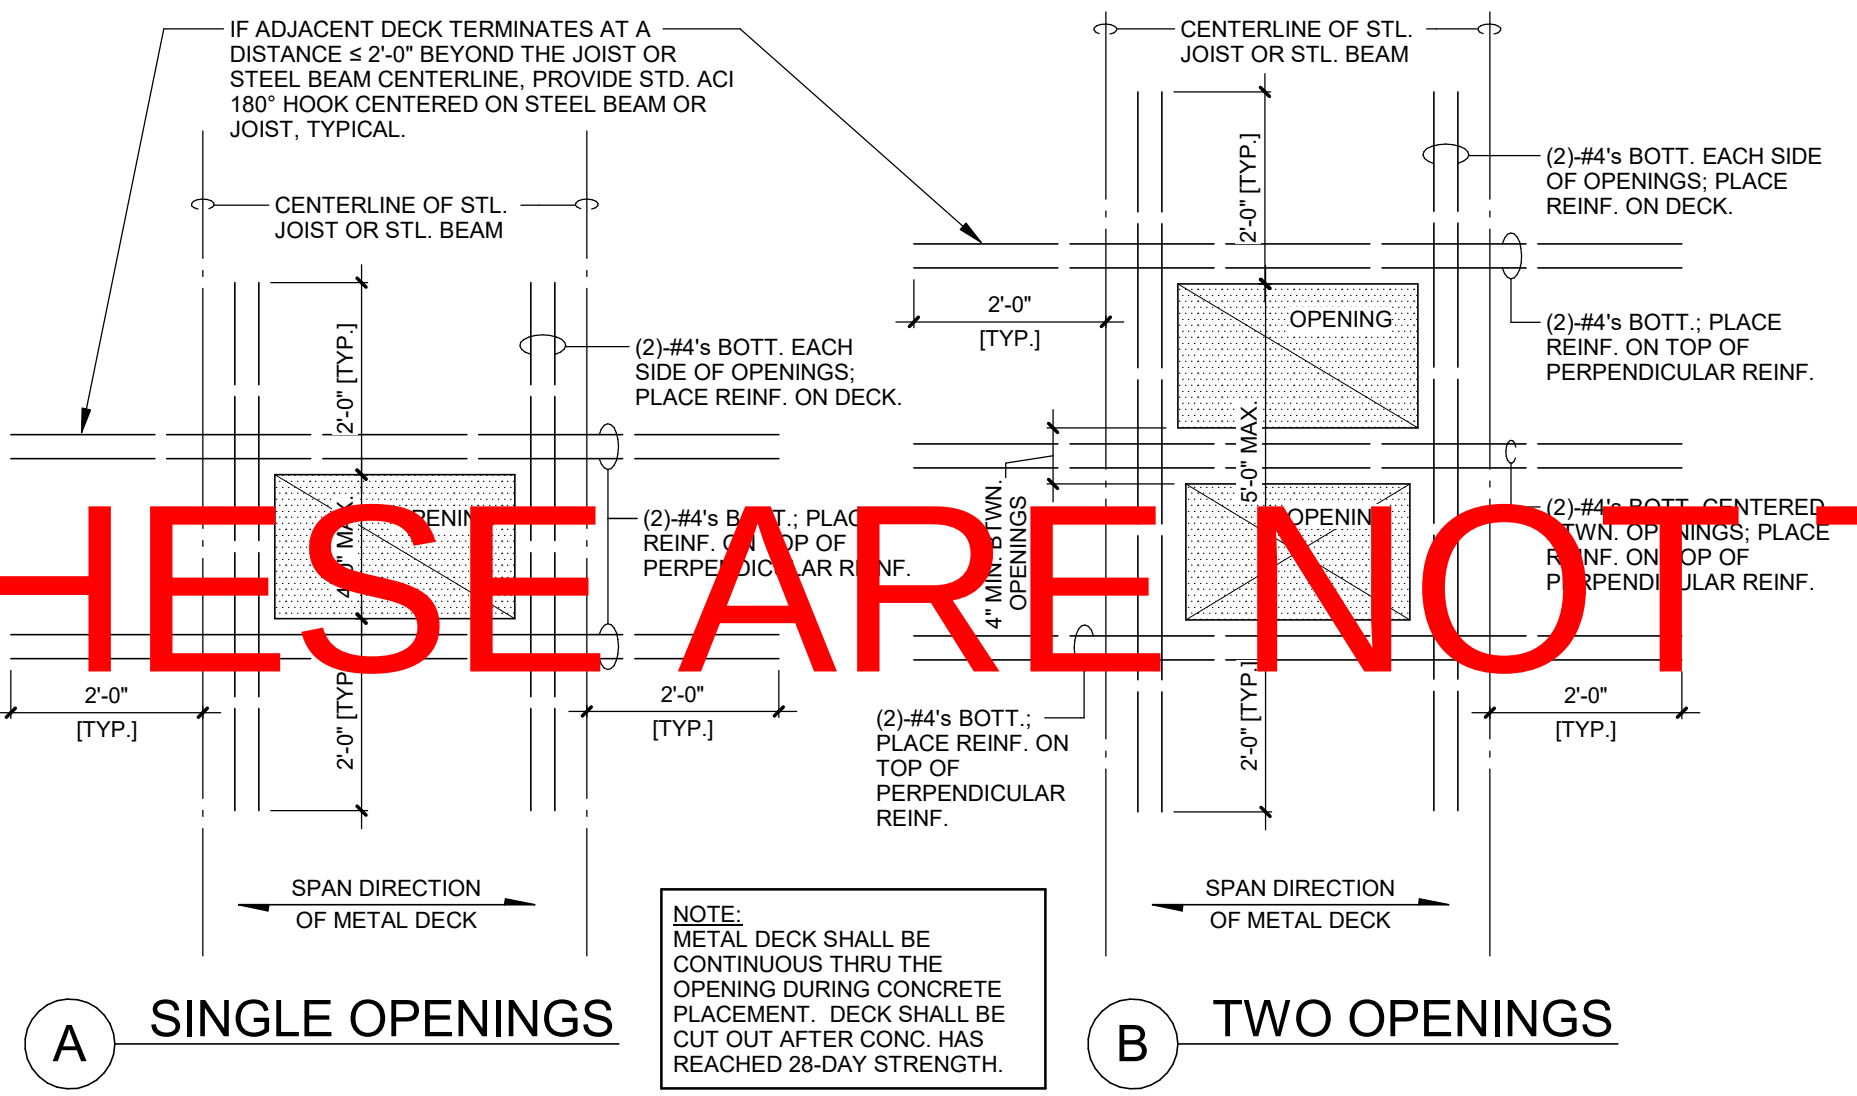


6 SLAB OPENINGS IN NEW COMPOSITE MTL. DECK
1/2" = 1'-0"

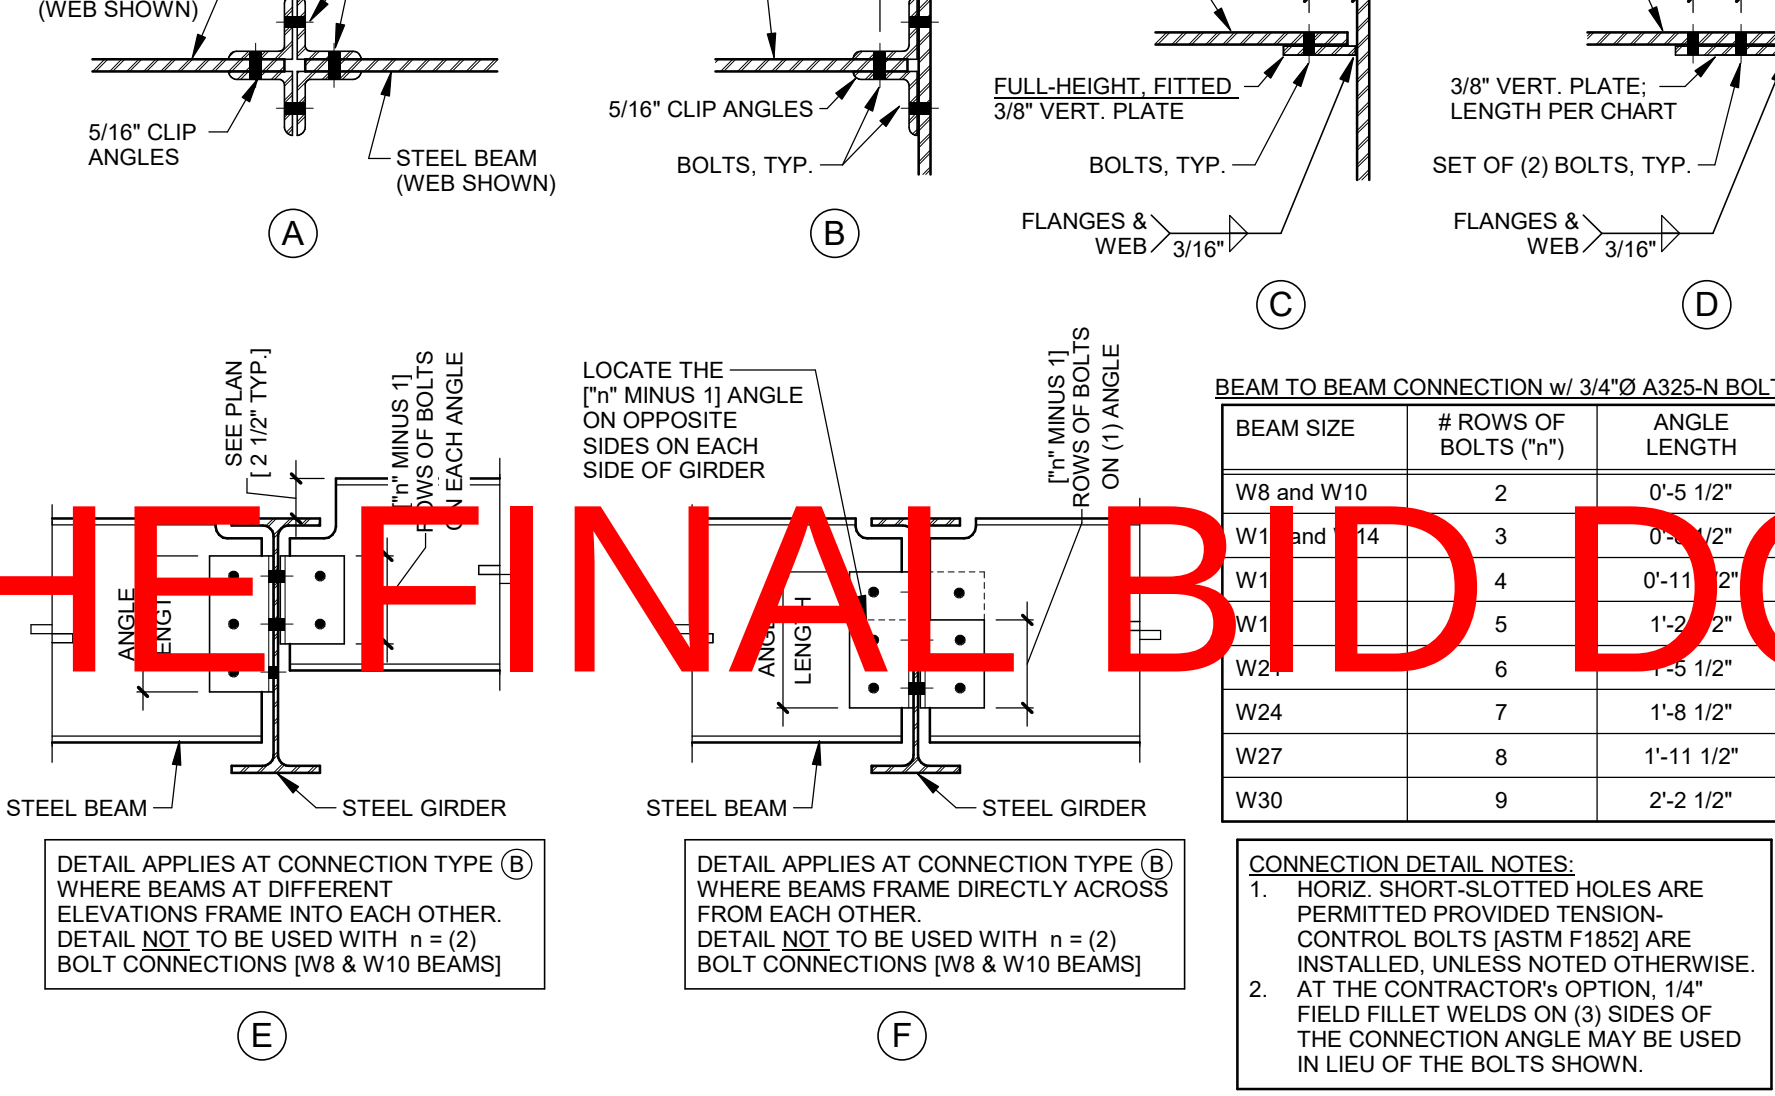


7 TYP. STEEL BEAM TO BEAM CONNECTIONS
1" = 1'-0"

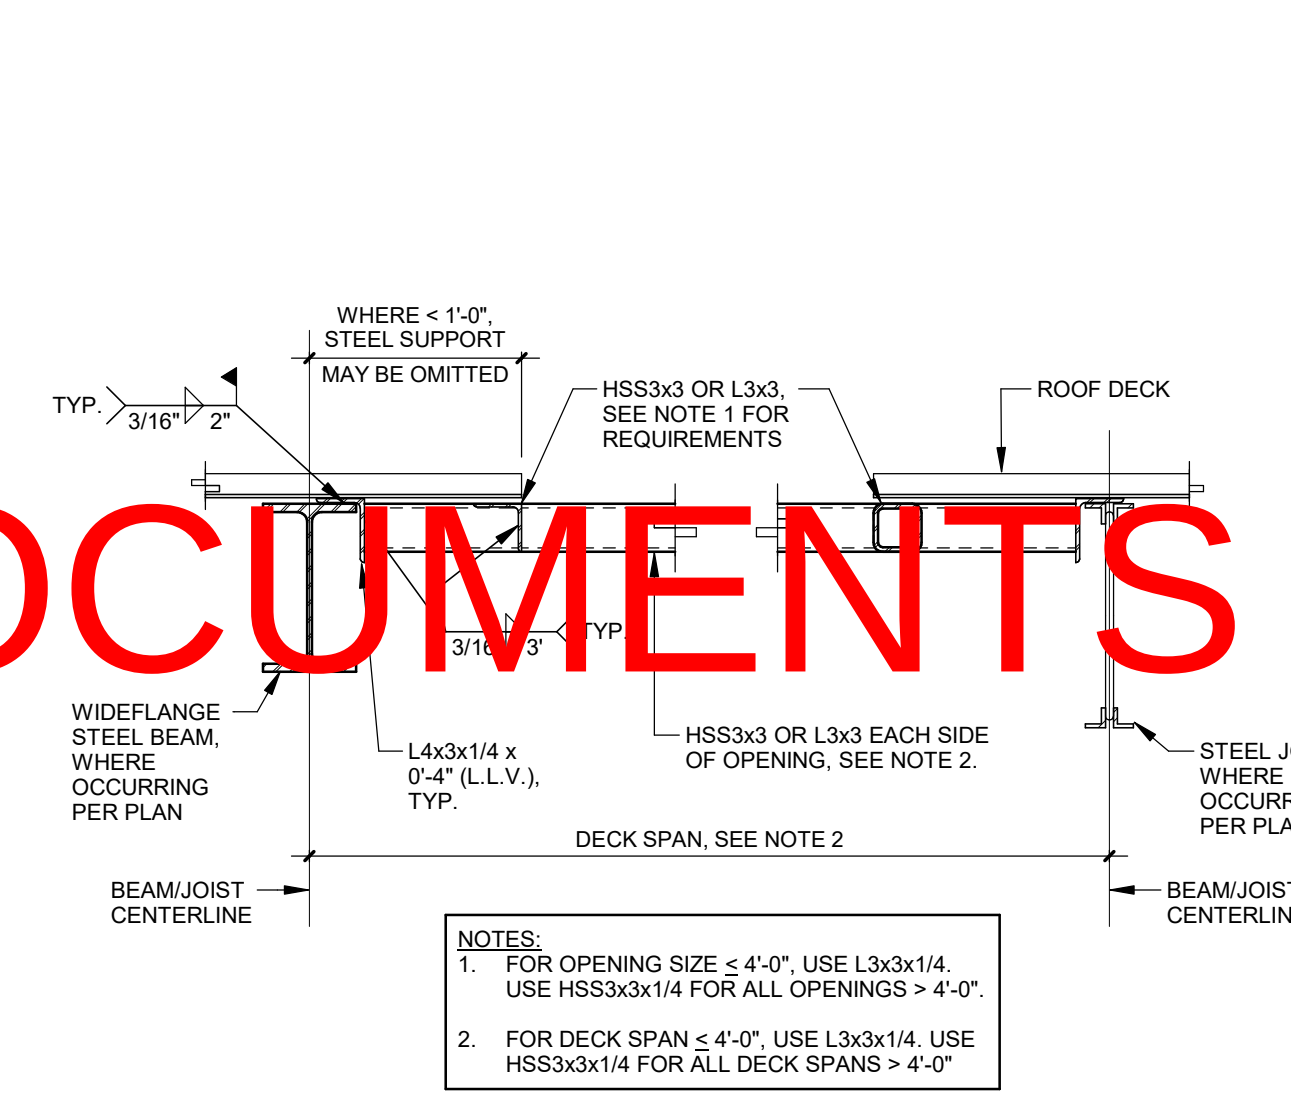

8 OPENINGS IN METAL ROOF DECK
1" = 1'-0"

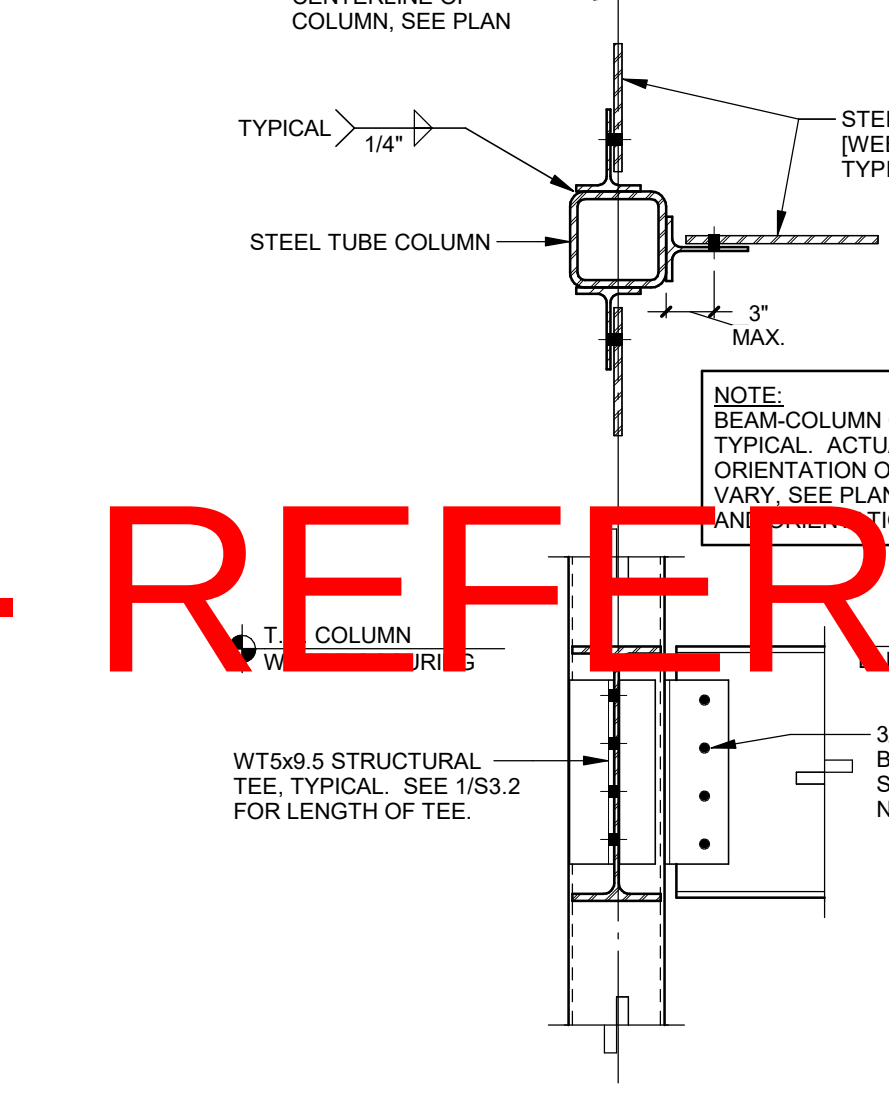

9 BEAM TO SIDE OF TUBE COL.
1" = 1'-0"

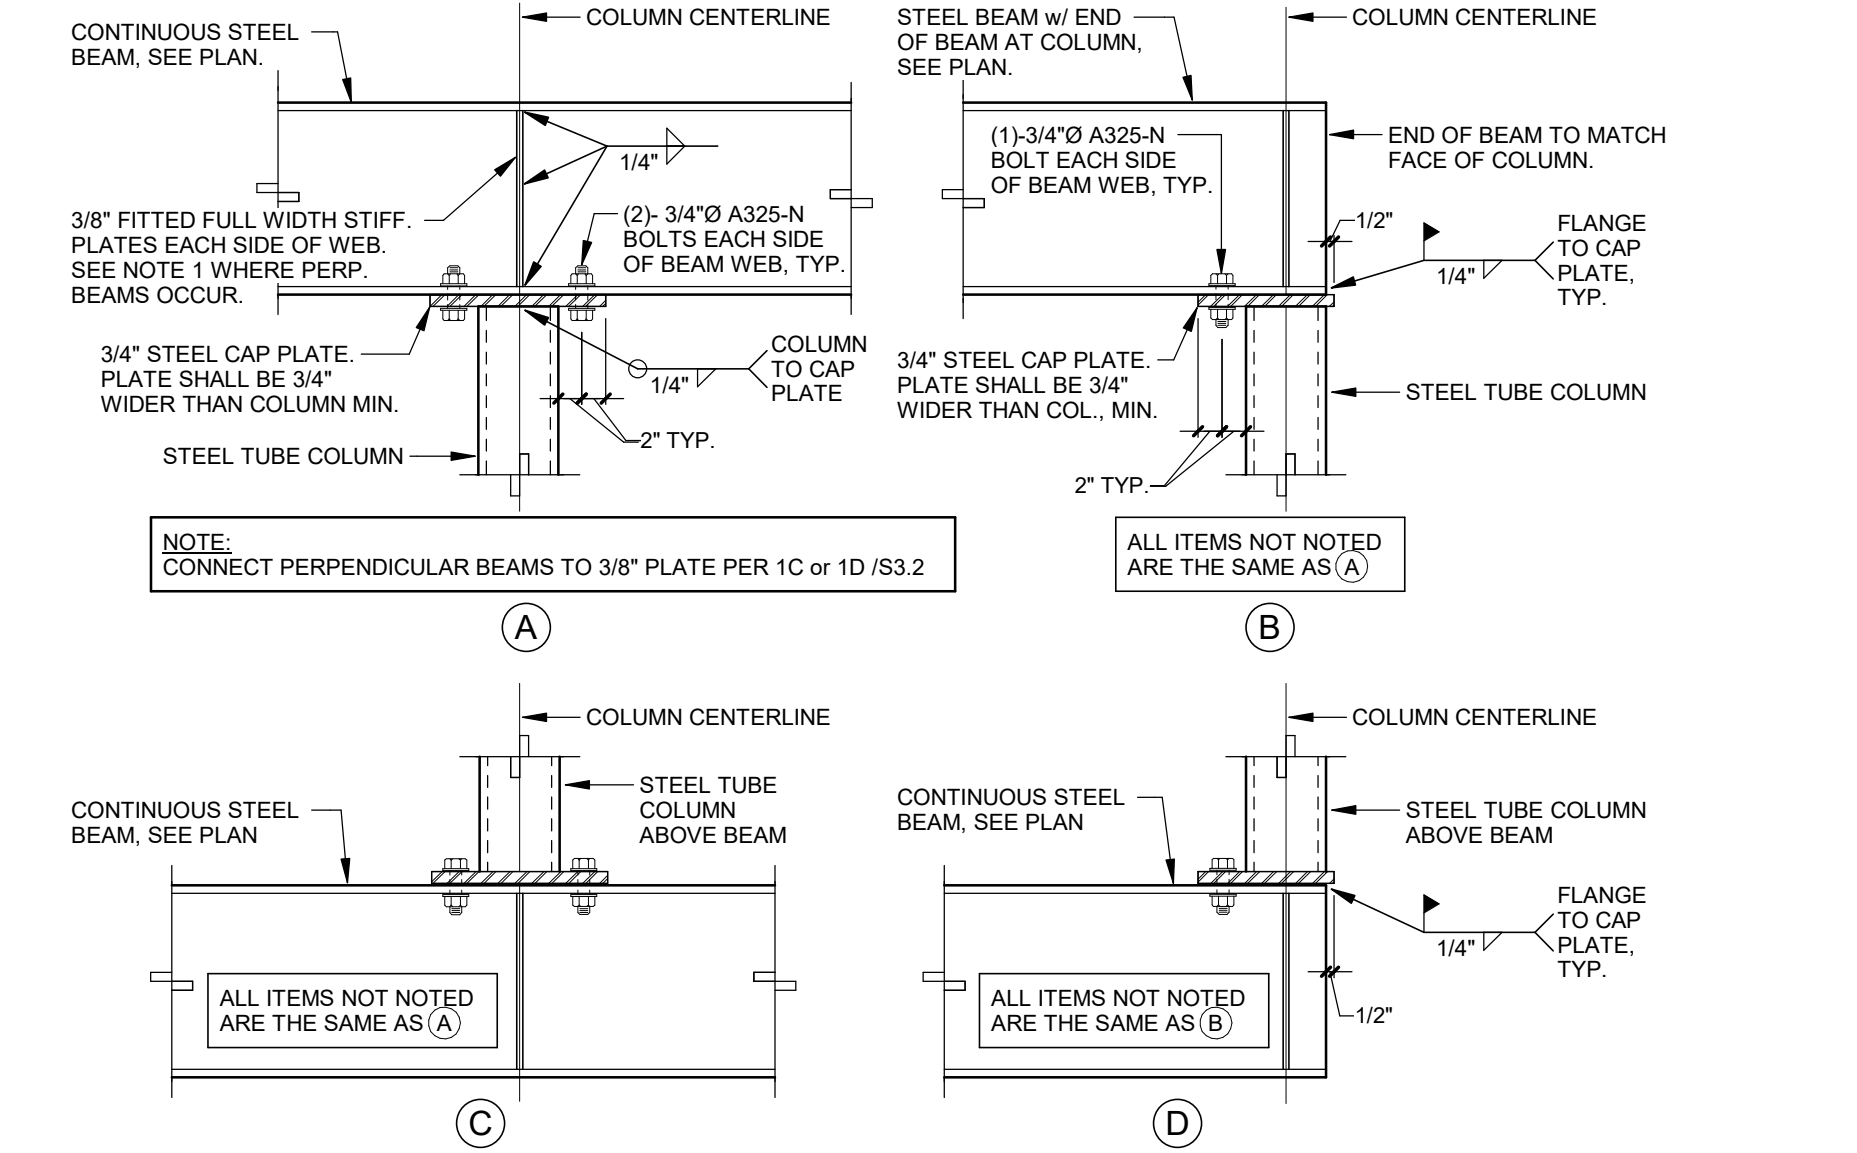

10 BEAM TO STEEL TUBE COLUMN CONNECTIONS
1" = 1'-0"

3/10/2023 8:55:26 AM

ENERGY CODE COMPLIANCE		
CODE	2012 IECC	REMARKS
ComCHECK	YES	(1)
COMMISSIONING	YES	(2) (3) (4)
TAB REPORT	YES	(3) (4)
REMARKS:		

1. ComCHECK COMPLIANCE REPORT CAN BE FOUND IN THE PROJECT MANUAL.
2. COMMISSIONING IS REQUIRED.
3. REQUIRED DOCUMENTS (REFER TO CODE) SHALL BE PROVIDED TO THE BUILDING OWNER OR OWNER REPRESENTATIVE WITHIN 90 DAYS OF THE DATE OF RECEIPT OF THE CERTIFICATE OF OCCUPANCY.
4. SEE RESPECTIVE SPECIFICATION SECTIONS FOR ADDITIONAL INFORMATION.

GENERAL MECHANICAL NOTES

1. DO NOT ROUTE DUCTWORK ABOVE ELECTRICAL PANELS. MAINTAIN ALL CODE REQUIRED CLEARANCES.
2. MAINTAIN MINIMUM 10'-0" CLEARANCE TO EXHAUST FANS FROM ALL FRESH AIR INTAKES.
3. MAINTAIN MANUFACTURER'S REQUIRED CLEARANCE AROUND ALL MECHANICAL EQUIPMENT TO ALLOW PROPER OPERATION AND FOR EASY MAINTENANCE AND FILTER ACCESS.
4. COORDINATE EXACT LOCATION OF ALL FLOOR, WALL, AND ROOF PENETRATIONS AND WORK TO BE PERFORMED ABOVE THE FLOORS AND ROOF WITH GENERAL CONTRACTOR. SEAL ALL PENETRATIONS OF EXTERIOR ENVELOPE WEATHER TIGHT.
5. UNLESS OTHERWISE NOTED, ROUTE DUCTWORK AS HIGH AS POSSIBLE. UTILIZE JOIST SPACE AND OPEN WEBBING OF JOISTS TO AVOID CONFLICTS. COORDINATE EXACT ROUTING WITH STRUCTURE, LIGHTS, AND ALL OTHER TRADES. PROVIDE NECESSARY OFFSETS, TRANSITIONS, AND EXTENSIONS AS REQUIRED TO COMPLETE INSTALLATION AT NO ADDITIONAL COST TO OWNER.
6. PLANS ARE SCHEMATIC IN NATURE. DUCTWORK ROUTING IS SHOWN FOR CLARITY AND FOR GENERAL ROUTING INFORMATION. COORDINATE EXACT ROUTING WITH ALL OTHER TRADES. PROVIDE ALL ADDITIONAL OFFSETS AS REQUIRED TO COMPLETE INSTALLATION.
7. INSTALL ALL FIRE DAMPERS, FIRE/SMOKE DAMPERS, VOLUME DAMPERS, ETC. ABOVE ACCESSIBLE CEILINGS OR IN ACCESSIBLE LOCATIONS. PROVIDE ACCESS PANELS WHERE REQUIRED.
8. FIRE CAULK ALL DUCTWORK PENETRATIONS THROUGH FIRE RATED WALLS AND ASSEMBLIES. CAULK AROUND ALL DUCTWORK PENETRATIONS THOUGH FULL HEIGHT SOUND WALLS. REFER TO ARCHITECTURAL DRAWINGS FOR WALL CONSTRUCTION. ALL PENETRATIONS OF FIRE-RESISTANT CONSTRUCTION SHALL BE SEALED WITH A LISTED FIRESTOPPING ASSEMBLY BY THE CONTRACTOR RESPONSIBLE FOR THE PENETRATION.
9. CENTER DIFFUSERS, REGISTERS, AND GRILLES IN CEILING TILES WHERE 24X24 OR 24X12 CEILING DEVICES ARE NOT USED.
10. SPACE ABOVE ALL CEILINGS SHALL BE MAINTAINED AS A RETURN AIR PLENUM PER APPLICABLE BUILDING CODES AND AHJ. COMBUSTIBLE MATERIALS ARE NOT PERMITTED WITHIN RETURN AIR PLENUM. ONLY PLENUM RATED MATERIALS CAN BE EXPOSED TO RETURN AIR PLENUM.
11. CONTRACTOR TO PROVIDE ALL LOW VOLTAGE AND LINE VOLTAGE CONTROL WIRING REQUIRED FOR COMPLETE OPERATION OF ALL MECHANICAL EQUIPMENT.
12. PROVIDE RETURN AIR BOOT AT EACH G-1, G-2 AND LR-1 RETURN AIR GRILLE. SEE DETAIL X SHEET MX.X.
13. FOR GENERAL DUCTWORK FITTINGS, SEE DETAIL X ON SHEET MX.X.
14. RUN OUTS TO DIFFUSERS AND REGISTERS SHALL MATCH NECK SIZE UNLESS OTHERWISE NOTED. SEE DETAIL X ON SHEET MX.X.
15. SEE ELECTRICAL DRAWINGS DEVICE ALIGNMENT DETAIL FOR ALL SENSOR AND/OR CONTROL DEVICE INSTALLATION HEIGHTS AND SPACING NOTES UNLESS OTHERWISE NOTED. IF DEVICE ALIGNMENT DETAIL NOT AVAILABLE, MOUNT AT PREFERRED MOUNTING HEIGHT WHERE APPLICABLE. SEE SPECIFICATIONS, OR CONFIRM WITH ENGINEER PRIOR TO INSTALLATION.

GENERAL PLUMBING NOTES

1. DO NOT ROUTE PIPING ABOVE ELECTRICAL PANELS. MAINTAIN ALL CODE REQUIRED CLEARANCES.
2. MAINTAIN MINIMUM 10'-0" CLEARANCE TO WASTE VENTS FROM ALL FRESH AIR INTAKES.
3. MAINTAIN MANUFACTURER'S REQUIRED CLEARANCE AROUND ALL MECHANICAL EQUIPMENT TO ALLOW PROPER OPERATION AND FOR EASY MAINTENANCE AND FILTER ACCESS.
4. COORDINATE EXACT LOCATION OF ALL FLOOR, WALL, AND ROOF PENETRATIONS AND WORK TO BE PERFORMED ABOVE THE FLOORS AND ROOF WITH GENERAL CONTRACTOR. SEAL ALL PENETRATIONS OF EXTERIOR ENVELOPE WEATHER TIGHT.
5. UNLESS OTHERWISE NOTED, ROUTE PIPING AS HIGH AS POSSIBLE. UTILIZE JOIST SPACE AND OPEN WEBBING OF JOISTS TO AVOID CONFLICTS. COORDINATE EXACT ROUTING WITH STRUCTURE, LIGHTS, DUCTWORK, AND ALL OTHER TRADES. PROVIDE NECESSARY OFFSETS, TRANSITIONS, AND EXTENSIONS AS REQUIRED TO COMPLETE INSTALLATION AT NO ADDITIONAL COST TO OWNER.
6. PLANS ARE SCHEMATIC IN NATURE. PIPE ROUTING IS SHOWN FOR CLARITY AND FOR GENERAL ROUTING INFORMATION. COORDINATE EXACT ROUTING WITH ALL OTHER TRADES. PROVIDE ALL ADDITIONAL OFFSETS AS REQUIRED TO COMPLETE INSTALLATION.
7. INSTALL ALL VALVES ABOVE ACCESSIBLE CEILINGS OR IN ACCESSIBLE LOCATIONS. PROVIDE ACCESS PANELS WHERE REQUIRED.
8. DO NOT ROUTE WATER PIPING IN EXTERIOR WALLS UNLESS OTHERWISE NOTED. PIPING ROUTED IN EXTERIOR WALLS SHALL BE LOCATED ON THE INTERIOR SIDE OF INSULATION.
9. FIRE CAULK ALL PIPE PENETRATIONS THROUGH FIRE RATED WALLS AND ASSEMBLIES. CAULK AROUND ALL PIPE PENETRATIONS THOUGH FULL HEIGHT SOUND WALLS. REFER TO ARCHITECTURAL DRAWINGS FOR WALL CONSTRUCTION. ALL PENETRATIONS OF FIRE-RESISTANT CONSTRUCTION SHALL BE SEALED WITH A LISTED FIRESTOPPING ASSEMBLY BY THE CONTRACTOR RESPONSIBLE FOR THE PENETRATION.
10. SPACE ABOVE ALL CEILINGS SHALL BE MAINTAINED AS A RETURN AIR PLENUM PER APPLICABLE BUILDING CODES AND AHJ. COMBUSTIBLE MATERIALS ARE NOT PERMITTED WITHIN RETURN AIR PLENUM. ONLY PLENUM RATED MATERIALS CAN BE EXPOSED TO RETURN AIR PLENUM.
11. ALL PLUMBING SHALL BE IN ACCORDANCE WITH THE LOCAL PLUMBING CODE. NOT ALL CLEANOUTS SHOWN. PROVIDE CLEANOUTS AS REQUIRED PER AUTHORITY HAVING JURISDICTION. COORDINATE CLEANOUT LOCATIONS WITH GENERAL CONTRACTOR.
12. SEE WASTE AND VENT RISES DIAGRAMS ON SHEET MX.X FOR COMPLETE PLUMBING SIZES AND CONFIGURATION.
13. SEE PLUMBING FIXTURE SCHEDULE SHEET MX.X FOR PLUMBING FIXTURE CONNECTION REQUIREMENTS.

FIRE SPRINKLER GENERAL NOTES

1. ENTIRE BUILDING SHALL BE PROTECTED BY FIRE SPRINKLER SYSTEM IN ACCORDANCE WITH THE REQUIREMENTS OF NFPA 13 AND THE AUTHORITY HAVING JURISDICTION. FIRE SPRINKLER CONTRACTOR SHALL VERIFY AVAILABLE PRESSURE AND FLOW AND SIZE PIPING TO MEET THE REQUIREMENTS OF NFPA 13 AND THE AUTHORITY HAVING JURISDICTION.
2. HYDRAULIC CALCULATIONS AND SPRINKLER PIPING LAYOUT SHALL BE SUBMITTED TO ENGINEER FOR REVIEW. A SECOND SET OF SHOP DRAWINGS SHALL BE SUBMITTED AFTER THE STATE FIRE MARSHAL HAS REVIEWED DESIGN.
3. PROVIDE AN AUTOMATIC WET PIPE SPRINKLER SYSTEM THROUGHOUT THE BUILDING. COMPLETE IN ALL ASPECTS AND READY FOR OPERATION INCLUDING ALL TEST AND DRAIN LINES, PRESSURE GAUGES, HANGERS AND SUPPORTS, SIGNS, AND OTHER STANDARD APURTENANCES. WIRING SHALL BE PROVIDED UNDER THE ELECTRICAL DIVISION.
4. PROVIDE FIRE SERVICE ENTRANCE WITH DOUBLE CHECK BACKFLOW PREVENTER, ISOLATION VALVES, CHECK VALVES, FLOW SWITCH, ETC. AS REQUIRED BY NFPA 13, AUTHORITY HAVING JURISDICTION, AND ALL LOCAL CODES.
5. PIPING MATERIAL AND SPRINKLER HEADS SHALL MEET THE REQUIREMENTS OF NFPA 13. FINAL PIPE SIZING AND HEAD LAYOUT BY FIRE SPRINKLER CONTRACTOR.
6. MINIMIZE EXPOSED PIPING IN AREAS WITHOUT CEILINGS. IN SPACES WITHOUT CEILINGS, SPRINKLER HEADS AND PIPING SHALL BE LOCATED AS HIGH AS POSSIBLE. ROUTE FIRE SPRINKLER MAINS ALONG STRUCTURE TO MINIMIZE VISIBILITY. PAINT EXPOSED PIPING PER ARCHITECTURAL SPECIFICATIONS. DO NOT PAINT HEADS.
7. NEW FIRE SPRINKLER HEADS IN ALL AREAS WITH CEILINGS SHALL BE CONCEALED TYPE WITH STANDARD COLOR COVER PLATES SELECTED BY ARCHITECT FLUSH TO CEILING. FIRE SPRINKLER HEADS SHALL BE CENTERED IN TILE WHERE INSTALLED IN LAY-IN TILE CEILINGS. COORDINATE WITH ELECTRICAL AND MECHANICAL CONTRACTOR.
8. DO NOT INSTALL FIRE SPRINKLER PIPING OR FIRE SPRINKLER HEADS ABOVE ELECTRICAL PANELS OR CODE REQUIRED CLEARANCE SPACES. MINIMIZE PIPING ROUTED THROUGH ELECTRICAL AND IT ROOMS. PROVIDE PIPE GUARDS ON ALL HEADS LOCATED IN THESE SPACES.
9. COORDINATE ALL WALL AND FLOOR PENETRATIONS WITH GENERAL CONTRACTOR. SEAL PENETRATIONS OF EXTERIOR ENVELOPE WATERTIGHT. FIRE CAULK ALL PIPE PENETRATIONS THROUGH FIRE RATED WALLS AND ASSEMBLIES. CAULK AROUND ALL PIPE PENETRATIONS THOUGH FULL HEIGHT SOUND WALLS. REFER TO ARCHITECTURAL DRAWINGS FOR WALL CONSTRUCTION. ALL PENETRATIONS OF FIRE-RESISTANT CONSTRUCTION SHALL BE SEALED WITH A LISTED FIRESTOPPING ASSEMBLY BY THE CONTRACTOR RESPONSIBLE FOR THE PENETRATION.
10. COORDINATE FIRE SPRINKLER PIPE ROUTING AND FIRE SPRINKLER HEAD LOCATIONS WITH DIFFUSERS, REGISTERS, AND GRILLES, FIRE ALARM DETECTORS, LIGHTS AND CEILING PLANS.
11. CONTRACTOR SHALL COORDINATE ALL PIPE ROUTING WITH ALL OTHER TRADES. CONTRACTOR SHALL PROVIDE ALL ADDITIONAL OFFSETS AS REQUIRED TO COMPLETE INSTALLATION AND AVOID CONFLICTS. IF CONFLICTS DO OCCUR SUCH THAT LIGHTS, DUCTWORK, OR CEILING SYSTEMS CANNOT BE INSTALLED DUE TO SPRINKLER PIPING INTERFERENCE, THE PIPING SHALL BE RELOCATED AT NO ADDITIONAL EXPENSE TO THE PROJECT.
12. INSTALL ALL VALVES IN ACCESSIBLE LOCATIONS.
13. MAINTAIN MANUFACTURER'S REQUIRED CLEARANCE AROUND ALL MECHANICAL EQUIPMENT TO ALLOW PROPER OPERATION AND FOR EASY MAINTENANCE.

MECHANICAL SYMBOLS			
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
TYPICAL PIPING			
	PIPE TEE / PIPE ELBOW		UNION
	ELBOW DN / ELBOW UP		STRAINER
	ISOLATION VALVE (BALL OR BUTTERFLY)		CHECK VALVE (ARROW INDICATES FLOW)
	BALANCING VALVE		AUTOMATIC CONTROL VALVE TWO-WAY/THREE-WAY
	GATE VALVE		PRESSURE REGULATING VALVE (PRV)
	GLOBE VALVE		PRESSURE GAUGE
	PRESSURE/TEMPERATURE TEST PORT		THERMOMETER
TYPICAL PLUMBING			
	WATER CLOSET (SEE SPECIFICATIONS FOR TYPE)		GAS COOK
	LAVATORY (SEE SPECIFICATIONS FOR TYPE)		FLOOR DRAIN - SIZE TYPE
	SINK (SEE SPECIFICATIONS FOR TYPE)		ROOF DRAIN - SIZE TYPE
	ELECTRIC WATER COOLER (SEE SPECIFICATIONS FOR TYPE)		OVERFLOW DRAIN - SIZE TYPE
	MOP SINK (SEE SPECIFICATIONS FOR TYPE)		HOSE BIBB
	DUCTILE IRON		WALL HYDRANT (NON-FREEZE)
	CAST IRON		VENT THROUGH ROOF
	POLY VINYL CHLORIDE		INVERT ELEVATION
	AIR VENT		FLOW LINE
HVAC			
	SIDEWALL SUPPLY REGISTER OR GRILLE		NECKSIZE (N), TAG
	SIDEWALL RETURN OR EXHAUST REGISTER OR GRILLE		AIRFLOW (CFM)
	SUPPLY AIR REGISTER		NECKSIZE (N), TAG
	SUPPLY AIR, OUTSIDE AIR OR MIXED AIR DUCT END OR RISER UP/RISER DN		AIRFLOW (CFM)
	RETURN AIR, EXHAUST AIR OR RELIEF AIR DUCT END OR RISER UP/RISER DN		VOLUME DAMPER
	RECTANGULAR DUCTWORK (WIDTH/DEPTH)(N) (FIRST NUMBER IS SIDE SHOWN)		FIRE DAMPER WITH SLEEVE AND ACCESS DOOR
	ROUND DUCTWORK (DIAMETER)(N) (SPIRAL DUCT IN EXPOSED AREAS)		SMOKE DAMPER WITH SLEEVE AND ACCESS DOOR
	TURNING VANES		FIRE/SMOKE DAMPER WITH SLEEVE AND ACCESS DOOR
FIRE PROTECTION			
	POST INDICATOR VALVE		FIRE HYDRANT
	FIRE DEPARTMENT CONNECTION		O.S & Y VALVE
	FIRE HOSE CABINET		FLOW SWITCH
	FIRE VALVE CABINET		

MECHANICAL SHEET LIST	
Sheet Number	Sheet Name
M0.0	MECHANICAL COVERSHEET
FPI.1	FLOOR PLANS - FIRE PROTECTION
M1.1	FLOOR PLANS - HVAC
M1.2	ROOF PLAN - MECHANICAL
M2.0	BELOW GRADE FLOOR PLAN - PLUMBING
M2.1	FLOOR PLANS - PLUMBING
M4.0	MECHANICAL ENLARGED PLANS
M4.1	WASTE AND VENT RISER DIAGRAM
M5.0	MECHANICAL CONTROL DIAGRAMS
M5.1	MECHANICAL CONTROL DIAGRAMS
M6.0	MECHANICAL DETAILS
M6.1	MECHANICAL DETAILS
M7.0	MECHANICAL SCHEDULES
M7.1	MECHANICAL SCHEDULES
M7.2	PLUMBING FIXTURE SCHEDULE

PIPING ABBREVIATIONS	
DESCRIPTION	ABBV.
Domestic Cold Water	CW
Domestic Hot Water	HW
Domestic Hot Water Radiat	HWC
Fire Protection Wet	F
Natural Gas	G
Refrigerant	REF
Sanitary	W
Storm	ST
Storm Above Grade	ST
Storm Overflow Above Grade	OF
Vent	V

DUCT ABBREVIATIONS	
DESCRIPTION	ABBV.
Exhaust Air	EA
Return Air	RA
Supply Air	SA

Pottawattamie
County Health
Building

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE


△ REVISION DATE
Project Number: 21064
Date: MARCH 10, 2023
COPYRIGHT © 2022

MECHANICAL COVERSHEET


M0.0

NOT FOR CONSTRUCTION

KEYNOTES

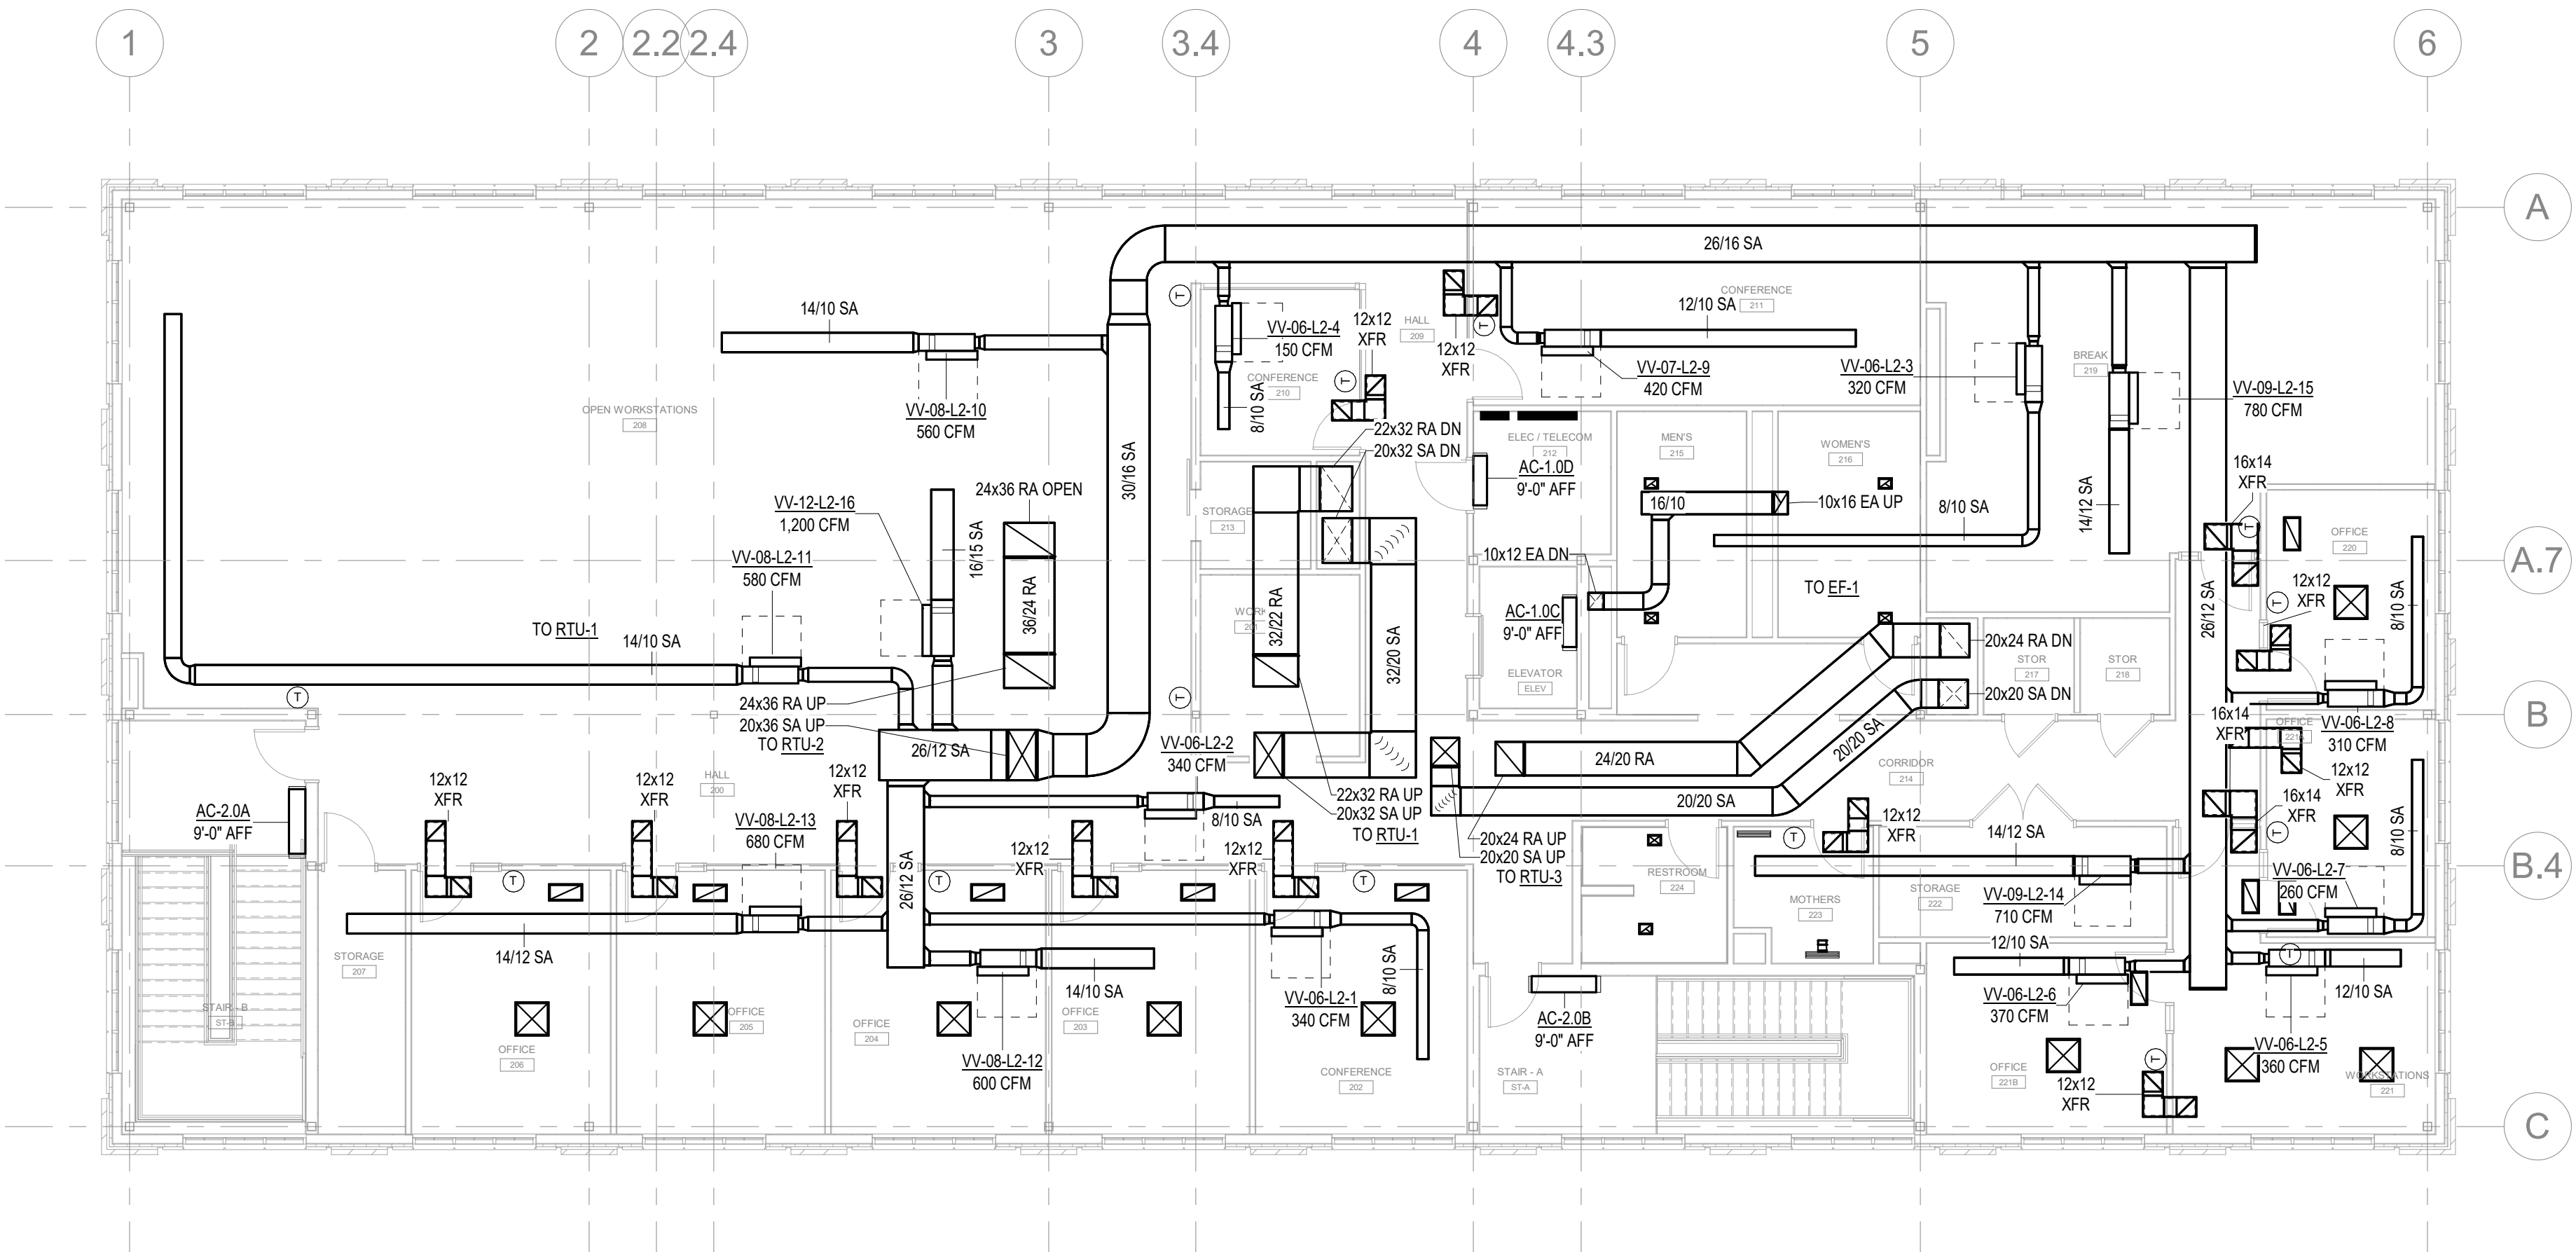

2 FLOOR PLAN - LEVEL 02 - HVAC
M1.1 SCALE: 1/8" = 1'-0"

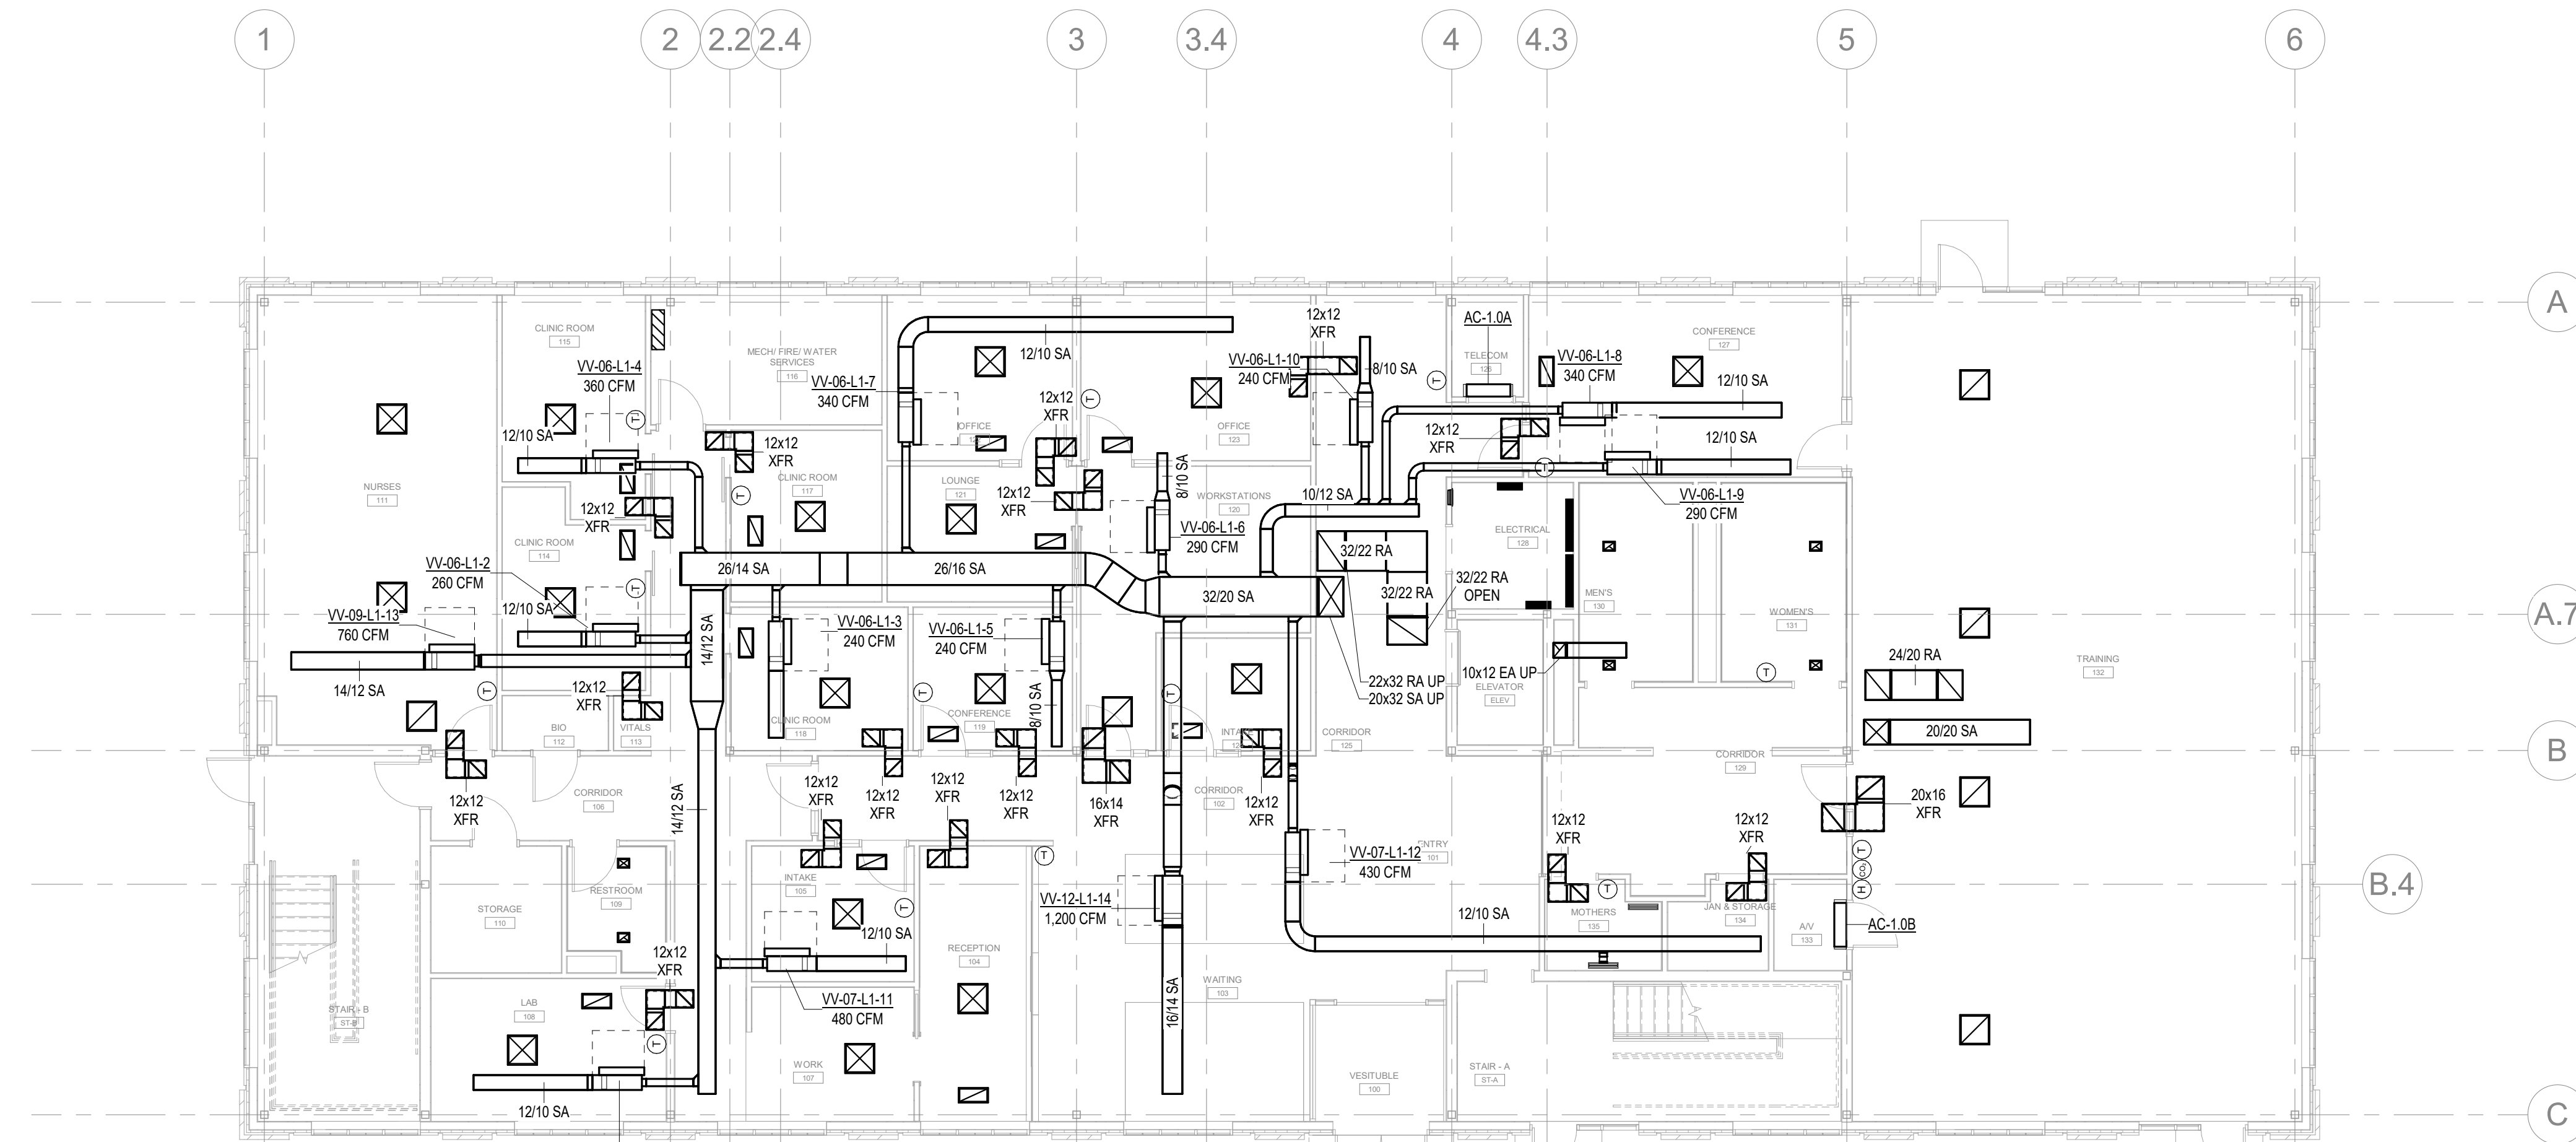

1 FLOOR PLAN - LEVEL 01 - HVAC
M1.1 SCALE: 1/8" = 1'-0"

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE


REVISION	DATE
Project Number:	21064
Date:	MARCH 10, 2023
COPYRIGHT © 2022	

FLOOR PLANS - HVAC

M1.1

NOT FOR CONSTRUCTION

THESE ARE NOT THE FINAL BID DOCUMENTS - REFERENCE ONLY

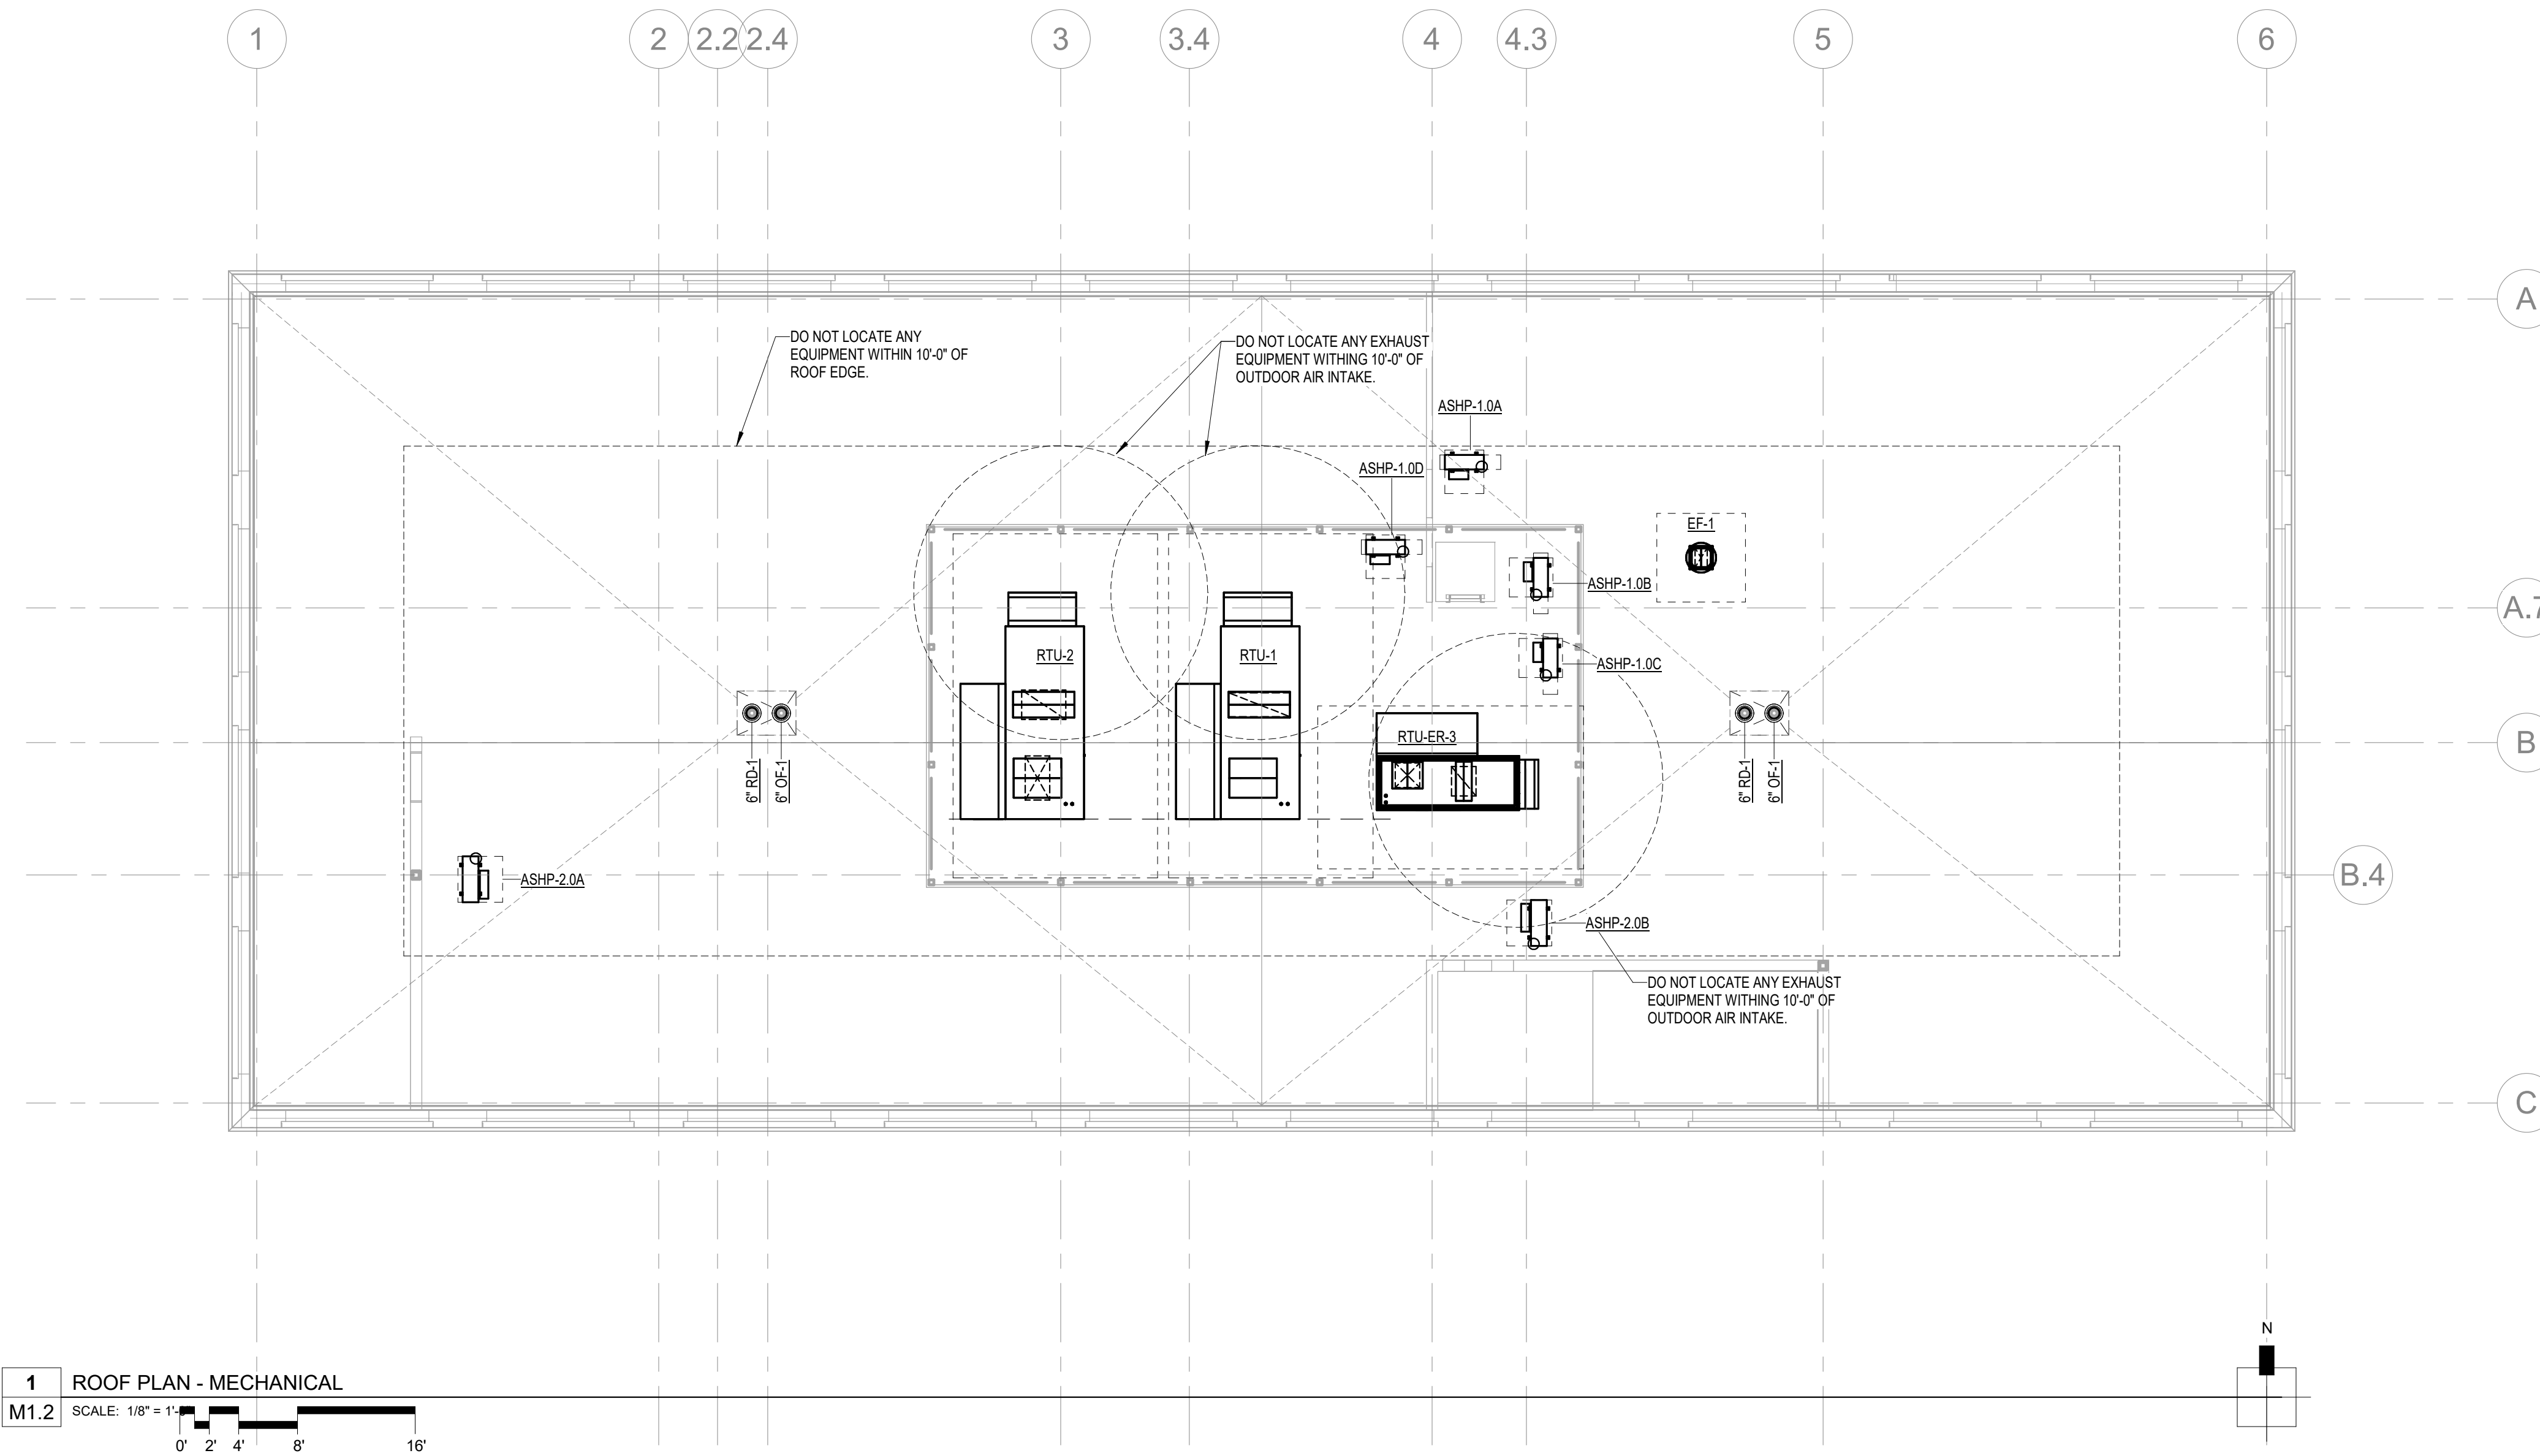

ALLEY POYNER
MACCHIETTO
ARCHITECTURE

REVISION	DATE
Project Number:	21064
Date:	MARCH 10, 2023


COPYRIGHT © 2022

ROOF PLAN - MECHANICAL

M1.2

NOT FOR CONSTRUCTION

THESE ARE NOT THE FINAL BID DOCUMENTS - REFERENCE ONLY

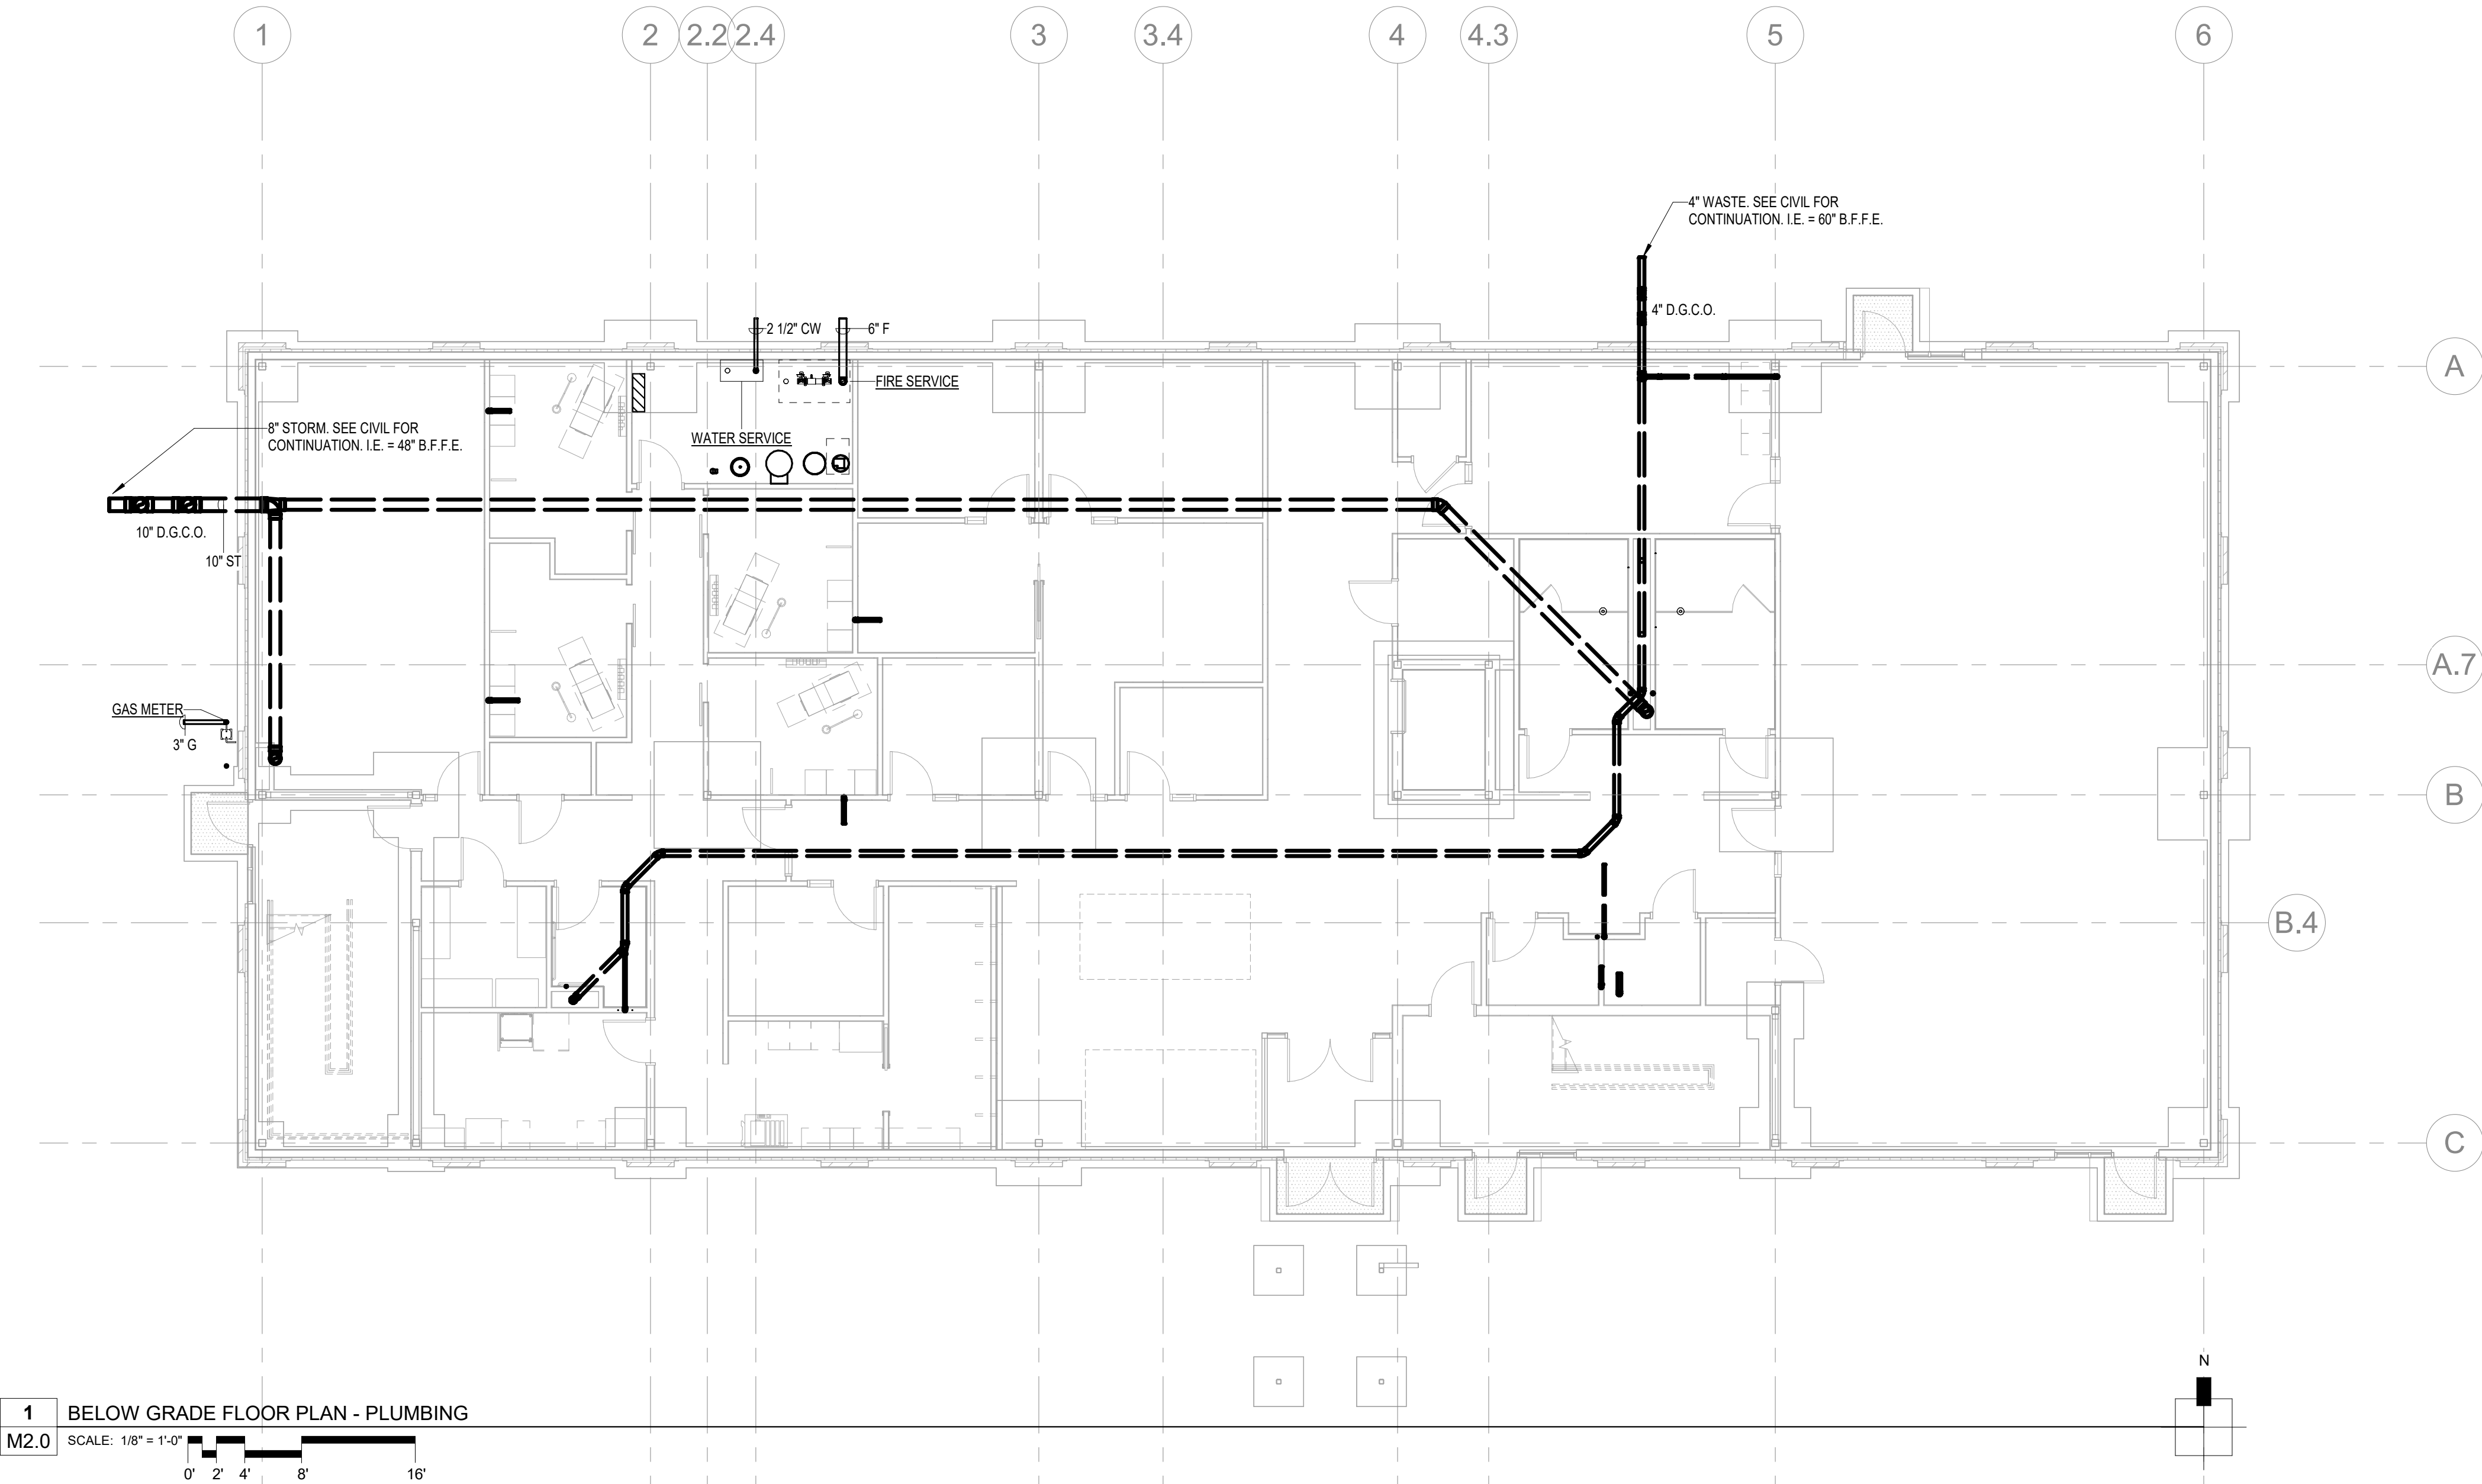

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE


REVISION	DATE
Project Number:	21064
Date:	MARCH 10, 2023
COPYRIGHT © 2022	

BELOW GRADE FLOOR PLAN
- PLUMBING


M2.0

NOT FOR CONSTRUCTION

KEYNOTES

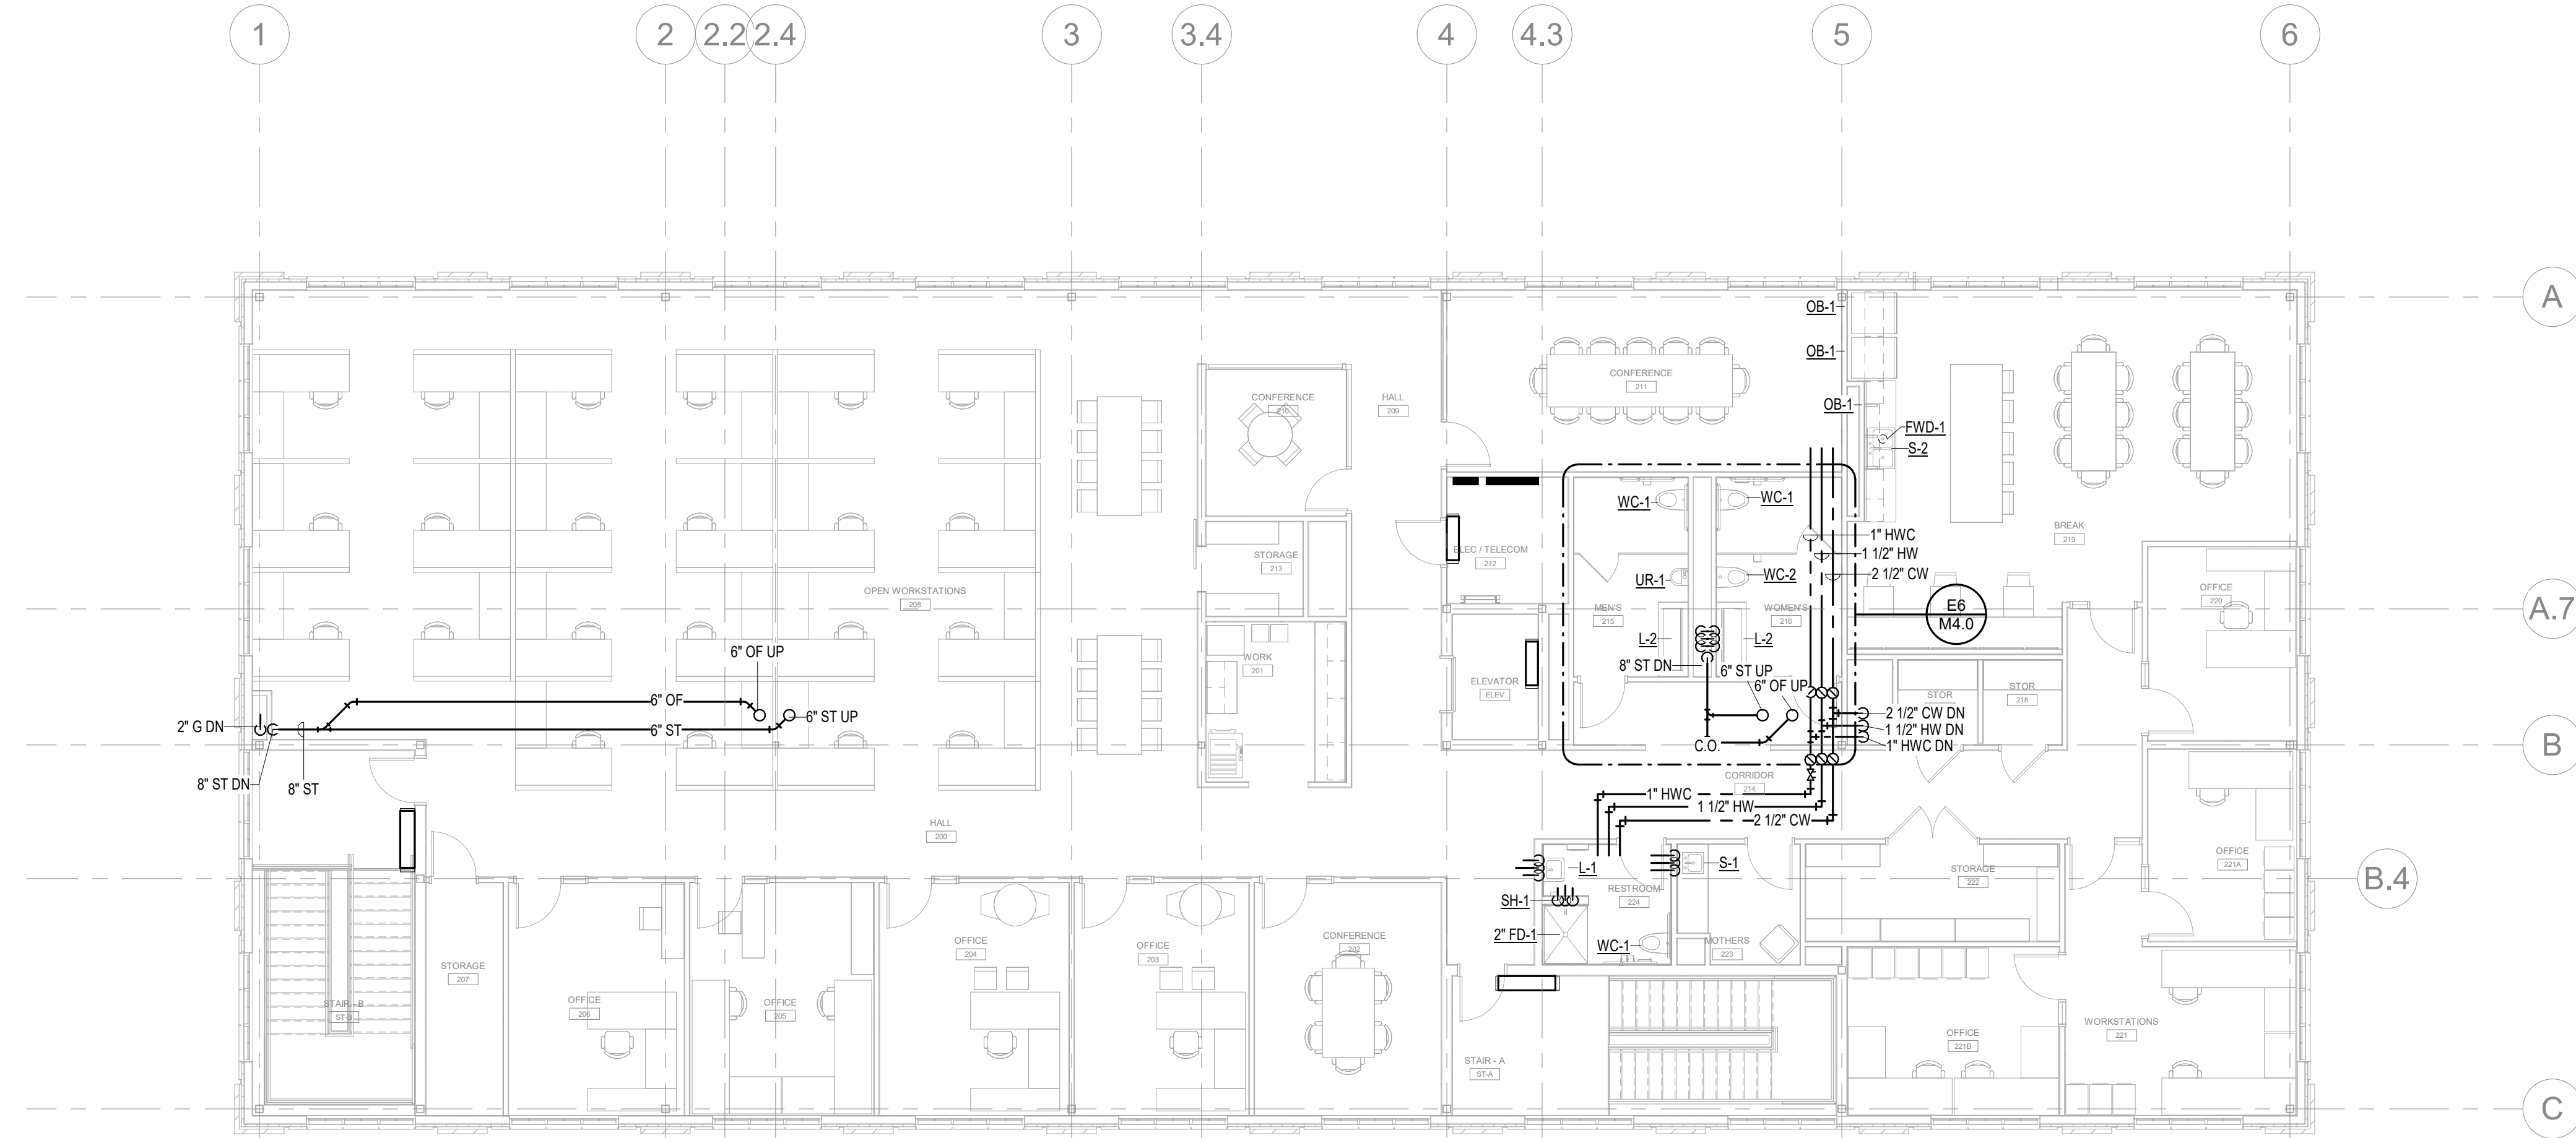

2 FLOOR PLAN - LEVEL 02 - PLUMBING
M2.1 SCALE: 1/8\"/>

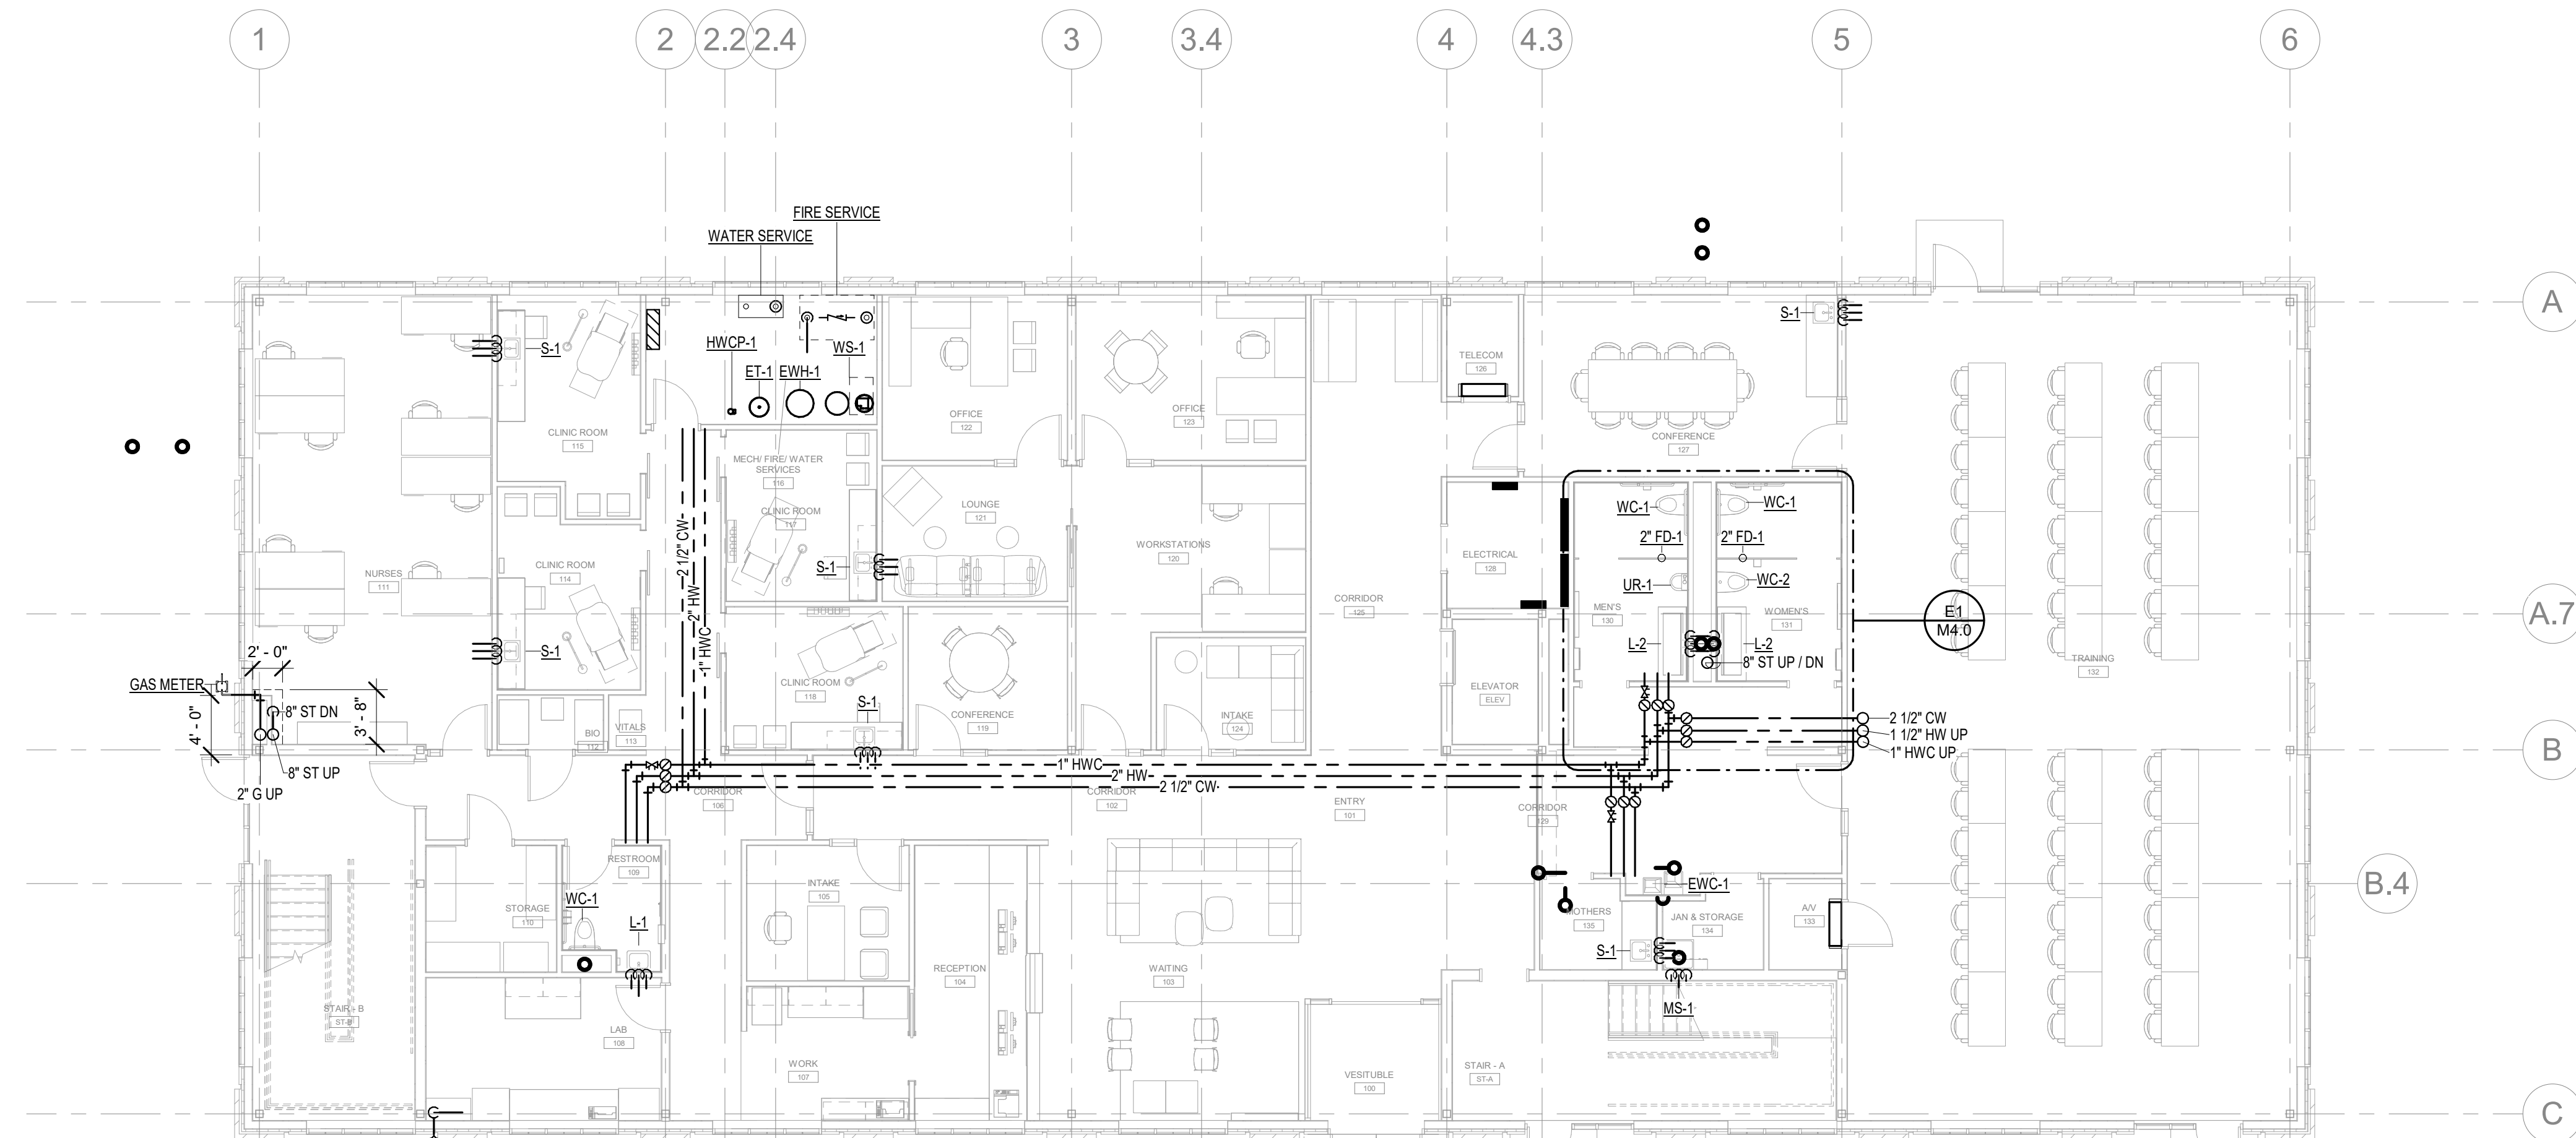

1 FLOOR PLAN - LEVEL 01 - PLUMBING
M2.1 SCALE: 1/8\"/>

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE

REVISION	DATE
Project Number:	21064
Date:	MARCH 10, 2023
COPYRIGHT © 2022	

FLOOR PLANS - PLUMBING

M2.1

NOT FOR CONSTRUCTION

KEYNOTES

E1 ENLARGED PLAN - LEVEL 01 RESTROOMS - PLUMBING
M4.0 SCALE: 1/4" = 1'-0"

E6 ENLARGED PLAN - LEVEL 02 RESTROOMS - PLUMBING
M4.0 SCALE: 1/4" = 1'-0"

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE

△ REVISION	DATE
Project Number:	21064
Date:	MARCH 10, 2023
COPYRIGHT © 2022	

MECHANICAL ENLARGED
PLANS

M4.0

NOT FOR CONSTRUCTION

3/10/2023 8:55:35 AM

THESE ARE NOT THE FINAL BID DOCUMENTS - REFERENCE ONLY



① WASTE AND VENT RISER DIAGRAM

Pottawattamie
County Health
Building

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE

△ REVISION	DATE
Project Number:	21064
Date:	MARCH 10, 2023
COPYRIGHT © 2022	

WASTE AND VENT RISER
DIAGRAM

M4.1

NOT FOR CONSTRUCTION

SEQUENCE OF OPERATION

A. THE FACTORY PROVIDED CONTROLLER (INTEGRAL TO UNIT) SHALL CONTROL ALL BASIC FUNCTIONS (COOLING, HEATING, ECONOMIZER, ETC.). THE BAS SHALL PROVIDE INPUT POINTS AS REQUIRED TO INTERFERE WITH SPACE CONDITIONS AND PROVIDE THE OPERATOR THE ABILITY TO ADJUST INTERNAL UNIT CONTROLLER SETPOINTS THROUGH THE BAS. THE BAS SHALL ALSO COMMUNICATE POINTS AS REQUIRED FROM THE FACTORY PROVIDED CONTROLLER TO THE BAS / OCCUPANT WORKSTATION FOR MONITORING AND ALARMING. COORDINATE WITH EQUIPMENT SUPPLIER. ALL SENSORS / THERMOSTATS WITH OCCUPANT INTERFACE SHALL BE PROVIDED BY THE TEMPERATURE CONTROL CONTRACTOR AND BE CONSISTENT THROUGHOUT THE BUILDING.

B. SYSTEM OFF - WHEN THE SYSTEM IS OFF:

1. THE SUPPLY FAN SHALL BE OFF.
2. THE EXHAUST FAN SHALL BE OFF.
3. THE RELIEF AIR DAMPER SHALL BE CLOSED.
4. THE OUTSIDE AIR DAMPER SHALL BE CLOSED.
5. THE RETURN AIR DAMPER SHALL BE OPEN.
6. THE DX COOLING COIL SHALL BE DISABLED.
7. THE NATURAL GAS-FIRED HEATING SYSTEM SHALL BE DISABLED.

B. INITIATION OF SYSTEM START-UP - THE SYSTEM SHALL BE STARTED:

1. MANUALLY BY AN OPERATOR THROUGH THE BAS.
2. AUTOMATICALLY BY THE BAS FOR MORNING WARM-UP / COOL-DOWN (OPTIMAL START).
3. AUTOMATICALLY BY THE BAS THROUGH OCCUPANCY SCHEDULE.
4. AUTOMATICALLY BY THE BAS DUE TO OCCUPANT OVERRIDE REQUEST. THIS SHALL REQUIRE A USER DEFINED MINIMUM NUMBER OF ZONES TO BE ACTIVE.
5. AUTOMATICALLY BY THE BAS TO MAINTAIN UNOCCUPIED SETPOINTS. THIS SHALL REQUIRE A USER DEFINED MINIMUM NUMBER OF ZONES TO BE ACTIVE.

C. SYSTEM OPERATION - AFTER SYSTEM START-UP HAS BEEN INITIATED THE FOLLOWING SHALL OCCUR:

1. RTU SERVES SINGLE DUCT VARIABLE AIR VOLUME TERMINAL UNITS. PRIMARY AIR DAMPERS SHALL MODULATE TO AT LEAST THEIR MINIMUM POSITIONS PRIOR TO INITIATING SYSTEM START-UP.
2. THE SUPPLY FAN SHALL BE ENABLED. DURING OCCUPIED HOURS, THE FAN SHALL RUN CONTINUOUSLY. DURING UNOCCUPIED HOURS, THE FAN SHALL BE ALLOWED TO CYCLE WITH HEATING / COOLING DEMAND.
3. THE SUPPLY FAN SHALL BE STARTED AT MINIMUM SPEED. AFTER AN OPERATOR DEFINED PERIOD OF TIME, THE FAN SHALL BE ENABLED FOR AUTOMATIC SPEED CONTROL. THE FACTORY PROVIDED UNIT CONTROLLER SHALL MODULATE SUPPLY FAN SPEED TO MAINTAIN THE SUPPLY STATIC PRESSURE SETPOINT. THE PRESSURE SENSOR SHALL BE LOCATED AT THE FURTHEST TERMINAL UNIT INLET.
4. THE OUTSIDE AIR DAMPER SHALL MODULATE TO ITS MINIMUM POSITION.
5. DISCHARGE AIR TEMPERATURE CONTROL:
 - a. WHEN THE DISCHARGE AIR TEMPERATURE IS BELOW THE DISCHARGE AIR TEMPERATURE SETPOINT, THE GAS-FIRED HEAT EXCHANGER SHALL MODULATE TO MAINTAIN THE DISCHARGE AIR TEMPERATURE SETPOINT.
 - b. WHEN THE DISCHARGE AIR TEMPERATURE IS ABOVE THE DISCHARGE AIR TEMPERATURE SETPOINT:
 - a. THE CONTROLLER SHALL EVALUATE CONDITIONS FOR POSSIBLE ECONOMIZER OPERATION.
 - THE RTU SHALL TRANSITION TO ECONOMIZER MODE WHEN THE OUTSIDE AIR ENTHALPY IS LESS THAN THE RETURN AIR ENTHALPY WHILE OPERATING IN ECONOMIZER. THE ECONOMIZER DAMPERS SHALL MODULATE TO MAINTAIN THE DISCHARGE AIR TEMPERATURE SETPOINT. UNDER NO CIRCUMSTANCES SHALL THE DISCHARGE AIR TEMPERATURE BE ALLOWED TO DROP BELOW 55°F (ADJ). IF THE OUTSIDE AIR DAMPER IS FULLY OPEN AND THE RTU IS UNABLE TO MAINTAIN THE DISCHARGE AIR TEMPERATURE, THE DX COOLING SHALL BE ALLOWED TO PROVIDE SUPPLEMENTAL COOLING.
 - WHEN THE OUTSIDE AIR ENTHALPY IS GREATER THAN THE RETURN AIR ENTHALPY, THE ECONOMIZER DAMPERS SHALL MODULATE TO THE MINIMUM OUTSIDE AIR DAMPER POSITION. THE DX COOLING SHALL MODULATE TO MAINTAIN THE DISCHARGE AIR TEMPERATURE SETPOINT.
 - b. DEMAND CONTROLLED VENTILATION. SELECTED ZONES INCLUDE CARBON DIOXIDE SENSORS (SEE PLANS). IF A VAV TERMINAL UNIT (SEE SEQUENCE OF OPERATION) MAKES A REQUEST TO INCREASE OUTSIDE AIR AT THE RTU, THE OUTSIDE AIR DAMPER SHALL MODULATE OPEN AN ADDITIONAL 10%. THE OUTSIDE AIR DAMPER SHALL REMAIN IN THIS POSITION FOR 10 MINUTES (ADJ.). IF ONE OR MULTIPLE VAV TERMINAL UNITS CONTINUE TO MAKE A REQUEST(S) TO INCREASE OUTSIDE AIR AT THE RTU, THE OUTSIDE AIR DAMPER SHALL MODULATE OPEN AN ADDITIONAL 10%. THIS SEQUENCE SHALL CONTINUE UNTIL SPACE VENTILATION NEEDS ARE MET. THE OUTSIDE AIR DAMPER SHALL NOT BE ALLOWED TO MODULATE PAST ITS MAXIMUM POSITION (SEE SCHEDULE). IF THE DISCHARGE AIR TEMPERATURE FALLS BELOW 55°F (ADJ) OR RISES ABOVE 65°F (ADJ), THE DEMAND CONTROL VENTILATION SEQUENCE SHALL BE SUSPENDED AND THE OUTSIDE AIR DAMPER SHALL RETURN TO ITS MINIMUM POSITION.
 - c. THE POWERED EXHAUST SHALL MODULATE TO MAINTAIN THE BUILDING STATIC PRESSURE SETPOINT. THE BUILDING PRESSURE SENSOR SHALL COMPARE THE PRESSURE DIFFERENCE BETWEEN THE INSIDE AND OUTSIDE. THE OUTSIDE PRESSURE SHALL BE TAKEN NEAR THE FRONT DOOR, LOW ON THE BUILDING, PREFERABLY SOUTH, OR ALTERNATIVELY EAST OR WEST SIDES OF THE BUILDING.

SEQUENCE OF OPERATION (CONTINUED)

D. SYSTEM SHUTDOWN - SHALL BE INITIATED AS FOLLOWS:

1. MANUALLY BY AN OPERATOR THROUGH THE BAS.
2. AUTOMATICALLY BY THE BAS THROUGH OCCUPANCY SCHEDULE.
3. AUTOMATICALLY BY THE BAS DUE TO EXPIRATION OF OCCUPANCY OVERRIDE REQUESTS.
4. AUTOMATICALLY BY THE BAS UPON SATISFYING UNOCCUPIED SETPOINTS.
5. AUTOMATICALLY BY THE BAS DUE TO HIGH/LOW DISCHARGE AIR TEMPERATURE.
6. AUTOMATICALLY IN THE EVENT OF BUILDING POWER FAILURE OR FIRE ALARM.

E. SYSTEM SETPOINTS - THE SETPOINTS SHALL BE OPERATOR CHANGEABLE AND INITIALLY SET AS FOLLOWS:


1. DISCHARGE AIR TEMPERATURE SETPOINT SHALL BE RESET BETWEEN 55°F AND 65°F BASED ON THE CRITICAL ZONE.
2. THE MINIMUM AND MAXIMUM SUPPLY FAN SPEED SIGNALS SHALL BE SET BY THE BALANCING CONTRACTOR WITHIN THE FAN MANUFACTURER'S LIMITATIONS.
3. THE MINIMUM AND MAXIMUM DESIGN OUTSIDE AIRFLOW RATE SETPOINTS SHALL BE AS SCHEDULED ON THE MECHANICAL DRAWINGS.
4. THE SUPPLY STATIC PRESSURE SETPOINT SHALL BE 0.75".
5. THE BUILDING PRESSURE SETPOINT SHALL BE 0.05 INCHES W.G.
6. THE HIGH DISCHARGE AIR TEMPERATURE ALARM SETPOINT SHALL BE 75°F.
7. THE LOW DISCHARGE AIR TEMPERATURE ALARM SETPOINT SHALL BE 45°F.
8. THE HIGH SPACE PRESSURE ALARM SETPOINT SHALL BE 0.15 INCHES W.G.
9. THE LOW SPACE PRESSURE ALARM SETPOINT SHALL BE -0.05 INCHES W.G.

F. ALARMS - THE BAS SHALL GENERATE AN ALARM FOR THE FOLLOWING CONDITIONS:

1. SUPPLY FAN FAILURE
2. EXHAUST FAN FAILURE
3. HIGH DISCHARGE AIR TEMPERATURE
4. LOW DISCHARGE AIR TEMPERATURE
5. HIGH BUILDING PRESSURE
6. LOW BUILDING PRESSURE
7. FREEZE/STAT
8. ALL ALARMS SHALL BE INHIBITED IF THE SUPPLY FAN IS NOT IN OPERATION. THE ALARMS, EXCEPT THE FAN FAILURE TO START, SHALL REMAIN INHIBITED FOLLOWING START-UP OF THE UNIT FOR AN OPERATOR DETERMINED PERIOD OF TIME, INITIALLY SET AT TWO MINUTES.

G. FAILURE POSITIONS - THE FOLLOWING SHALL OCCUR UPON COMPONENT FAILURE OR LOSS OF POWER:

1. RELIEF AIR DAMPER SHALL CLOSE.
2. OUTSIDE AIR DAMPER SHALL CLOSE.
3. RETURN AIR DAMPER SHALL OPEN.
4. THE SUPPLY FAN SHALL REMAIN IN THE LAST COMMANDED STATE AND THE SPEED SIGNAL SHALL GO TO THE MINIMUM SPEED.
5. DX COOLING SHALL BE DISABLED.
6. GAS HEATING SHALL BE DISABLED.

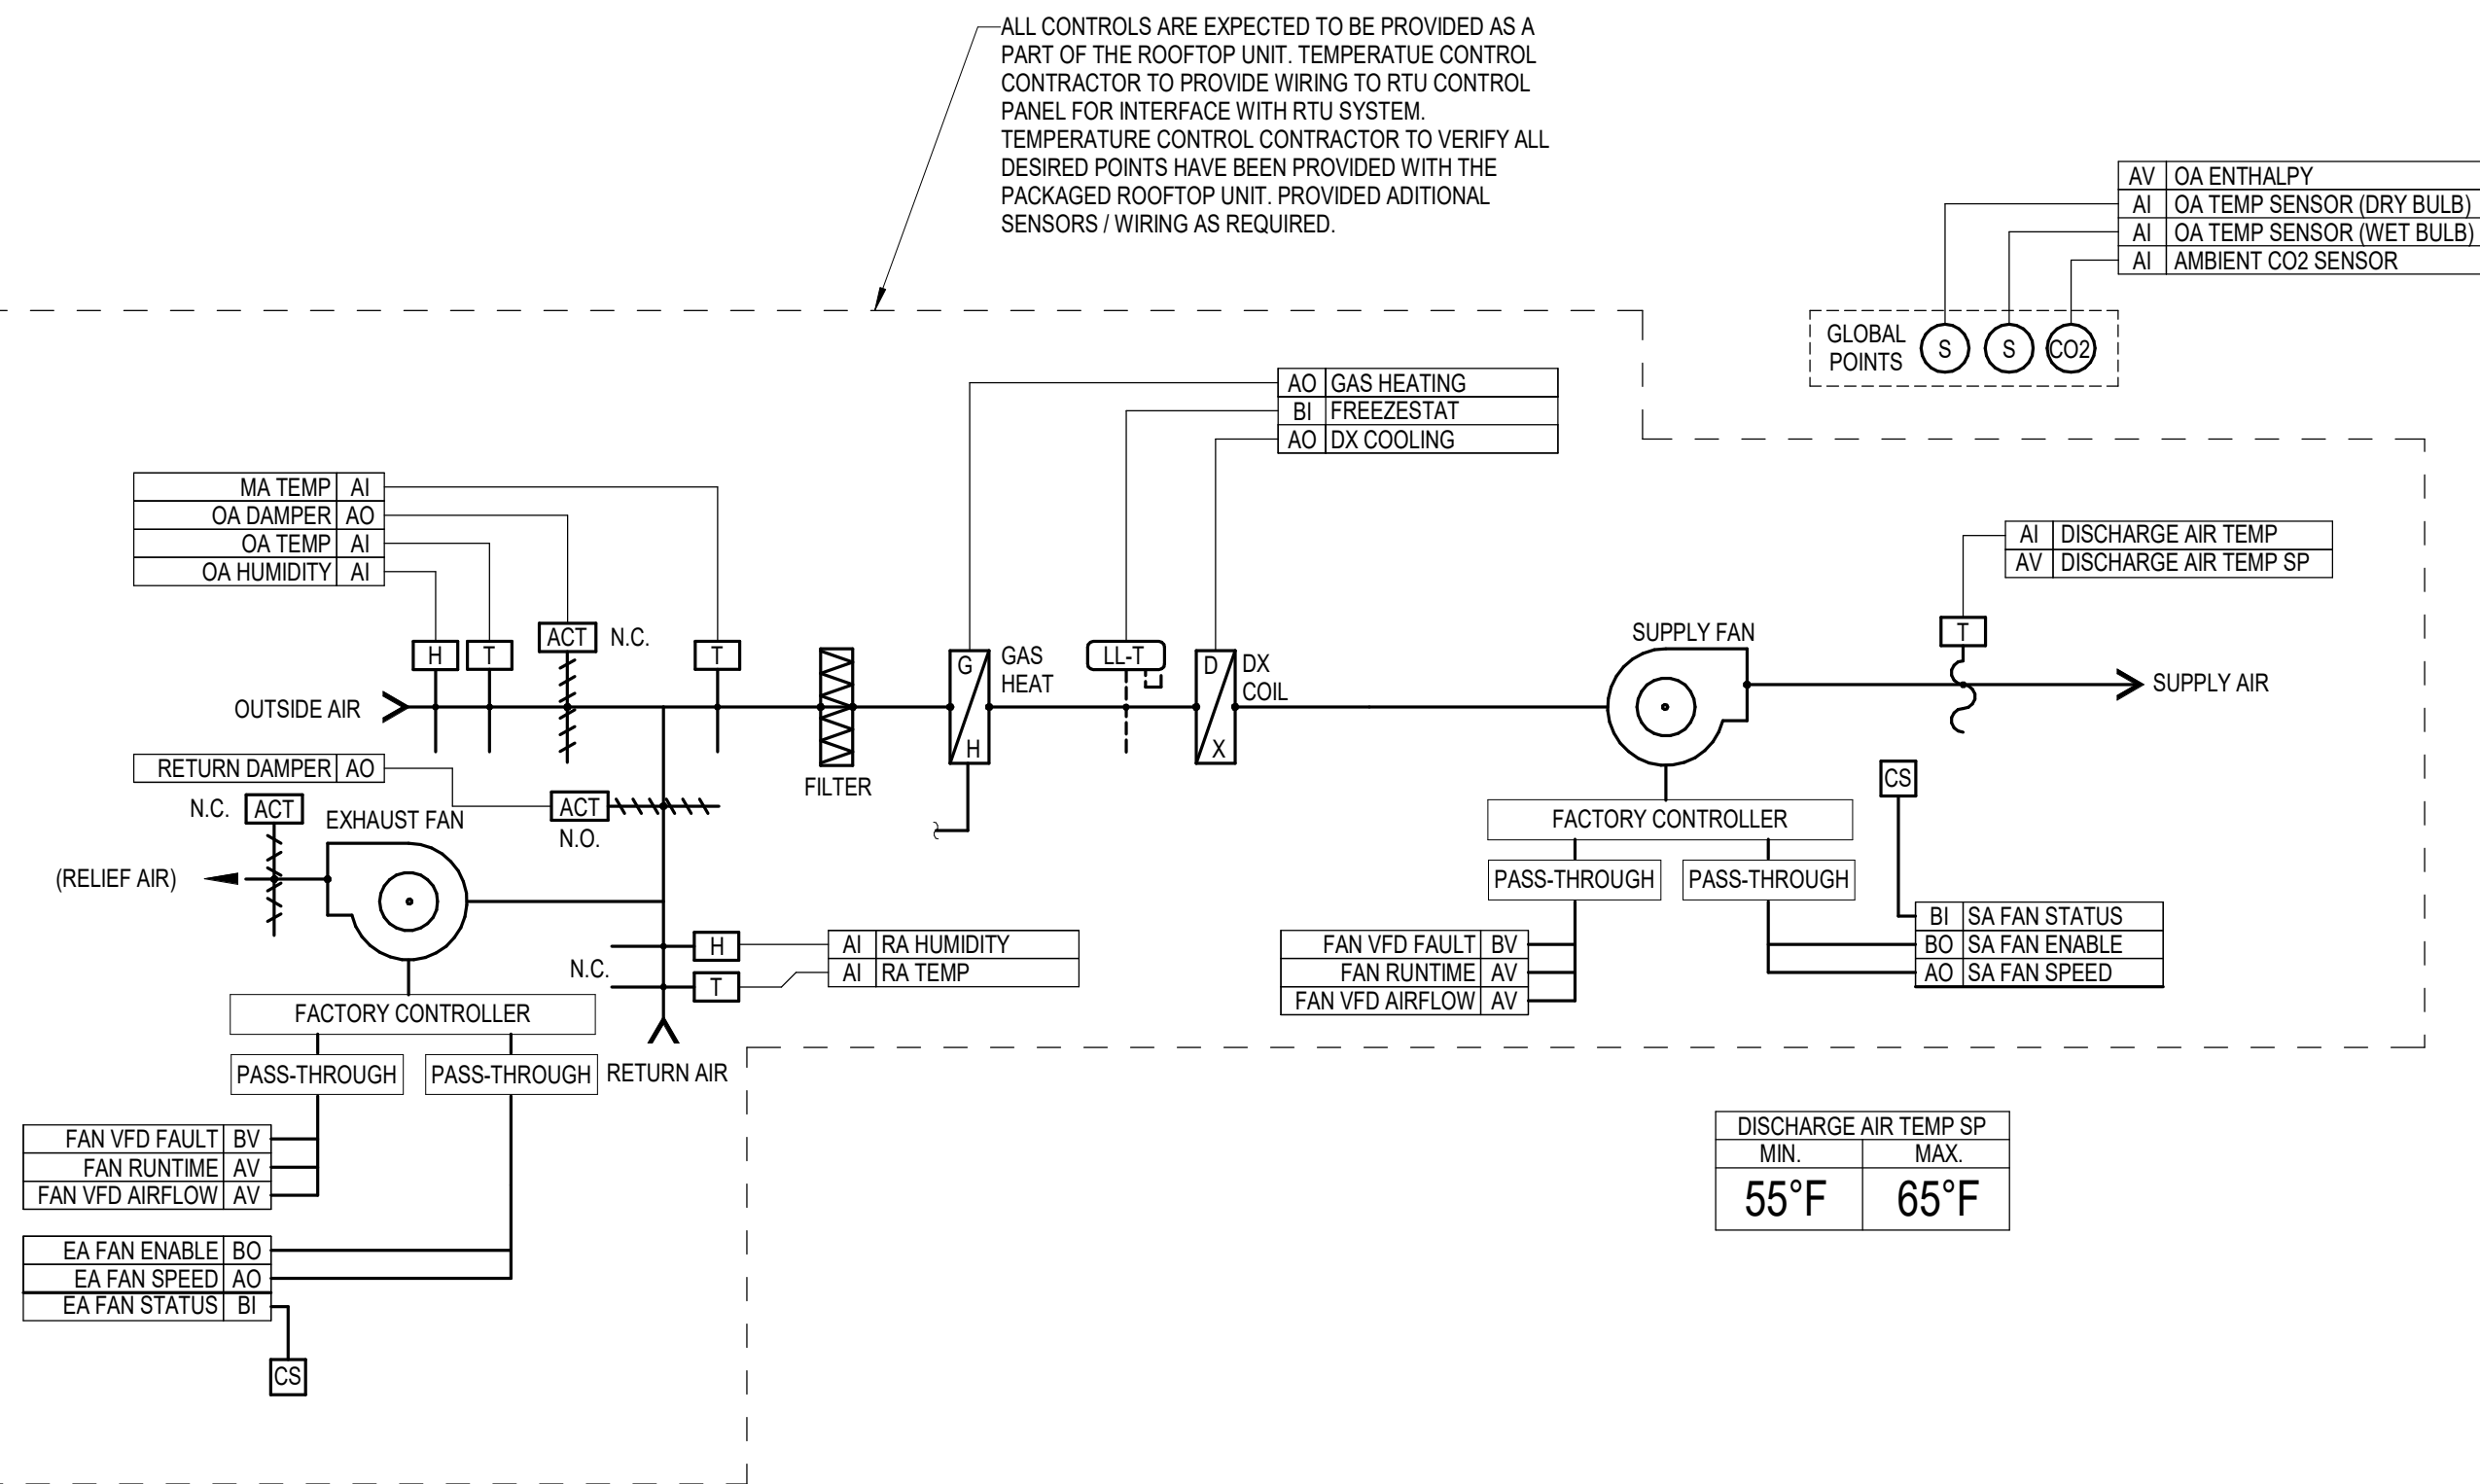

G1 ROOFTOP UNIT (RTU-1 & RTU-2)
M5.0 SCALE: NTS

SEQUENCE OF OPERATION

A. THE FACTORY PROVIDED CONTROLLER (INTEGRAL TO UNIT) SHALL CONTROL ALL BASIC FUNCTIONS (COOLING, HEATING, DEHUMIDIFICATION, ECONOMIZER, ETC.). THE BAS SHALL PROVIDE INPUT POINTS AS REQUIRED TO INTERFERE WITH SPACE CONDITIONS AND PROVIDE THE OPERATOR THE ABILITY TO ADJUST INTERNAL UNIT CONTROLLER SETPOINTS THROUGH THE BAS. THE BAS SHALL ALSO COMMUNICATE POINTS AS REQUIRED FROM THE FACTORY PROVIDED CONTROLLER TO THE BAS / OCCUPANT WORKSTATION FOR MONITORING AND ALARMING. COORDINATE WITH EQUIPMENT SUPPLIER. ALL SENSORS / THERMOSTATS WITH OCCUPANT INTERFACE SHALL BE PROVIDED BY THE TEMPERATURE CONTROL CONTRACTOR AND BE CONSISTENT THROUGHOUT THE BUILDING.

B. SYSTEM OFF - WHEN THE SYSTEM IS OFF:

1. THE SUPPLY FAN SHALL BE OFF.
2. THE POWERED EXHAUST FAN SHALL BE OFF.
3. THE RELIEF AIR DAMPER SHALL BE CLOSED.
4. THE OUTSIDE AIR DAMPER SHALL BE CLOSED.
5. THE RETURN AIR DAMPER SHALL BE OPEN.
6. THE DX COOLING COIL SHALL BE DISABLED.
7. THE HOT GAS REHEAT SYSTEM SHALL BE DISABLED.
8. THE NATURAL GAS-FIRED HEATING SYSTEM SHALL BE DISABLED.
9. THE ENTHALPY WHEEL SHALL BE DISABLED.

B. INITIATION OF SYSTEM START-UP - THE SYSTEM SHALL BE STARTED:

1. MANUALLY BY AN OPERATOR THROUGH THE BAS.
2. AUTOMATICALLY BY THE BAS FOR MORNING WARM-UP / COOL-DOWN (OPTIMAL START).
3. AUTOMATICALLY BY THE BAS THROUGH OCCUPANCY SCHEDULE.
4. AUTOMATICALLY BY THE BAS DUE TO OCCUPANT OVERRIDE REQUEST.
5. AUTOMATICALLY BY THE BAS TO MAINTAIN UNOCCUPIED SETPOINTS.

C. SYSTEM OPERATION - AFTER SYSTEM START-UP HAS BEEN INITIATED THE FOLLOWING SHALL OCCUR:

1. THE SUPPLY FAN SHALL BE ENABLED. DURING OCCUPIED HOURS (OR DURING OCCUPANT OVERRIDE REQUEST), THE FAN SHALL RUN CONTINUOUSLY. THE FACTORY PROVIDED UNIT CONTROLLER SHALL MODULATE SUPPLY FAN SPEED TO MATCH COOLING AND HEATING LOADS. DURING UNOCCUPIED HOURS, THE FAN SHALL CYCLE TO MAINTAIN THE UNOCCUPIED TEMPERATURE SETPOINTS.
2. THE BAS SHALL PROVIDE THE FACTORY UNIT CONTROLLER WITH THE SPACE TEMPERATURE, SPACE TEMPERATURE SETPOINT, SPACE RELATIVE HUMIDITY AND SPACE RELATIVE HUMIDITY SETPOINT. THE FACTORY UNIT CONTROLLER SHALL OPERATE THE COOLING, HEATING AND REHEAT COMPONENTS IN A SIMILAR MANNER AS FOLLOWS:
 - a. WHEN THE SPACE TEMPERATURE IS ABOVE THE SPACE COOLING TEMPERATURE SETPOINT, THE DX COOLING SYSTEM AND SUPPLY FAN SHALL MODULATE TO MAINTAIN THE SPACE COOLING TEMPERATURE SETPOINT.
 - b. ECONOMIZER:
 - a. WHEN THE OUTDOOR AIR ENTHALPY IS BELOW THE RETURN AIR ENTHALPY, THE CONTROL SYSTEM SHALL ENABLE THE AIRSIDE ECONOMIZER. FACTORY CONTROLLER SHALL MODULATE THE OUTSIDE AND RETURN AIR DAMPERS TO MAINTAIN THE SUPPLY AIR TEMPERATURE SETPOINT.
 - b. DX COOLING SHALL BE ALLOWED TO SUPPLEMENT ECONOMIZER WHEN 100% ECONOMIZER IS NOT ADEQUATE FOR SPACE COOLING.
 - c. WHEN THE OUTDOOR AIR ENTHALPY IS ABOVE THE RETURN AIR ENTHALPY, THE AIRSIDE ECONOMIZER SHALL BE DISABLED AND THE FACTORY CONTROLLER SHALL MODULATE THE OUTSIDE AIR DAMPER TO ITS MINIMUM POSITION AND RETURN AIR DAMPER TO ITS MAXIMUM POSITION.
 - c. WHEN THE SPACE RELATIVE HUMIDITY IS ABOVE THE MAXIMUM SPACE RELATIVE HUMIDITY SETPOINT (BUT SENSIBLE COOLING IS NOT REQUIRED), THE DEHUMIDIFICATION CYCLE (COOLING COIL AND REHEAT COIL) SHALL BE SEQUENCED TO MAINTAIN THE SPACE RELATIVE HUMIDITY SETPOINT WITHOUT OVER COOLING THE SPACE.
 - d. WHEN THE SPACE TEMPERATURE IS BELOW THE SPACE HEATING TEMPERATURE SETPOINT, THE GAS-FIRED HEAT EXCHANGER AND SUPPLY FAN SHALL MODULATE TO MAINTAIN THE SPACE HEATING TEMPERATURE SETPOINT.
 - e. HEATING SUPPLY AIR TEMPERATURE SETPOINT SHALL BE 1°F (ADJ.) LESS THAN THE COOLING SUPPLY AIR TEMPERATURE SETPOINT. THIS SHALL PREVENT UNNECESSARY CYCLING BETWEEN HEATING AND COOLING MODES OF OPERATION.
3. THE BAS SHALL PROVIDE THE FACTORY CONTROLLER WITH SPACE PRESSURE AND SPACE PRESSURE SETPOINT. THE POWERED EXHAUST SHALL OPERATE DURING ECONOMIZER MODE TO MAINTAIN THE SPACE STATIC PRESSURE SETPOINT. THE SPACE PRESSURE SENSOR SHALL COMPARE THE PRESSURE DIFFERENCE BETWEEN THE INSIDE AND OUTSIDE.
4. DEMAND CONTROL VENTILATION
 - a. IF THE SPACE CO2 LEVEL EXCEEDS THE HIGH LIMIT SETPOINT WHEN THE OUTSIDE AIR DAMPER IS AT MINIMUM POSITION, THE OUTSIDE AIR DAMPER SHALL MODULATE OPEN 10% INCREMENTS TO MAINTAIN SETPOINT. IF AFTER A 10 MINUTE DELAY (ADJ.) THE SPACE CO2 LEVEL STILL EXCEEDS THE HIGH LIMIT SETPOINT, THE OUTSIDE AIR DAMPER SHALL MODULATE OPEN AN ADDITIONAL 10% AND SO ON UNTIL THE SPACE CO2 LEVEL FALLS BELOW THE HIGH LIMIT SETPOINT FOR 30 MINUTES (ADJ.) OR THE MAXIMUM OUTSIDE AIR DAMPER POSITION IS REACHED.
 - b. IF AFTER A 20 MINUTE DELAY (ADJ.) THE SYSTEM CANNOT MAINTAIN SPACE TEMPERATURE DUE TO THE INCREASED VENTILATION LOAD, THE OUTSIDE AIR DAMPER SHALL RETURN TO ITS MINIMUM POSITION. THE DAMPER SHALL REMAIN AT ITS MINIMUM POSITION FOR 30 MINUTES (ADJ.) BEFORE ALLOWING THE OUTSIDE AIR DAMPER TO RESPOND TO THE CO2 LEVEL AGAIN.
5. ENERGY WHEEL CONTROL.
 - a. BYPASS DAMPERS: BYPASS DAMPERS ARE OPENED WHEN THE UNIT ENTERS THE ECONOMIZER OPERATING STATE. OTHERWISE, THE BYPASS DAMPERS REMAIN CLOSED.
 - b. WHEEL EFFECTIVENESS CONTROL: THE ENERGY RECOVERY WHEEL WILL START/STOP TO MEET THE DISCHARGE AIR TEMPERATURE SET POINT USING FACTORY MOUNTED TEMPERATURE SENSORS. THE ENERGY WHEEL IS THE FIRST FORM OF HEATING OR COOLING WHEN ACTIVE. COMPRESSORS OR HEAT WILL ONLY BE ACTIVE WHEN THE ENERGY RECOVERY WHEEL CANNOT SATISFY THE DAT.
 - c. ON-OFF DEFROST CONTROL: WHEN THE OUTSIDE AIR TEMP IS BELOW AN ADJUSTABLE FROST TEMPERATURE (DEFAULT 32°F) THE WHEEL IS STOPPED FOR AN ADJUSTABLE PERIOD OF TIME (DEFAULT 5 MINUTES) ONCE EVERY 60 MINUTES (ADJUSTABLE).

SEQUENCE OF OPERATION (CONTINUED)

D. SYSTEM SHUTDOWN - SHALL BE INITIATED AS FOLLOWS:

1. MANUALLY BY AN OPERATOR THROUGH THE BAS.
2. AUTOMATICALLY BY THE BAS THROUGH OCCUPANCY SCHEDULE.
3. AUTOMATICALLY BY THE BAS DUE TO EXPIRATION OF OCCUPANCY OVERRIDE REQUEST.
4. AUTOMATICALLY BY THE BAS UPON SATISFYING UNOCCUPIED SETPOINTS.
5. AUTOMATICALLY BY THE BAS DUE TO HIGH/LOW DISCHARGE AIR TEMPERATURE.
6. AUTOMATICALLY IN THE EVENT OF BUILDING POWER FAILURE OR FIRE ALARM.

E. SYSTEM SETPOINTS - THE SETPOINTS SHALL BE OPERATOR CHANGEABLE AND INITIALLY SET AS FOLLOWS:


1. SEE SPACE SETPOINT TABLE FOR OCCUPIED / UNOCCUPIED SPACE SETPOINTS.
 - a. THE OCCUPANT SHALL HAVE THE CAPABILITY TO ADJUST THE SPACE TEMPERATURE SETPOINT THROUGH THE SPACE THERMOSTAT. THE PROGRAMMING SHALL LIMIT USER ADJUSTMENT TO +1 OR -2°F OF THE BASE SETPOINT.
 - b. THE OCCUPANT SHALL NOT HAVE THE CAPABILITY TO ADJUST THE SPACE RELATIVE HUMIDITY SETPOINT.
 - c. SEE SCHEDULE FOR DESIGN HEATING DISCHARGE AIR TEMPERATURE SETPOINT.
 - d. SEE SCHEDULE FOR DESIGN COOLING DISCHARGE AIR TEMPERATURE SETPOINT.
2. THE MINIMUM DESIGN OUTSIDE AIR FLOW RATE SETPOINT SHALL BE AS SCHEDULED ON THE MECHANICAL DRAWINGS.
3. THE RETURN AIR CO2 HIGH LIMIT SHALL BE 1,000 PPM.
4. THE BUILDING PRESSURE SETPOINT SHALL BE 0.05 INCHES W.G.
5. THE HIGH DISCHARGE AIR TEMPERATURE ALARM SETPOINT SHALL BE 110°F.
6. THE LOW DISCHARGE AIR TEMPERATURE ALARM SETPOINT SHALL BE 45°.
7. THE HIGH SPACE PRESSURE ALARM SETPOINT SHALL BE 0.15 INCHES W.G.
8. THE LOW SPACE PRESSURE ALARM SETPOINT SHALL BE -0.05 INCHES W.G.
9. THE RETURN AIR CO2 HIGH LIMIT SHALL BE 1,000 PPM.

F. ALARMS - THE BAS SHALL GENERATE AN ALARM FOR THE FOLLOWING CONDITIONS:

1. SUPPLY FAN FAILURE
2. EXHAUST FAN FAILURE
3. HIGH DISCHARGE AIR TEMPERATURE
4. LOW DISCHARGE AIR TEMPERATURE
5. HIGH SPACE RELATIVE HUMIDITY
6. HIGH SPACE TEMPERATURE
7. LOW SPACE TEMPERATURE
8. HIGH SPACE PRESSURE
9. LOW SPACE PRESSURE
10. ENTHALPY WHEEL FAILURE
11. FREEZE/STAT
12. ALL ALARMS SHALL BE INHIBITED IF THE SUPPLY FAN IS NOT IN OPERATION. THE ALARMS, EXCEPT THE FAN FAILURE TO START, SHALL REMAIN INHIBITED FOLLOWING START-UP OF THE UNIT FOR AN OPERATOR DETERMINED PERIOD OF TIME, INITIALLY SET AT TWO MINUTES.

G. FAILURE POSITIONS - THE FOLLOWING SHALL OCCUR UPON COMPONENT FAILURE OR LOSS OF POWER:

1. RELIEF AIR DAMPER SHALL CLOSE.
2. OUTSIDE AIR DAMPER SHALL CLOSE.
3. RETURN AIR DAMPER SHALL OPEN.
4. THE SUPPLY FAN SHALL REMAIN IN THE LAST COMMANDED STATE AND THE SPEED SIGNAL SHALL GO TO THE MINIMUM SPEED.
5. DX COOLING SHALL BE DISABLED.
6. DX HOT GAS REHEAT SHALL BE DISABLED.
7. GAS HEATING SHALL BE DISABLED.

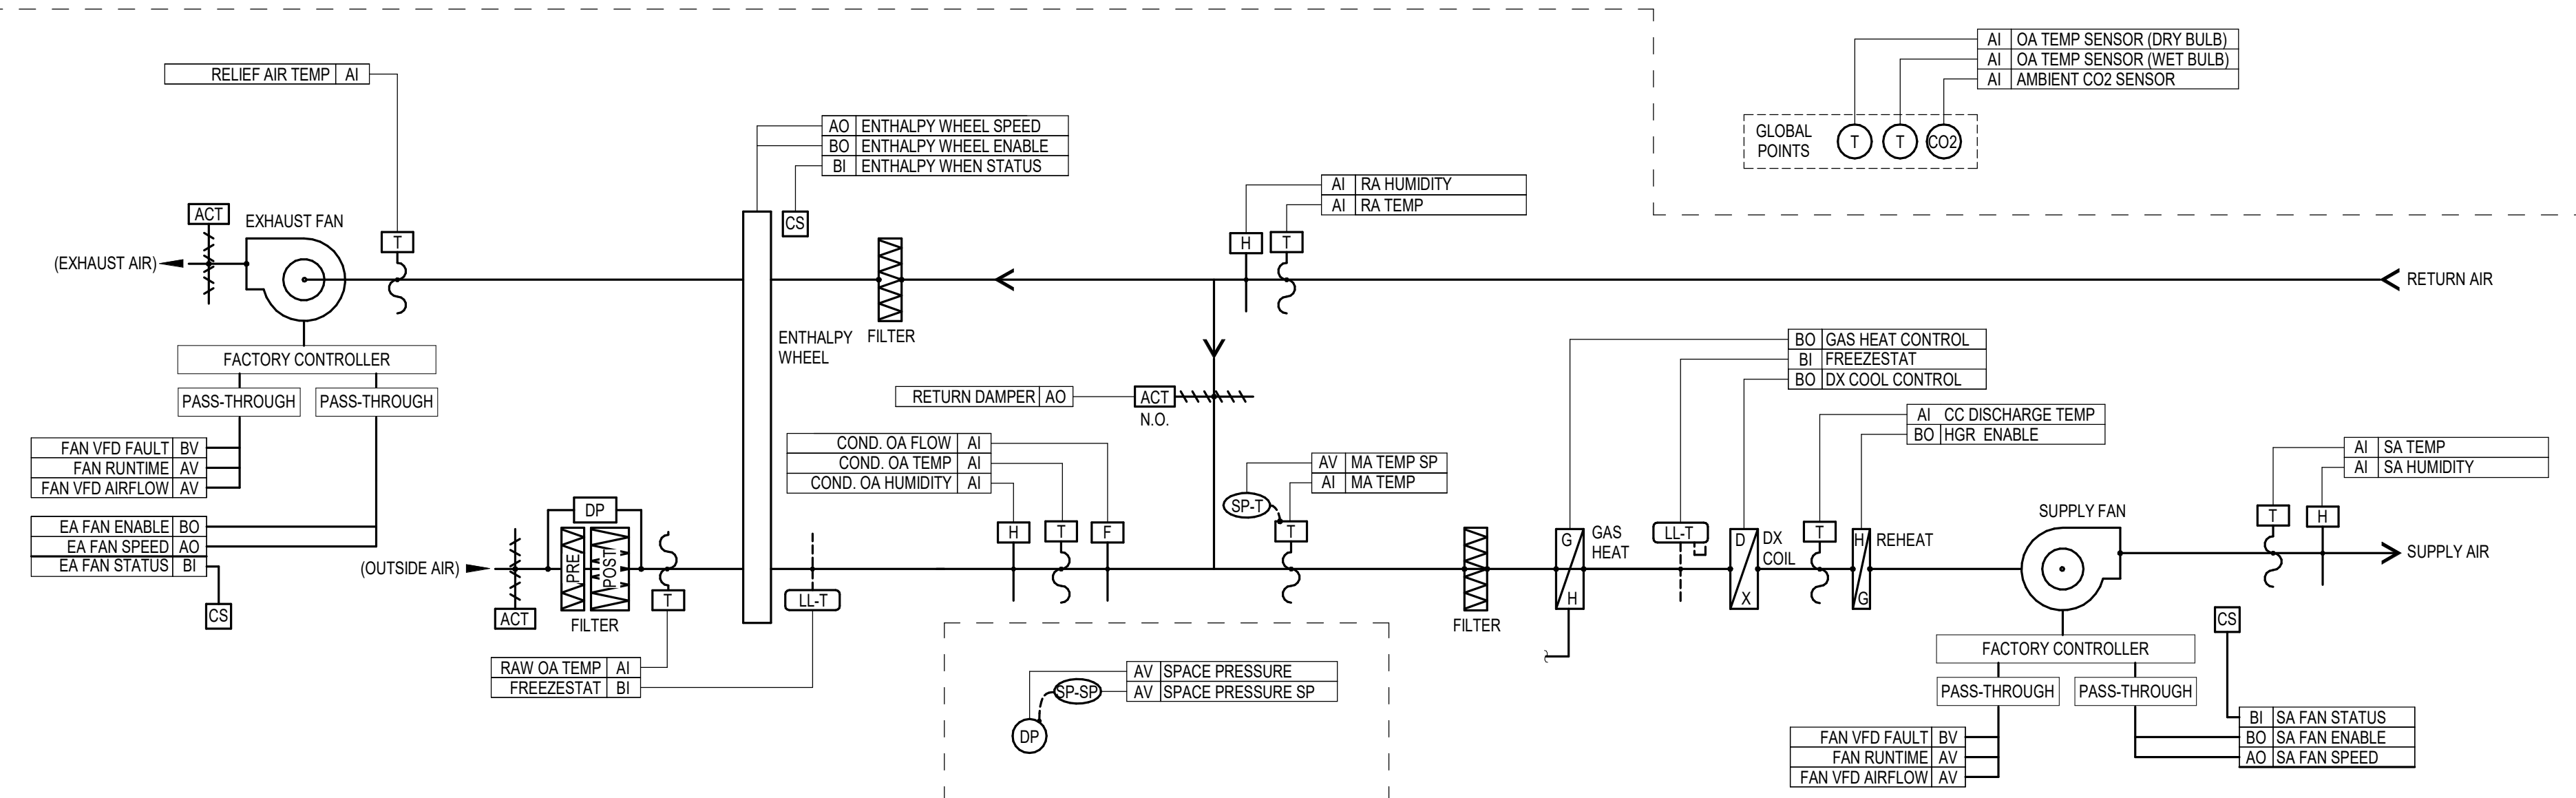

ALL CONTROLS ARE EXPECTED TO BE PROVIDED AS A PART OF THE ROOFTOP UNIT. TEMPERATURE CONTROL CONTRACTOR TO PROVIDE WIRING TO RTU SYSTEM. TEMPERATURE CONTROL CONTRACTOR TO VERIFY ALL DESIRED POINTS HAVE BEEN PROVIDED WITH THE PACKAGED ROOFTOP UNIT. PROVIDED ADDITIONAL SENSORS / WIRING AS REQUIRED.

P1 ROOFTOP UNIT (RTU-ER-3)
M5.0 SCALE: NTS

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE

NOT FOR CONSTRUCTION

REVISION DATE

Project Number: 21064

Date: MARCH 10, 2023

COPYRIGHT © 2022

MECHANICAL CONTROL
DIAGRAMS

M5.0

SEQUENCE OF OPERATION

- A. SYSTEM OFF – WHEN THE SYSTEM IS OFF:
1. THE PRIMARY AIR DAMPER SHALL BE CLOSED.
 2. THE ELECTRIC REHEAT COIL SHALL BE DISABLED.
- B. INITIATION OF SYSTEM START-UP – THE SYSTEM SHALL BE STARTED:
1. MANUALLY BY AN OPERATOR THROUGH THE BAS.
 2. AUTOMATICALLY BY THE BAS THROUGH OCCUPANCY SCHEDULE. COORDINATE OCCUPANCY SCHEDULE WITH AN OWNER REPRESENTATIVE.
- A. THE BAS SHALL INITIATE AN OPTIMAL START SEQUENCE SUCH THAT THE TERMINAL UNIT (AND ASSOCIATED RTU) ARE ENABLED TO ALLOW ZONE TEMPERATURES TO REACH THE OCCUPIED HEATING / COOLING TEMPERATURE SETPOINTS PRIOR TO SCHEDULED OCCUPANCY. THE SYSTEM SHALL WAIT AS LONG AS POSSIBLE BEFORE STARTING SO THE TEMPERATURE IN EACH ZONE REACHES THE OCCUPIED SETPOINT JUST PRIOR TO SCHEDULED OCCUPANCY.
3. AUTOMATICALLY BY THE BAS DUE TO OCCUPANCY OVERRIDE REQUEST.
 4. AUTOMATICALLY BY THE BAS TO MAINTAIN UNOCCUPIED SETBACK TEMPERATURES.


- C. SYSTEM OPERATION – AFTER SYSTEM START-UP HAS BEEN INITIATED THE FOLLOWING SHALL OCCUR:
1. MODE OF OPERATION:
 - A. IF IN SCHEDULED OCCUPIED HOURS AND ASSOCIATED OCCUPANCY SENSOR INDICATES "OCCUPIED", THE OCCUPIED SETPOINTS SHALL BE USED.
 - B. IF IN SCHEDULED OCCUPIED HOURS AND ASSOCIATED OCCUPANCY SENSOR INDICATES "UNOCCUPIED", THE STANDBY SETPOINTS SHALL BE USED.
 - C. IF IN SCHEDULED UNOCCUPIED HOURS, THE UNOCCUPIED SETPOINTS SHALL BE USED.
 2. OCCUPIED MODE:
 - A. IF THE SPACE TEMPERATURE IS GREATER THAN THE SPACE TEMPERATURE COOLING SETPOINT:
 1. THE PRIMARY AIR DAMPER SHALL MODULATE FROM MINIMUM TO MAXIMUM AIRFLOW SETPOINTS TO MAINTAIN THE SPACE COOLING SETPOINT.
 - a. UPON THE PRIMARY AIR DAMPER REACHING 80% (ADJ) OPEN OR GREATER, THE VAV BOX SHALL INITIATE A DUCT STATIC PRESSURE REQUEST TO THE ASSOCIATED RTU.
 2. THE ELECTRIC REHEAT COIL SHALL BE DISABLED.
 - B. IF THE SPACE TEMPERATURE IS LESS THAN THE OCCUPIED SPACE TEMPERATURE HEATING SETPOINT:
 1. THE PRIMARY AIR DAMPER SHALL MODULATE TO THE MINIMUM AIRFLOW SETPOINT.
 2. UPON THE VAV BOX ACHIEVING THE MINIMUM AIRFLOW SETPOINT, THE ELECTRIC REHEAT COIL SHALL MODULATE TO MAINTAIN THE SPACE TEMPERATURE HEATING SETPOINT.
 - a. THE BAS SHALL PREVENT THE DISCHARGE AIR TEMPERATURE FROM EXCEEDING THE LIMIT DISCHARGE AIR TEMPERATURE SETPOINT. IF THE DISCHARGE AIR TEMPERATURE IS GREATER THAN THE LIMIT DISCHARGE AIR TEMPERATURE SETPOINT, THE BAS SHALL MODULATE THE ELECTRIC REHEAT COIL TO MAINTAIN THE LIMIT DISCHARGE AIR TEMPERATURE SETPOINT.
 3. IF THE PRIMARY AIR DAMPER IS AT MINIMUM AIRFLOW SETPOINT AND THE DISCHARGE AIR TEMPERATURE IS AT THE LIMIT SETPOINT AND THE SPACE TEMPERATURE IS LESS THAN THE SPACE TEMPERATURE HEATING SETPOINT, THE PRIMARY AIR DAMPER SHALL MODULATE TOWARDS THE MAXIMUM HEATING AIRFLOW. THE ELECTRIC REHEAT SHALL MODULATE TO MAINTAIN THE DISCHARGE AIR TEMPERATURE SETPOINT.
 - C. THE OCCUPANT SHALL HAVE THE CAPABILITY TO ADJUST THE SPACE TEMPERATURE SETPOINT THROUGH THE SPACE TEMPERATURE SENSOR. THE PROGRAMMING SHALL LIMIT USER ADJUSTMENT TO + OR - 2°F OF THE BASE SETPOINT.
 - D. THE BAS OPERATOR SHALL HAVE THE ABILITY TO ADJUST THE SPACE TEMPERATURE SETPOINT THROUGH THE FRONT END. BAS PROGRAMMING SHALL NOT LIMIT THE BAS OPERATOR ADJUSTMENT.

SEQUENCE OF OPERATION (CONTINUED)

3. UNOCCUPIED MODE:
 - A. THE PRIMARY AIR DAMPER SHALL MODULATE TO ITS MINIMUM POSITION.
 - B. THE ELECTRIC REHEAT COILS SHALL BE DISABLED.
 - C. IF THE SPACE TEMPERATURE RISES ABOVE THE UNOCCUPIED SPACE TEMPERATURE COOLING SETPOINT AND THE ASSOCIATED RTU IS OPERATING, THE VAV BOX SHALL BE ENABLED AND OPERATE AS INDICATED IN THE OCCUPIED MODE.
 - D. IF THE SPACE TEMPERATURE FALLS BELOW THE UNOCCUPIED SPACE TEMPERATURE HEATING SETPOINT AND THE ASSOCIATED RTU IS OPERATING, THE VAV BOX SHALL BE ENABLED AND OPERATE AS INDICATED IN THE OCCUPIED MODE.
 - E. IF THE SPACE TEMPERATURE RISES ABOVE THE UNOCCUPIED SPACE TEMPERATURE COOLING SETPOINT OR FALLS BELOW THE UNOCCUPIED SPACE TEMPERATURE HEATING SETPOINT AND THE RTU IS NOT OPERATING, INCREASE THE VAV UNOCCUPIED REQUESTS FOR THE ASSOCIATED RTU TO OPERATE BY 1.
 1. THE ASSOCIATED RTU SHALL ONLY BE STARTED IF THERE IS AN OPERATOR DETERMINED MINIMUM NUMBER OF TERMINAL UNITS REQUESTING UNOCCUPIED OVERRIDE OPERATION.
3. DEMAND CONTROL MODE:
 - A. FOR ROOMS WITH CO2 SENSORS (AS SHOWN ON PLANS), PROVIDE CO2 PPM VALUE BACK TO BAS FOR DEMAND CONTROL VENTILATION (DCV) SEQUENCE.
 - B. IF ROOM CO2 PPM DIFFERENTIAL FROM AMBIENT EXCEEDS CO2 HIGH LIMIT, STAGE 1 OF THE DCV SEQUENCE SHALL MODULATE THE PRIMARY AIR DAMPER TO MAXIMUM AIRFLOW SETPOINT.
 1. IF SPACE TEMPERATURE BEGINS TO FALL BELOW SPACE TEMPERATURE SETPOINT WHILE IN DCV STAGE 1, ENERGIZE THE REHEAT COIL PER THE NORMALLY HEATING SEQUENCE.
 - C. IF ROOM CO2 PPM DIFFERENTIAL CONTINUES TO EXCEED CO2 HIGH LIMIT AFTER STAGE 1 TIME DELAY, STAGE 2 OF THE DCV SEQUENCE SHALL MODULATE THE RTU OUTSIDE AIR DAMPER OPEN (SEE RTU SEQUENCE).
 - D. VAV TO RESET AIRFLOW SETPOINT AND RESUME PREVIOUS OPERATION WHEN CO2 PPM FALLS BELOW THE CO2 HIGH LIMIT AND REMAINS BELOW FOR A PREDETERMINED AMOUNT OF TIME (INITIALLY SET AT 10 MINUTES).
- D. SYSTEM SHUTDOWN – SHALL BE INITIATED AS FOLLOWS:
 1. MANUALLY BY AN OPERATOR THROUGH THE BAS.
 2. AUTOMATICALLY BY BAS THROUGH OCCUPANCY SCHEDULE.
 3. AUTOMATICALLY BY BAS DUE TO OCCUPANCY OVERRIDE REQUEST EXPIRATION.
- E. SYSTEM SETPOINTS – THE SETPOINTS SHALL BE OPERATOR CHANGEABLE AND INITIALLY SET AS FOLLOWS:
 1. SEE TABLE IN CONTROL DRAWING FOR SPACE TEMPERATURE SETPOINTS.
 2. SEE VAV SCHEDULE FOR DISCHARGE AIR TEMPERATURE SETPOINT.
 3. SEE VAV SCHEDULE FOR MINIMUM AND MAXIMUM PRIMARY AIR FLOW SETPOINTS.
- F. FAILURE POSITIONS – THE FOLLOWING SHALL OCCUR UPON COMPONENT FAILURE OR LOSS OF POWER:
 1. DAMPER SHALL FAIL IN LAST COMMANDED POSITION.
- G. ALARMS, INTERLOCKS, AND SAFETIES:
 1. THE HIGH AND LOW TEMPERATURE SETPOINTS SHALL BE SET INITIALLY AT 2°F ABOVE/BELOW THE COOLING TEMPERATURE SETPOINT.
 2. DAMPER FAILURE.

E9 SPLIT SYSTEMS


M5.1 SCALE: NTS

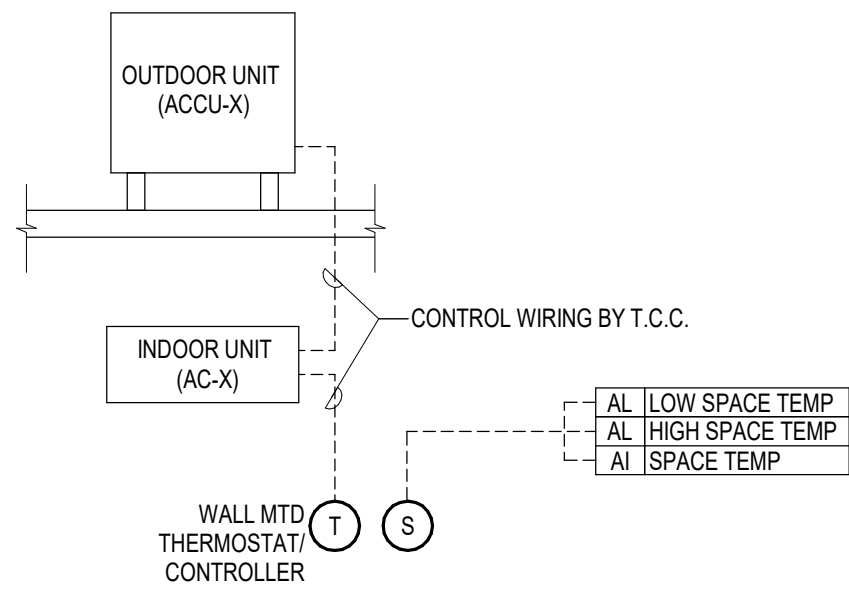

- SEQUENCE OF OPERATION:
- SPLIT SYSTEM AIR CONDITIONER SHALL BE CONTROLLED BY THE MANUFACTURER FURNISHED THERMOSTAT. PROVIDE TEMPERATURE SENSOR ADJACENT TO MANUFACTURER'S THERMOSTAT TO MONITOR SPACE TEMPERATURE.
- ALARMS, INTERLOCKS AND SAFETIES:
- AN ALARM SHALL BE GENERATED AT THE BMS OPERATOR WORKSTATION IN THE EVENT THE SPACE TEMPERATURE RISES ABOVE 80°F (ADJ) AND IF THE SPACE TEMPERATURE DROPS BELOW 55°F (ADJ).


E1 VARIABLE AIR VOLUME WITH ELECTRIC REHEAT

M5.1 SCALE: NTS

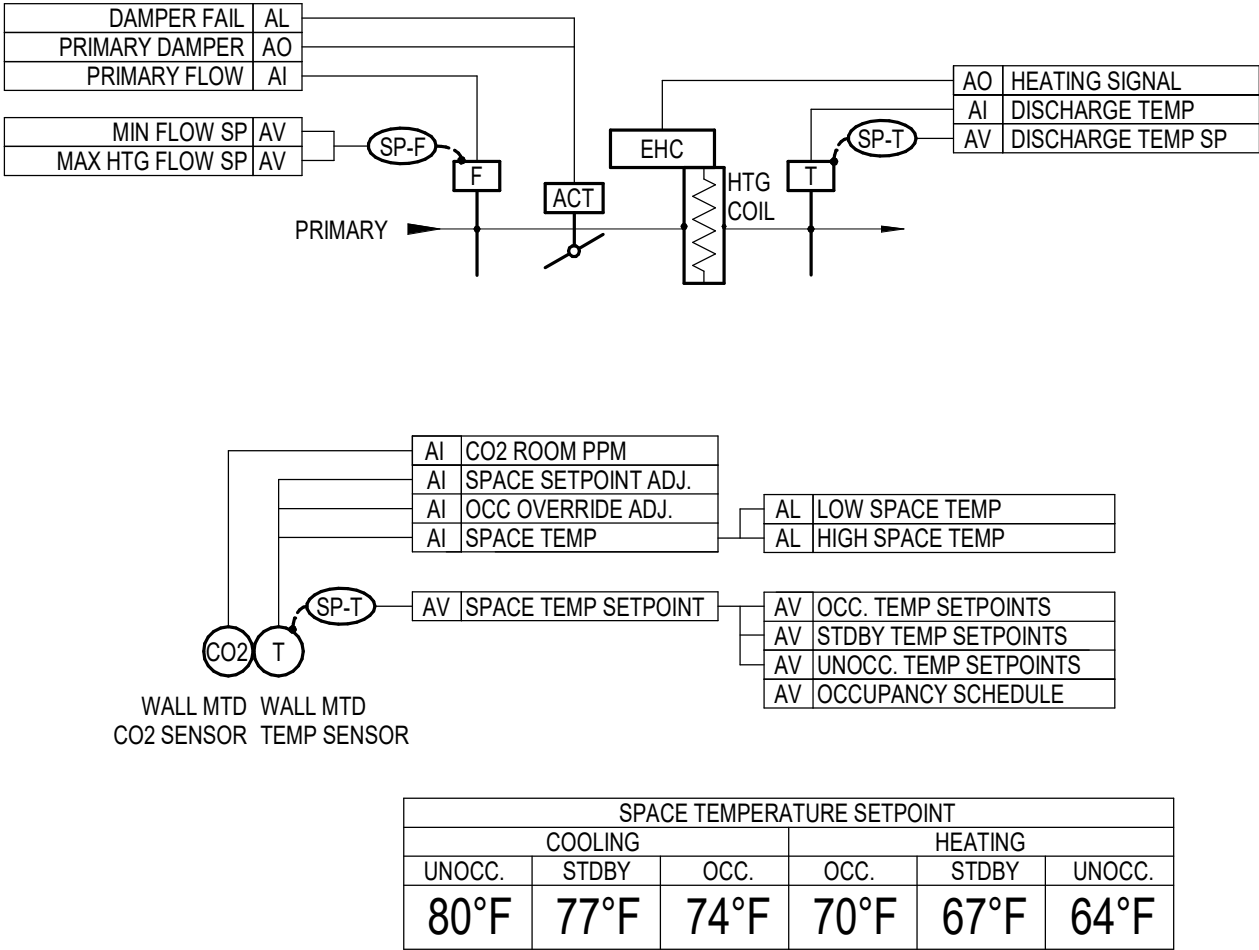

SEQUENCE OF OPERATION

- A. SYSTEM OFF – WHEN THE SYSTEM IS OFF:
1. FAN SHALL BE OFF.
 2. MOTORIZED DAMPER SHALL BE CLOSED (INTERLOCKED).
- B. INITIATION OF SYSTEM START-UP – THE SYSTEM SHALL BE STARTED:
1. MANUALLY BY AN OPERATOR THROUGH THE BAS.
 2. AUTOMATICALLY BASED ON OCCUPANCY SCHEDULE. FAN TO RUN CONTINUOUSLY DURING OCCUPIED HOURS.
- C. SYSTEM OPERATION – AFTER SYSTEM START-UP HAS BEEN INITIATED THE FOLLOWING SHALL OCCUR:
1. THE FAN SHALL START.
 2. THE MOTORIZED DUCT/RAFT DAMPER SHALL OPEN (INTERLOCKED).
- D. SYSTEM SETPOINTS – THE SETPOINTS SHALL BE OPERATOR CHANGEABLE AND INITIALLY SET AS FOLLOWS:
1. OCCUPANCY SCHEDULE.
- E. SYSTEM SHUTDOWN – SHALL BE INITIATED AS FOLLOWS:
1. MANUALLY BY AN OPERATOR THROUGH THE BAS.
 2. AUTOMATICALLY BASED ON OCCUPANCY SCHEDULE.
- F. FAILURE POSITIONS – THE FOLLOWING SHALL OCCUR UPON COMPONENT FAILURE OR LOSS OF POWER:
1. FAN SHALL BE OFF.
 2. MOTORIZED DAMPER SHALL BE CLOSED.
- G. ALARMS:
1. FAN FAILURE.

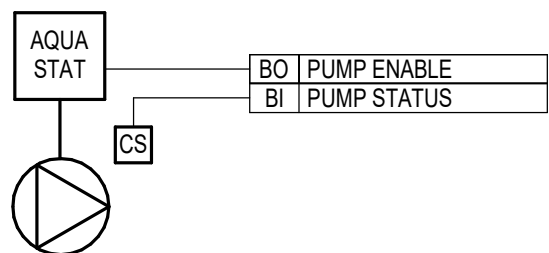


SEQUENCE OF OPERATION

- A. PUMP SHALL CYCLE UPON A SIGNAL FROM AN AQUASTAT INSTALLED ON THE DOMESTIC HOT WATER LINE. PUMP SHALL BE ENABLED DURING OCCUPIED HOURS DEFINED IN THE BAS.


J1 EXHAUST FAN (EF-1)

M5.1 SCALE: NTS

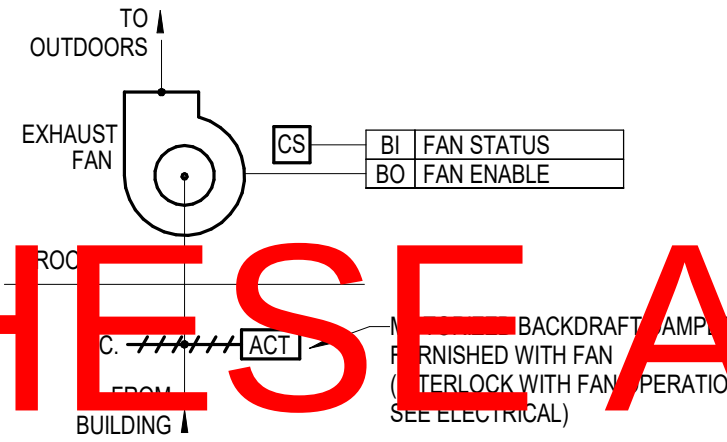


J7 DOMESTIC CIRCULATOR PUMP

M5.1 SCALE: NTS

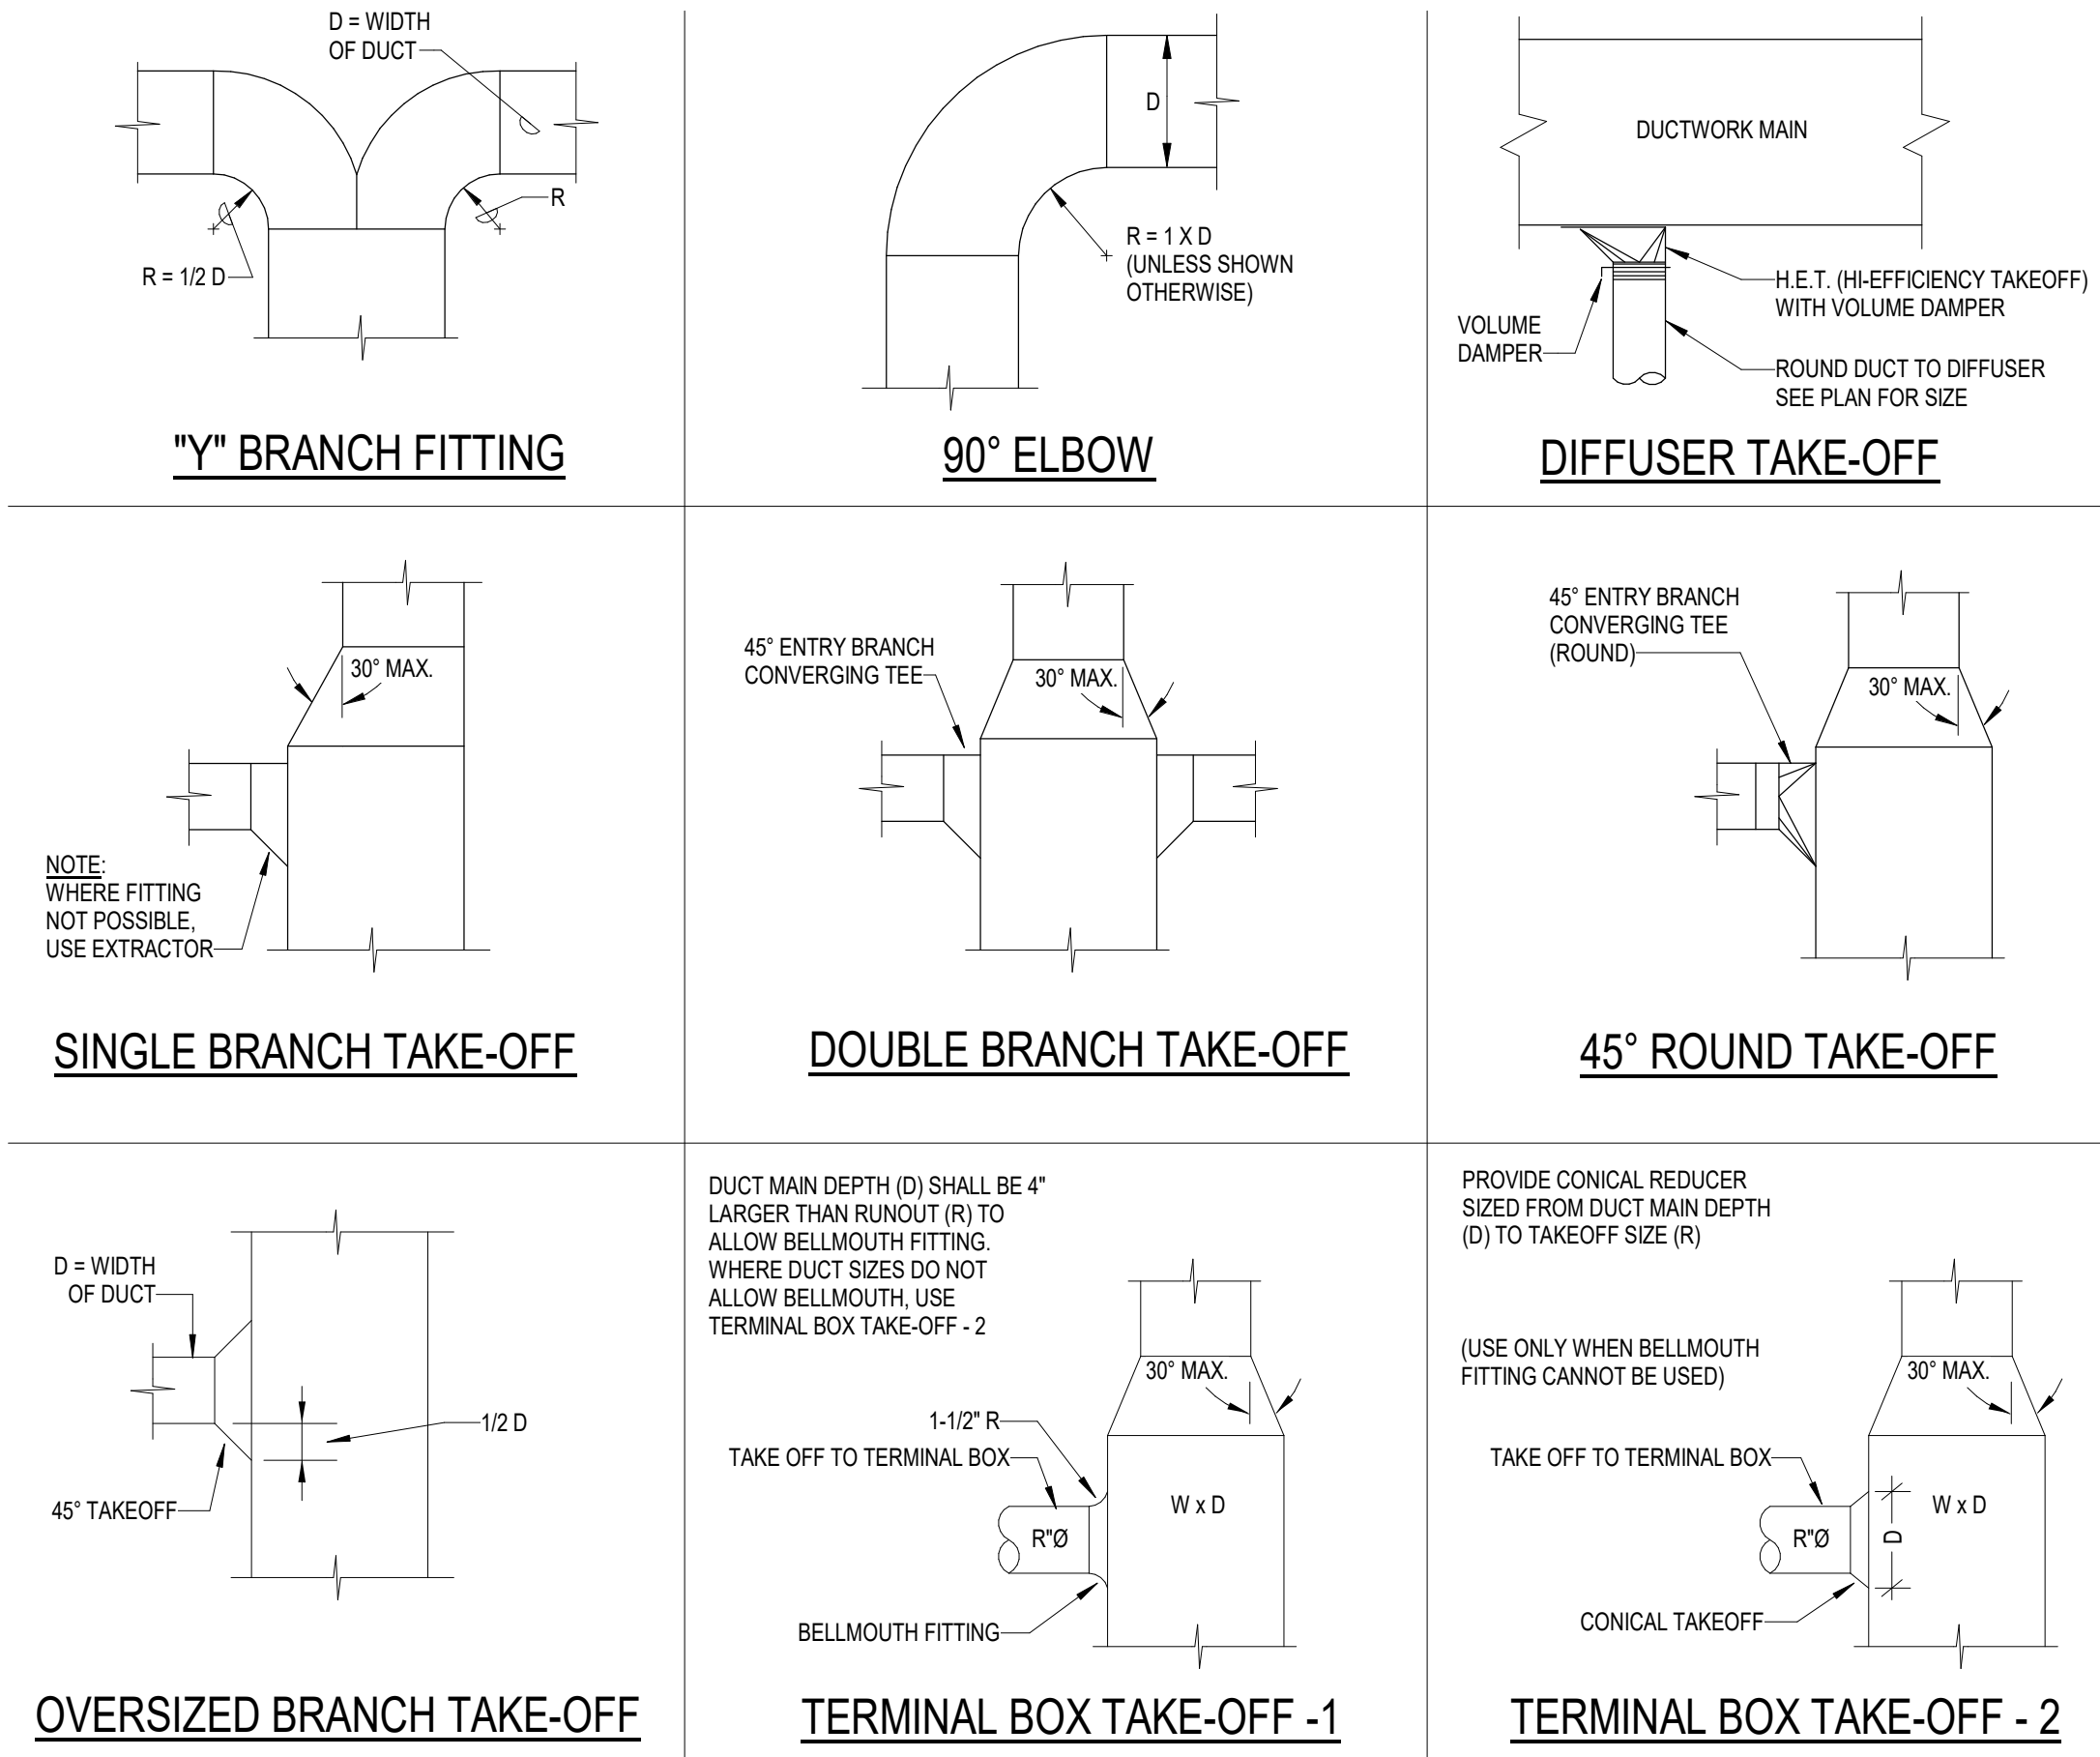

F1 DUCT FITTING DETAILS
M6.0 SCALE: NTS

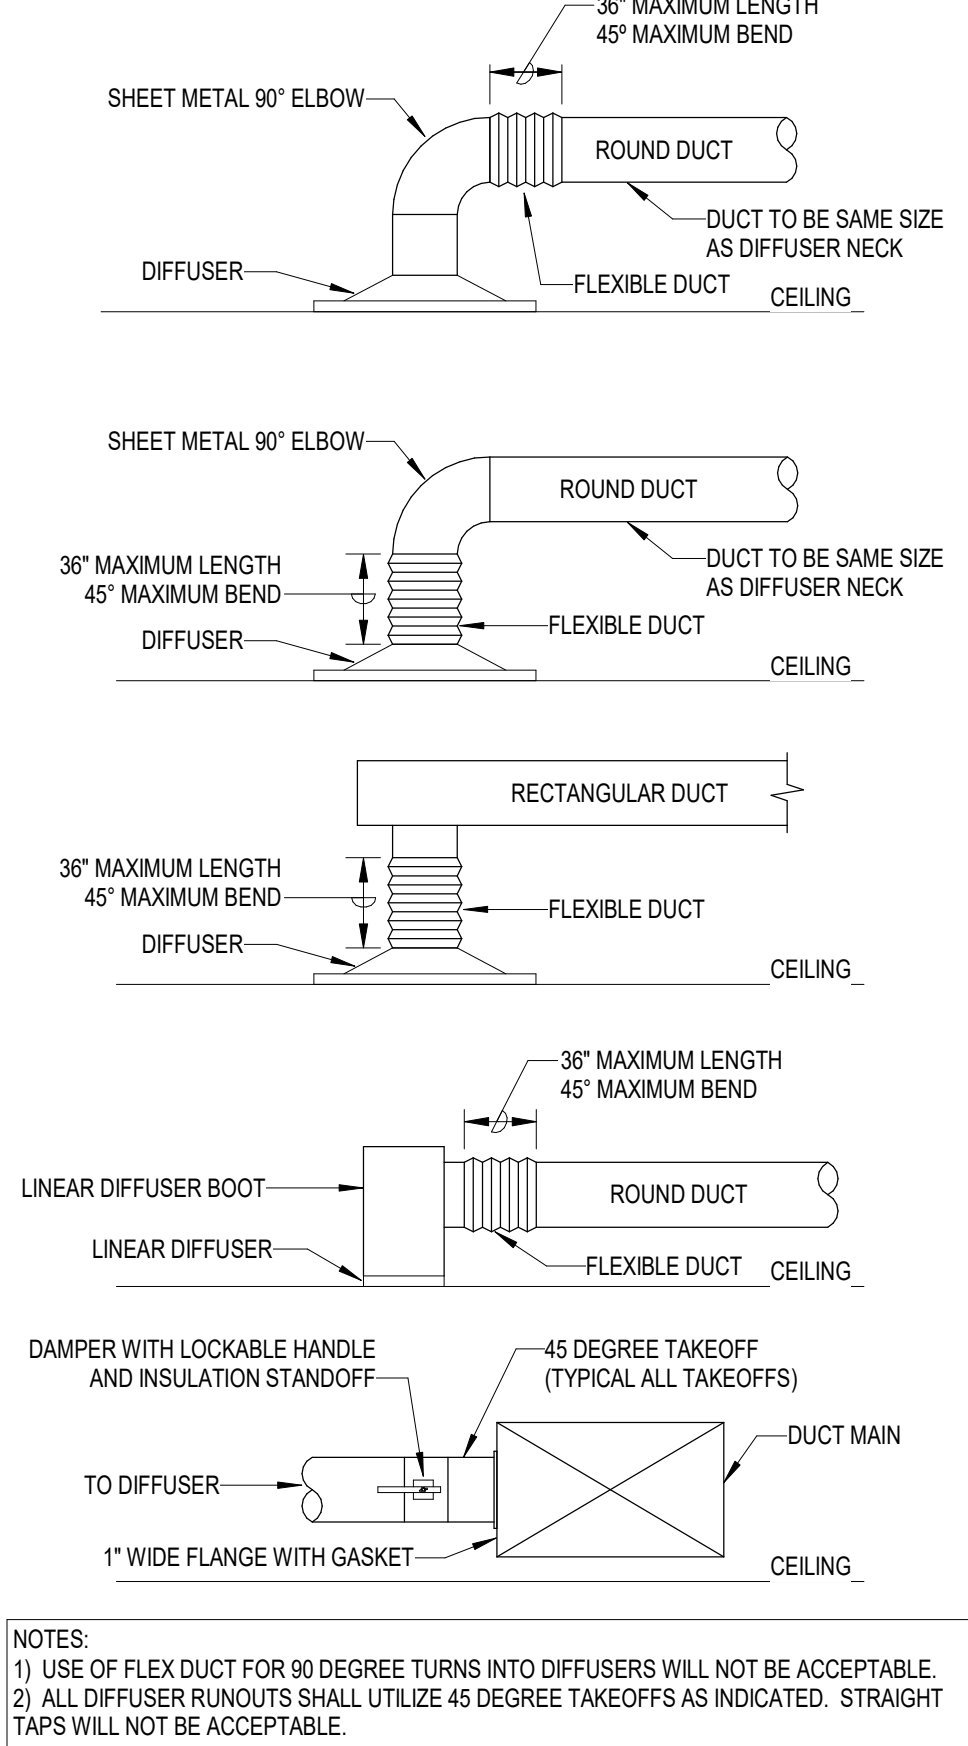


F8 DIFFUSER CONNECTION DETAILS
M6.0 SCALE: NTS

F12 WALL GRILLE TRANSFER DETAILS
M6.0 SCALE: NTS


THESE ARE NOT THE FINAL BID DOCUMENTS - REFERENCE ONLY

TRANSFER DUCT SCHEDULE					
PLAN TAG	CFM RANGE	DIMENSIONS (INCHES)			
		A	B	C	D
XFR - 1	0 - 100	6	6	26	20
XFR - 2	101 - 200	10	6	30	24
XFR - 3	201 - 350	10	10	34	28
XFR - 4	351 - 500	12	12	38	32
XFR - 5	501 - 750	16	14	44	38
XFR - 6	751 - 1100	20	16	50	44
XFR - 7	1101 - 1300	24	16	54	48
XFR - 8	1301 - 1650	30	16	60	54
XFR - 9	1651 - 2000	36	16	66	60
XFR - 10	2001 - 2300	42	16	72	66
XFR - 11	2301 - 2650	48	16	78	72


NOTES:
1. ALL RETURN AIR TRANSFER DUCTWORK SHALL BE LINED WITH ACOUSTICAL DUCT LINER. SEE SPECIFICATIONS FOR THICKNESS.
2. DUCT DIMENSIONS ARE INSIDE CLEAR OF LINER AND ARE SIZED AT 500 FPM MAX. DIMENSION 'D' IS A MINIMUM DIMENSION AND MAY VARY DEPENDING ON WALL CONSTRUCTION AND THICKNESS.
3. PROVIDE A MINIMUM OF 12" CLEAR FROM ALL OBSTRUCTIONS AT TRANSFER OPENINGS.

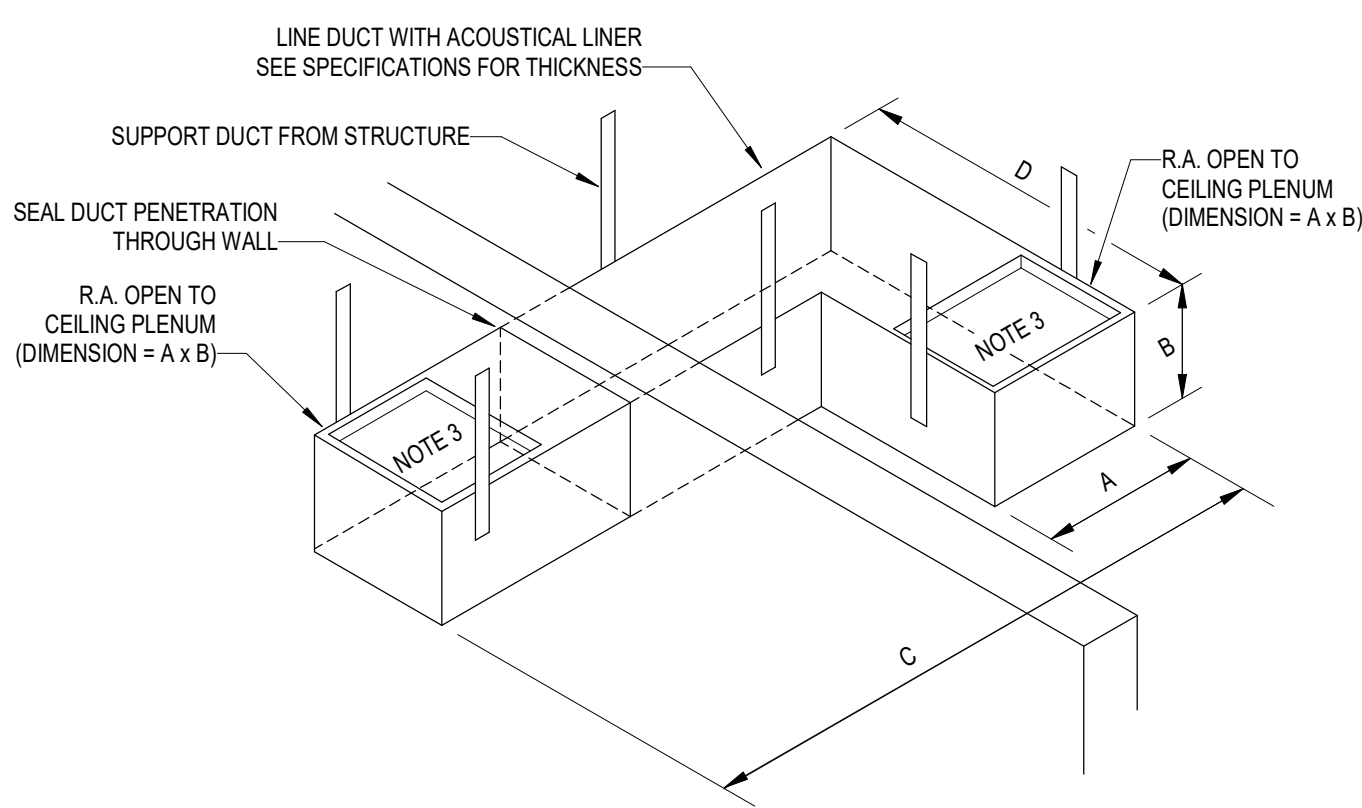


J1 TRANSFER DUCT DETAIL
M6.0 SCALE: NTS

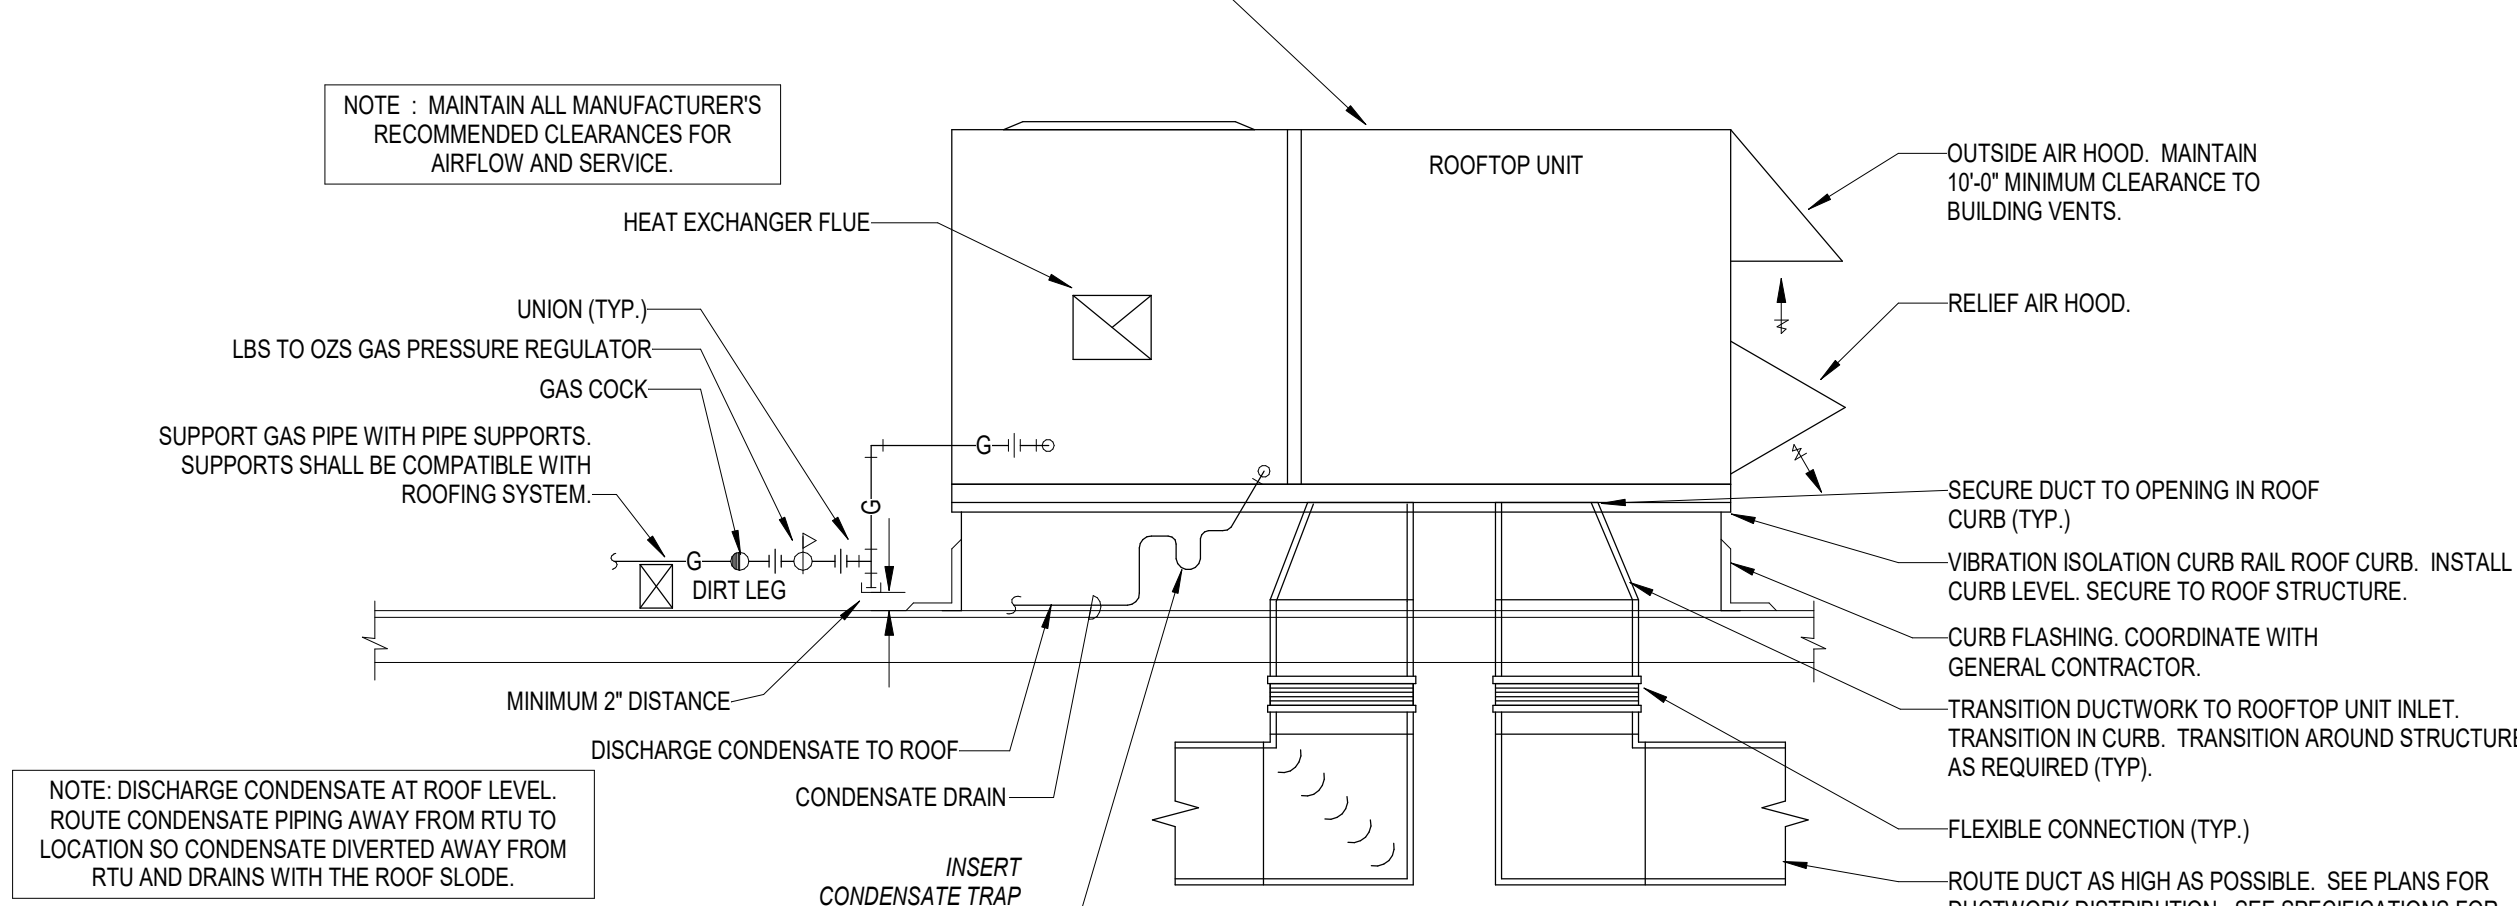


K8 RTU - DX/GAS SMALL
M6.0 SCALE: NTS

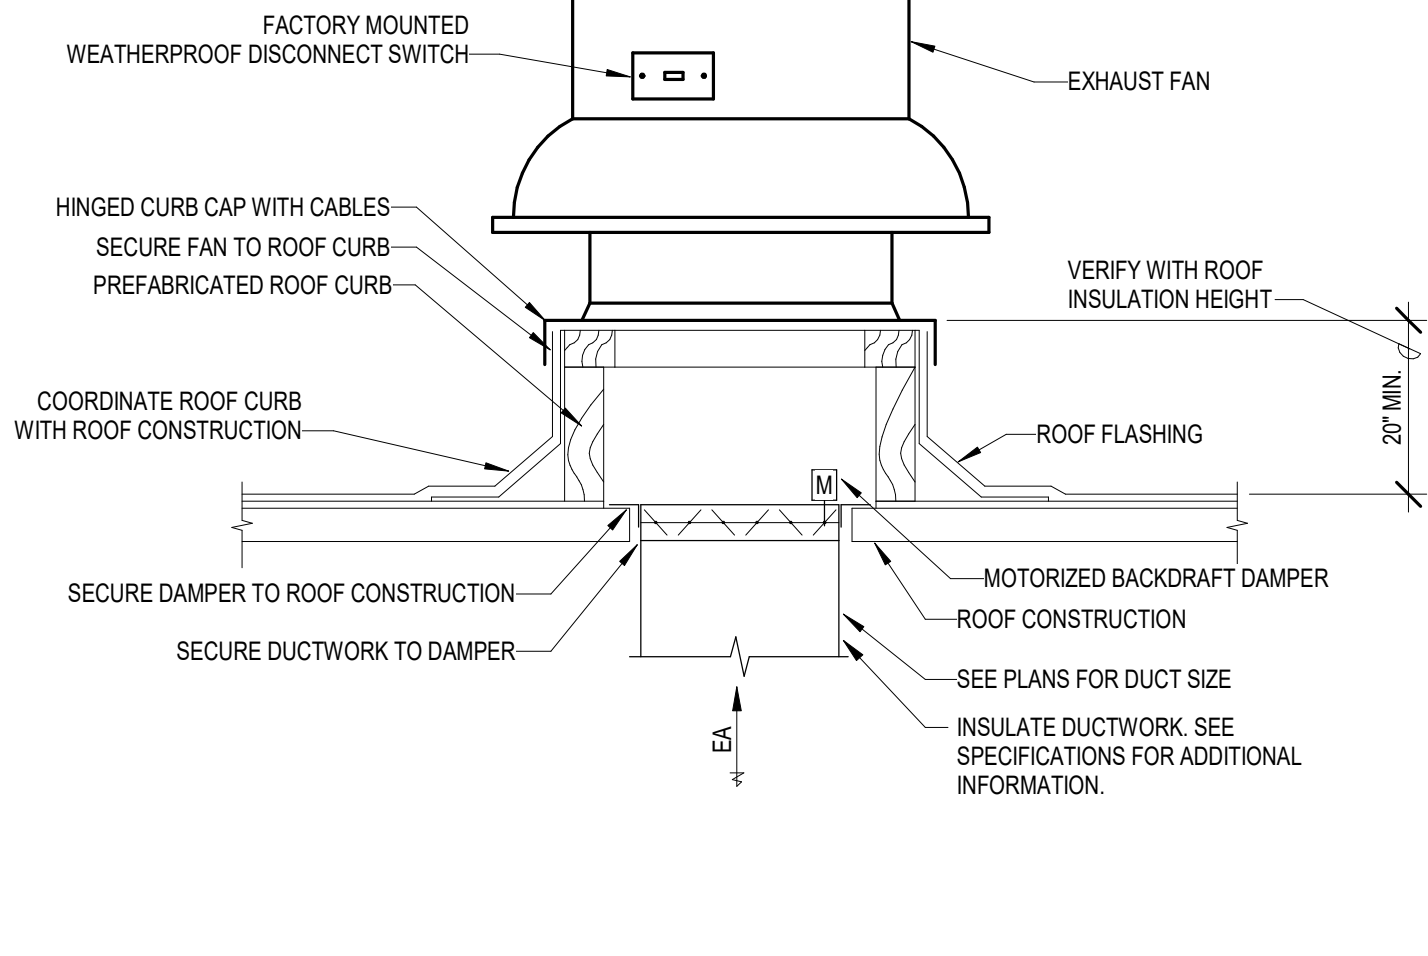


K15 FAN - ROOF MOUNTED EXHAUST
M6.0 SCALE: NTS

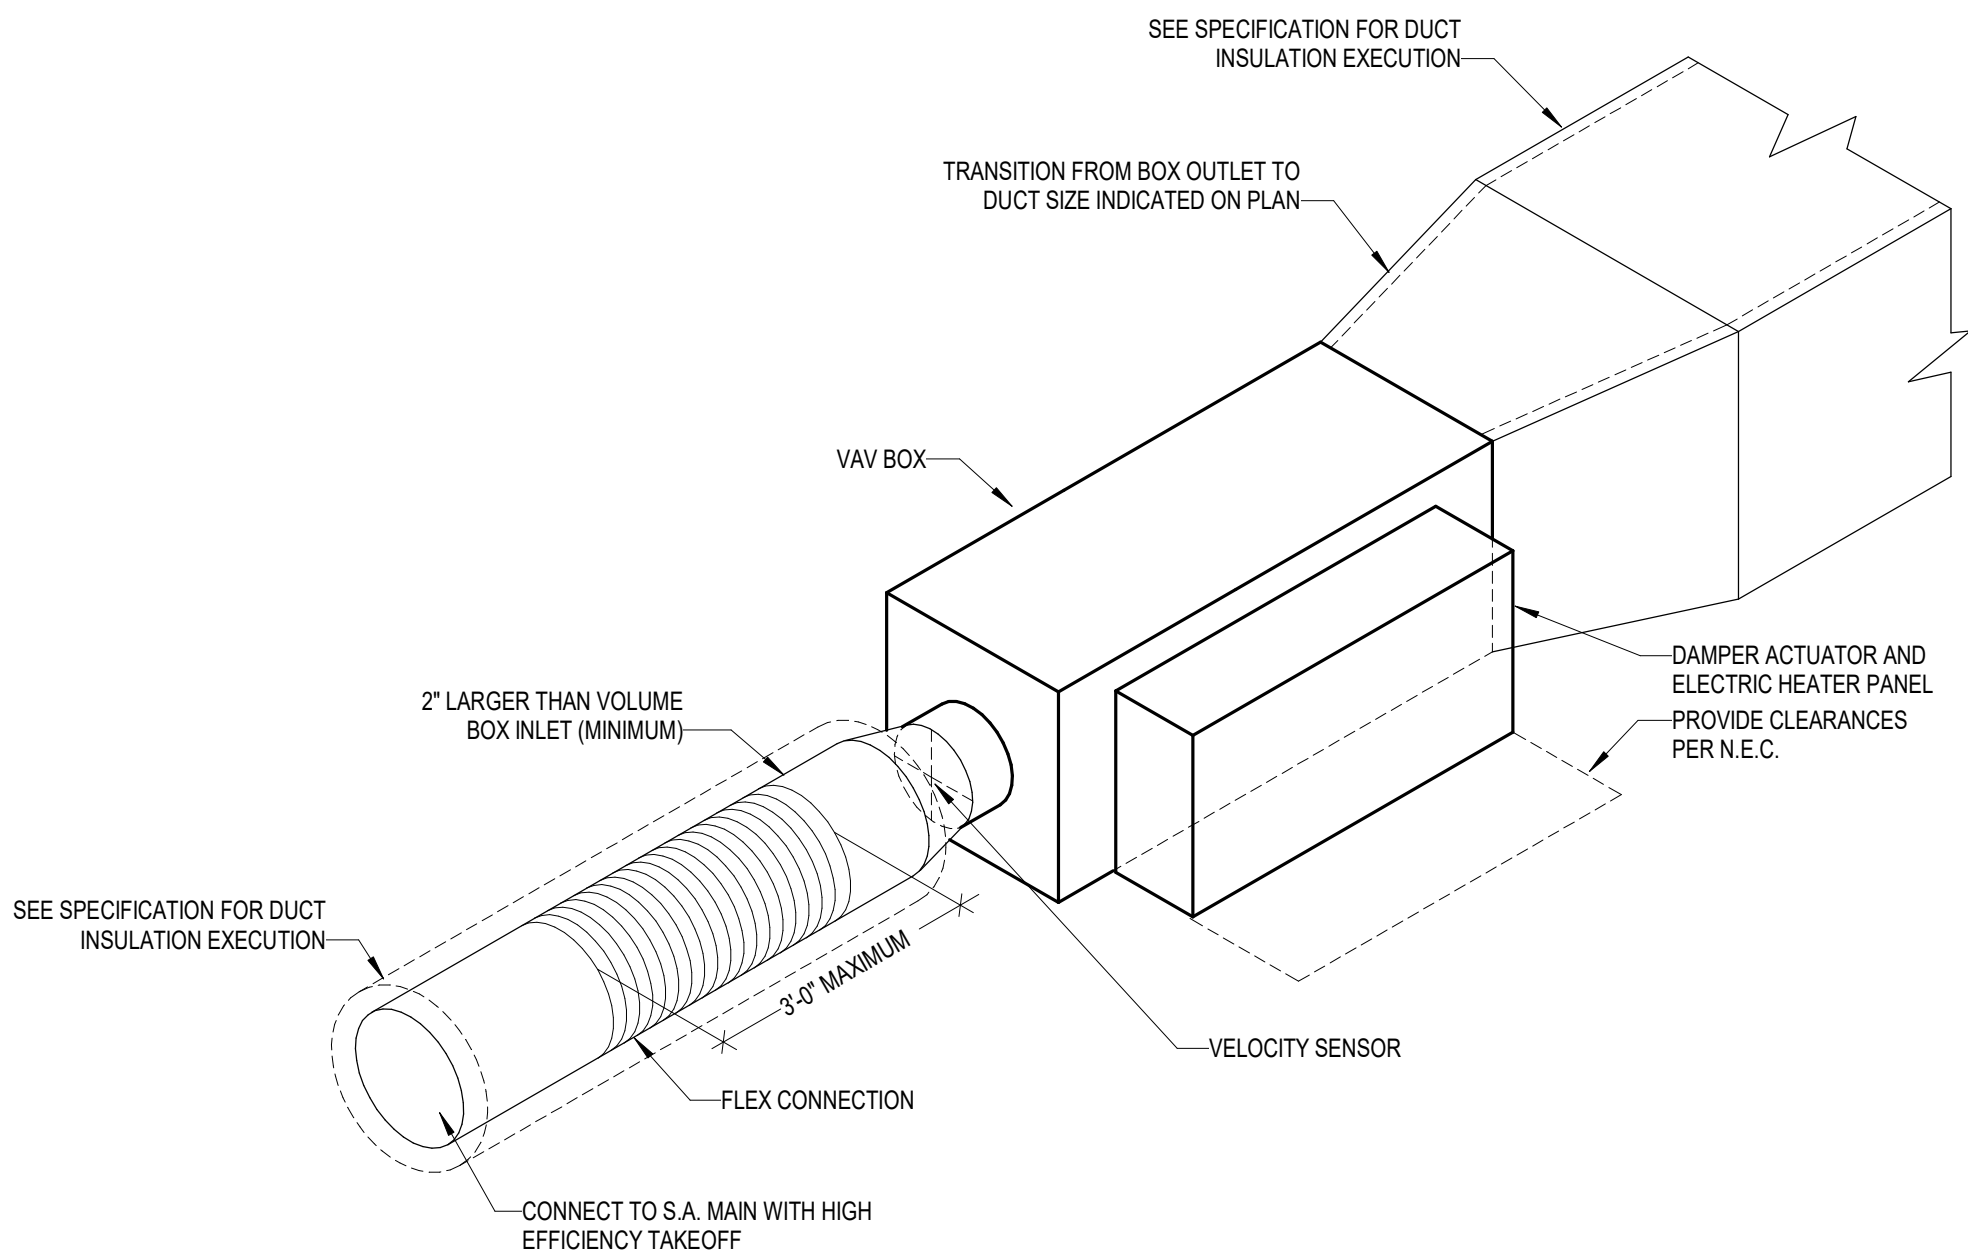


P1 VARIABLE AIR VOLUME DETAIL
M6.0 SCALE: NTS

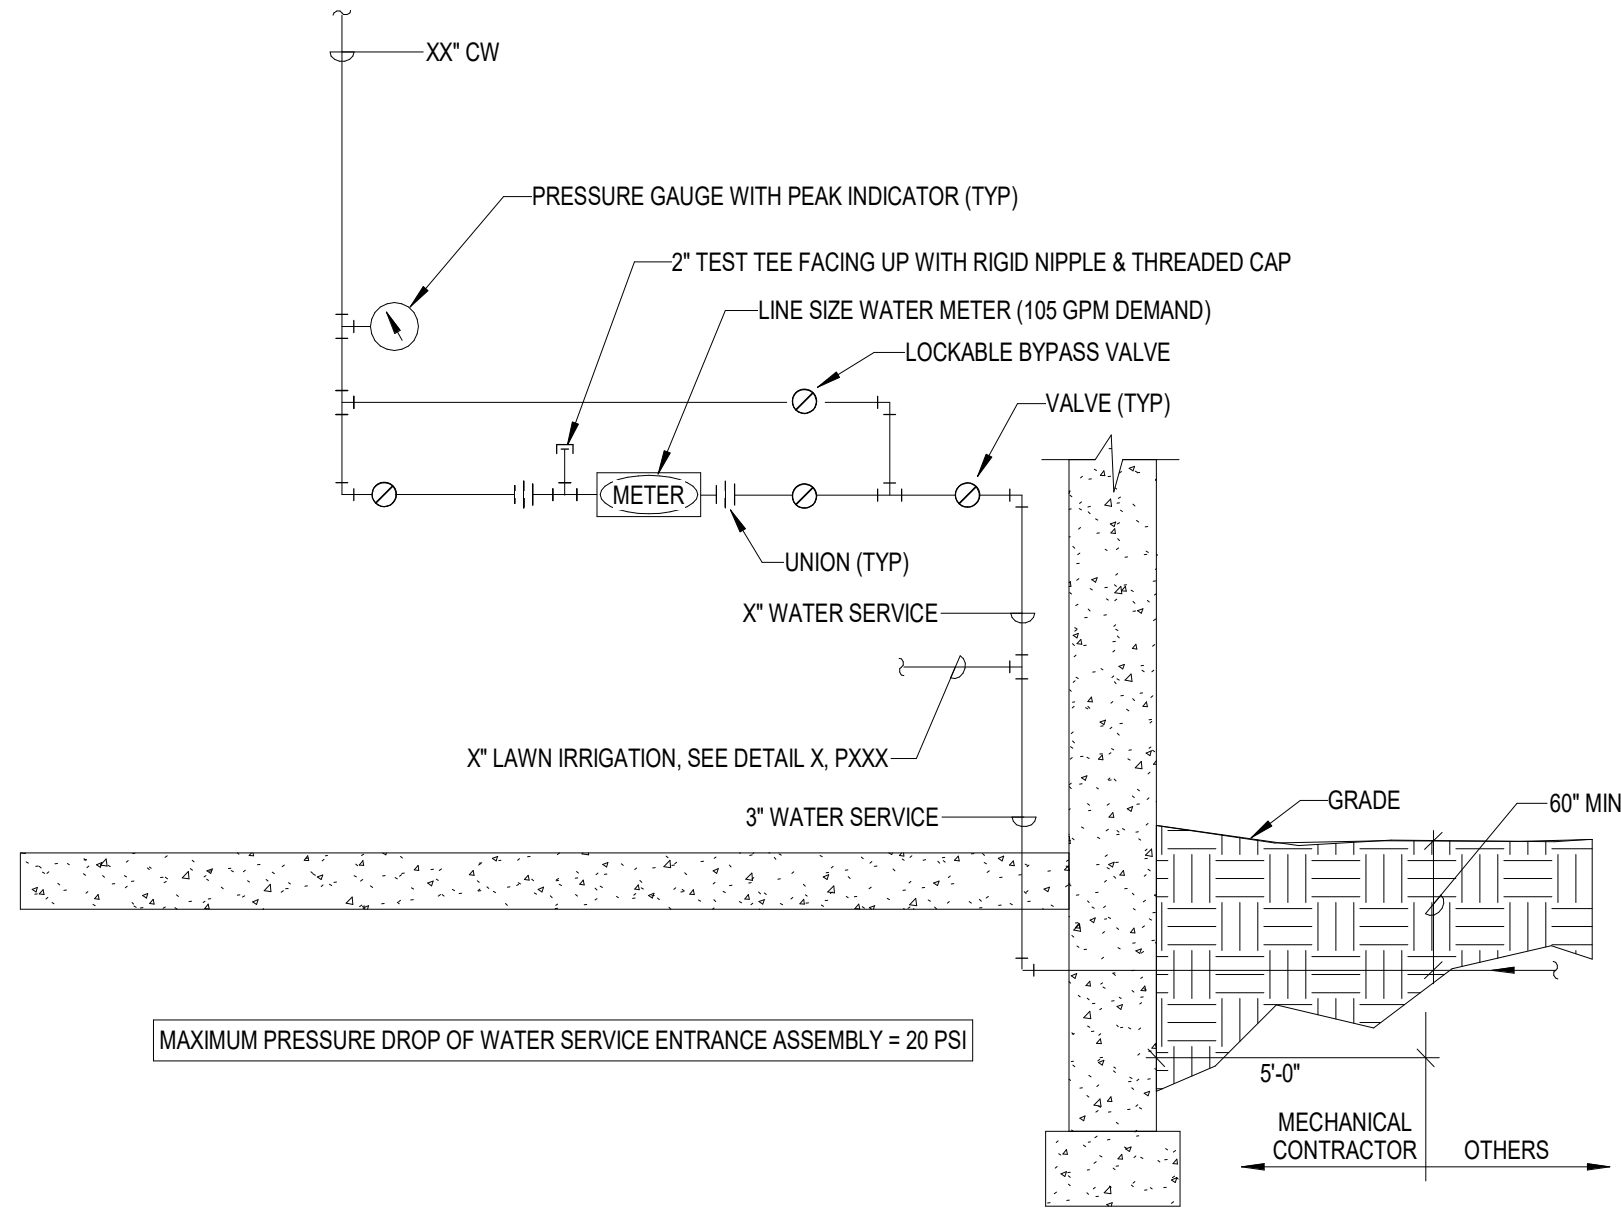


F1 PLUMBING - SERVICE ENTRANCE DETAILS
M6.1 SCALE: NTS

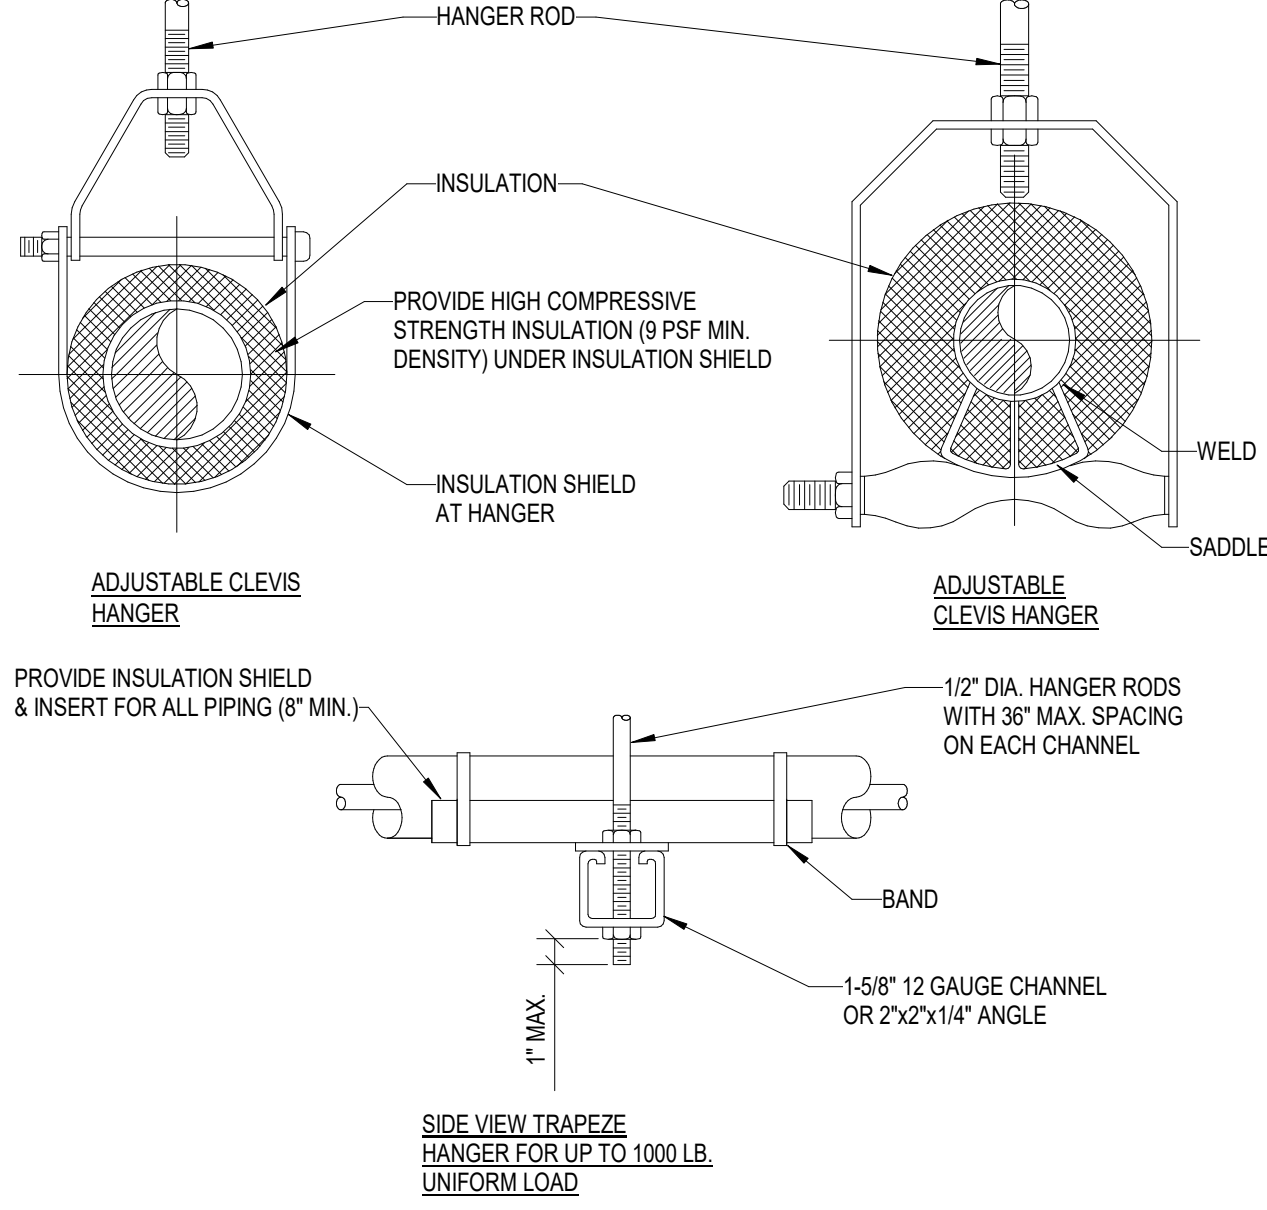


M7 PIPE HANGER AND INSULATION DETAIL
M6.1 SCALE: NTS

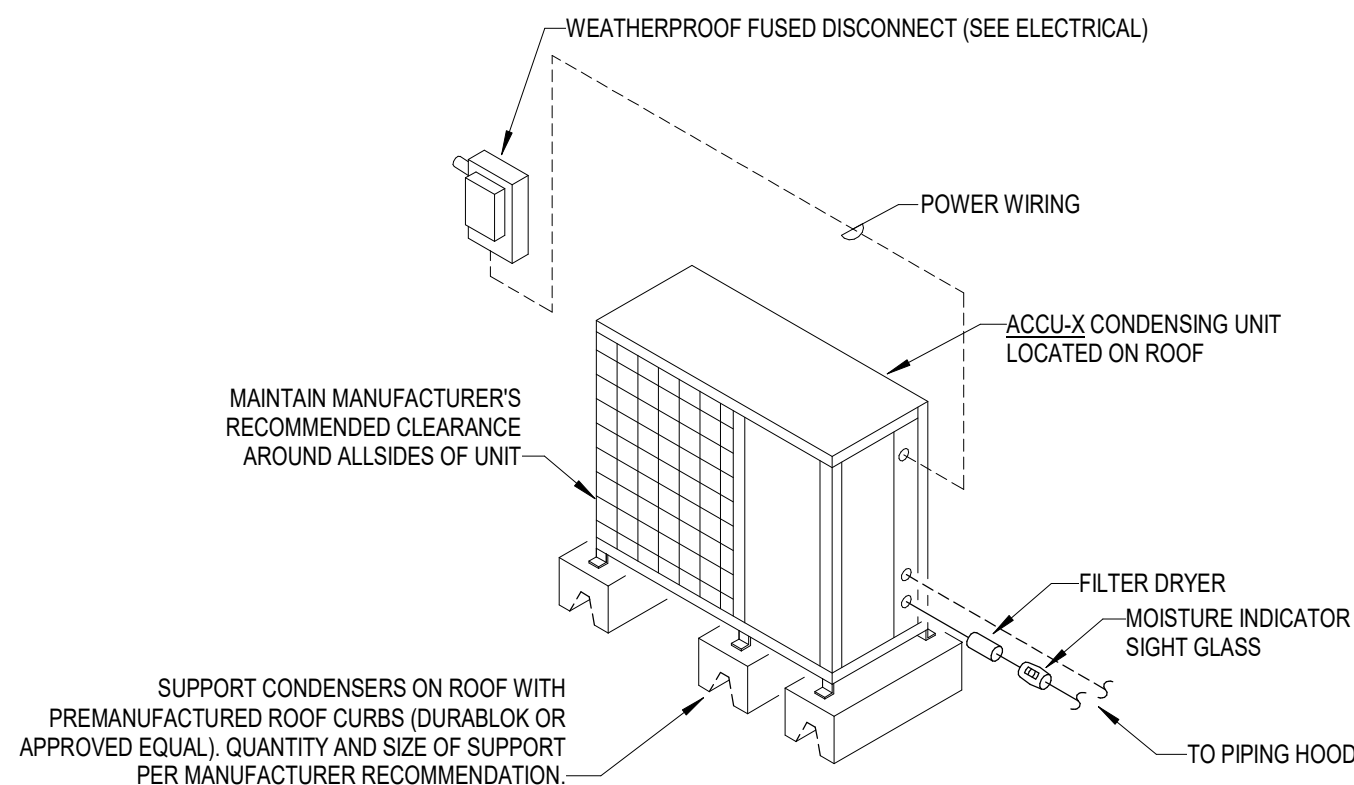


F11 SPLIT SYSTEM DETAIL (AC/ACCU)
M6.1 SCALE: NTS

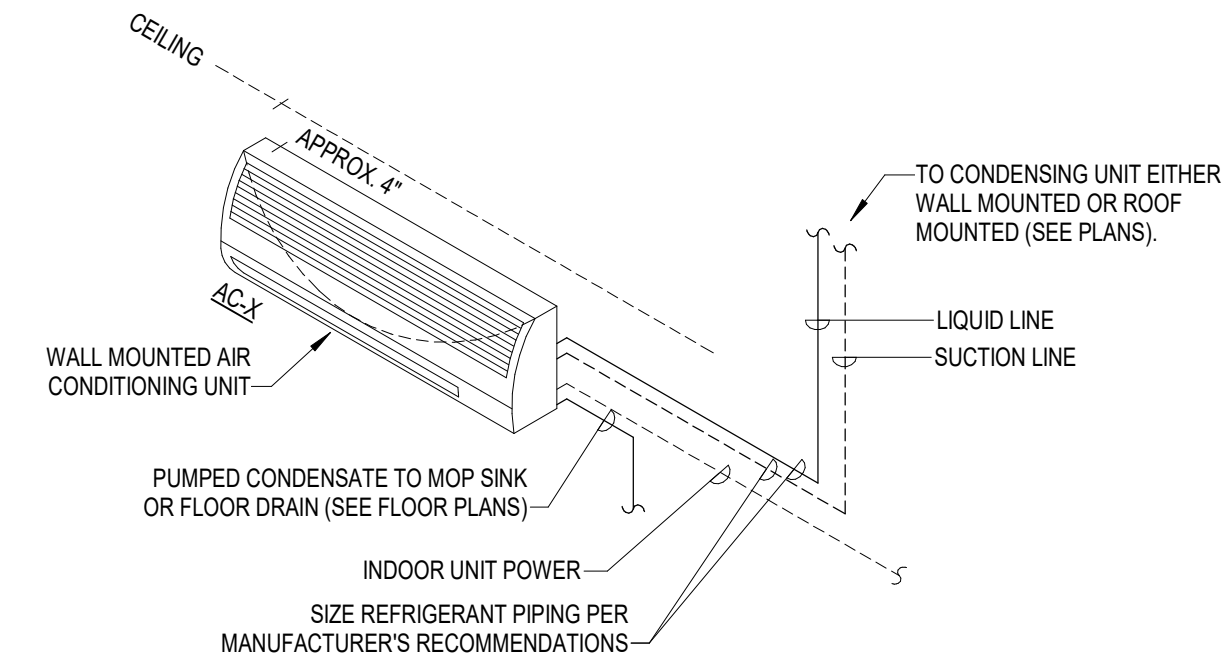


- NOTES:
1. WIRING AND PIPING SHOWN ARE GENERAL POINTS-OF-CONNECTION GUIDES ONLY AND ARE NOT INTENDED FOR A SPECIFIC INSTALLATION. REFER TO FLOOR PLANS FOR EQUIPMENT ORIENTATION. ALSO REFER TO MANUFACTURER'S INSTALLATION MANUALS FOR SPECIFIC INSTALLATION REQUIREMENTS.
 2. CONDENSATE PIPING ROUTED IN CEILING PLENUMS SHALL BE COPPER AND SHALL BE INSULATED. SEE SPECIFICATIONS.
 3. INSULATE SUCTION LINES.

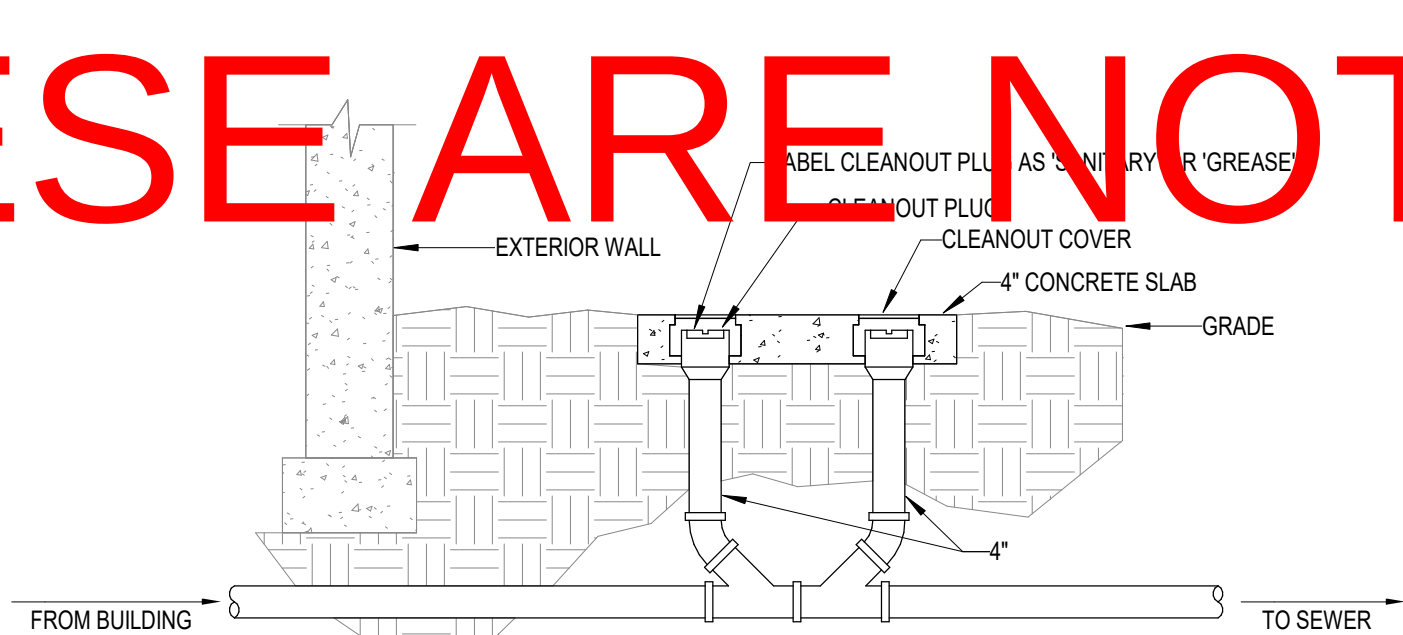

J1 CLEANOUT DETAIL
M6.1 SCALE: NTS

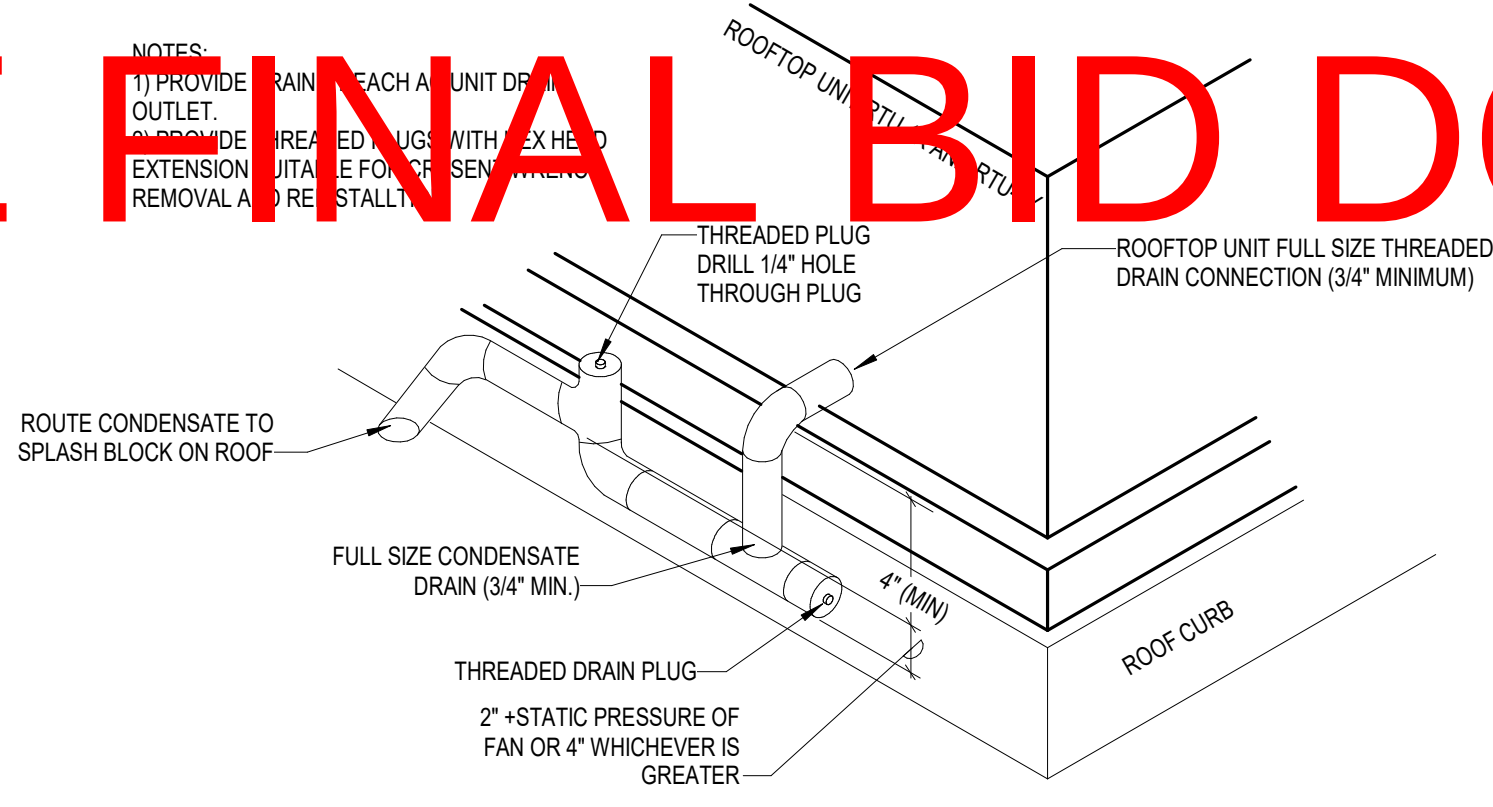

J7 RTU CONDENSATE DETAIL
M6.1 SCALE: NTS

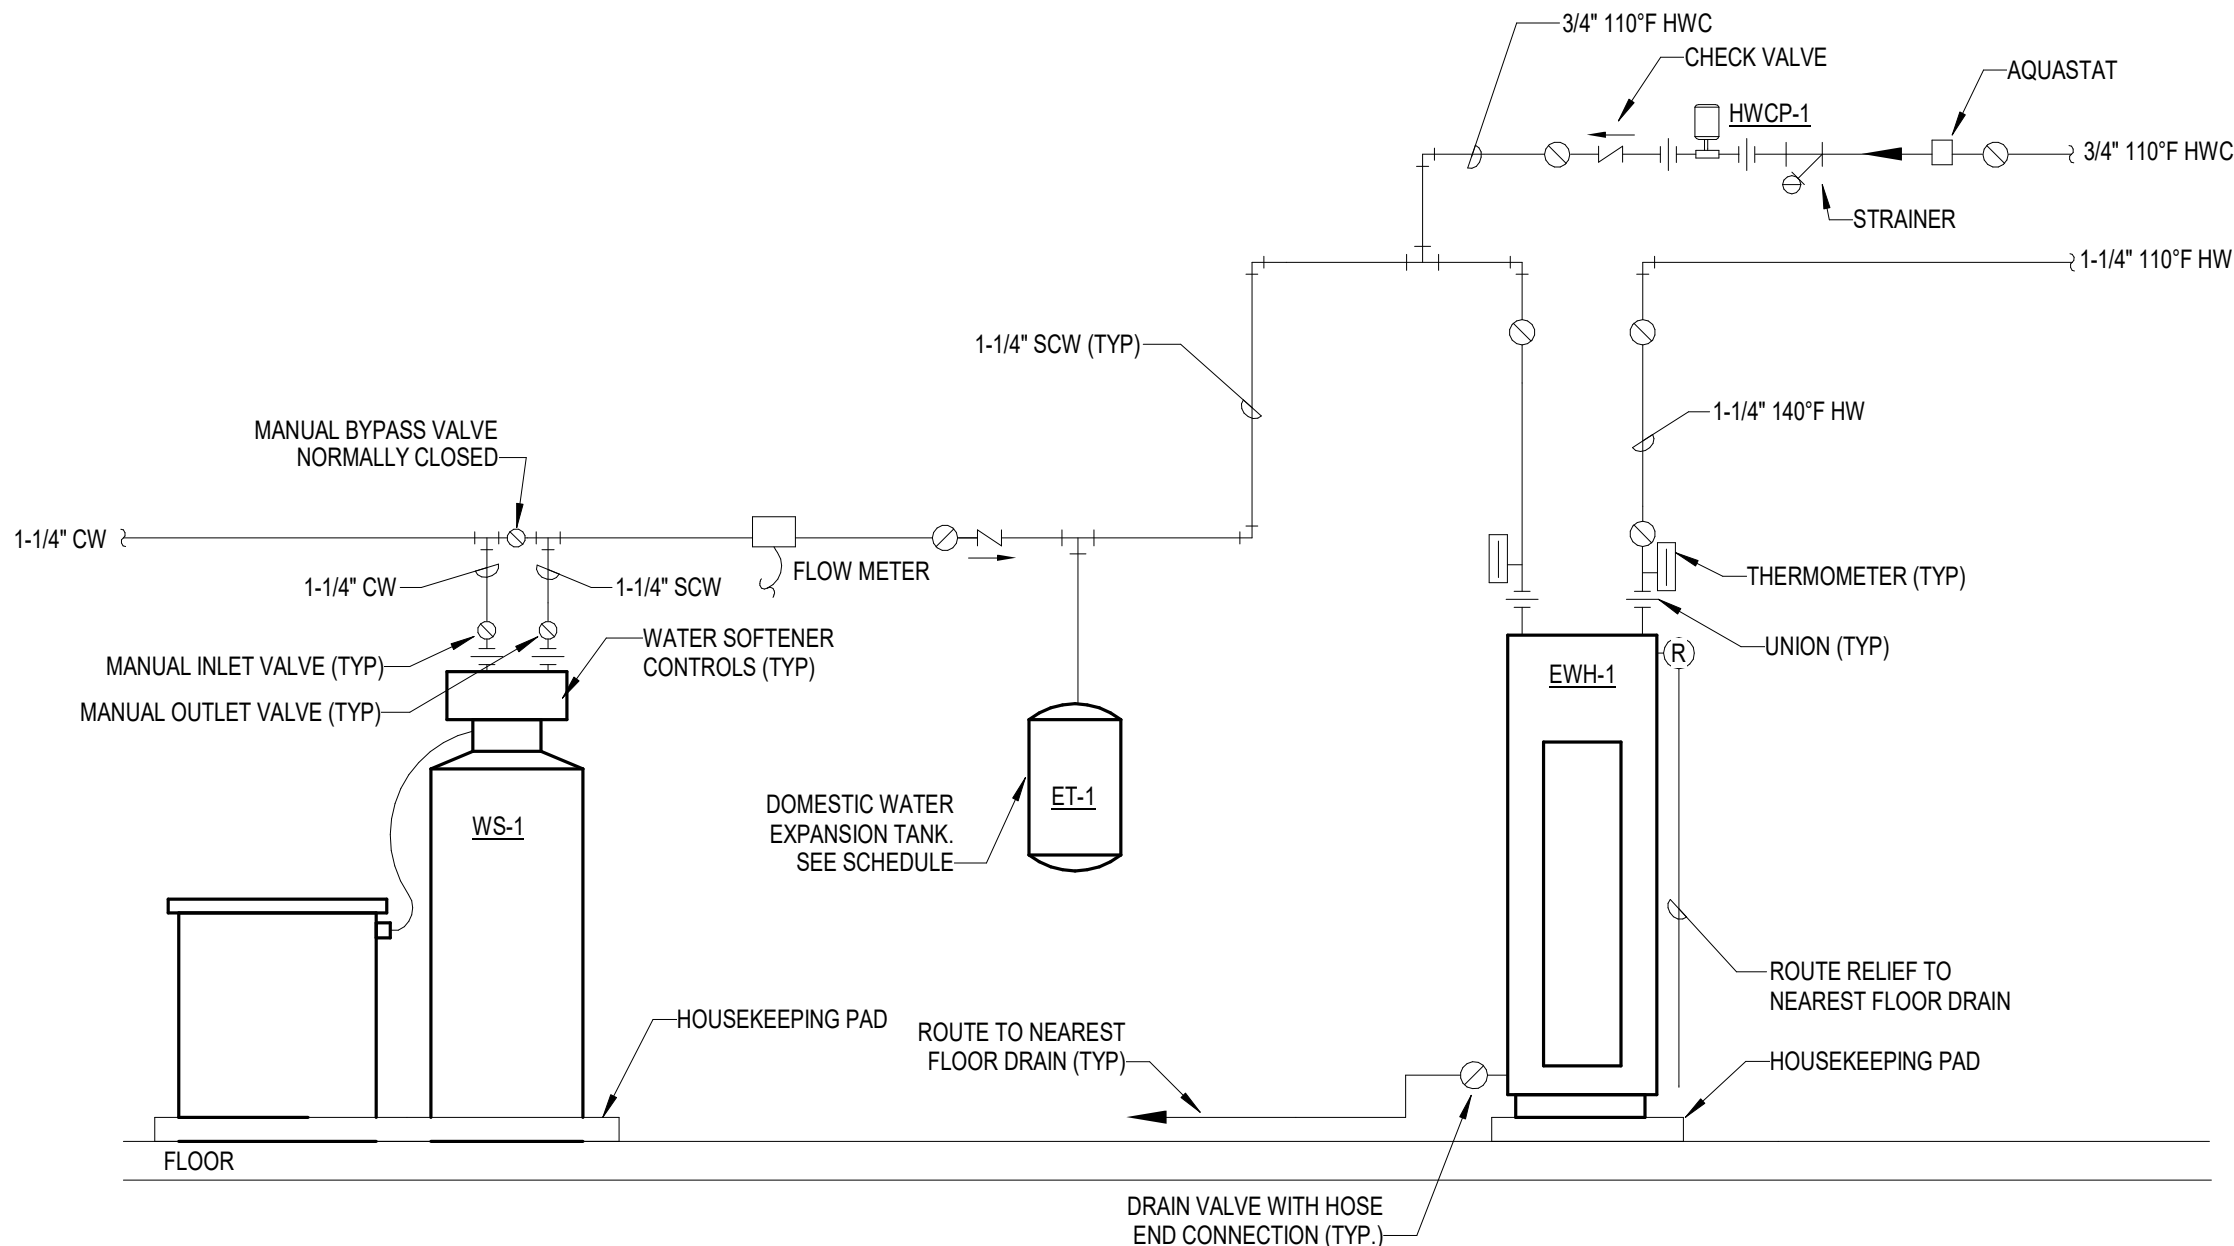

P1 DOMESTIC HOT WATER SYSTEM SCHEMATIC
M6.1 SCALE: NTS

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE

REVISION DATE
Project Number: 21064
Date: MARCH 10, 2023
COPYRIGHT © 2022

MECHANICAL DETAILS

M6.1

NOT FOR CONSTRUCTION

GENERAL				PHYSICAL SIZE (4)		SUPPLY FAN				EXHAUST FAN		ELECTRICAL			DX COOLING			COMPRESSOR		GAS FIRED HEATING				ENERGY RECOVERY WHEEL							HOT GAS REHEAT			REMARKS														
PLAN TAG	MANUFACTURER	MODEL	SERVES	CONFIG.	DIMENSIONS (W x H x L)	WEIGHT	AIRFLOW (CFM)	E.S.P. (in-wg)	RPM	FAN BHP / MOTOR HP	AIRFLOW (CFM)	E.S.P. (in-wg)	RPM	FAN BHP / MOTOR HP	VOLTAGE / PHASE	MCA	MOCp	CAPACITY (BTU/H)			AMBIENT AIR TEMP DB (°F)	MIN. LINE SEER	TEMPERATURES (°F) DB / WB - (EAT / LAT)		TYPE	QTY.	GAS LOAD				SUMMER PERFORMANCE					WINTER PERFORMANCE				LAT (°F) DB / WB	LAT (°F) DEW PT.	CAPACITY (BTU/H)						
																		NOM. TONS	TOTAL	SENSIBLE			FUEL	HIGH (BTU/H) INPUT			TURN DOWN	EFF.	OUTSIDE AIR (°F) DB / WB - (EAT / LAT)	EXHAUST (°F) EAT / DB / WB	RECOVERED CAP. (BTU/H)		WHEEL PRESSURE DROP		EFFECT- IVENESS	OUTSIDE AIR (°F) DB / WB - (EAT / LAT)	EXHAUST (°F) EAT / DB / WB	RECOVERED CAP. (BTU/H)					EFFECT- IVENESS					
																															TOTAL	SENSIBLE						TOTAL	SENSIBLE					TOTAL	SENSIBLE	TOTAL	SENSIBLE	
RTU-ER-3	Aeon, Inc.	RNA-V-AC-ER C-GAS	-	(1)	44" x 44" x 98"	0	2,300	0.75	1780	2.9 / 2.0	2,785	1.00	2200	1.8 / 4.0	208 V / 3	51.0 A	70.0 A	7	0	0	95 °F	-	81.9 / 68.7	53.5 / 53.5	INVERTER	1	NATURAL GAS	200,000	160,000	5:1	80.0%	95.0 / 78.0	81.9 / 68.7	75.0 / 62.0	159,400	159,400	0.25	7	-10.0	50.0 / 40.0	70.0 / 50.0	320,000	320,000	7	70.0 / 60.0	45.0	70,000	(1-13)

GENERAL				FILTERS		PHYSICAL SIZE (4)		AIRFLOW (CFM)		SUPPLY FAN				ELECTRICAL				DC COOLING				GAS FIRED HEATING				HOT GAS REHEAT		REMARKS							
PLAN TAG	MANUFACTURER (20)	MODEL	SERVES	CONFIG.	THICK NESS	MIN. EFF.	DIMENSIONS (W x H x L)	WEIGHT	TOTAL SUPPLY AIRFLOW	ECONOMIZER	MINIMUM OA	AIRFLOW (CFM)	E.S.P. (in-wg)	FAN BHP / MOTOR HP	VOLTAGE / PHASE	MCA	MOPP	CAPACITY (BTUH)			AMBIENT AIR TEMP DB (°F)		# OF STAGES	TEMPERATURES (°F) DB / WB - (EAT / LAT)		FUEL	GAS FLOW		# OF STAGES	EFF.	LAT (°F) DB / WB	LAT (°F) DEW PT	CAPACITY (BTUH)		
																		NOM. TONS	TOTAL	SENSIBLE	DB IN	DB OUT		MIN. NET SEER	INPUT		OUTPUT							LOW (BTUH) INPUT	LOW (BTUH) OUTPUT
RTU-1	AMON	RNC-VAC-PR-GAS	-	-	2"	MERV 8	64" x 59" x 127"	0	5,980	0	1,000	5,980	0	1,300	0.00	208 V / 3	120	175	16	0	0	105.0	0	80.0 / 67.0	54.5 / 54.4	NATURAL GAS	0	0	0	2	80.0%	70.0 / 60.0	55.0	0	(1-18)
RTU-2	AMON	RNC-VAC-PR-GAS	-	-	2"	MERV 8	64" x 59" x 127"	0	7,980	0	1,300	7,980	0	1,600	0.00	208 V / 3	181	225	25	0	0	105.0	0	80.0 / 67.0	54.5 / 54.4	NATURAL GAS	0	0	0	2	80.0%	70.0 / 60.0	55.0	0	(1-18)

APPX. QTY. (1a,b)	PLAN TAG	MANUFACTURER (8)	MODEL	FUNCTION	DESCRIPTION	MOUNTING (1)	DEFLECTION	AIR P.D. (IN WG)	MATERIAL	FINISH	NECK SIZE	FACE SIZE	PLENUM	REMARKS
6		KRUEGER	580H	EXHAUST	RECT SINGLE DEFLECTION GRILLE	GYP CEILING	SINGLE 3/4"	0.10"	ALUMINUM	WHITE	SEE PLANS	NECK SIZE + 1-3/4"	-	(1) (2) (3)
6		KRUEGER	680H	RETURN /XFR	RECT NECK PERFORATED FACE	ACTY GYF	PERFORATED	0.10"	STEEL	WHITE	22x22"	42x24"	RETURN AIR BOOT (4)	(1) (2)
6		KRUEGER	880H	SUPPLY	RECT SUBLEAKAGE REGISTER	ACTY GYF	PERFORATED	0.10"	STEEL	WHITE	22x22"	42x24"	RETURN AIR BOOT (4)	(1) (2)
1		KRUEGER	890H	SUPPLY	RECT DOUBLE DEFLECTION REGISTER	WALL/SOFT	DOUBLE 3/4"	0.10"	STEEL	WHITE	SEE PLANS	NECK SIZE + 1-3/4"	-	(1) (2) (3)
26	D-1	KRUEGER	PLQ	SUPPLY	PLAQUE DIFFUSER	ACTGY GYF CEILING	360"	0.10"	STEEL	WHITE	SEE PLANS	24x24"	-	(1) (2) (3)
22	G-1	KRUEGER	640H	RETURN /XFR	RECT NECK PERFORATED FACE	ACTY CEILING	PERFORATED	0.10"	STEEL	WHITE	10x22"	12x24"	RETURN AIR BOOT (4)	(1) (2)

BIDD DOCUMENTS - REFERENCE

REMARKS:

ELECTRIC HEAT:

1. HEATING DATA BASED ON 55°F ENTERING PRIMARY AIR.
2. SOUND DATA BASED ON MAXIMUM SCHEDULED AIRFLOW.
3. SEE FLOOR PLANS FOR VAV BOX CONFIGURATION. PROVIDE RIGHT HAND OR LEFT HAND CONTROL ENCLOSURE AS REQUIRED. ADJUST CONFIGURATION AS REQUIRED TO AVOID CONFLICTS WITH STRUCTURE AND ALL OTHER TRADES.
4. MAXIMUM STATIC PRESSURE DROP INCLUDES DAMPER AND REHEAT COIL. LISTED PRESSURE DROP IS AT FULL AIRFLOW.
5. PROVIDE WITH PROPORTIONAL CONTROL OF ELECTRIC HEAT WITH LEAVING AIR TEMPERATURE CONTROL. SEE TEMPERATURE CONTROL SPECIFICATIONS FOR ADDITIONAL INFORMATION ON SEQUENCING.
6. MINIMUM DUCT INLET SIZE UNLESS INDICATED OTHERWISE ON PLANS OR DETAILS.
7. DUCT CONNECTION SHALL BE 2" LARGER THAN INLET DIAMETER UNLESS OTHERWISE INDICATED ON PLAN.
8. MINIMUM AIRFLOW SHALL BE SET AT MANUFACTURER'S MINIMUM RECOMMENDED AIRFLOW PLUS AN ADDITIONAL 10%. INDICATED AIRFLOWS ARE APPROXIMATE. VERIFY WITH BOX MANUFACTURER.
9. PROVIDE HEATERS WITH THE FOLLOWING: ATTENUATOR, DISC TYPE AUTOMATIC AND MANUAL RESET THERMAL CUTOFFS TO PROTECT AGAINST OVERHEATING, DIFFERENTIAL PRESSURE AIRFLOW SWITCH, DE-ENERGIZING MAGNETIC CONTACTORS, CONTROL CIRCUIT TRANSFORMER (24 VOLT), SNAP ACTING DISCONNECT SWITCH (NON-FUSED) WITH DOOR INTERLOCK, MECHANICAL CONTACTOR SHALL COORDINATE TRANSFORMER REQUIREMENT WITH TEMPERATURE CONTROL CONTRACTOR.

APPY_QTY (1a.1b)	PLAN TAG	MANUFACTURER (8)	MODEL	FUNCTION	MOUNTING (1) (4)	DEFLECTION	AIR P.D. (IN WG)	MATERIAL	FINISH	NECK SIZE	PLENUM	SLOTS		LENGTH	REMARKS
												QTY	WIDTH		
1	KRUEGER	1900	RETURN	ACT CEILING	(6)	0.10"	0.10"	ALUMINUM	WHITE	SEE PLANS	RETURN AIR BOX (7)	2	1"	2'-0"	(1)(2)
1	KRUEGER	1900	SUPPLY	ACT CEILING	180° ADJUSTABLE	0.10"	0.10"	ALUMINUM	WHITE	SEE PLANS	INSULATED PLUMB BOOT (2)	2	1"	2'-0"	(1)(2)(3)
1	KRUEGER	1900	RETURN	ACT CEILING	(6)	0.10"	0.10"	ALUMINUM	WHITE	SEE PLANS	RETURN AIR BOX (7)	2	1"	2'-0"	(1)(2)
1	KRUEGER	1900	SUPPLY	ACT CEILING	180° ADJUSTABLE	0.10"	0.10"	ALUMINUM	WHITE	SEE PLANS	INSULATED PLUMB BOOT (2)	2	1"	2'-0"	(1)(2)(3)

△ REVISION	DATE
Project Number:	21064
Date:	MARCH 10, 2023
COPYRIGHT © 2022	

△ REVISION	DATE
Project Number:	21064
Date:	MARCH 10, 2023
COPYRIGHT © 2022	

MECHANICAL SCHEDULES

M7.0

3/10/2023 8:55:44 AM

DUCTWORK INSULATION SCHEDULE (1) (2)							
SERVICE	DUCTWORK	APPLICATION	INSULATION TYPE	INSULATION THICKNESS	MINIMUM R-VALUE	VAPOR RETARDER	REMARKS
SUPPLY AIR	ROUND	CONCEALED ABOVE CEILING	MINERAL FIBER BLANKET	2-3/16"	R-6	YES	-
SUPPLY AIR	RECTANGULAR	CONCEALED ABOVE CEILING	DUCT LINER	1-1/2"	R-6	YES	-
RETURN AIR	RECTANGULAR	CONCEALED ABOVE CEILING	DUCT LINER	1-1/2"	R-6	YES	-
RETURN / XFR AIR	RECTANGULAR	PLENUM BOOTS & TRANSFER DUCTS	DUCT LINER	1"	-	NO	-
SUPPLY AIR	ROUND	EXPOSED - SPIRAL	DUCT LINER	1"	R-3	NO	(3) (6)
SUPPLY AIR	RECTANGULAR	EXPOSED	DUCT LINER	1-1/2"	R-6	YES	(6)
RETURN AIR	RECTANGULAR	EXPOSED	NONE	-	-	NO	(6)
EXHAUST AIR	FROM FAN	BACK 36" INTO BUILDING	MINERAL FIBER BLANKET	2-3/16"	R-6	YES	-

REMARKS:
1. INSULATION TYPE AND THICKNESS SHALL MEET ALL REQUIREMENTS OF 2018 IECC / ASHRAE 90.1-2016.
2. SEE SPECIFICATION SECTION 23 07 00 FOR ADDITIONAL INFORMATION.
3. DOUBLE WALL WITH 1" INTERSTITIAL INSULATION.
4. THICKNESS / INSTALLATION AS REQUIRED TO MAINTAIN ZERO CLEARANCE TO COMBUSTIBLES.
5. 1-1/2" DUCT LINER AND 1-1/2" MINERAL FIBER BOARD. PROVIDE FIELD APPLIED WEATHERPROOF ALUMINUM JACKET.
6. PROVIDE EXPOSED DUCTWORK WITH PAINT GRIP WHERE APPLICABLE. COORDINATE FINAL PAINT FINISH WITH ARCHITECT.

PIPING INSULATION SCHEDULE (1) (2) (3)					
SERVICE	PIPING SIZES	INSULATION TYPE	INSULATION THICKNESS	VAPOR RETARDER	REMARKS
CONDENSATE DRAIN (COPPER)	ALL	MINERAL FIBER	1/2"	YES	-
REFRIGERANT SUCTION (RS)	1-1/4" AND SMALLER	FLEXIBLE ELASTOMERIC	1/2"	YES	-
REFRIGERANT SUCTION (RS)	1-1/2" AND LARGER	FLEXIBLE ELASTOMERIC	1"	YES	-
REFRIGERANT LIQUID (RL)	ALL	NONE	-	-	-
REFRIGERANT HOT GAS DISCHARGE (RD)	ALL	FLEXIBLE ELASTOMERIC	1/2"	YES	-
DOMESTIC COLD WATER (CW)	ALL	MINERAL FIBER	1/2"	YES	-
DOMESTIC HOT WATER (WITH RECIRC.)	1/2" TO 2"	MINERAL FIBER	1"	NO	-
DOMESTIC HOT WATER (WITH RECIRC.)	2-1/2" AND LARGER	MINERAL FIBER	1-1/2"	NO	-
SANITARY WASTE	ALL	NONE	-	-	-
ROOF DRAIN BODIES (RD & OFD)	ALL	FLEXIBLE ELASTOMERIC	1/2"	YES	-
DRAINING WASTE (DRAIN BELOW ROOF)	ALL	MINERAL FIBER	1/2"	YES	-
STORM DRAIN (ST & OF)	ALL	MINERAL FIBER	1"	YES	-

REMARKS:
1. SEE PIPING INSULATION DETAIL.
2. INSULATION TYPE AND THICKNESS SHALL MEET ALL REQUIREMENTS OF 2018 IECC / ASHRAE 90.1-2016.
3. SEE SPECIFICATION SECTIONS 22 07 20 & 23 07 20 FOR ADDITIONAL INFORMATION.
4. PROVIDE WITH PVC JACKET.
5. PROVIDE WITH ALUMINUM JACKET.
6. PROVIDE EXTERIOR PIPING INSULATION WITH ALUMINUM JACKET.

FAN SCHEDULE																			
REMARKS: 1. ROOF MOUNTED, DIRECT DRIVE, CENTRIFUGAL DOWNBLAST EXHAUST FAN. 2. PROVIDE WITH 24" INSULATED ROOF CURB COMPATIBLE WITH ROOFING SYSTEM, BIRDSREEN, FAN MOUNTED SPEED CONTROLLER, MOTORIZED DAMPER (SAME VOLTAGE AS FAN MOTOR & INTERLOCKED WITH FAN), AND ELECTRICAL DISCONNECT. CONTRACTOR SHALL CONFIRM ROOF INSULATION THICKNESS AT FINAL PLACEMENT OF EQUIPMENT. PROVIDE ROOF CURB HEIGHT TO ALLOW A MINIMUM 8" ROOF FLASHING UP TO VALER (VERIFY REQUIRED FLASHING DIMENSION WITH ROOFING CONTRACTOR). INCREASE INDICATED CURB HEIGHT AS REQUIRED. 3. CONTROL THRU BAS. SEE TEMPERATURE CONTROL SPECIFICATIONS. FAN TO RUN CONTINUOUSLY DURING OCCUPIED HOURS. 4. DIRECT DRIVE WITH EC MOTOR.																			
GENERAL				PHYSICAL SIZE					FAN					MOTOR					
PLAN TAG	MANUFACTURER	MODEL	SERVES	TYPE	ACC.	ROOF / WALL OPENING SIZE	WEIGHT (lbs)	DIMENSIONS (D x W x H)	AIRFLOW (CFM)	E.S.P. (in-Hg)	WHEEL TYPE	DIA. Ø	CLASS	DRIVE	BHP	MAXIMUM RPM	SONES	HP	RPM
EF-1	GREENHECK	G-100-VG	-	DOWNBLAST (1)	-2	14.5" x 14.5"	54	24" x 24" x 24"	1250 CFM	0.50	B.L.	10"	-	DIRECT		1725	13	0.25	1725
																		208 V / 1	O.D.P.
																		-	(1) (2) (3) (4)

ELECTRIC WATER HEATER SCHEDULE													
REMARKS: 1. ELECTRIC WATER HEATER WITH INTEGRAL GLASS-LINED TANK. 2. PROVIDE WITH PRESSURE/ TEMPERATURE RELIEF VALVE. 3. ELECTRICAL DISCONNECT BY ELECTRICAL CONTRACTOR. SEE ELECTRICAL DRAWINGS. COORDINATE ELECTRICAL REQUIREMENTS WITH SUPPLIED UNIT AND WITH ELECTRICAL CONTRACTOR. 4. DUAL, SIMULTANEOUS ELECTRIC HEATING ELEMENTS.													
GENERAL				TANK		DOMESTIC HOT WATER			ELECTRICAL		ELECTRIC HEAT		
PLAN TAG	MANUFACTURER (6)	MODEL	SERVES	STORAGE CAPACITY	DIMENSIONS (DIA. Ø x H)	RECOVERY	DISCHARGE TEMP.	TEMP. RISE	VOLTAGE / PHASE	FLA	CAPACITY (KW)	WV / STAGE	# OF ELEMENTS
EVH-1	A.O. SMITH	DRE-52	DOM. HW	52	22"Ø x 56"	77 GPH	120 °F	80 °F	208 V / 3	41.6 A	15.0 KW	5.0 KW	3
													3
													(1) (2) (3) (4)

WATER SOFTENER SCHEDULE																
REMARKS: 1. COMMERCIAL WATER SOFTENER SHALL CONSIST OF (2) FIBERGLASS REINFORCED POLYESTER SOFTENER TANKS WITH INTERIOR EPOXY LINING AND (1) FIBERGLASS REINFORCED PLASTIC BRINE TANK. 2. SOFTENER TANKS ARE APPROXIMATELY 16"Ø x 60" TALL. BRINE TANK IS APPROXIMATELY 24"Ø x 50" TALL. OVERALL DIMENSIONS ARE APPROXIMATELY 72" WIDE x 24" DEEP x 78" TALL. 3. CONTRACTOR SHALL INSTALL WATER SOFTENER PER MANUFACTURER'S RECOMMENDATIONS. PROVIDE ALL NECESSARY PIPING AND PIPING SPECIALTIES (I.E. STRAINERS, ISOLATION VALVES, BYPASS, ETC.) NOT INCLUDED WITH SOFTENER. 4. PROVIDE WITH FRP TANKS. 2" STAINLESS STEEL METER WITH SERVICE FLOW OF 1.5 TO 150 GPM, CONFIGURED FOR PROGRESSIVE FLOW. BRINE RECLAIM. AQUA SENSOR CONTROL. PRESSURE GAUGES ON INLET AND OUTLET. AND SINGLE POINT POWER CONNECTION (120 VOLT, 1Ø). PROVIDE A MINIMUM OF 1-YEAR WARRANTY ON DEFECTS AND 5-YEAR WARRANTY ON THE SOFTENER AND BRINE TANKS. CONTROLS SHALL BE MICROPROCESSOR FOR AUTOMATICALLY CYCLING THE REGENERATION CYCLE. GRAVITY DRAIN SOFTENER DISCHARGE FROM WATER SOFTENER TO FLOOR SINK. 5. MINIMUM OF 150,000 GRAIN CAPACITY AT 40 LB SALT DOSAGE. MAXIMUM OF 240,000 GRAIN CAPACITY AT 120 LB SALT DOSAGE. 6. MINIMUM OF 50,000 GRAIN CAPACITY AT 20 LB SALT DOSAGE. MAXIMUM OF 60,000 GRAIN CAPACITY AT 30 LB SALT DOSAGE. 7. WATER SOFTENER SHALL HAVE SINGLE POINT ELECTRICAL CONNECTION WITH CORD AND PLUG. COORDINATE ELECTRICAL OUTLET LOCATION WITH ELECTRICAL CONTRACTOR. 8. SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE PRODUCT BY ONE OF THE FOLLOWING MANUFACTURERS: CULLIGAN.																
PLAN TAG	MANUFACTURER (7)	MODEL	SERVES	OPTIONS	CONFIG.	TYPE	RESIN QUANTITY	ACC.	DIMENSIONS (D x W x H)	WEIGHT	FLOWRATE (GPM)		PRESSURE DROP (PSI)		VOLTAGE / PHASE	REMARKS
											CONTINUOUS	PEAK	CONTINUOUS	PEAK		
WS-1	CULLIGAN	HE-060	DOM. HOT WATER	-	(1)	SIMPLEX	(5)	(3)	(2)	855	25 GPM	32 GPM	25.1	31.5	120 V / 1	(6)

EXPANSION TANK SCHEDULE																	
REMARKS: 1. ASME DIAPHRAGM EXPANSION TANK SUITABLE FOR POTABLE WATER SYSTEMS. 2. BUTYL POLYPROPYLENE LINER. 3. OPEN SYSTEM, RELIEF VALVE NOT REQUIRED.																	
GENERAL				PHYSICAL SIZE			TANK CAPACITY (GALLONS)			FILL PRESSURE		SYSTEM TEMP (°F)		SYSTEM VOLUME (GALLONS)			INLET SIZE
PLAN TAG	MANUFACTURER	MODEL	SERVES	TYPE	LINER	DIMENSIONS (HEIGHT x DIA. Ø)	WEIGHT (lbs.) DRY	REQUIRED ACCEPTANCE	TOTAL	FLUID	INITIAL	FINAL	COLD	HOT	CALC'D	DESIGN	AS BUILT
ET-1	BELL & GOSSETT	PT-30V	DOMESTIC HOT WATER	(1)	(2)	25" x 15"Ø	24	140	11.3	14	WATER	15	65	50	150	0.0	0.0
															-	1"	(3)


DOMESTIC WATER PUMP SCHEDULE																	
REMARKS: 1. LEAD FREE / ALL BRONZE CONSTRUCTION FOR POTABLE WATER APPLICATIONS. 2. SEE WATER HEATER DETAIL FOR PIPING SPECIALTIES. 3. PUMP SHALL BE SCHEDULED THROUGH THE BUILDING AUTOMATION SYSTEM. WHEN ENABLED, THE PUMP SHALL CYCLE THROUGH THE USE OF AN AQUASTAT. 4. PUMP SHALL BE 3 SPEED WITH THERMALLY PROTECTED MOTOR COVERING A WIDE RANGE OF HYDRAULIC CAPABILITIES. MINIMUM PERFORMANCE ON SPEED 1: 8 GPM AT 14' H2O. PERFORMANCE ON SPEED 2: 8 GPM AT 21' H2O. MAXIMUM PERFORMANCE ON SPEED 3: 8 GPM AT 28' H2O. SET PUMP SPEED AS REQUIRED FOR APPLICATION. 5. SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE PRODUCT BY ONE OF THE FOLLOWING MANUFACTURERS: B&G, GRUNDOS, TACO																	
GENERAL				PUMP - FLOW				PUMP - SIZE				MOTOR					
PLAN TAG	MANUFACTURER (8)	MODEL	SERVES	TYPE	FLUID	TEMP	GPM	HEAD (FT) TOTAL	SHUTOFF	SUCT.	DISCH.	RPM	HP	RPM	VOLTAGE / PHASE	TYPE	REMARKS
HWCP-1	BELL & GOSSETT	NBF-10	HW CRC	IN-LINE (1)	WATER	110 °F	7	5 FT	15 FT	1/2"	1/2"	2800	0.07	2800	120 V / 1	O.D.P.	(2) (3)

3/10/2023 9:55:45 AM

THESE ARE NOT THE FINAL BID DOCUMENTS REFERENCE ONLY

NOT FOR CONSTRUCTION

PLUMBING SPECIALTIES SCHEDULE (1) (2)									
REMARKS: 1. SEE SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS INCLUDING STOPS, FITTINGS AND ALL OTHER SPECIALTIES. 2. PICTURES OF FIXTURES MAY NOT INDICATE ACTUAL FIXTURE SPECIFIED. PICTURES ARE GRAPHICAL IN NATURE. SEE DESCRIPTION FOR ACTUAL FIXTURE AND MODEL. 3. APPROXIMATE QUANTITIES SHOWN ARE NOT FINAL AND ONLY INDICATED FOR EASE OF COORDINATION. QUANTITIES DO NOT RELIEVE CONTRACTOR OF ITEMS WHICH MAY BE INDICATED ON PLANS BUT NOT INCLUDED IN THIS COUNT. CONTRACTOR SHALL DETERMINE QUANTITIES FROM PLANS AND SPECIFICATIONS.									
TAG	FIXTURE (2)		DESCRIPTION	CONNECTIONS				REMARKS	APPX QTY (3)
	MODEL	IMAGE		CW	HW	V	W		
FD-1	J.R. SMITH-2005		FLOOR DRAIN WITH CAST IRON BODY, FLASHING COLLAR, 6" ROUND ADJUSTABLE NICKEL BRONZE GRATE.	-	-	1-1/2"	2"	SEE PLANS FOR WASTE AND VENT SIZE REQUIREMENTS.	3
OF-1	J.R. SMITH-1010		ROOF DRAIN WITH CAST IRON BODY, COMBINATION FLASHING COLLAR AND GRAVEL STOP, WITH THE FOLLOWING FEATURES: 1. UNDER-DECK CLAMP 2. ADJUSTABLE INSULATION EXTENSION 3. SUMP RECEIVER 4. CAST IRON VANDAL PROOF DOME 5. REQUIRED GASKETS	-	-	-	-	SEE PLANS FOR STORM AND OVERFLOW SIZE REQUIREMENTS.	2
RD-1	J.R. SMITH-1010		ROOF DRAIN WITH CAST IRON BODY, COMBINATION FLASHING COLLAR AND GRAVEL STOP, WITH THE FOLLOWING FEATURES: 1. UNDER-DECK CLAMP 2. ADJUSTABLE INSULATION EXTENSION 3. SUMP RECEIVER 4. CAST IRON VANDAL PROOF DOME 5. REQUIRED GASKETS 6.2" OVERFLOW STANDPIPE	-	-	-	-	SEE PLANS FOR STORM AND OVERFLOW SIZE REQUIREMENTS.	2
OB-1	OATEY12K		DESCRIPTION: RECESSED WALL OUTLET BOX WITH 1/4 TURN BRASS HAMMER BALL ISOLATION VALVE. COPPER SWEAT CONNECTION.	1/4"	-	-	-		3

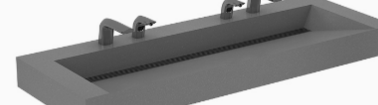PLUMBING FIXTURE SCHEDULE (1) (2)										
REMARKS: 1. SEE SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS INCLUDING STOPS, FITTINGS AND ALL OTHER SPECIALTIES. 2. PICTURES OF FIXTURES MAY NOT INDICATE ACTUAL FIXTURE SPECIFIED. PICTURES ARE GRAPHICAL IN NATURE. SEE DESCRIPTION FOR ACTUAL FIXTURE AND MODEL. 3. APPROXIMATE QUANTITIES SHOWN ARE NOT FINAL AND ONLY INDICATED FOR EASE OF COORDINATION. QUANTITIES DO NOT RELIEVE CONTRACTOR OF ITEMS WHICH MAY BE INDICATED ON PLANS BUT NOT INCLUDED IN THIS COUNT. CONTRACTOR SHALL DETERMINE QUANTITIES FROM PLANS AND SPECIFICATIONS.										
TAG	FIXTURE (2)		FAUCET-VALVE-ACCESSORY (2)		DESCRIPTION	CONNECTIONS				REMARKS
	MODEL	IMAGE	MODEL	IMAGE		CW	HW	V	W	
L-1	KOHLER-K-2005 "KINGSTON"		MOEN-"DURA" 8279SMF12		DESCRIPTION: WALL HANGING LAVATORY WITH MANUAL FAUCET. ADA COMPLIANT: YES. COLOR: WHITE FIXTURE DIMENSIONS: 18" x 22" CONSTRUCTION: FAUCET INLET SPACING TO MATCH LAVATORY OPENINGS. FAUCET VALVE OPERATION: MANUAL FAUCET ACCESSORIES: BELOW DECK THERMOSTATIC MIXING VALVE. DUAL LEVER WRIST BLADE HANDLES FAUCET SPOUT: INTEGRAL WITH BODY, VANDAL RESISTANT AERATOR, 1/2-GPM FLOW. DRAIN: GRID STRAINER PROVIDED WITH SHROUD ACCESSORY PACK	1/2"	1/2"	1-1/4"	1-1/4"	[PROVIDE BELOW DECK THERMOSTATIC MIXING VALVE SERVING HOT WATER SUPPLY. SET MAX TEMPERATURE TO 110° F.]
L-2	SLOAN-DSWD-8000		SLOAN-OPTIMA ETF-410		DESCRIPTION: PRE-FABRICATED, 2-STATION, SLOAN DESIGNER SERIES WASH BASIN WITH HARD-WIRED SENSOR FAUCETS. PROVIDE WITH MANUFACTURER'S STAINLESS-STEEL ANGLED ENCLOSURE WITH ACCESS PANEL TO CONCEAL PIPING AND COMPONENTS UNDER SINK. ADA COMPLIANT: YES. COLOR: WHITE FIXTURE DIMENSIONS: 60" x 22" x 5" CONSTRUCTION: PRE-FABRICATED FAUCET VALVE OPERATION: HARD-WIRED, SENSOR OPERATED. FAUCET ACCESSORIES: BOX TRANSFORMER AND BELOW DECK THERMOSTATIC MIXING VALVE FAUCET SPOUT: INTEGRAL WITH BODY, VANDAL RESISTANT AERATOR, 1/2-GPM FLOW.	1/2"	1/2"	1-1/4"	1-1/4"	[PROVIDE BELOW DECK THERMOSTATIC MIXING VALVE SERVING HOT WATER SUPPLY. SET MAX TEMPERATURE TO 110° F.]
WC-1	KOHLER-K-96057 HIGHCLIFF		SLOAN-111-1.6 SFSM		DESCRIPTION: ELONGATED, SIPHON JET BOWL, FLOOR MOUNTED, FLOOR OUTLET WATER CLOSET WITH FLUSHOMETER FEATURING TRUE MECHANICAL OVERRIDE. ADA COMPLIANT: YES COLOR: WHITE FLUSHOMETER: TOP SPUD: 1.6 GALLONS PER FLUSH. FLUSHOMETER FINISH: POLISHED CHROME. FLUSHOMETER OPERATION: BATTERY WITH TRUE MANUAL OVERRIDE. SEAT: WHITE, ELONGATED, OPEN FRONT WITHOUT COVER, SEAT WITH CHECK HINGE. RIM HEIGHT: 17"	3/4"	-	2"	4"	FIXTURE SHALL BE MAP TESTED FOR A MINIMUM OF 1,000 GRAMS PER FLUSH.
WC-2	KOHLER-K-96053 WELLCOMME		SLOAN-111-1.6 SFSM		DESCRIPTION: ELONGATED, SIPHON JET BOWL, FLOOR MOUNTED, FLOOR OUTLET WATER CLOSET WITH FLUSHOMETER FEATURING TRUE MECHANICAL OVERRIDE. ADA COMPLIANT: NOT REQUIRED COLOR: WHITE FLUSHOMETER: TOP SPUD: 1.6 GALLONS PER FLUSH. FLUSHOMETER FINISH: POLISHED CHROME. FLUSHOMETER OPERATION: BATTERY WITH TRUE MANUAL OVERRIDE. SEAT: WHITE, ELONGATED, OPEN FRONT WITHOUT COVER, SEAT WITH CHECK HINGE. RIM HEIGHT: 15"	3/4"	-	2"	4"	FIXTURE SHALL BE MAP TESTED FOR A MINIMUM OF 1,000 GRAMS PER FLUSH.
UR-1	KOHLER-4991-ET "BARDON"		SLOAN-ROYAL 186-0.5 SFSM		DESCRIPTION: WASH-DOWN, WALL HANGING, WALL OUTLET WITH URINAL FLUSHOMETER FEATURING TRUE MECHANICAL OVERRIDE. ADA COMPLIANT: YES COLOR: WHITE FLUSHOMETER: TOP SPUD: 0.5 GALLONS PER FLUSH. FLUSHOMETER FINISH: POLISHED CHROME FLUSHOMETER OPERATION: BATTERY POWERED, SENSOR ACTUATION, AUTOMATIC FLUSH SYSTEM WITH TRUE MECHANICAL OVERRIDE. RIM HEIGHT: 17"	3/4"	-	1-1/2"	2"	
MS-1	WILLIAMS SB-900 "SERVICEPORT"		KOHLER-K-837760-44 "TRITON BOWE"		FLOOR MOUNTED, TOP SINK WITH WALL MOUNTED FAUCET. ADA COMPLIANT: NOT REQUIRED FIXTURE DIMENSIONS: 24" x 24" x 12" HIGH FIXTURE CONSTRUCTION: TERRAZZO (MOLDED STONE) [FIBERGLASS], RIM GUARD: STAINLESS STEEL FAUCET: ROUGH CHROME, WIDESPREAD BAST BRASS WITH SUPPLIES 8" ON CENTER. FAUCET MOUNTING: WALL CENTERED ON FIXTURE. FAUCET HANDLE: DUAL LEVER. FAUCET SPOUT: INTEGRAL VACUUM BREAKER, PAIL HOOK, AND HOSE THREAD OUTLET. WALL BRACE: ASSEMBLY WITH WALL BRACKET AND SUPPORT TO FAUCET SPOUT. HOSE HOLDER: E.L. MUSTEE & SONS 65.700; HEAVY DUTY 3/8" DIA. 31" RUBBER HOSE AND SPRING LOADED MOLDED RUBBER HOSE HOLDER ON STAINLESS STEEL WALL PLATE. MOP HANGER: E.L. MUSTEE & SONS 65.600; THREE SPRING-LOADED RUBBER MOP HOLDERS ATTACHED TO STAINLESS STEEL WALL PLATE. WALL GUARD: E.L. MUSTEE & SONS 67.2424; 12" HIGH, 20 GAUGE, #304 STAINLESS STEEL WALL GUARD.	3/4"	3/4"	1-1/2"	3"	
S-1	ELKAY-ECTRU17179TPD		MOEN-8279SMF12		DESCRIPTION: UNDERMOUNT, SINGLE-BOWL, 18-GUAGE STAINLESS STEEL SINK. ADA COMPLIANT: SINK - YES; FAUCET - YES FIXTURE BOWL DIMENSIONS: 17" x 17" x 9"(NON-ADA) FIXTURE OVERALL DIMENSIONS: 18 1/2" x 18 1/2" x 9" FIXTURE CONSTRUCTION: FAUCET INLET SPACING TO MATCH SINK OPENINGS. FIXTURE DRAIN: 1-1/2" GRID STRAINER WITH 3-1/2" REMOVABLE STAINLESS STEEL CRUMB CUP. FIXTURE DRAIN: "PERFECT DRAIN" OR APPROVED EQUAL. FAUCET HANDLE: DUAL LEVEL WRIST BLADE HANDLES. FAUCET SPOUT: REACH - 5 1/4" HEIGHT - 10 3/4" WITH 1-1/2 GPM FLOW AERATOR. FAUCET FINISH: POLISHED CHROME.	1/2"	1/2"	1-1/2"	1-1/2"	
S-2	ELKAY-ELUH4D31185SPD		MOEN-"ALIGN" 7565		DESCRIPTION: UNDERMOUNT, DOUBLE-BOWL, 18-GUAGE STAINLESS STEEL SINK W/ PULL-DOWN GOOSENECK SWING SPOUT. ADA COMPLIANT: SINK - YES; FAUCET - YES FIXTURE BOWL DIMENSIONS: 13 1/2" x 16" x 6-1/2" FIXTURE OVERALL DIMENSIONS: 31" x 18 1/2" x 6-1/2" FIXTURE CONSTRUCTION: FAUCET INLET SPACING TO MATCH SINK OPENINGS. FIXTURE DRAIN: 1-1/2" GRID STRAINER WITH 3-1/2" REMOVABLE STAINLESS STEEL CRUMB CUP. FIXTURE DRAIN: "PERFECT DRAIN" OR APPROVED EQUAL. FAUCET HANDLE: SINGLE HANDLE LEVER. FAUCET SPOUT: REACH - 7 1/2" HEIGHT - 15 3/4" WITH 1-1/2 GPM FLOW AERATOR. FAUCET FINISH: STAINLESS STEEL. FOOD WASTE DISPOSER: SEE FWD-1	1/2"	1/2"	1-1/2"	1-1/2"	
SH-1	AQUATIC-14836BFLP		SEE DESCRIPTION		DESCRIPTION: AQUATIC SHOWER ENCLOSURE WITH DELTA T13H322 DUAL SHOWER UNIT WITH STANDARD 24" STAINLESS STEEL BAR WITH ADA SLIDE HAND-SHOWER AND SHOWER DIVERTER VALVE-BACKFLOW PROTECTION BY TWO INTEGRAL CHECK VALVES IN HAND-SHOWER. ADA COMPLIANT: YES COLOR: FAUCET - POLISHED CHROME. ENCLOSURE - WHITE. FIXTURE ENCLOSURE: ALCOVE 1-PIECE SHOWER STALL. GRAB BARS AND SEAT: 18" VERTICAL STRAIGHT GRAB BAR, L-CONFIGUREDE BAR PACKAGE, AND LEFT HAND L-SHAPED PHENOLIC FOLD UP SEAT. SHOWER DRAIN: 2" FLOOR DRAIN. SEE FD-1 THIS SHEET. SHOWER VALVE: PRESSURE BALANCED VALVE WITH SCREWDRIVER STOPS. (DELTA R1070D-UNWS ROUGH-IN) SHOWER HANDLE: SINGLE-LEVER SHOWER HEAD: ARM AND FLANGE, DELTA T13H322 UNIVERSAL SHOWER TRIM WITH DIVERTER VALVE. SHOWER FLOW RATE: 2.0-2.5 GPM.	1/2"	1/2"	1-1/2"	1-1/2"	
FWD-1	INSINKERATOR-BADGER 5 PLUS				FOOD WASTE DISPOSER: IN-SINK ERATOR, BADGER 5XP, 115VAC, 3/4 (1/2) HP DISPOSER. INCLUDE MOTOR WITH OVERLOAD PROTECTION AND RESET BUTTON, WALL SWITCH, CORROSION RESISTANT CHAMBER WITH JAM RESISTANT STAINLESS STEEL GRINDER, SPASH GUARD, AND COMBINATION COVER/STOPPER.	-	-	-	-	
EW-1	ELKAY-EZWS-ERP6M26K				DESCRIPTION: FULLY EXPOSED WALL MOUNTED 8-LEVEL FILTERED WATER COOLERS AND BOTTLE FILLER WITH RECESSED IN WALL REFRIGERATION SYSTEM. ADA COMPLIANT: YES FIXTURE DIMENSIONS: 14" DIAMETER BOWLS, 38.5" OVERALL, MINIMUM 1/2" DEPTH WALL REQUIRED TO ACCOMMODATE REFRIGERATION SYSTEM. COORDINATE WITH ARCHITECTURAL NUMBER OF BUBBLERS: TWO + BOTTLE FILLER (SEE BELOW) BOTTLE FILLER: SENSOR ACTIVATED: 1.1 GPM LAMNAR FLOW WITH 20 SECOND SHUT OFF, LED LIGHT AND BOTTLES SAVED DIGITAL DISPLAY COUNTER. FIXTURE CABINET MATERIAL: STAINLESS STEEL. THERMOSTAT: ADJUSTABLE SET AT 50°F ELECTRICAL: 120V, 3 WIRE CORD AND PLUG. ACTIVATION: PUSH BAR ACTUATION MECHANISM. [UNIT SHALL INCLUDE 300-GALLON CAPACITY FILTER, CERTIFIED TO NSF/ANSI 42 & 53, WITH VISUAL FILTER MONITOR TO INDICATE WHEN REPLACEMENT IS NECESSARY AND SHALL AUTOMATICALLY DETECT A NEW FILTER / RESET VISUAL FILTER MONITOR ACCORDINGLY. UNIT SHALL TURN OFF REFRIGERATION SYSTEM AS NEEDED. IN ADDITION TO SELF-DIAGNOSING SYSTEM ISSUES AND DISPLAY RELATED MESSAGES.]	1/2"	-	1-1/4"	1-1/4"	

Pottawattamie
County Health
Building

AGENCY APPROVAL


ALLEY POYNER
MACCHIETTO
ARCHITECTURE

△ REVISION DATE
Project Number: 21064
Date: MARCH 10, 2023
COPYRIGHT © 2022

PLUMBING FIXTURE
SCHEDULE

M7.2

3/10/2023 8:55:25 AM

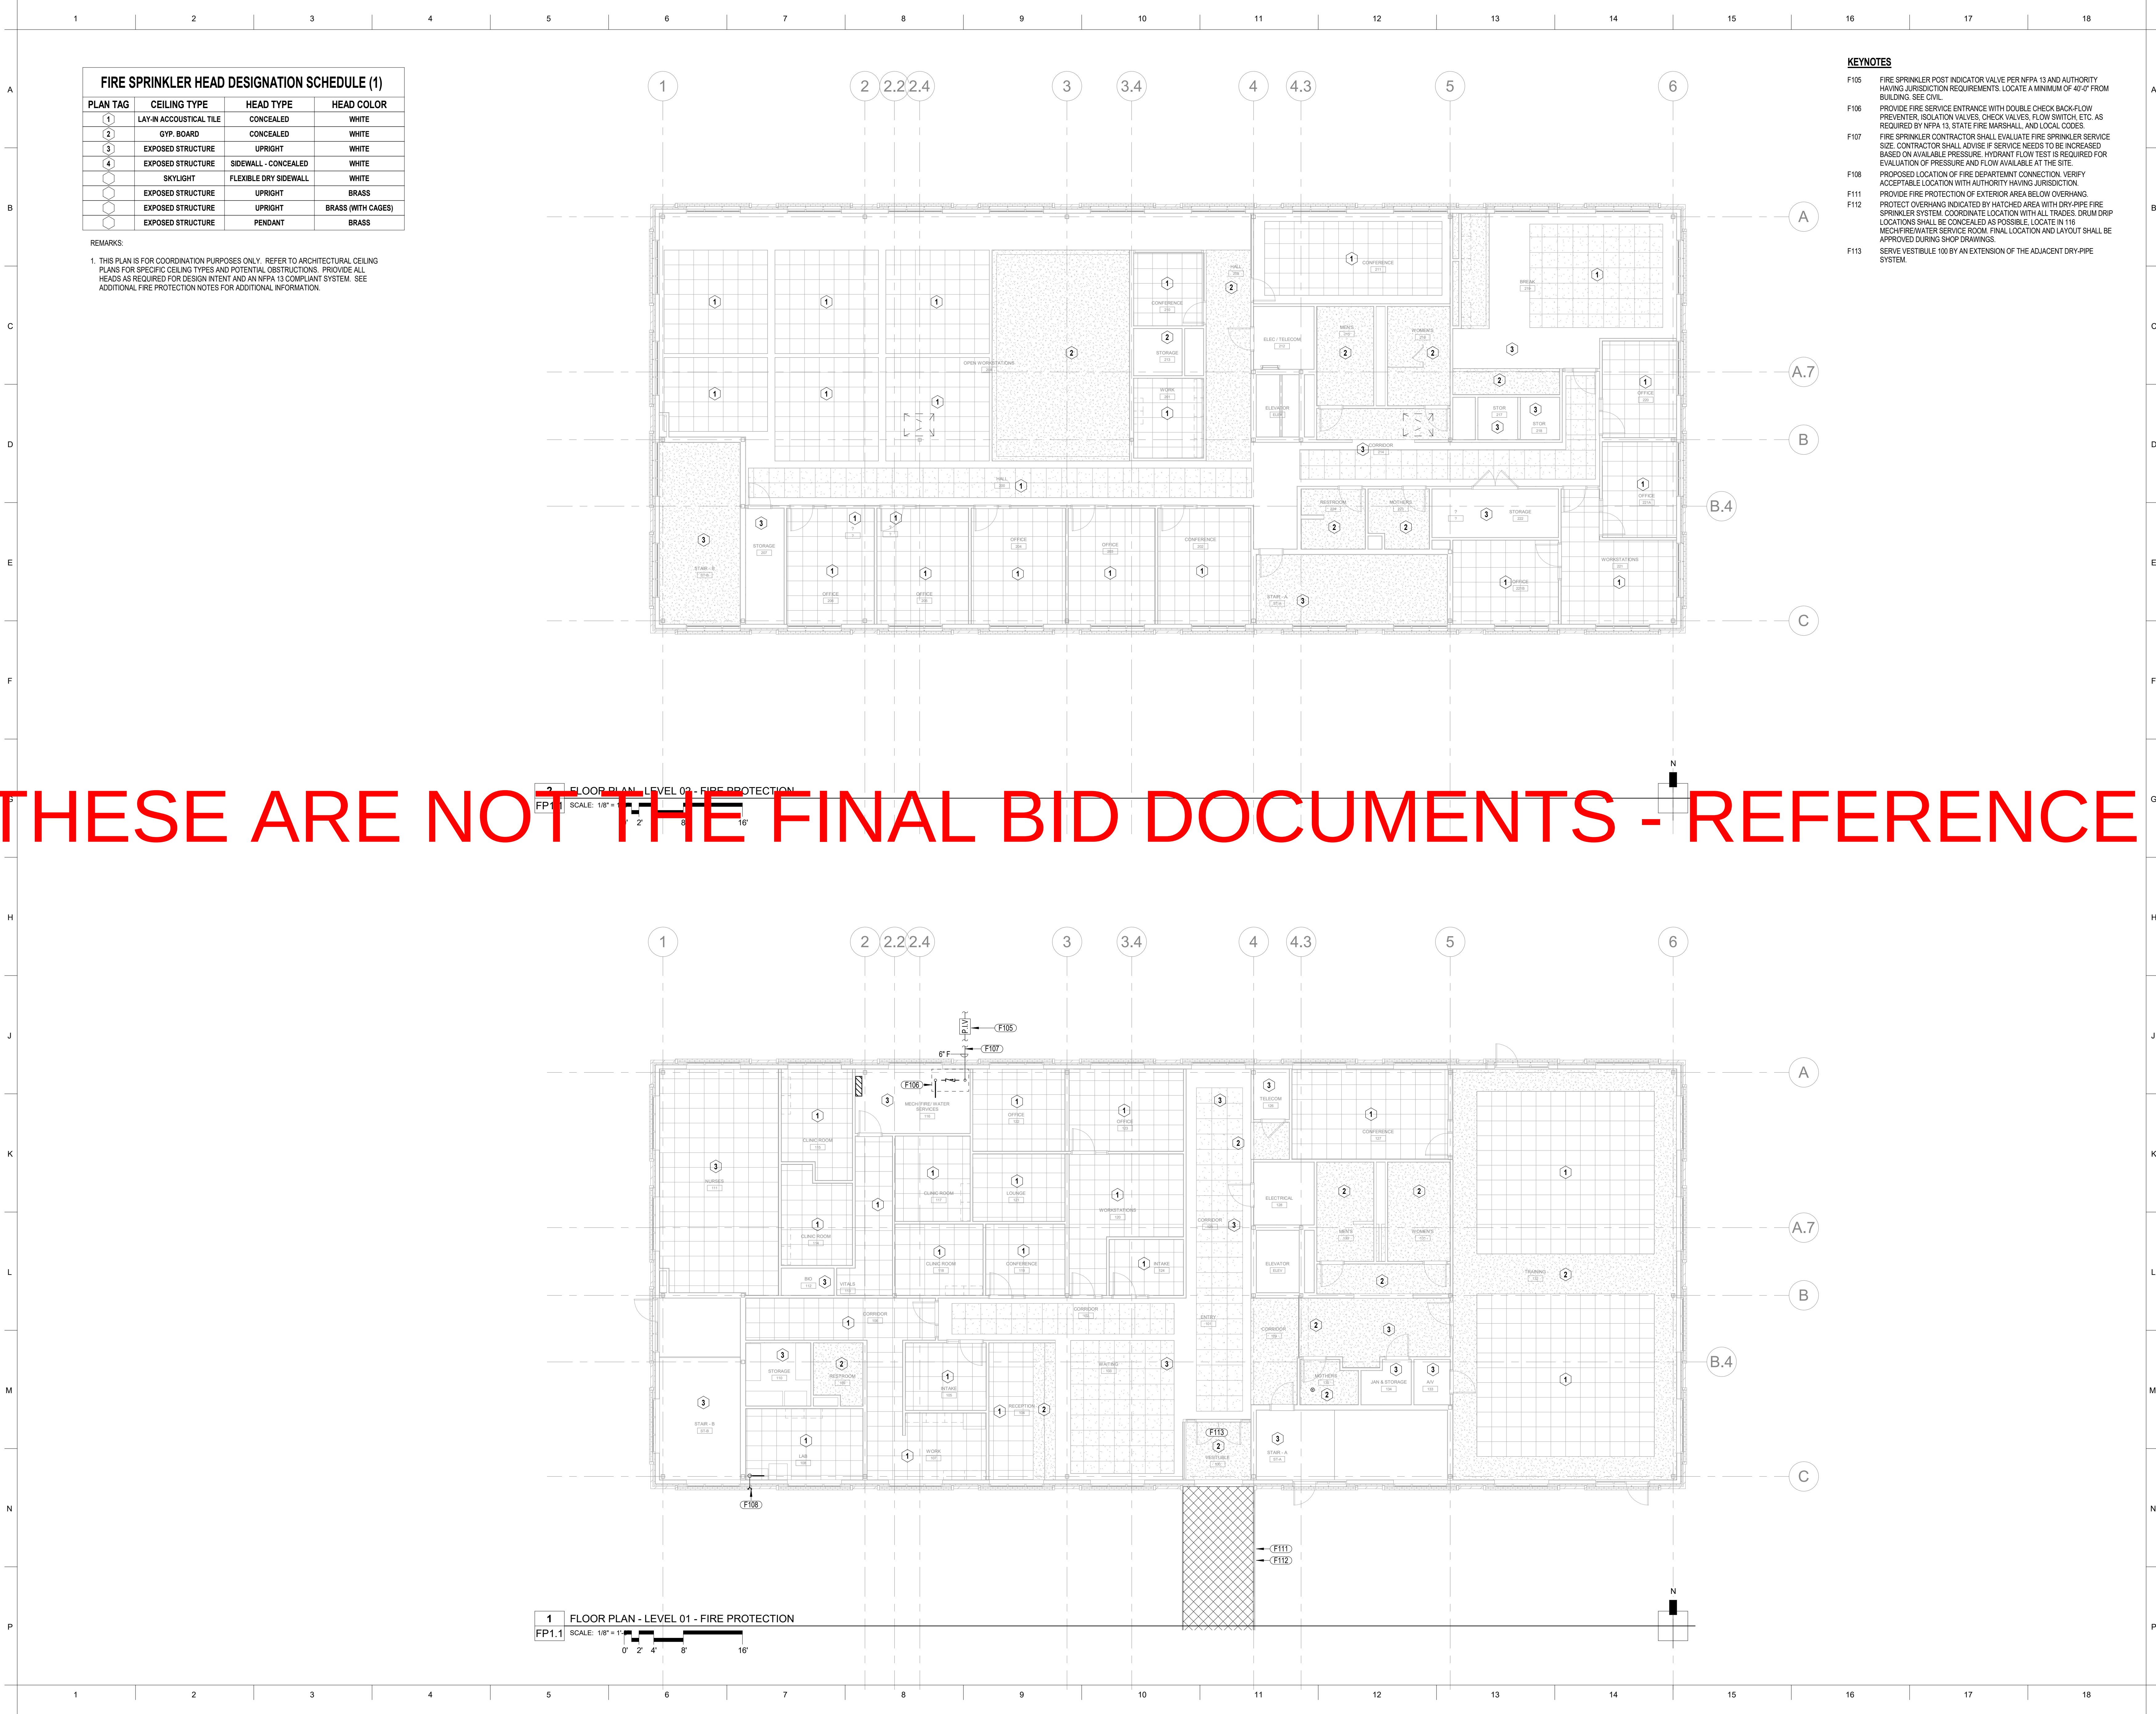

FIRE SPRINKLER HEAD DESIGNATION SCHEDULE (1)			
PLAN TAG	CEILING TYPE	HEAD TYPE	HEAD COLOR
1	LAY-IN ACCUSTICAL TILE	CONCEALED	WHITE
2	GYP. BOARD	CONCEALED	WHITE
3	EXPOSED STRUCTURE	UPRIGHT	WHITE
4	EXPOSED STRUCTURE	SIDEWALL - CONCEALED	WHITE
5	SKYLIGHT	FLEXIBLE DRY SIDEWALL	WHITE
6	EXPOSED STRUCTURE	UPRIGHT	BRASS
7	EXPOSED STRUCTURE	UPRIGHT	BRASS (WITH CAGES)
8	EXPOSED STRUCTURE	PENDANT	BRASS

REMARKS:
1. THIS PLAN IS FOR COORDINATION PURPOSES ONLY. REFER TO ARCHITECTURAL CEILING PLANS FOR SPECIFIC CEILING TYPES AND POTENTIAL OBSTRUCTIONS. PROVIDE ALL HEADS AS REQUIRED FOR DESIGN INTENT AND AN NFPA 13 COMPLIANT SYSTEM. SEE ADDITIONAL FIRE PROTECTION NOTES FOR ADDITIONAL INFORMATION.

- KEYNOTES**
- F105 FIRE SPRINKLER POST INDICATOR VALVE PER NFPA 13 AND AUTHORITY HAVING JURISDICTION REQUIREMENTS. LOCATE A MINIMUM OF 40'-0" FROM BUILDING. SEE CIVIL.
 - F106 PROVIDE FIRE SERVICE ENTRANCE WITH DOUBLE CHECK BACK-FLOW PREVENTER, ISOLATION VALVES, CHECK VALVES, FLOW SWITCH, ETC. AS REQUIRED BY NFPA 13, STATE FIRE MARSHALL, AND LOCAL CODES.
 - F107 FIRE SPRINKLER CONTRACTOR SHALL EVALUATE FIRE SPRINKLER SERVICE SIZE. CONTRACTOR SHALL ADVISE IF SERVICE NEEDS TO BE INCREASED BASED ON AVAILABLE PRESSURE. HYDRANT FLOW TEST IS REQUIRED FOR EVALUATION OF PRESSURE AND FLOW AVAILABLE AT THE SITE.
 - F108 PROPOSED LOCATION OF FIRE DEPARTMENT CONNECTION. VERIFY ACCEPTABLE LOCATION WITH AUTHORITY HAVING JURISDICTION.
 - F111 PROVIDE FIRE PROTECTION OF EXTERIOR AREA BELOW OVERHANG. PROTECT OVERHANG INDICATED BY HATCHED AREA WITH DRY-PIPE FIRE SPRINKLER SYSTEM. COORDINATE LOCATION WITH ALL TRADES. DRUM DRIP LOCATIONS SHALL BE CONCEALED AS POSSIBLE. LOCATE IN 118 MECH/FIREWATER SERVICE ROOM. FINAL LOCATION AND LAYOUT SHALL BE APPROVED DURING SHOP DRAWINGS.
 - F112
 - F113 SERVE VESTIBULE 100 BY AN EXTENSION OF THE ADJACENT DRY-PIPE SYSTEM.

Pottawattamie
County Health
Building

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE


REVISION	DATE
Project Number:	21064
Date:	MARCH 10, 2023
COPYRIGHT © 2022	

FLOOR PLANS - FIRE
PROTECTION

FP1.1

NOT FOR CONSTRUCTION


KEYNOTES

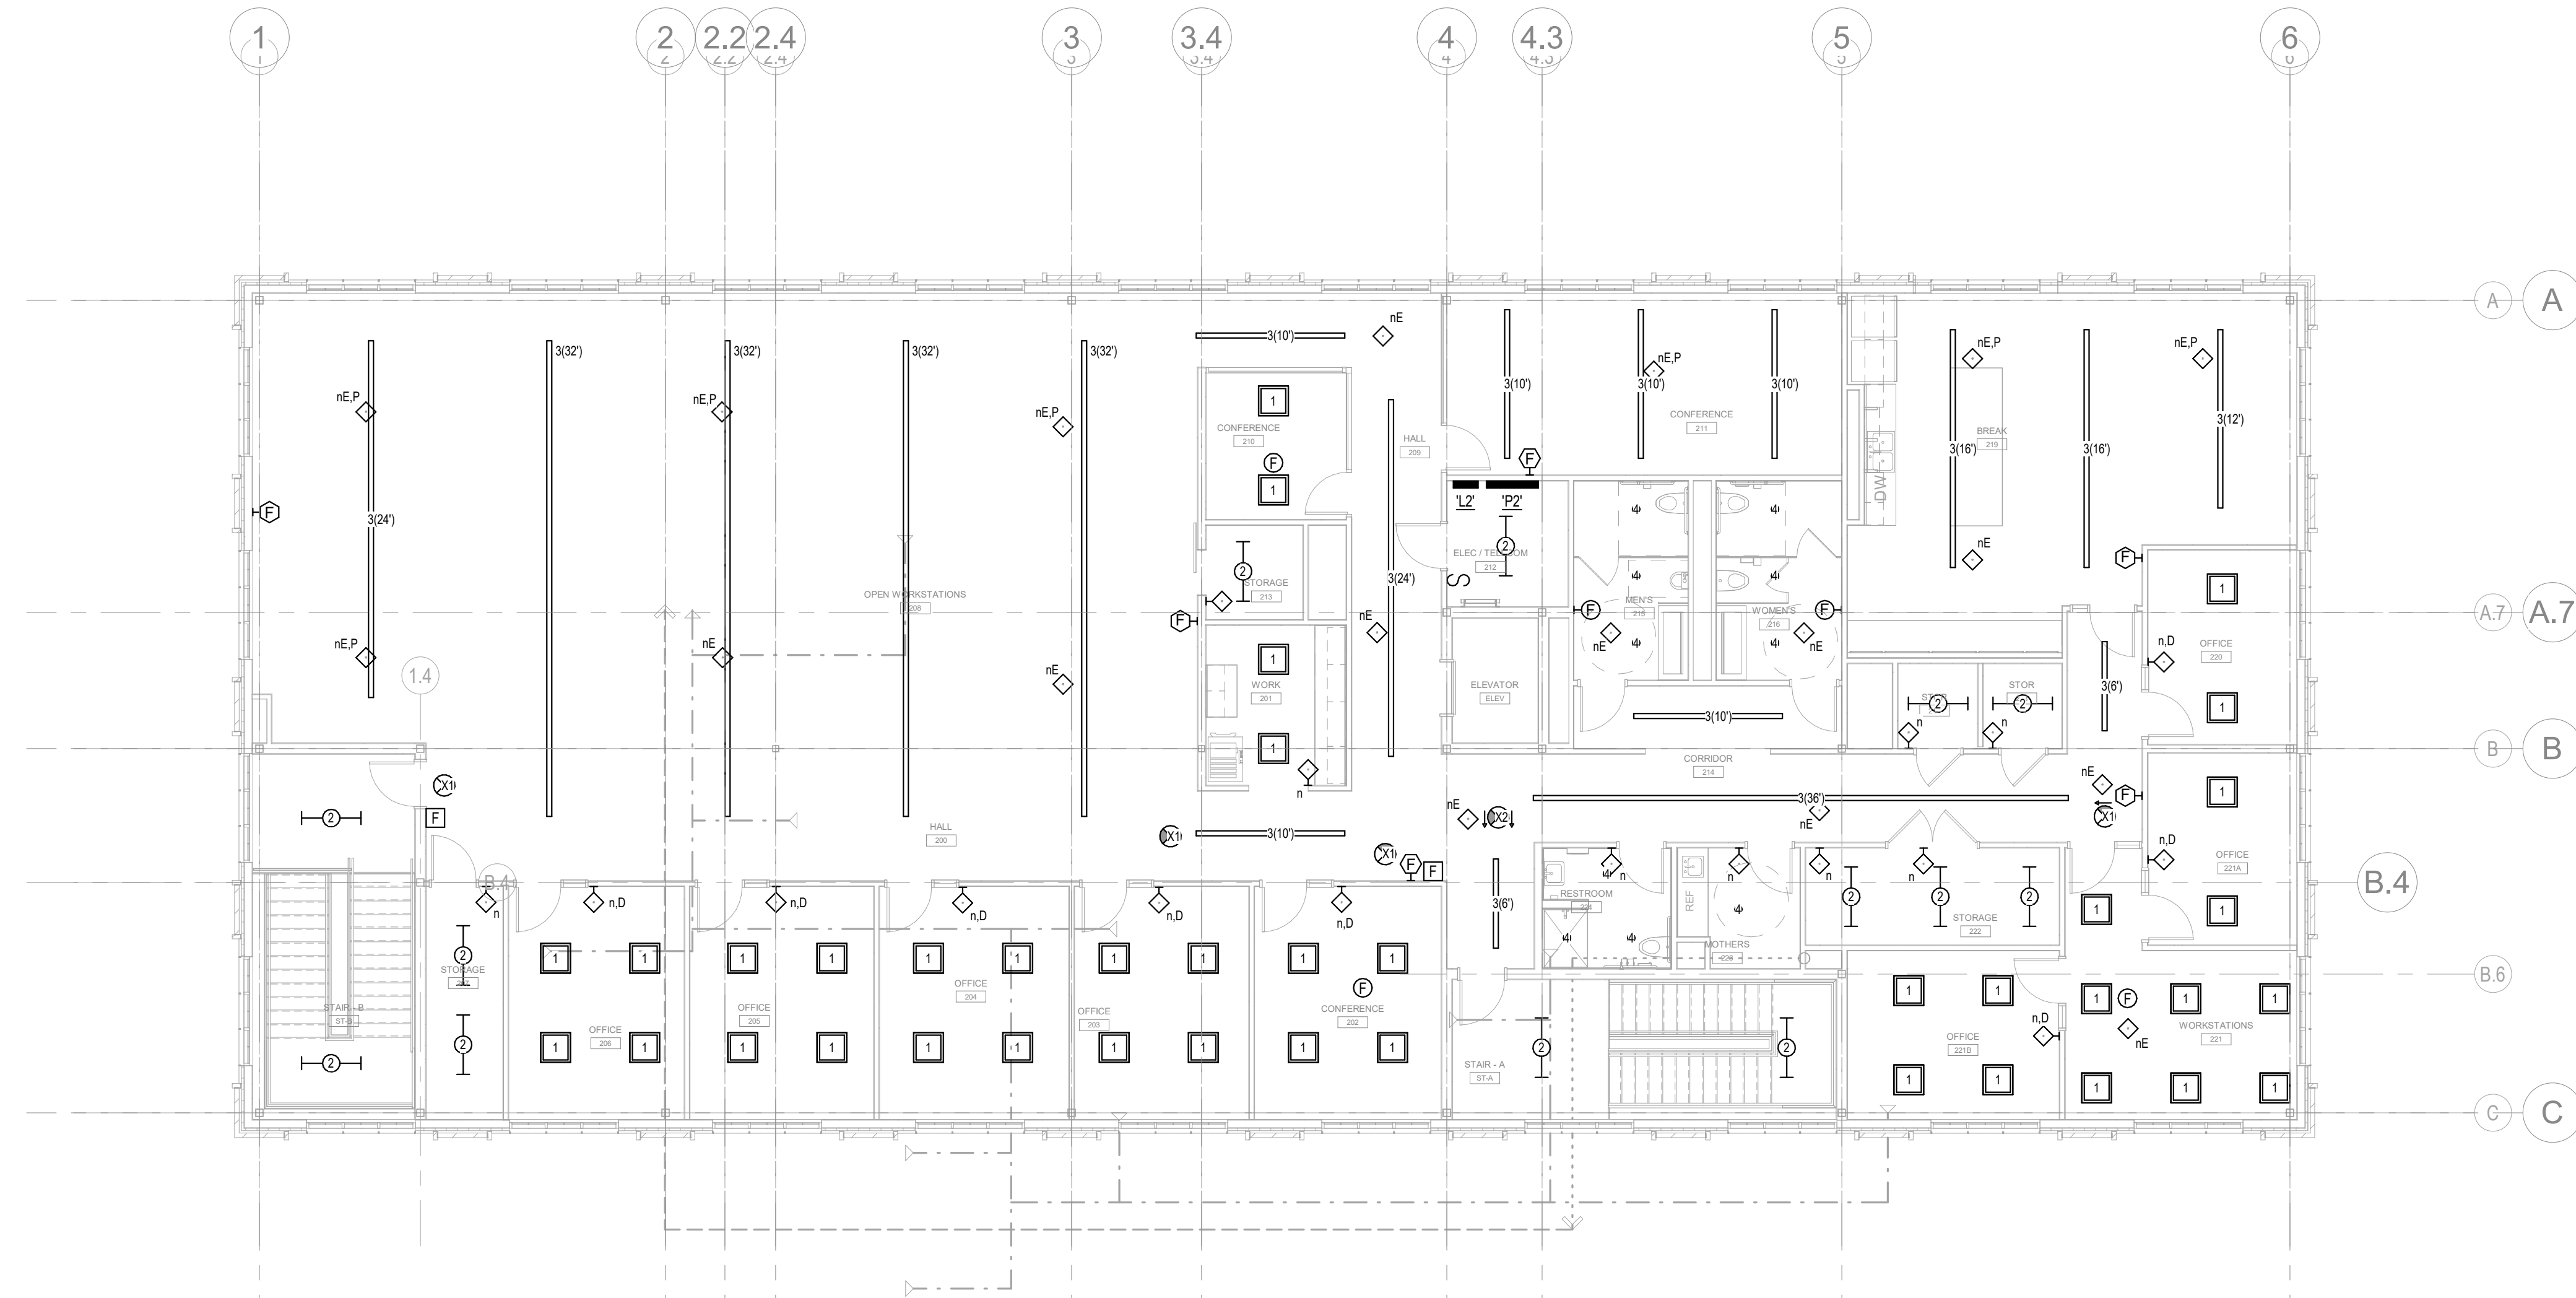

2 FLOOR PLAN - LEVEL 02 - LIGHTING
E1.1 SCALE: 1/8" = 1' - 0"

AGENCY APPROVAL

THESE ARE NOT THE FINAL BID DOCUMENTS - REFERENCE ONLY

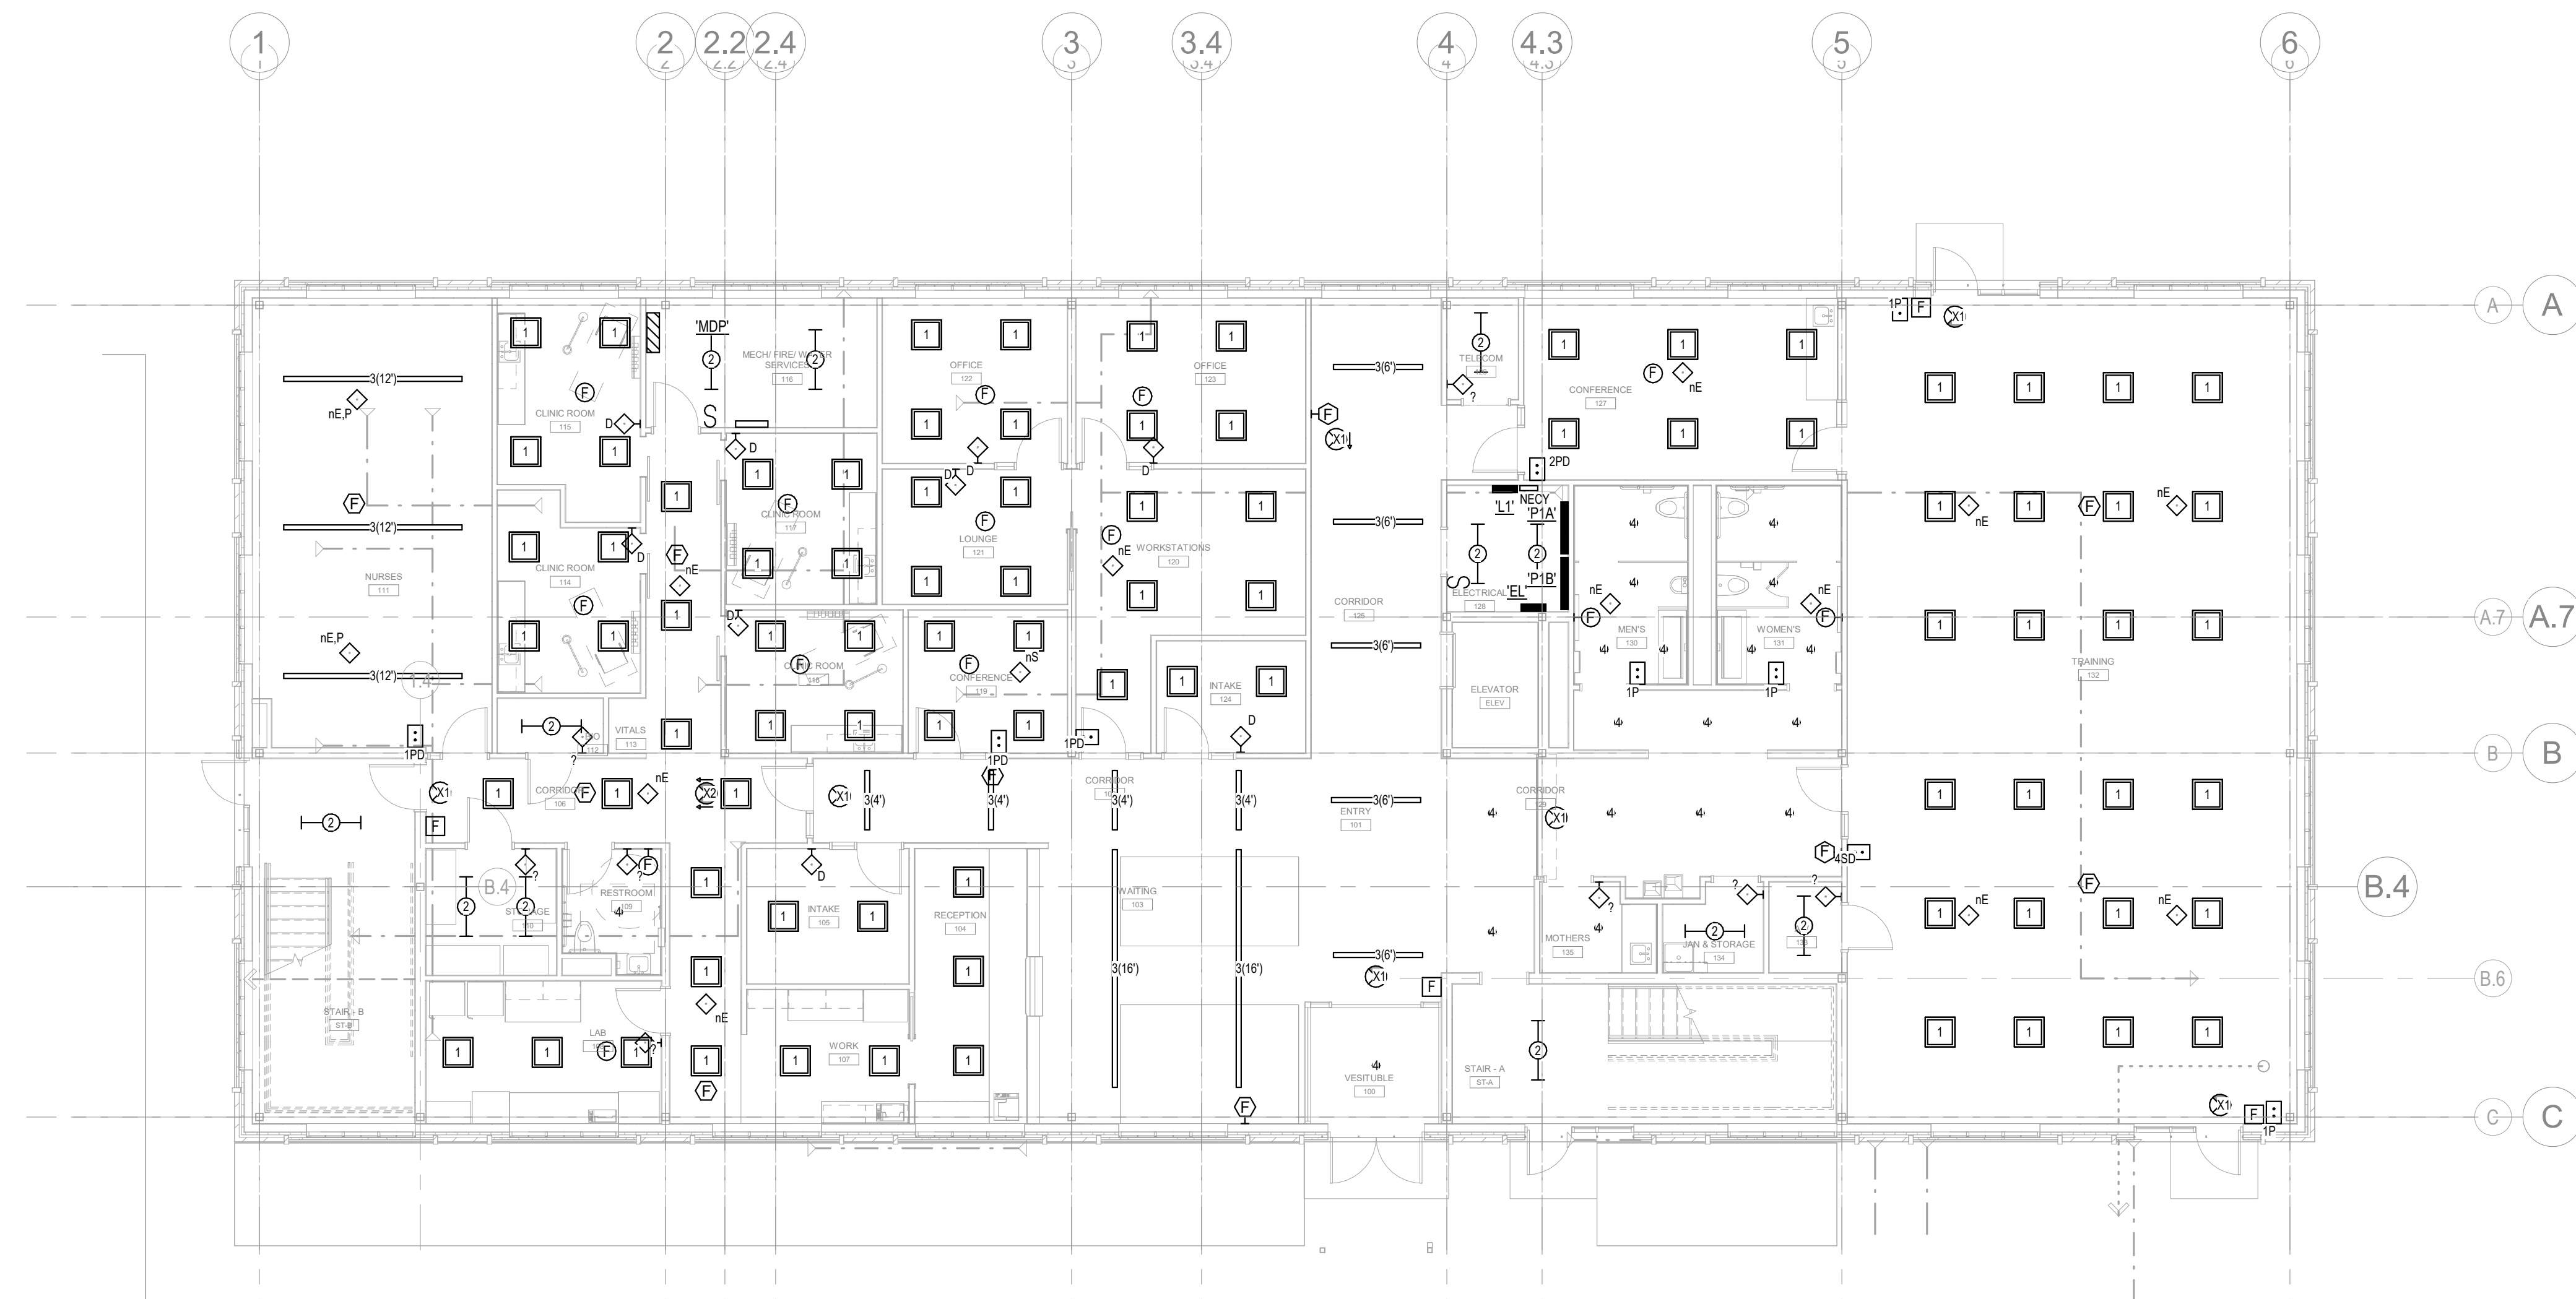

1 FLOOR PLAN - LEVEL 01 - LIGHTING
E1.1 SCALE: 1/8" = 1' - 0"

ALLEY POYNER
MACCHIETTO
ARCHITECTURE


REVISION	DATE
Project Number:	21064
Date:	MARCH 10, 2023
COPYRIGHT © 2022	

FLOOR PLANS - LIGHTING


E1.1

NOT FOR CONSTRUCTION

KEYNOTES

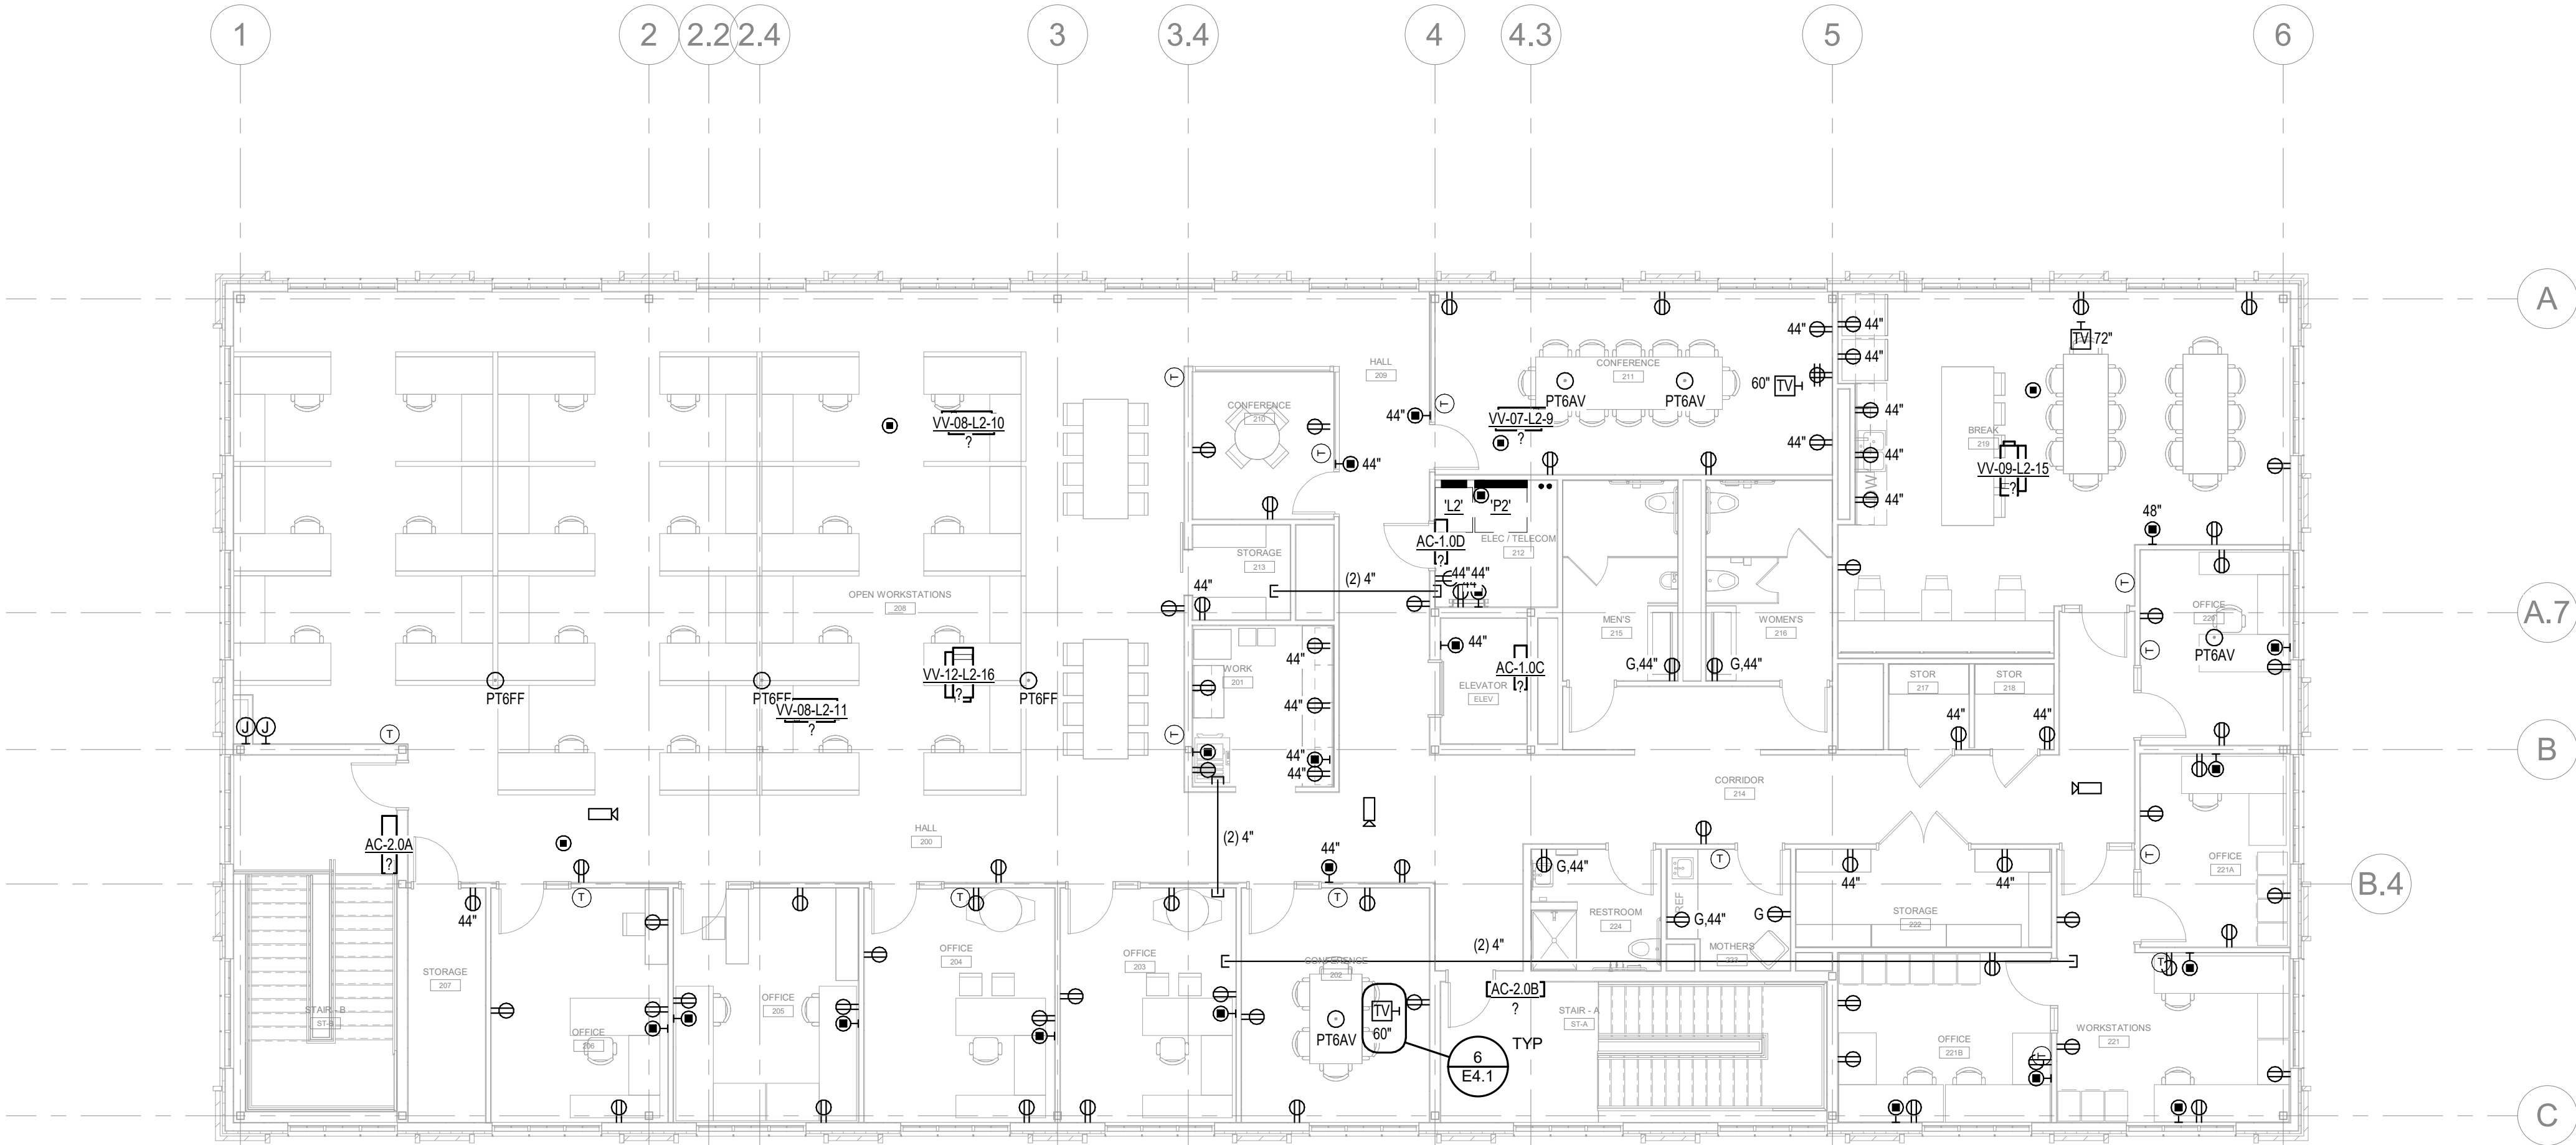

2 FLOOR PLAN - LEVEL 02 - POWER
E2.1 SCALE: 1/8" = 1'-0"

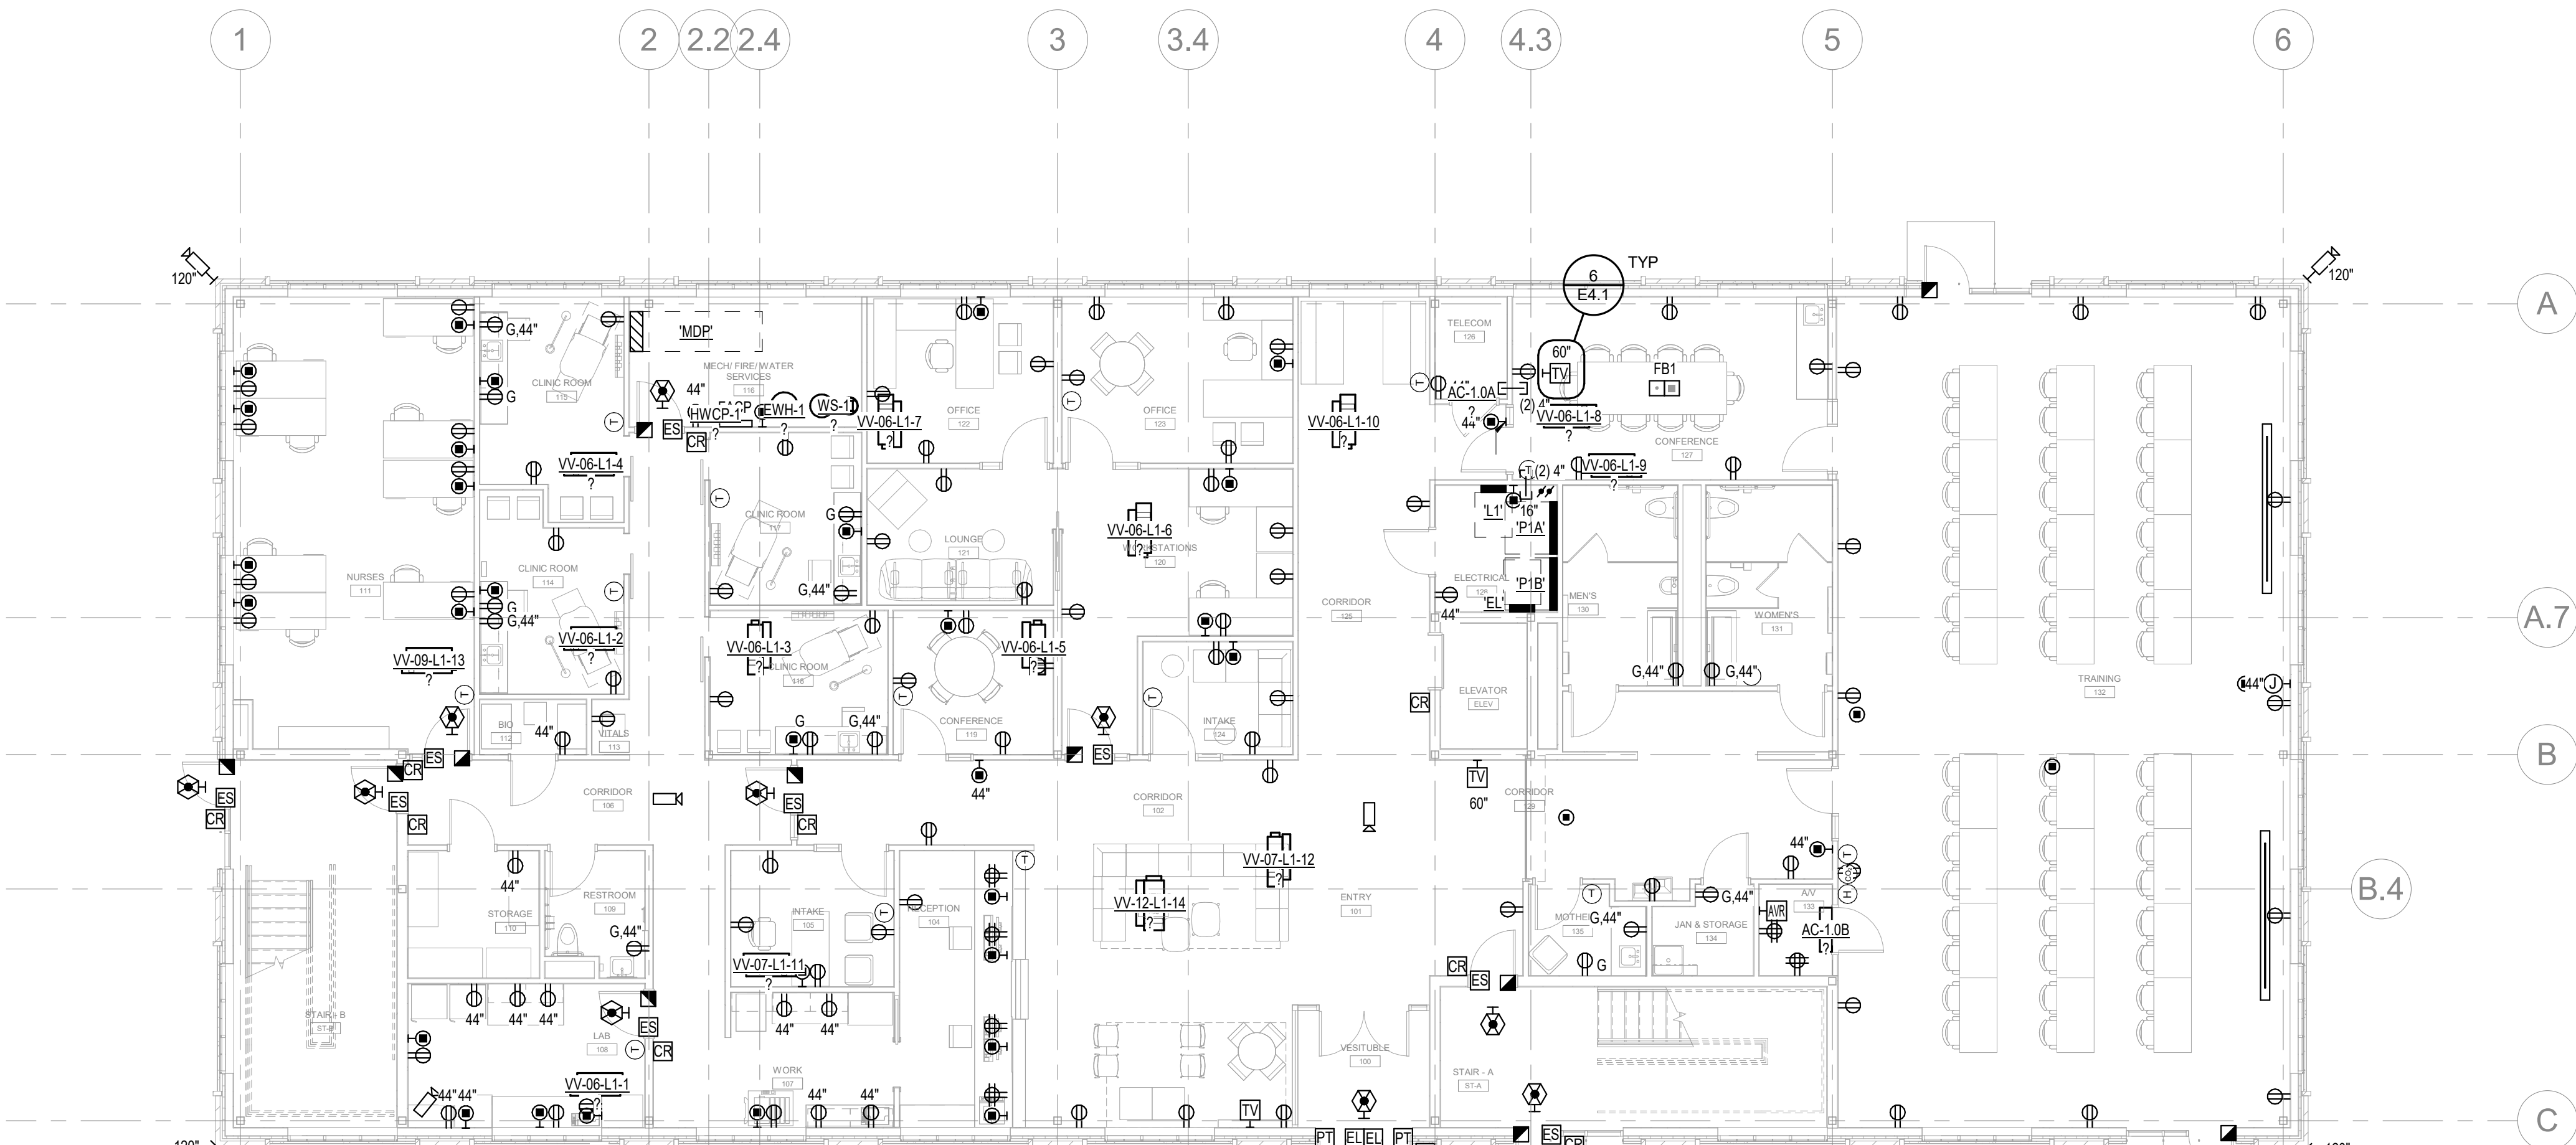

1 FLOOR PLAN - LEVEL 01 - POWER
E2.1 SCALE: 1/8" = 1'-0"

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE

REVISION	DATE
Project Number:	21064
Date:	MARCH 10, 2023
COPYRIGHT © 2022	

FLOOR PLANS - POWER

E2.1

NOT FOR CONSTRUCTION

3/10/2023 10:08:14 AM


THESE ARE NOT THE FINAL BID DOCUMENTS - REFERENCE ONLY

Pottawattamie
County Health
Building

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE

NOT FOR CONSTRUCTION

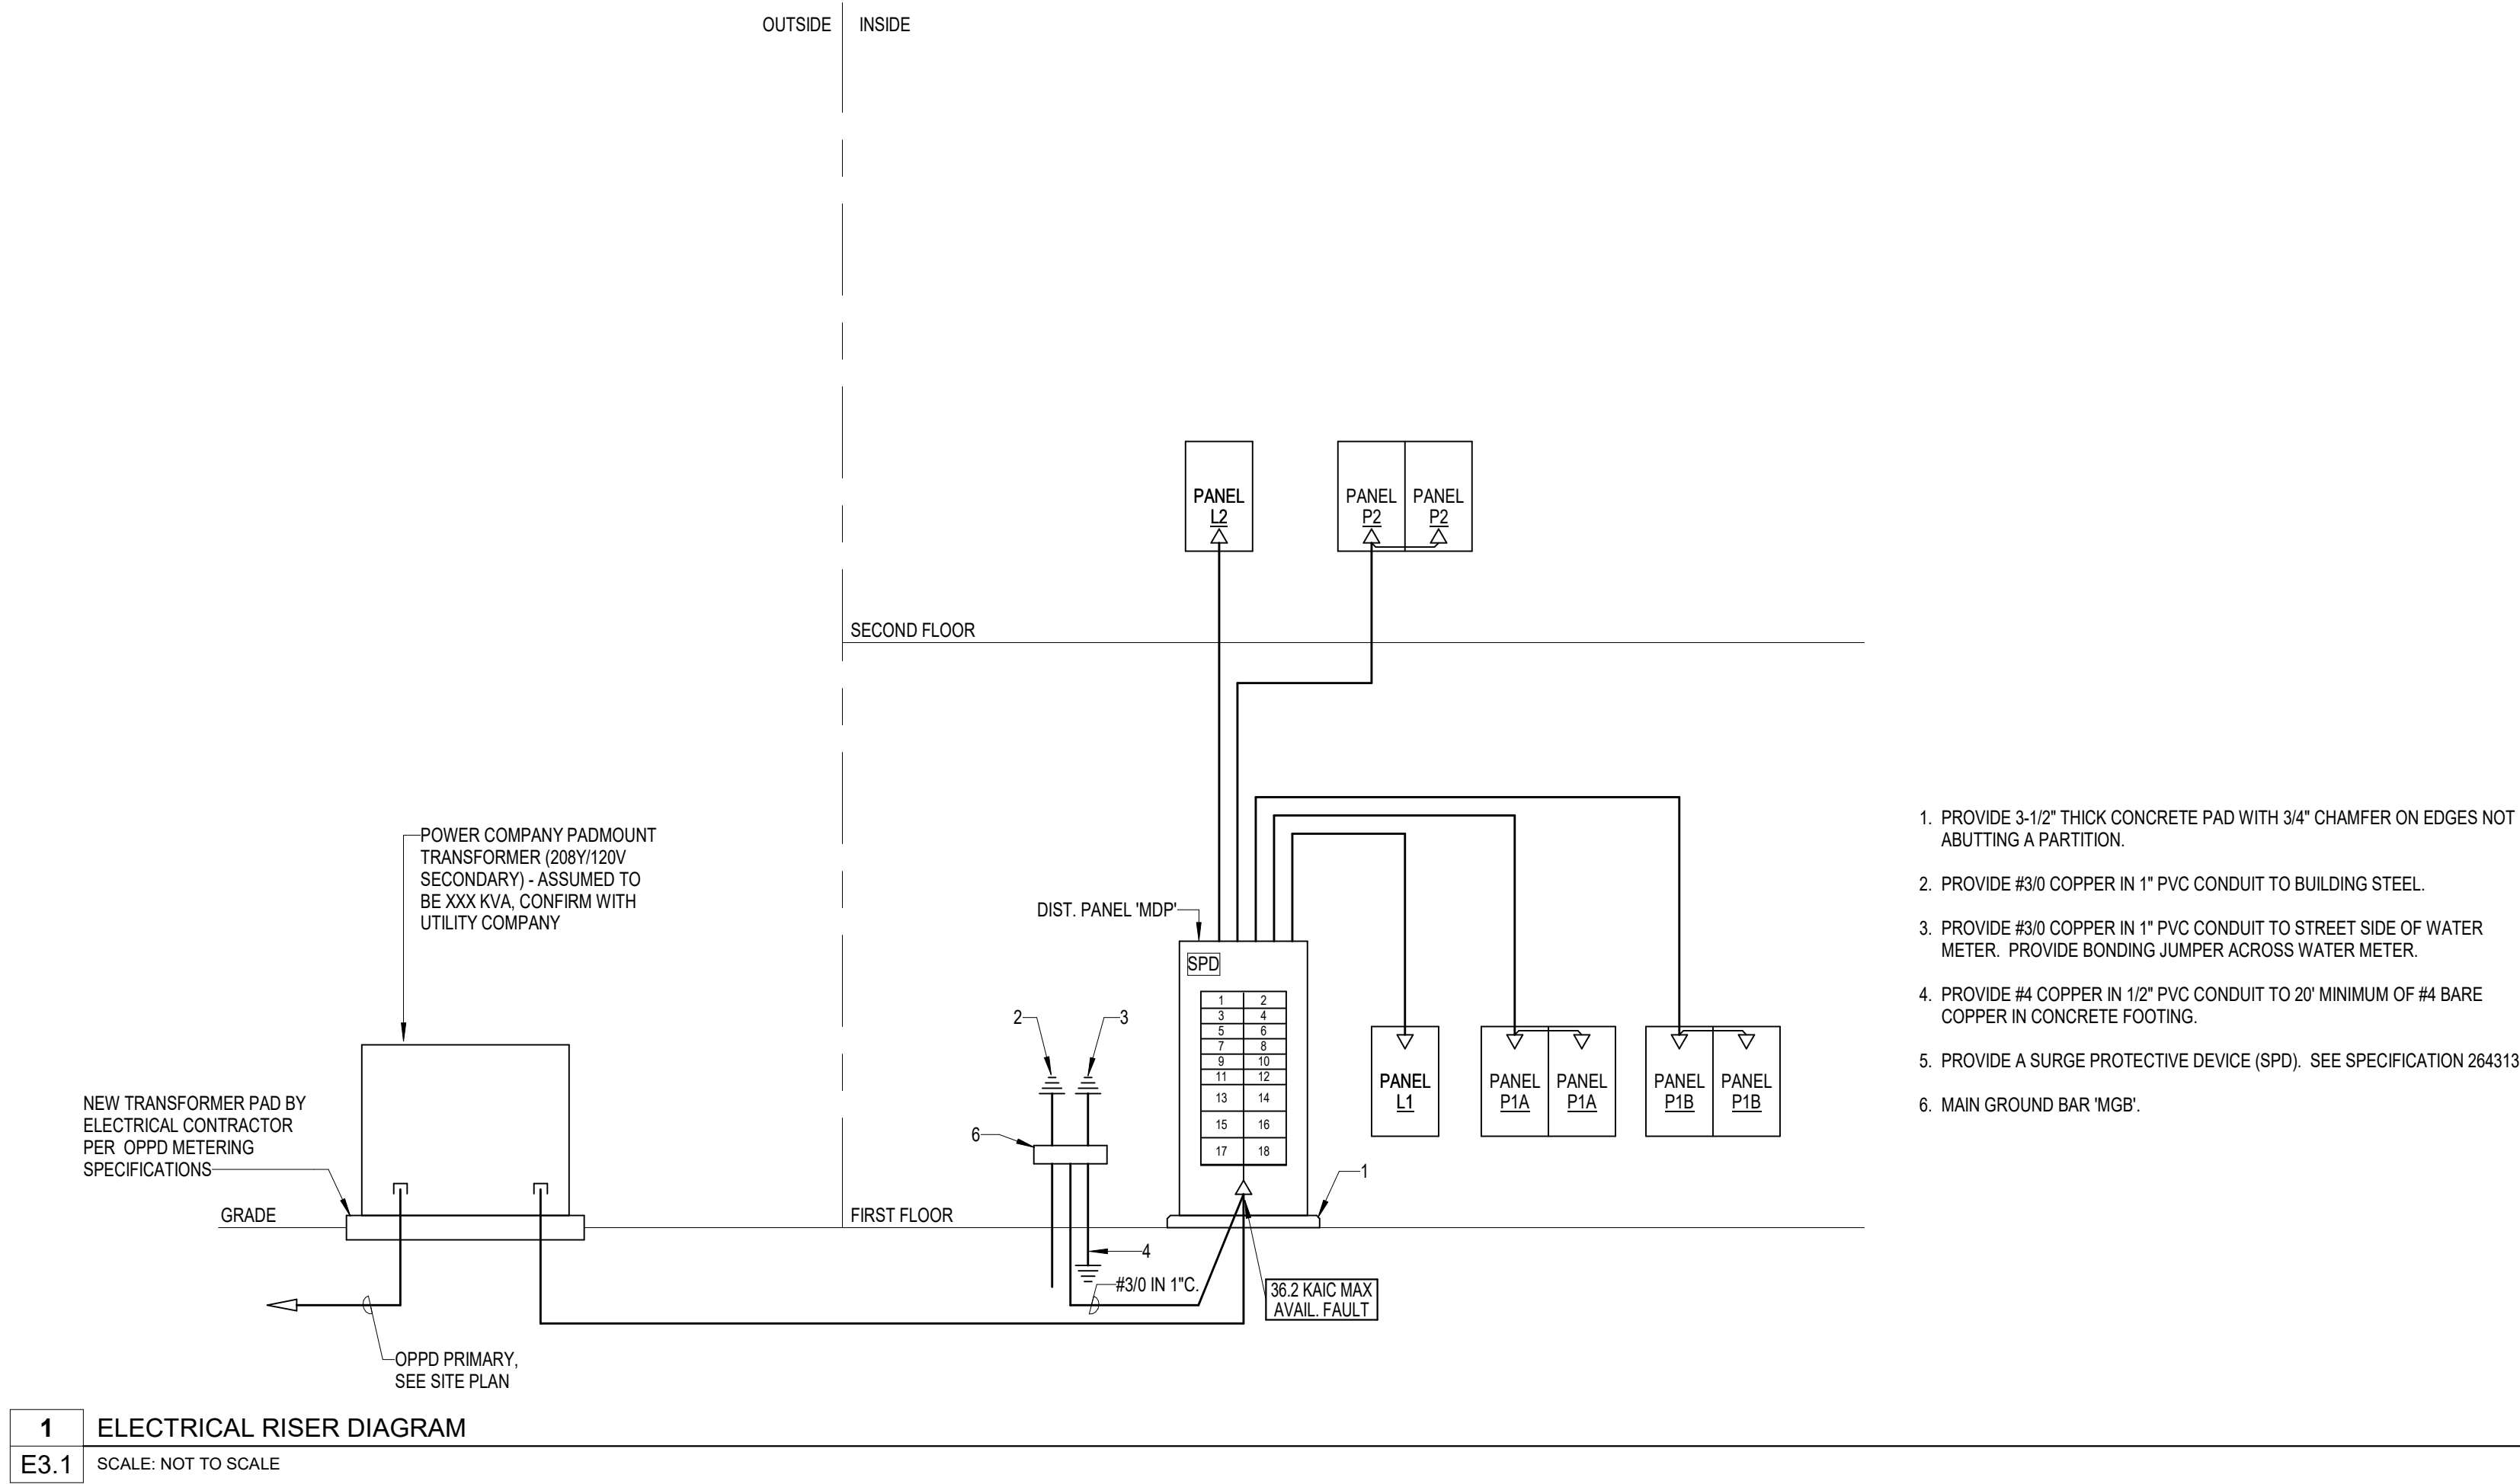

1 ELECTRICAL RISER DIAGRAM
E3.1
SCALE: NOT TO SCALE







REVISION	DATE
Project Number:	21064
Date:	MARCH 10, 2023

COPYRIGHT © 2022

ELECTRICAL RISER
DIAGRAM

E3.1

REVISION	DATE
Project Number:	21064
Date:	MARCH 10, 2023
COPYRIGHT © 2022	
ELECTRICAL DETAILS	

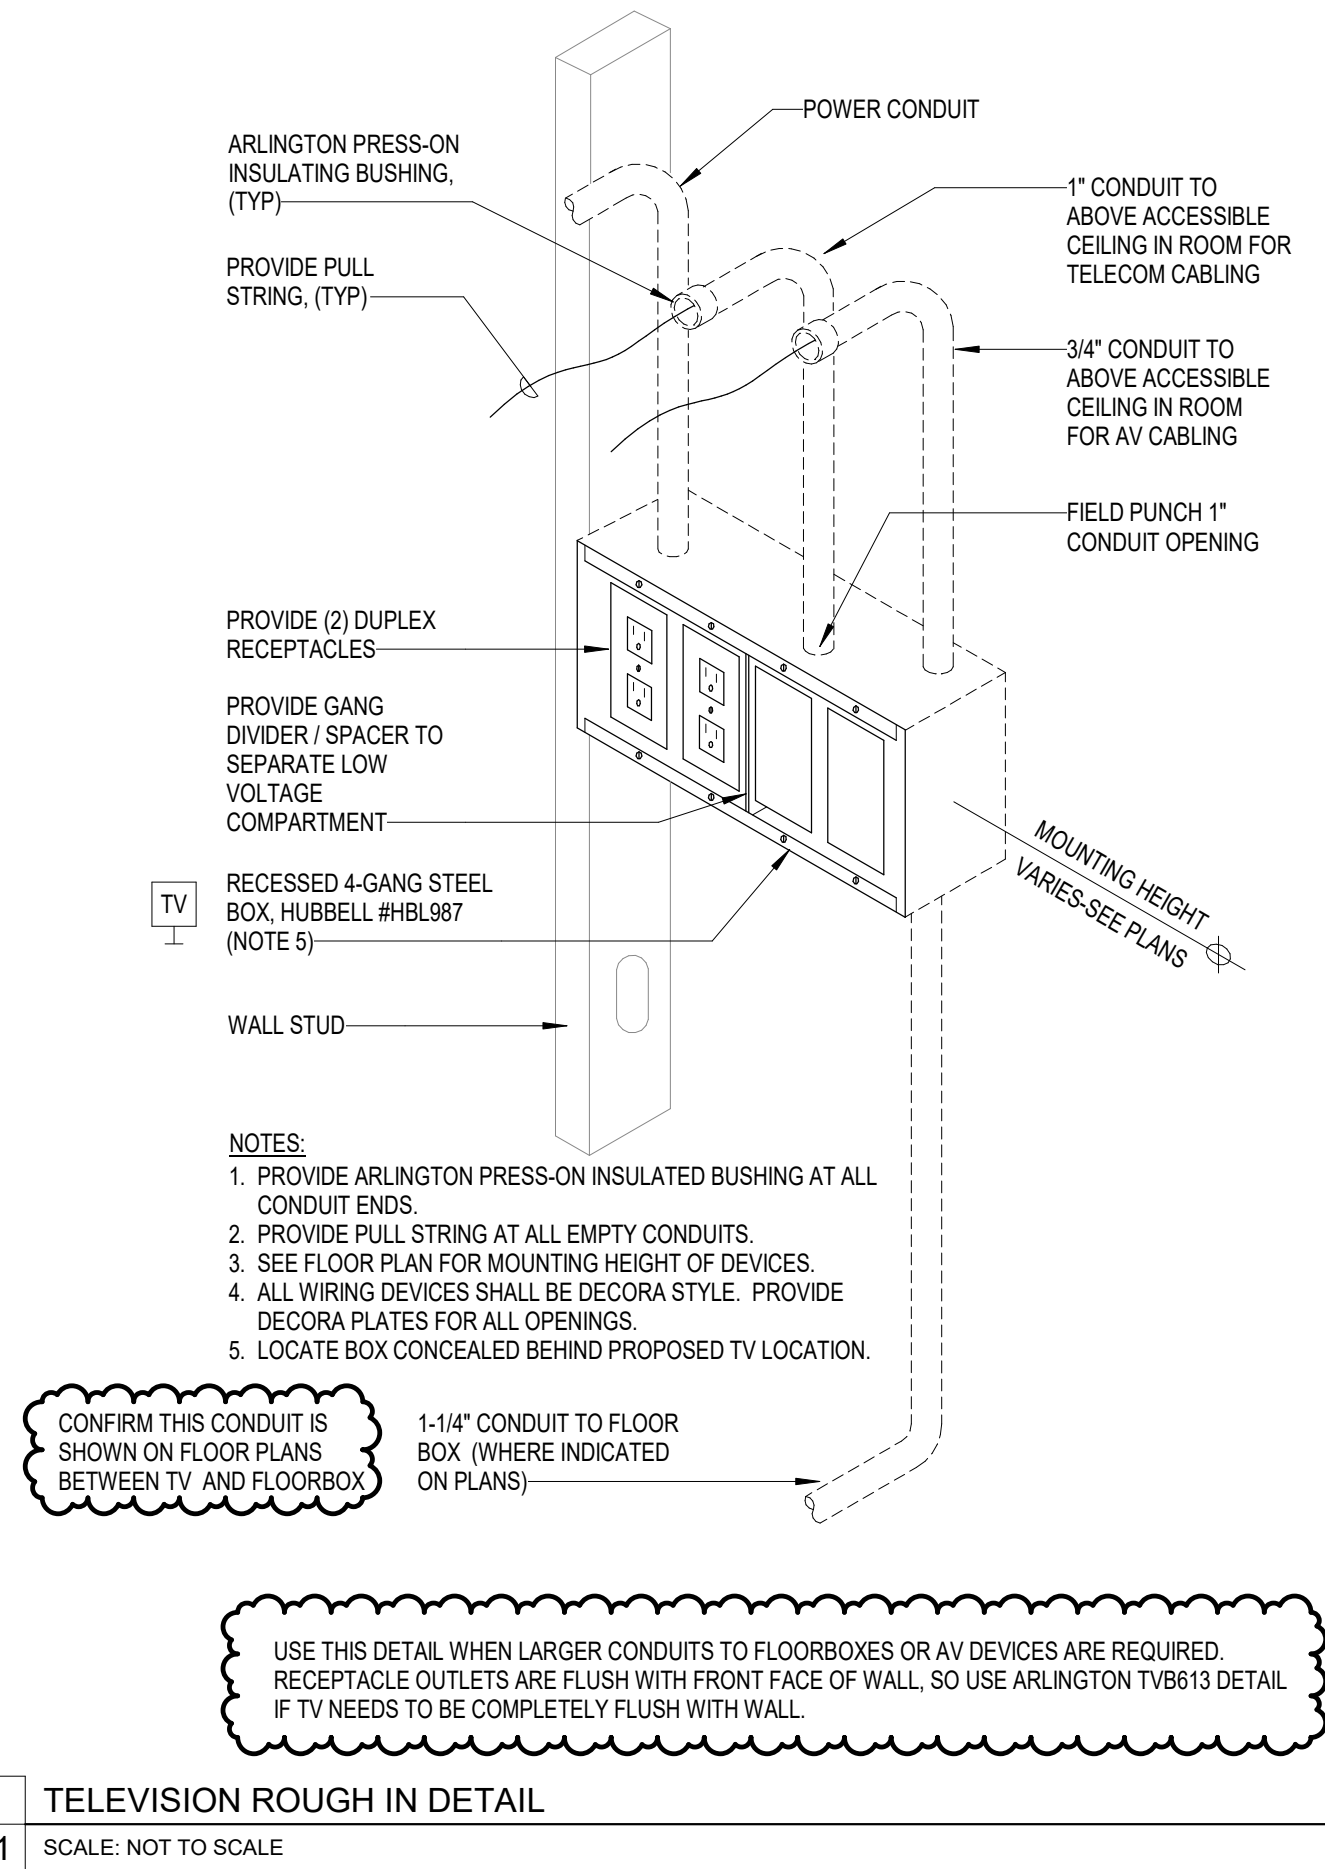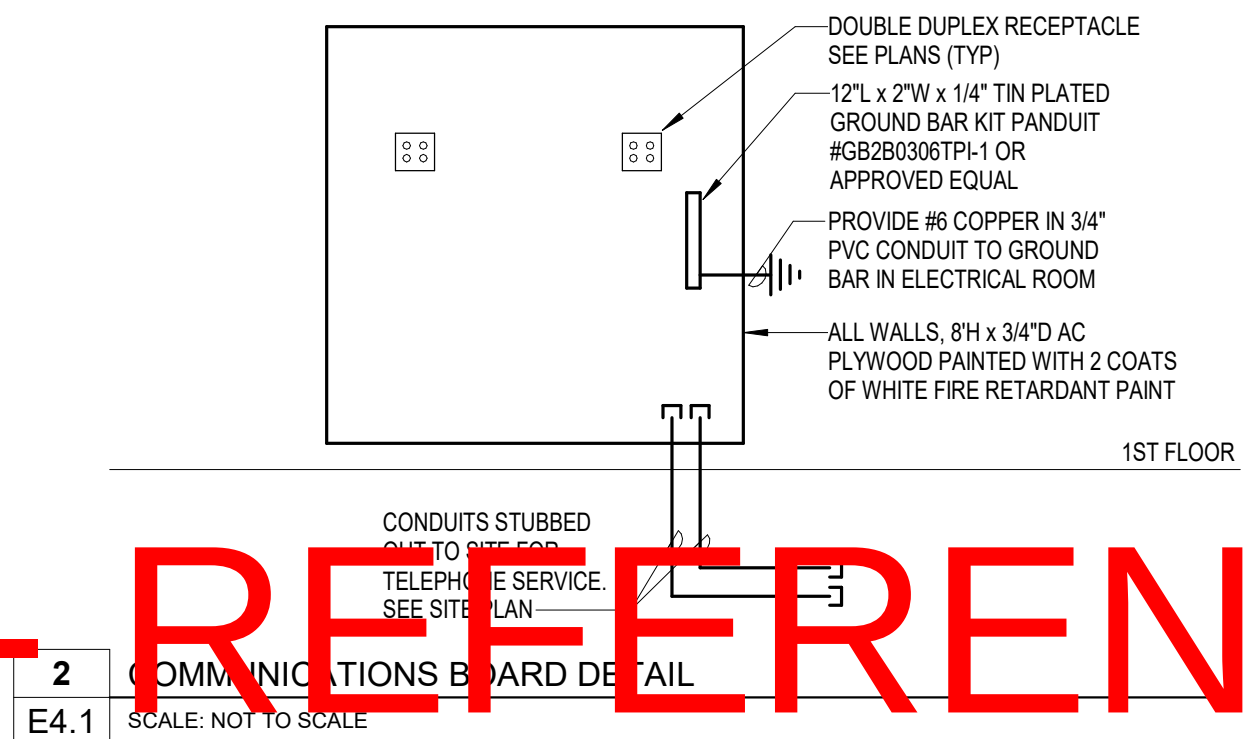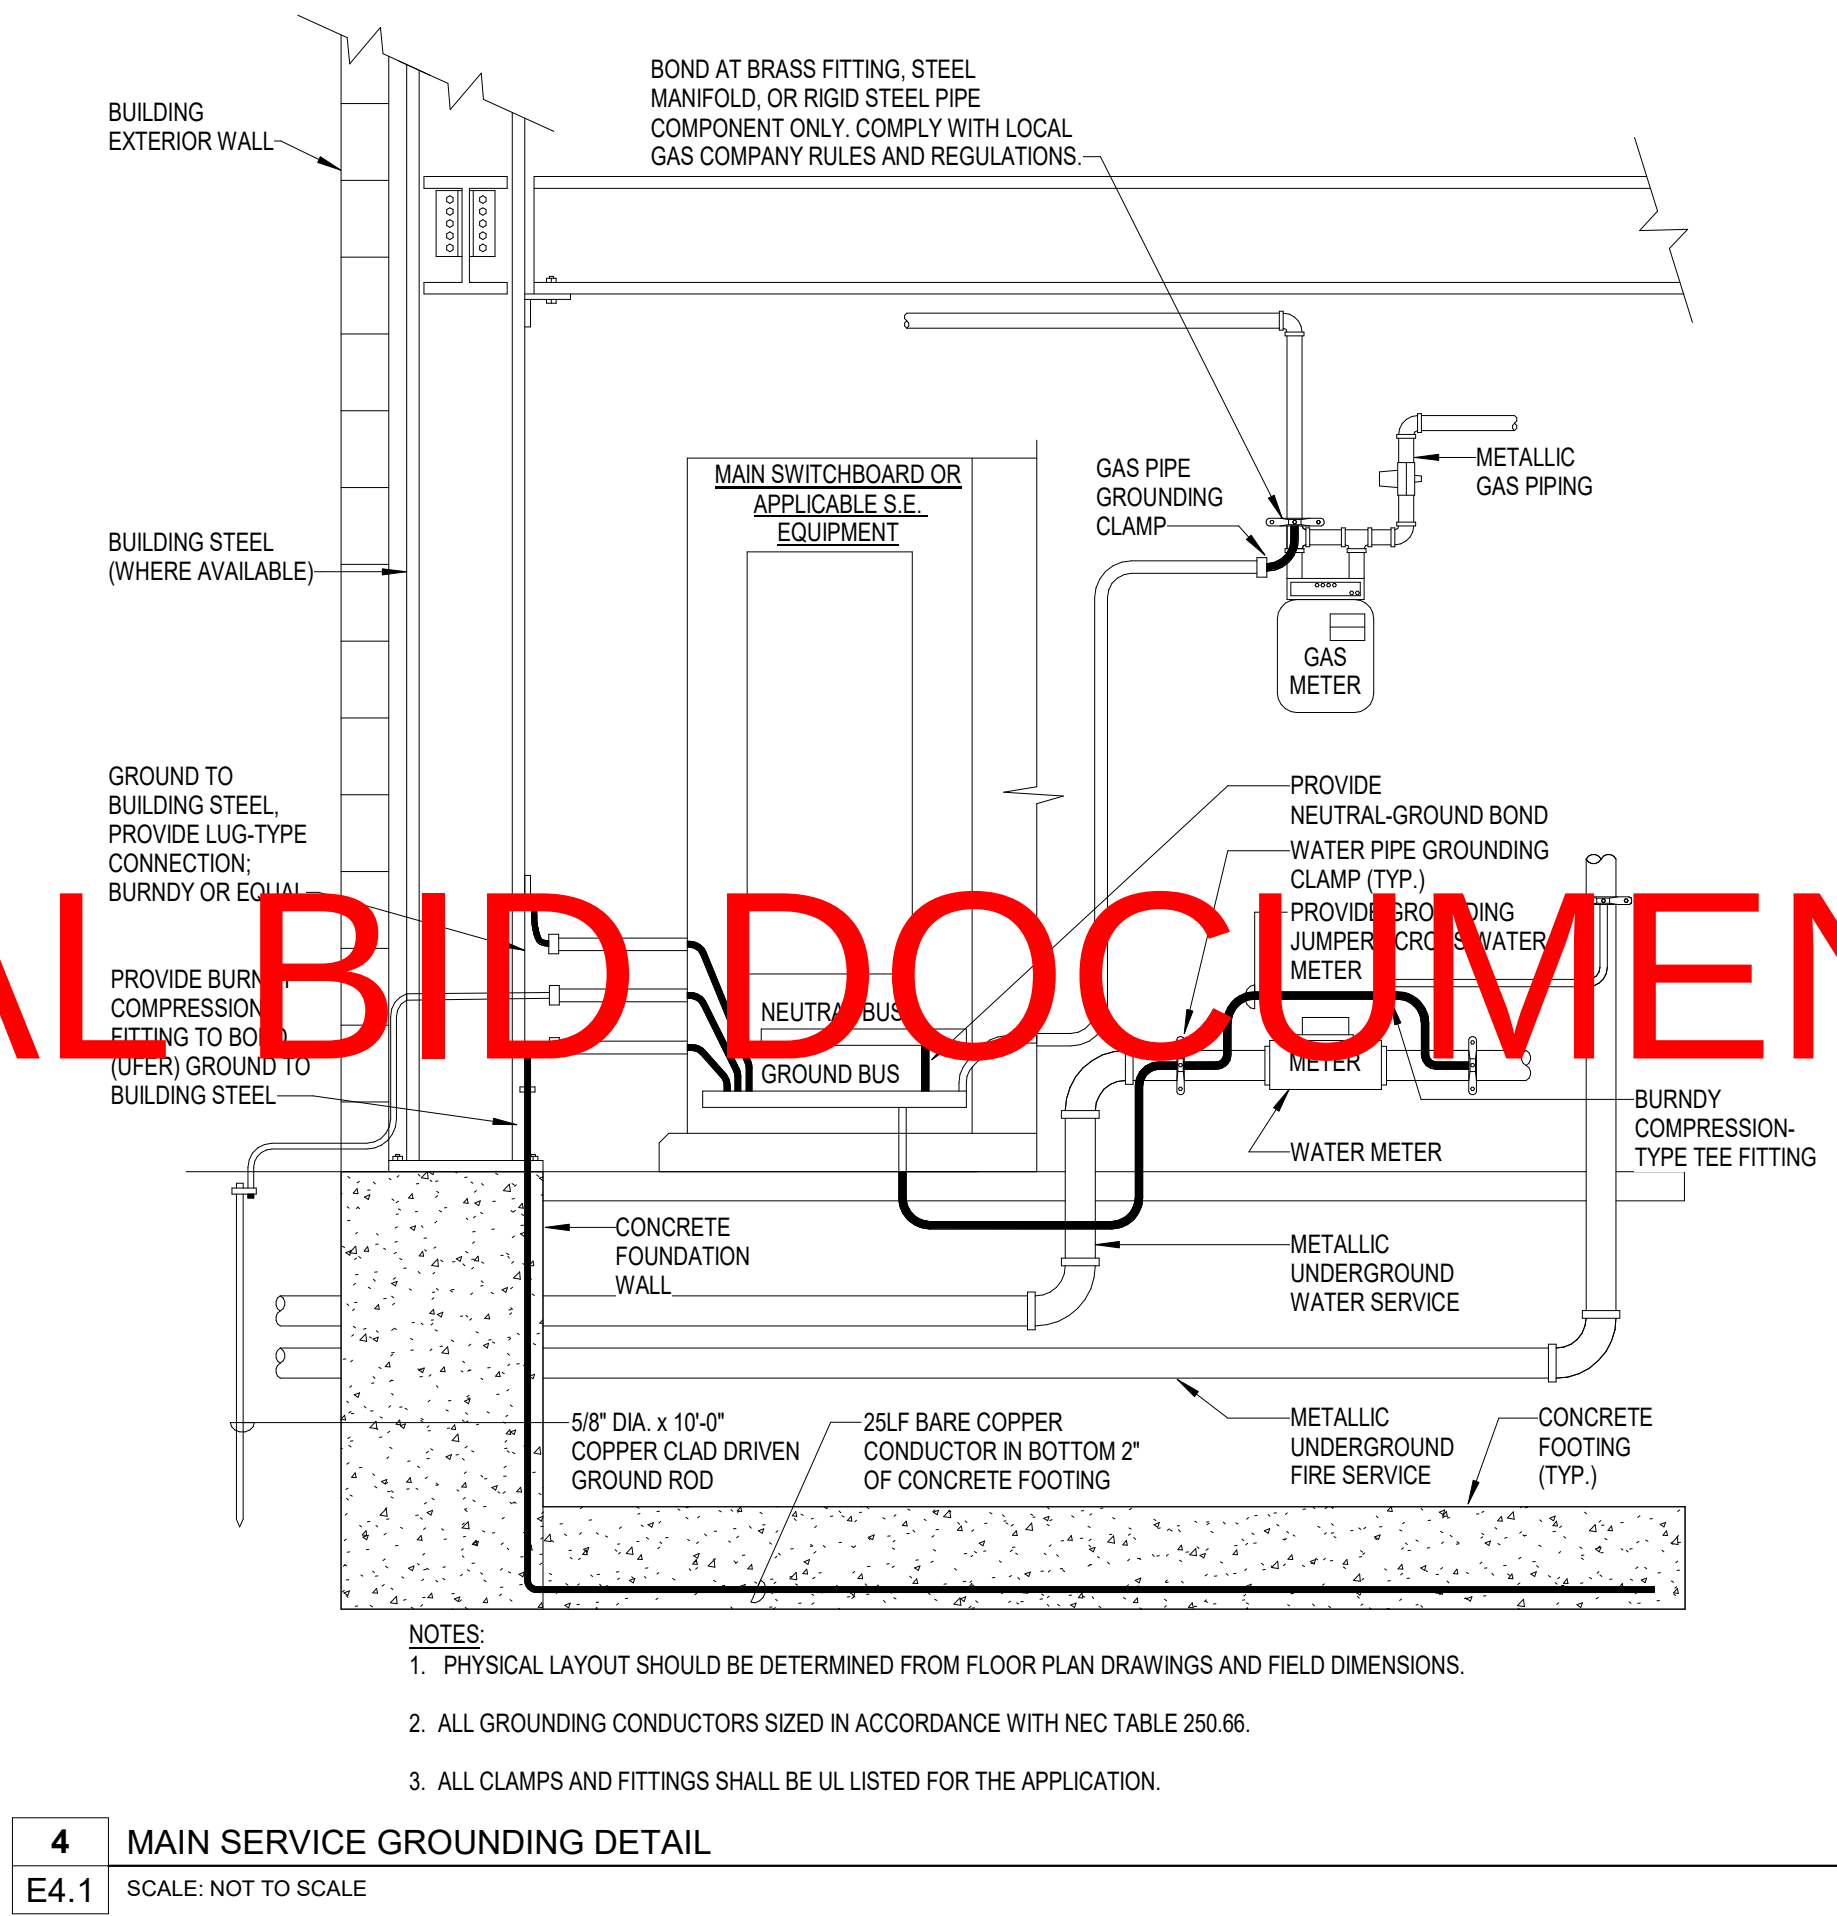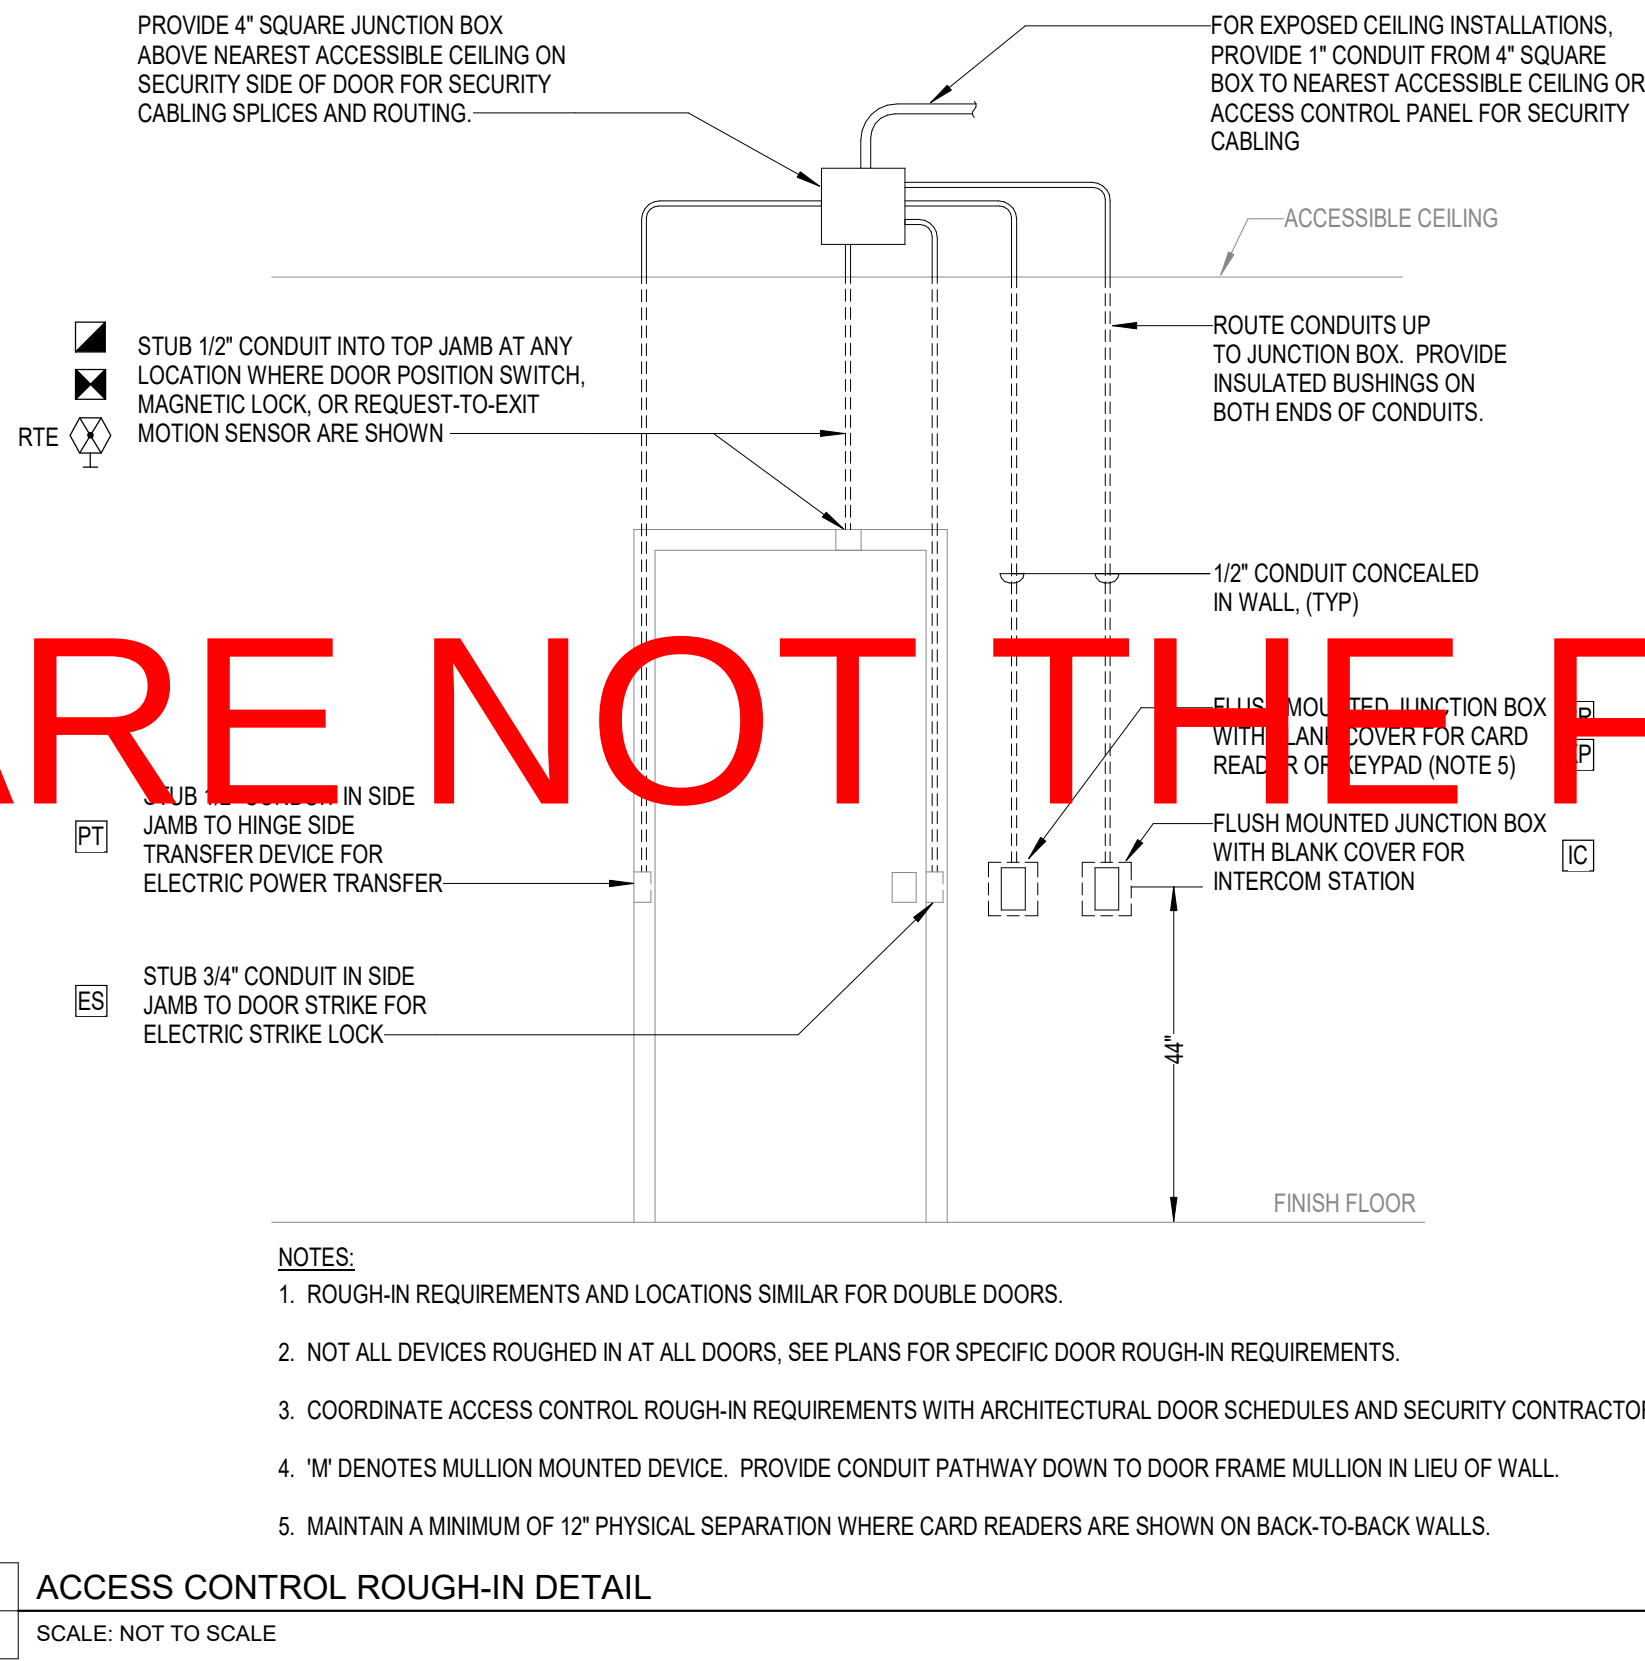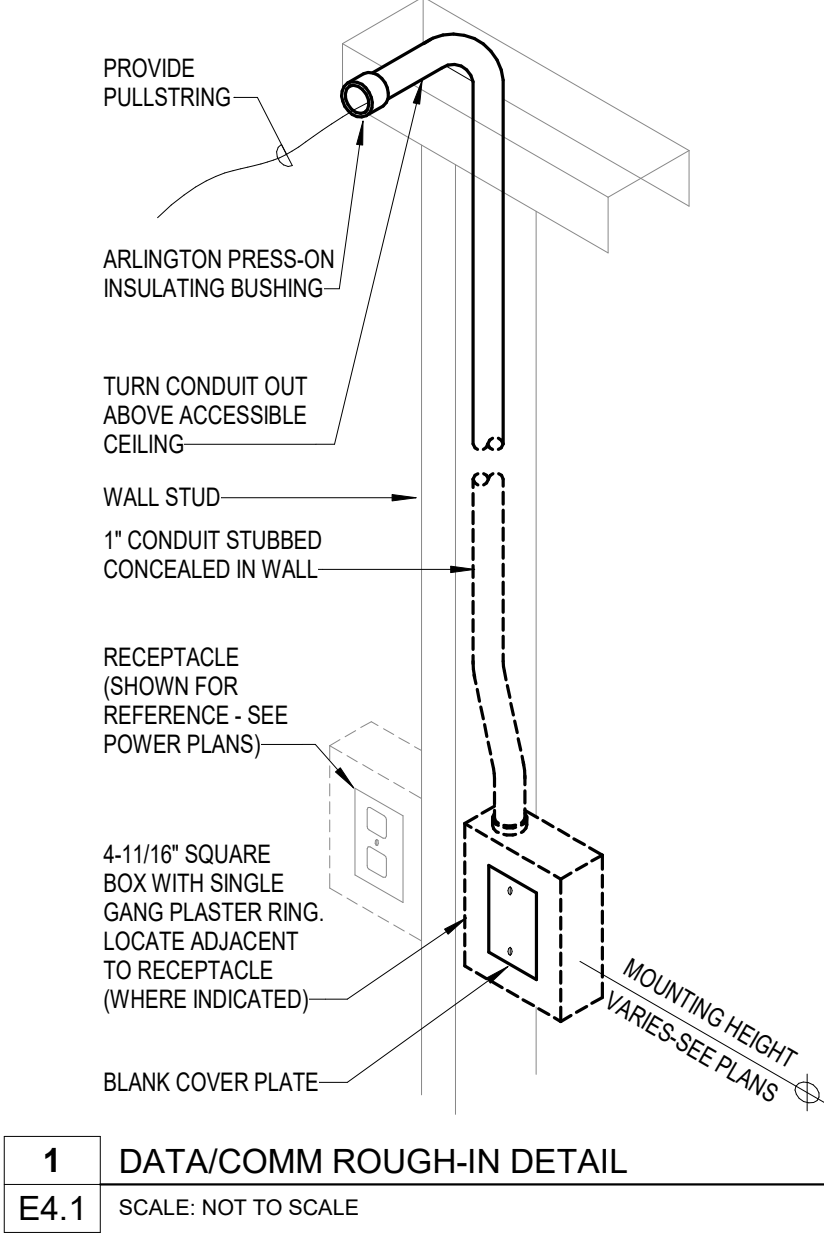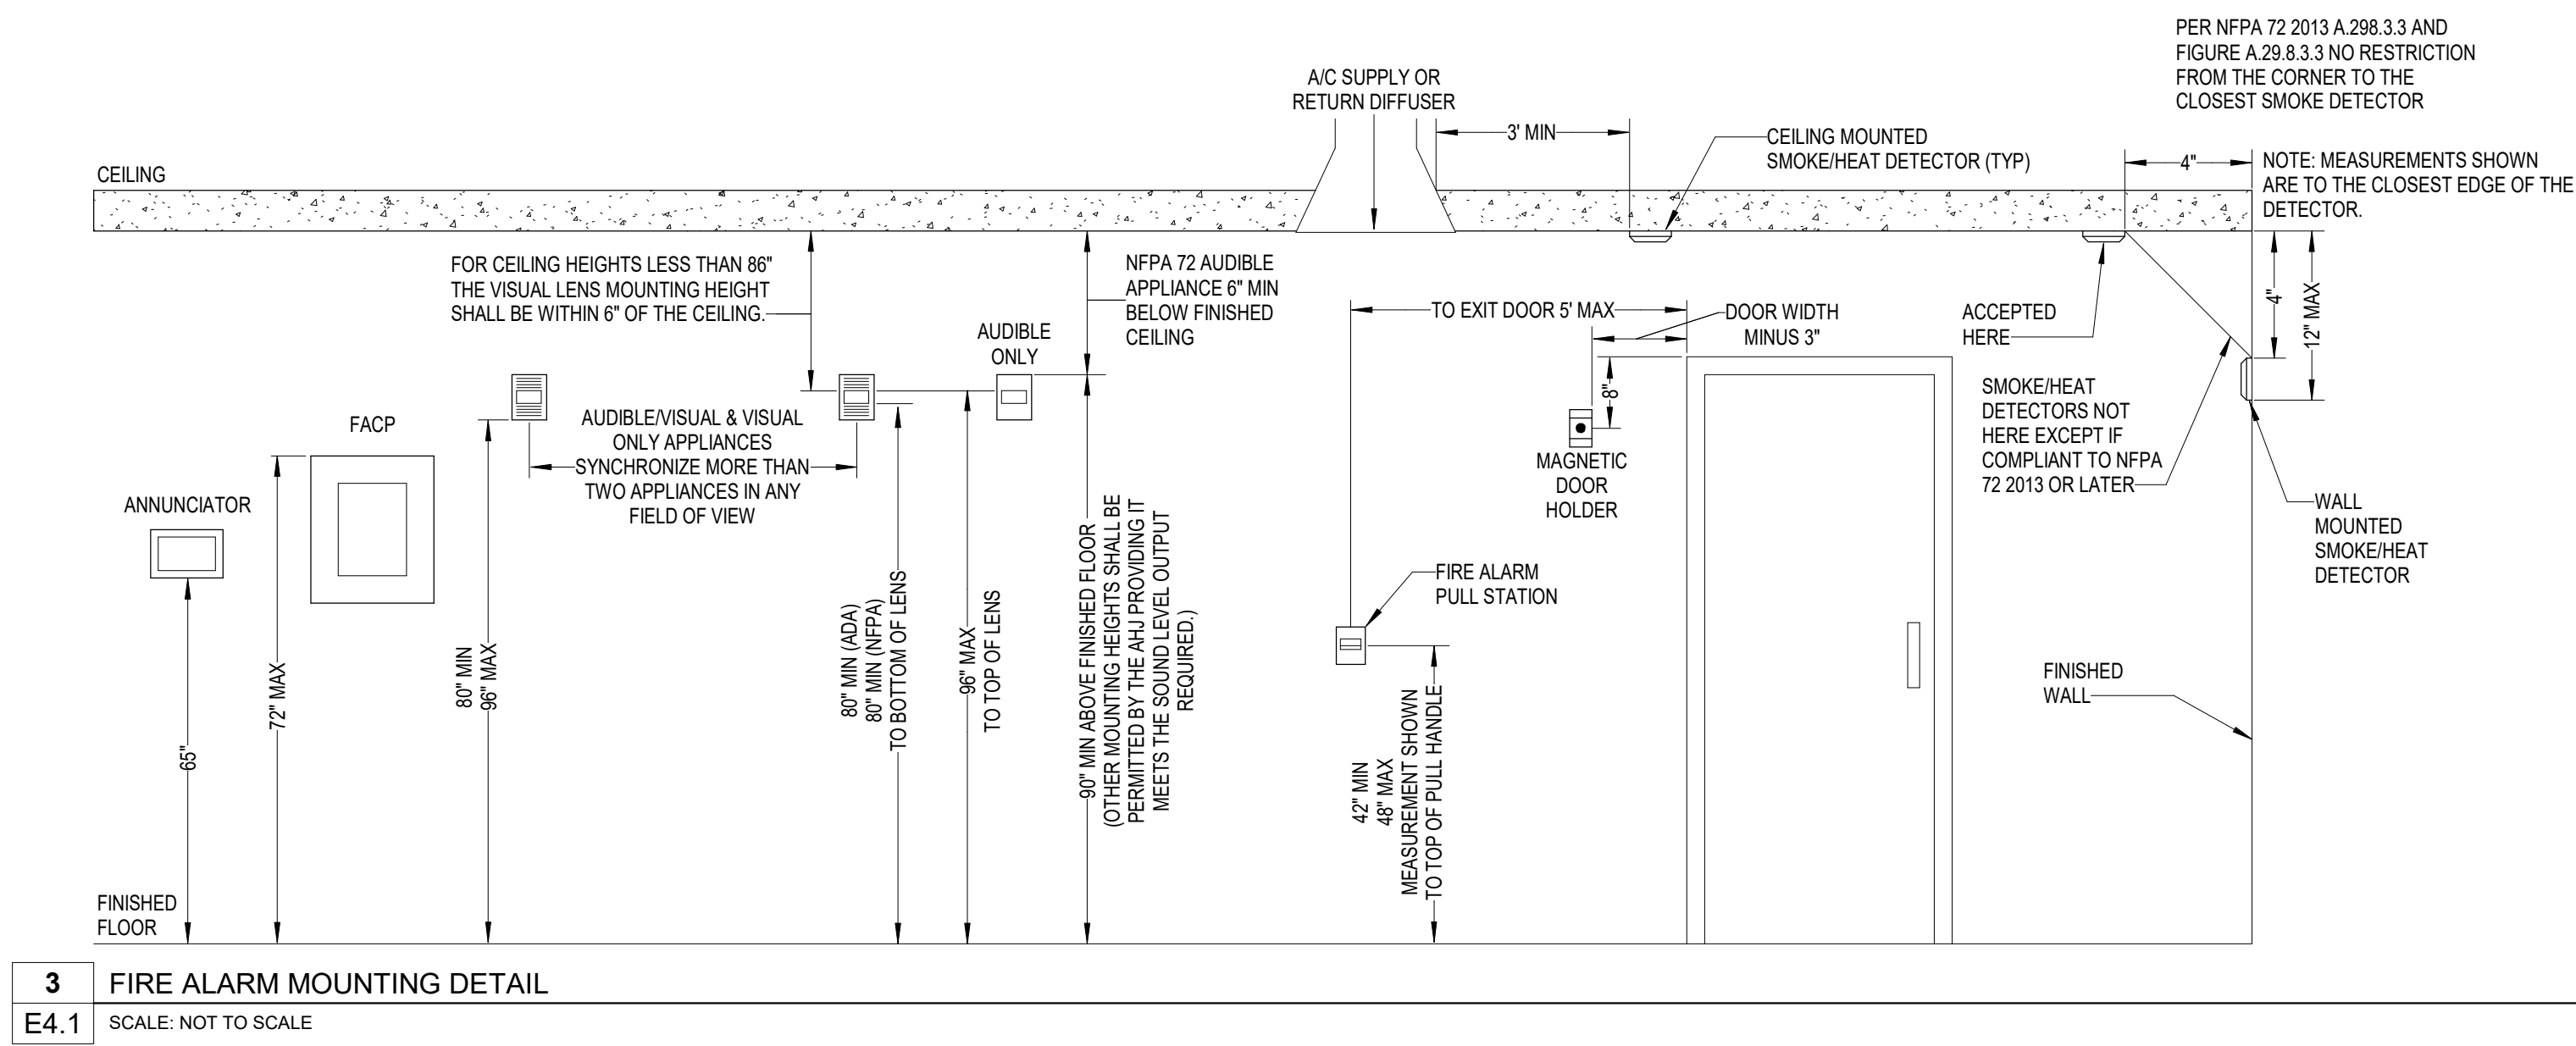

GENERAL REQUIREMENTS:

A. CONTRACTOR SHALL VERIFY CATALOG NUMBERS AND INSTALLATION REQUIREMENTS PRIOR TO ORDERING. NOTIFY ENGINEER OF ANY CONFLICTS WITH PROPOSED INSTALLATION.

B. CONTRACTOR SHALL COORDINATE CEILING TRIM OPTIONS FOR LUMINAIRES INSTALLED IN GRID-TYPE SUSPENDED CEILINGS. SEE ARCHITECTURAL DRAWINGS AND SPECIFICATIONS.

C. UNLESS NOTED OTHERWISE REFER TO PLANS FOR SUSPENSION LENGTHS REQUIRED FOR ALL SUSPENDED LUMINAIRES.

D. PROVIDE EQUAL SECTION LENGTHS FOR LUMINAIRES COMPRISED OF MULTIPLE SECTIONS. SUBMIT SHOP DRAWINGS OF PROPOSED CONFIGURATIONS FOR REVIEW.

E. PROVIDE [##] SPARE EXIT SIGNS FOR PROJECT. EXIT SIGN LOCATIONS AND MOUNTING REQUIREMENTS TO BE FIELD COORDINATED AS DIRECTED BY AIAJ.

LUMINAIRE SCHEDULE NOTES:

1. LUMINAIRE SHALL BE CONSIDERED EQUAL AS MANUFACTURED BY: ACUITY BRANDS, COOPER, CURRENT, SIGNIFY, CREE LIGHTING.

2. LUMINAIRE SHALL BE CONSIDERED EQUAL AS MANUFACTURED BY: GOTHAM, PORTFOLIO, PRESOLITE, PATHWAY LIGHTING.

3. LUMINAIRE SHALL BE CONSIDERED EQUAL AS MANUFACTURED BY: FOCAL POINT, LUMINERX, AXIS.

4. REFER TO PLANS FOR MOUNTING REQUIREMENTS SUCH AS WALL MOUNT, END MOUNT, CEILING MOUNT AND PROVIDE LUMINAIRES ACCORDINGLY. PROVIDE DIRECTIONAL CHEVRON ARROWS AS INDICATED ON PLANS.

5. PROVIDE 1 CIRCUIT SWAYAL TRACK. REFER TO PLANS FOR TRACK LENGTHS AND CONFIGURATIONS REQUIRED. PROVIDE ALL NECESSARY POWER FEEDS AND SYSTEM CONNECTORS REQUIRED FOR A COMPLETE AND OPERABLE TRACK LIGHTING SYSTEM. FINISH OF ALL COMPONENTS SHALL MATCH SPECIFIED LUMINAIRE FINISH.

6. REFER TO PLANS FOR RUN LENGTHS AND CONFIGURATIONS REQUIRED. LUMINAIRE SHALL BE CONTINUOUS FOR ENTIRE LENGTHS OF WALLS WITH ILLUMINATED SLIDING SLEEVES AND CORNERS. PRIOR TO ORDERING CONTRACTOR SHALL VERIFY WALL DIMENSIONS. REFER TO TYPICAL PERIMETER LUMINAIRE DETAIL FOR ADDITIONAL REQUIREMENTS.

7. REFER TO PLANS FOR LUMINAIRE LENGTHS AND CONFIGURATIONS REQUIRED. PROVIDE WITH MOUNTING CHANNEL AND LENS CONTINUOUS FOR RUN LENGTH. 0-10V DIMMING REMOTE POWER SUPPLIES SIZED PER MANUFACTURER'S RECOMMENDATIONS, AND ALL OTHER ACCESSORIES REQUIRED FOR COMPLETE AND OPERABLE INSTALLATION. COORDINATE REQUIRED WIRE SIZE WITH MANUFACTURER FROM LUMINAIRE TO POWER SUPPLY.

8. SPECIFIED LUMINAIRE IS PART OF AN INTEGRATED CEILING SYSTEM - SEE ARCHITECTURAL DRAWINGS AND SPECIFICATIONS FOR MORE INFORMATION. COORDINATE SUBMITTALS AND INSTALLATION WITH OTHER TRADES.

GENERAL REQUIREMENTS:

1. CONTRACTOR SHALL VERIFY CATALOG NUMBERS AND INSTALLATION REQUIREMENTS PRIOR TO ORDERING. NOTIFY ENGINEER OF ANY CONFLICTS WITH PROPOSED INSTALLATION.
2. INSTALL PER MANUFACTURER'S INSTRUCTIONS.
3. CONFIRM FINAL LOCATION WITH ARCHITECT AND OWNER PRIOR TO PURCHASING.
4. VERIFY FINISH AND FLOORING TYPE PRIOR TO ORDERING.
5. PREPARE SLEEVES IN PLACE OF CORE DRILLING/SAW CUTTING IF LOCATIONS ARE DETERMINED PRIOR TO POURING THE FLOOR.

FLOORBOX SCHEDULE NOTES:

1. FLOORBOX SHALL BE CONSIDERED EQUAL AS MANUFACTURED BY: WIREMOLD, HUBBELL.
2. PROVIDE WITH INTERNAL RJ DEVICE BRACKETS AND ALL OTHER MOUNTING HARDWARE AS REQUIRED.
3. PROVIDE CONDUIT FROM CONNECTOR ROUTED UNDER FLOOR, UP CONCEALED IN WALL, AND STUBBED TO ABOVE ACCESSIBLE CEILING SPACE. TERMINATE WITH INSULATING BUSHING.
4. COORDINATE CONNECTION REQUIREMENTS WITH FURNITURE INSTALLER. SEE DETAIL XE.XX FOR MODULAR FURNITURE WIRING DIAGRAM.
5. SAWCUT FLOOR AS REQUIRED.
6. RUN 2" CONDUIT FROM #2CH2A CONNECTOR UNDER FLOOR TO AV BOX INDICATED ON PLANS, THEN CONTINUE CONDUIT FROM AV BOX STUBBED DIRECTLY ABOVE THE CEILING.
7. PROVIDE WITH EXTENSION RING FOR USE WHEN POURING FLOOR.


<

LIGHTING CONTROL DEVICE SCHEDULE				
SYMBOL	TAG	MANUFACTURER	CATALOG NUMBER	DESCRIPTION
	1P	ACUITY CONTROLS NLIGHT	rPDMA	LIGHTING CONTROL NETWORK ENTRY STATION WITH ON AND OFF PUSH-BUTTONS
	2PD	ACUITY CONTROLS NLIGHT	rPDMA 2P DX	LIGHTING CONTROL NETWORK ENTRY STATION WITH TWO SETS OF ON AND OFF PUSH BUTTONS AND RAISE/LOWER DIMMING CONTROL
	4SD	ACUITY CONTROLS NLIGHT	rPDMA 4S DX	LIGHTING CONTROL NETWORK ENTRY STATION WITH FOUR BUTTON SCENE CONTROL, ON AND OFF PUSH BUTTONS, AND RAISE/LOWER DIMMING CONTROL
	1PD	ACUITY CONTROLS NLIGHT	rPDMA DX	LIGHTING CONTROL NETWORK ENTRY STATION WITH ON AND OFF PUSH BUTTONS AND RAISE/LOWER DIMMING CONTROL
	NCEY	ACUITY CONTROLS NLIGHT	NCEY SERIES (SEE SPECIFICATIONS)	LIGHTING CONTROL NETWORK SYSTEM CONTROLLER
	nS	ACUITY CONTROLS NLIGHT	nCM PDT 9	LIGHTING CONTROL NETWORK STANDARD RANGE CEILING OCCUPANCY SENSOR
	nE	ACUITY CONTROLS NLIGHT	nCM PDT 10	LIGHTING CONTROL NETWORK EXTENDED RANGE CEILING OCCUPANCY SENSOR
	nE-P	ACUITY CONTROLS NLIGHT	nCM PDT 10 ADDX	LIGHTING CONTROL NETWORK EXTENDED RANGE CEILING OCCUPANCY SENSOR WITH AUTO DIMMING PHOTOCELL
	n	ACUITY CONTROLS NLIGHT	nWSXA PDT LV	LIGHTING CONTROL NETWORK WALL SWITCH OCCUPANCY SENSOR
	nD	ACUITY CONTROLS NLIGHT	nWSXA PDT LV DX	LIGHTING CONTROL NETWORK WALL SWITCH OCCUPANCY SENSOR WITH RAISE/LOWER DIMMING CONTROL


- GENERAL SPECIAL SYSTEMS NOTES**
- SPECIAL SYSTEMS ROUGH-INS PROVIDED BY ELECTRICAL CONTRACTOR.
 - PROVIDE J-HOOK CABLE SUPPORTS FOR ALL CABLE NOT SUPPORTED BY CABLE TRAY. MAXIMUM SPACING SHALL BE 60".
 - PROVIDE UL LISTED FIRESTOP AND SMOKESTOP ASSEMBLIES FOR ALL RATED PENETRATIONS.
 - PROVIDE STAINLESS STEEL WALL PLATE WITH MOUNTING STUDS FOR ALL SINGLE CABLE TELEPHONE OUTLETS MOUNTED AT 44". ENSURE TERMINATION MATCHES CATEGORY CABLE RATING.
 - PROVIDE W/ SERVICE LOOP FOR ALL COMMUNICATIONS CABLES AT COMMUNICATION TERMINATION ROOM. 3' SERVICE LOOP AT STATION END.
 - ALL TELECOMMUNICATIONS CABLING SHALL BE TERMINATED TO THE COMMUNICATIONS TERMINATION ROOM DESIGNATED FOR THAT SPECIFIC AREA OF THE FACILITY, UNLESS OTHERWISE INDICATED.
 - PROVIDE FACTORY CABLE DROP-OUTS FOR ANY CABLING ENTERING OR EXITING CABLE TRAY OR LADDER RUNWAY.
 - PROVIDE ALL SUGGESTED FACTORY MOUNTING BRACKETS FOR LADDER RUNWAY. PROVIDE END CLOSING KIT FOR ALL LADDER RUNWAY THAT DOES NOT TERMINATE TO A WALL.
 - PROVIDE TWO-HOLE DOUBLE CRIMP, GROUNDING LUGS WITH VIEWING HOLES, SIZED TO MATCH CONDUCTORS.
 - PROVIDE STAINLESS STEEL MOUNTING HARDWARE FOR ALL GROUND CONNECTIONS.
 - MECHANICALLY LABEL ALL GROUND BARS AND CONNECTIONS TO GROUND BARS.
 - MECHANICALLY LABEL TERMINATION BLOCKS AND CABLES.

KEYNOTES

- E301 PROVIDE QUANTITY OF DATA CABLES INDICATED AT EACH ROUGH-IN LOCATION.
- E302 PROVIDE 14' DATA CABLES FOR CONNECTION TO TV, UNLESS OTHERWISE INDICATED.
- E303 PROVIDE (1) DATA CABLE TO EACH WIRELESS ACCESS POINT. PROVIDE 30' SERVICE LOOP. TERMINATE WITH PLENUM RATED SURFACE BOX MOUNTED ABOVE ACCESSIBLE CEILING. PROVIDE 3' PATCH CORD FOR CONNECTION TO OWNER PROVIDED WIRELESS ACCESS POINT.
- E304 FURNITURE FEED J-BOX/POKE THRU. ROUTE QUANTITY OF DATA CABLES SHOWN THROUGH WALLS OF FURNITURE SYSTEM AND TERMINATE DATA CABLES AT EACH WORKSTATION. PROVIDE JACKS AND PLATES COMPATIBLE WITH FURNITURE SYSTEM.
- E305 PROVIDE (1) DATA CABLE FOR CONNECTION TO FIRE ALARM CONTROL PANEL. IP DIALER. TERMINATE NEAR FACP WITH SURFACE MOUNT BISCUIT BOX. PROVIDE 3' PATCH CORD TO IP DIALER.
- E306 PROVIDE (1) DATA CABLE FOR CONNECTION TO SURVEILLANCE CAMERA. PROVIDE 20' SERVICE LOOP. TERMINATE WITH PLENUM RATED SURFACE BOX MOUNTED ABOVE ACCESSIBLE CEILING. PROVIDE PATCH CORD FOR CONNECTION TO CAMERA.
- E307 PROVIDE COMMUNICATIONS BACKBOARD ON WALLS INDICATED WITH HEAVY LINE TYPE 3/4". A/C GRADE A SIDE OUT, ALL SIDES PAINTED WITH 3 COATS OF WHITE FIRE RATED PAINT. MOUNT 8' TALL BOARD 6" ABOVE FLOOR.
- E308 PROVIDE CABLE DROP OUTS ANYWHERE CABLES ENTER / EXIT CABLE RUNWAY.
- E310 BOND LADDER RUNWAY TO COMMUNICATIONS GROUND BAR WITH #6 AWG THIN.
- E311 BOND EACH SECTION OF LADDER NOT BONDED WITH A FACTORY WELD, REMOVE POWDER COATING UNDER BONDING CONNECTION.
- E312 PROVIDE 12" VERTICAL LADDER CABLE RUNWAY FOR EACH INSTANCE CABLING DROPS VERTICALLY FROM CONDUITS / SLEEVES INTO HORIZONTAL RUNWAY. C/Pi PART#: 1025G-712 OR APPROVED EQUAL.
- E313 PROVIDE 12" HORIZONTAL LADDER RUNWAY, C/Pi PART#: 1025G-712 OR APPROVED EQUAL.
- E314 PROVIDE TRIANGULAR SUPPORT KIT FOR EACH INSTANCE LADDER RUNWAY TERMINATES AT WALL. C/Pi PART#: 1174G-718 OR APPROVED EQUAL.
- E315 PROVIDE WALL ANGLE SUPPORT KIT FOR EACH INSTANCE LADDER RUNWAY TERMINATES AT WALL. C/Pi PART#: 11421-718 OR APPROVED EQUAL.
- E316 PROVIDE COMMUNICATIONS GROUND BAR 12" AFF. SEE DETAIL. REFERENCE ON ENCL. RGED PD.
- E317 PROVIDE (1) DATA CABLE OR POE TIME. C/Pi PART#: 1174G-718 OR APPROVED EQUAL.
- E318 PROVIDE (1) DATA CABLE TO SERVICE PROVIDER. PROVIDE 30' SERVICE LOOP. TERMINATE WITH PLENUM RATED SURFACE BOX MOUNTED ABOVE ACCESSIBLE CEILING. PROVIDE 3' PATCH CORD FOR CONNECTION TO AV DEVICE.
- E319 PROVIDE (1) DATA CABLE FOR CONNECTION TO ROOM SCHEDULER. RS. TERMINATE WITH PLENUM RATED SURFACE BOX MOUNTED ABOVE ACCESSIBLE CEILING. PROVIDE PATCH CORD FOR CONNECTION TO CONTROL PANEL. PROVIDE 3' PATCH CORD FOR CONNECTION TO CONTROL PANEL.
- E320 PROVIDE (1) DATA CABLE FOR CONNECTION TO ACCESS CONTROL PANELS. TERMINATE WITH PLENUM RATED SURFACE BOX NEAR ACCESS CONTROL PANEL. PROVIDE 3' PATCH CORD FOR CONNECTION TO CONTROL PANEL.
- E321 LOCATION FOR SECURITY EQUIPMENT. ACCESS CONTROL DOOR CONTROLLERS AND POWER SUPPLIES.

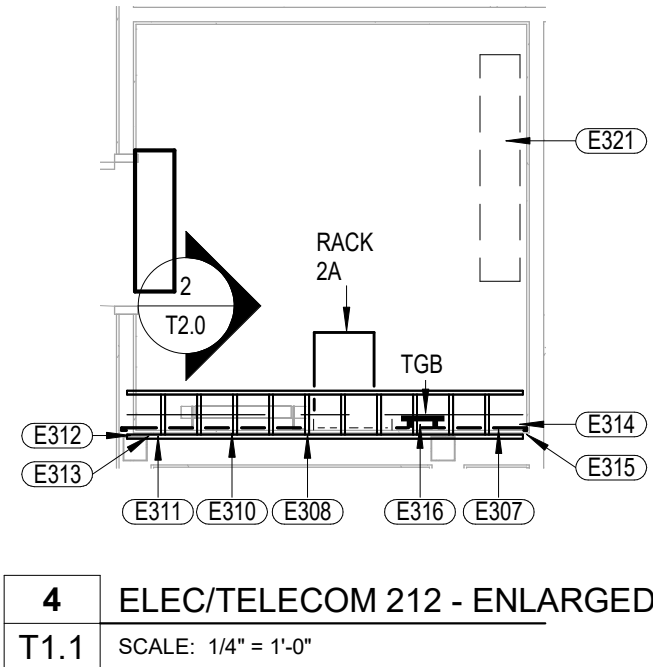

1 FLOOR PLAN - LEVEL 02 - TELECOM
T1.1 SCALE: 1/8" = 1'-0"

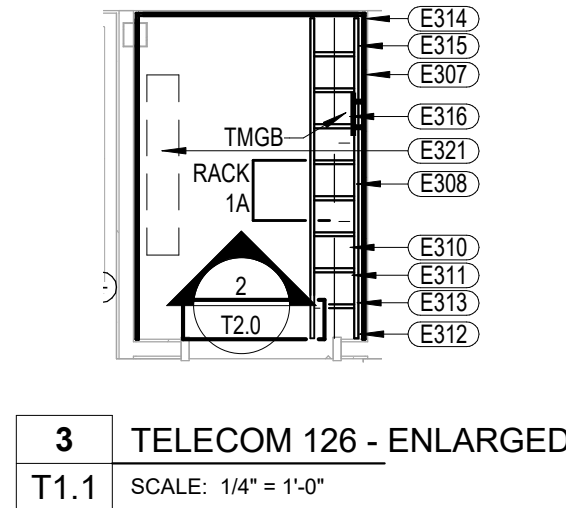


5 FLOOR PLAN - LEVEL 01 - TELECOM
T1.1 SCALE: 1/8" = 1'-0"


RACK 1A/2A		
RACK RU	PART NUMBER	DESCRIPTION
45	PANDUIT, FRME1U	RACK MOUNT OPTICAL FIBER ENCLOSURE, 1RU
44	TBD	
43	PANDUIT, DP48BX8BTGY	48-PORT CAT 6A PATCH PANEL, 2RU
42	-	
41	UNKNOWN	OWNER PROVIDED NETWORK SWITCH, 1RU
40	TBD	
39	PANDUIT, DP48BX8BTGY	48-PORT CAT 6A PATCH PANEL, 2RU
38	-	
37	UNKNOWN	OWNER PROVIDED NETWORK SWITCH, 1RU
36	TBD	
35	PANDUIT, DP48BX8BTGY	48-PORT CAT 6A PATCH PANEL, 2RU
34	-	
33	UNKNOWN	OWNER PROVIDED NETWORK SWITCH, 1RU
32	TBD	
31	TBD	
30	TBD	
29	TBD	
28	TBD	
27	TBD	
26	TBD	
25	TBD	
24	TBD	
23	TBD	
22	TBD	
21	TBD	
20	TBD	
19	TBD	
18	TBD	
17	TBD	
16	TBD	
15	TBD	
14	TBD	
13	TBD	
12	TBD	
11	TBD	
10	TBD	
9	TBD	
8	TBD	
7	TBD	
6	TBD	
5	TBD	
4	TBD	
3	TBD	
2	UNKNOWN	OWNER PROVIDED UPS, 2RU
1	-	

COMMUNICATIONS RACK 1A/2A		
QUAN.	PART NUMBER	DESCRIPTION
1	PANDUIT, R2P	7" TWO-POST COMMUNICATIONS RACK
1	PANDUIT, PR2VWF	RACK TOP WATERFALL TROUGH
1	PANDUIT, PR2VD08	8" VERTICAL DUAL SIDED MANAGER W/ DOORS
2	PANDUIT, RGS134-1Y	RACK MOUNT VERTICAL GROUND STRIP


NOTE:
1. FURNISH AND INSTALL ALL ITEMS LISTED IN FULL TONE, HALF TONE ITEMS SHOWN FOR COORDINATION ONLY.

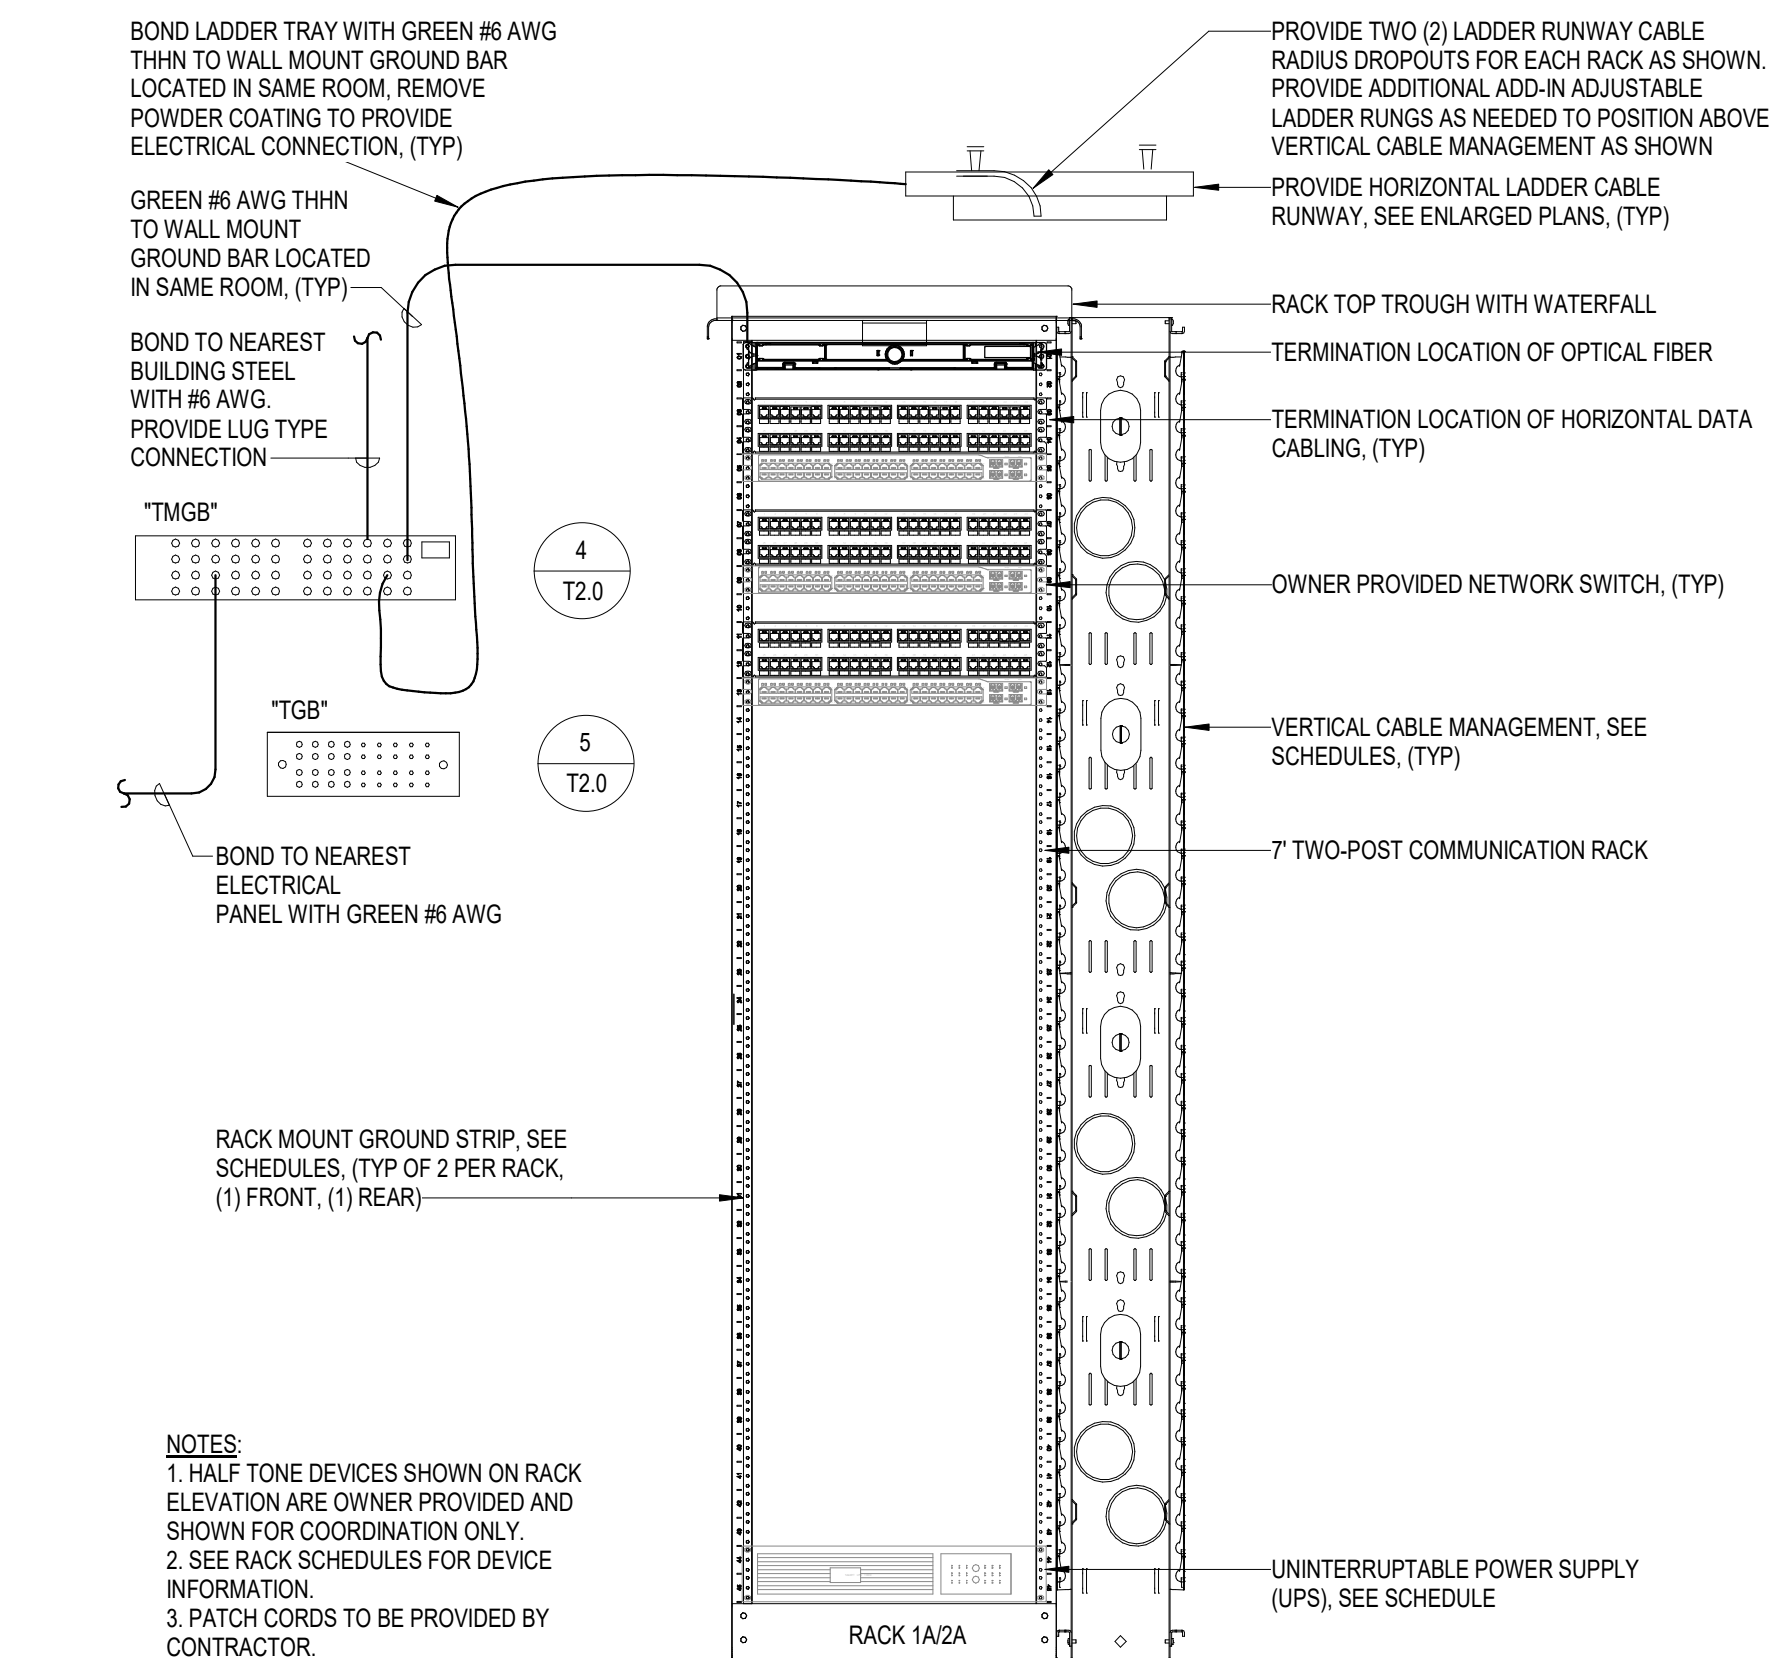


2 TELECOM ELEV. PLAN - 1 RACK
T2.0 SCALE: NOT TO SCALE

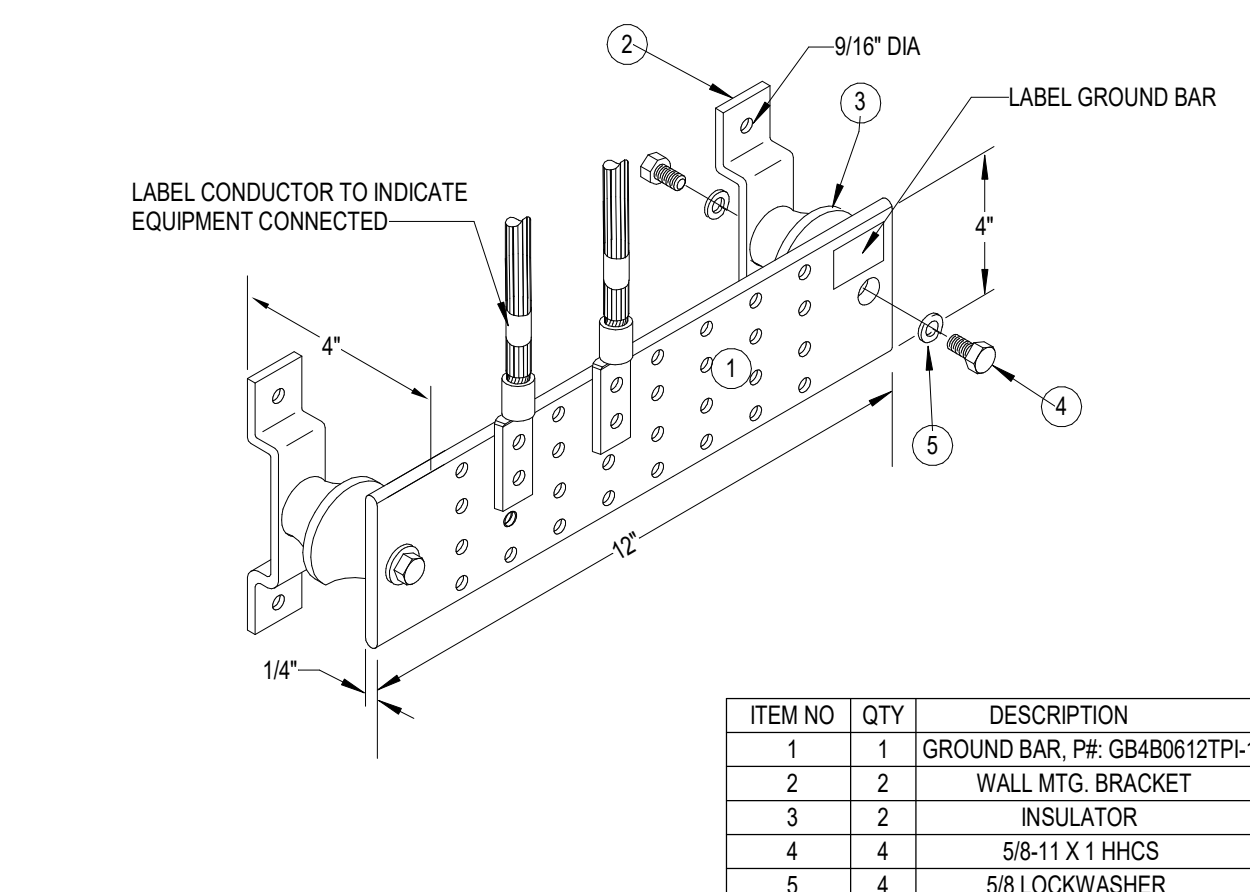

5 TELECOMMUNICATIONS GROUND BAR
T2.0 SCALE: NOT TO SCALE

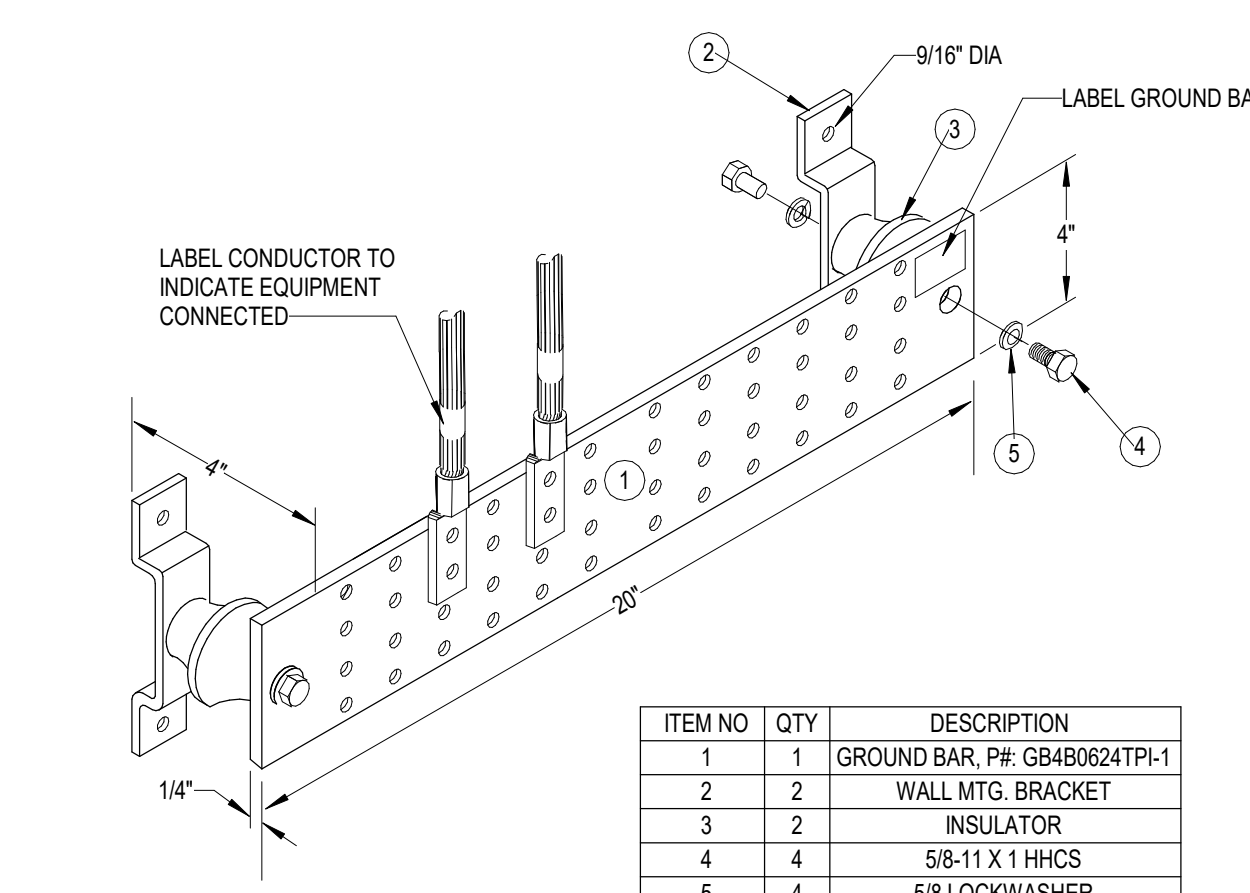



4 TELECOMMUNICATION MAIN GROUND BAR
T2.0 SCALE: NOT TO SCALE

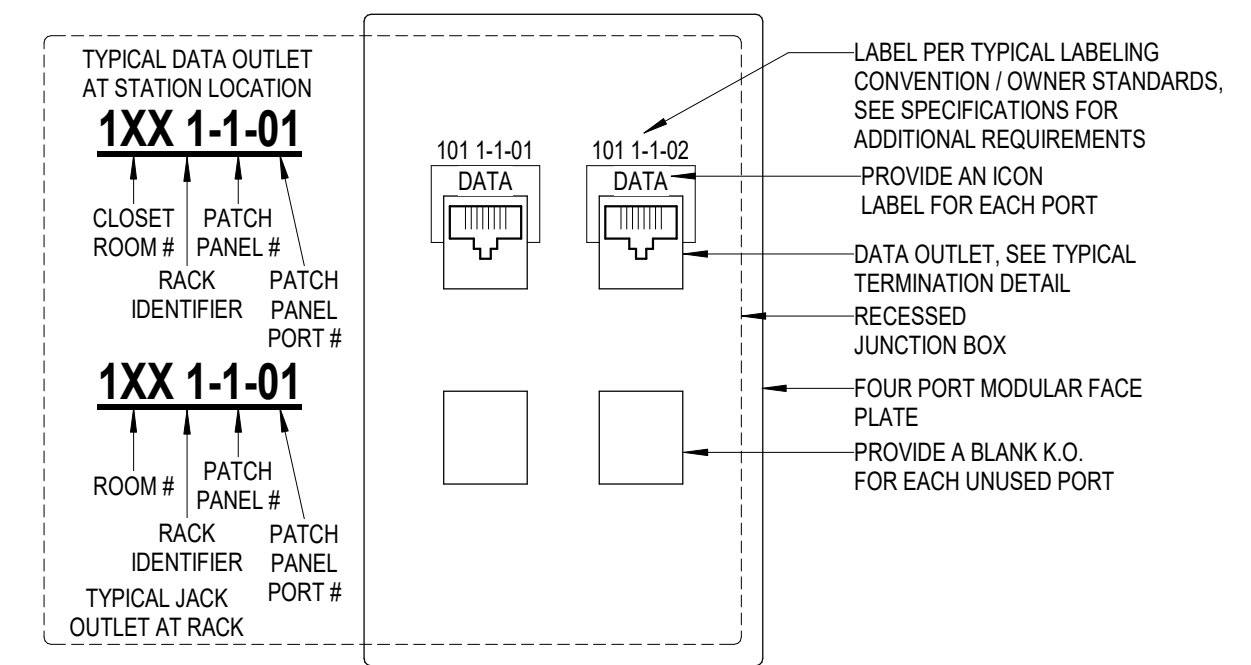

EXAMPLE CABLE COUNTS
ADDITIONAL COMBINATIONS PER DRAWINGS:
H=10 = 1 DATA OUTLET, 3 BLANKS
H=20 = 2 DATA OUTLETS, 2 BLANKS
H=40 = 4 DATA OUTLETS

JACK COLOR SCHEDULE (COORDINATE LOCATIONS WITH OWNER/ENGINEER)

6 STANDARD DATA OUTLET DETAIL
T2.0 SCALE: NOT TO SCALE

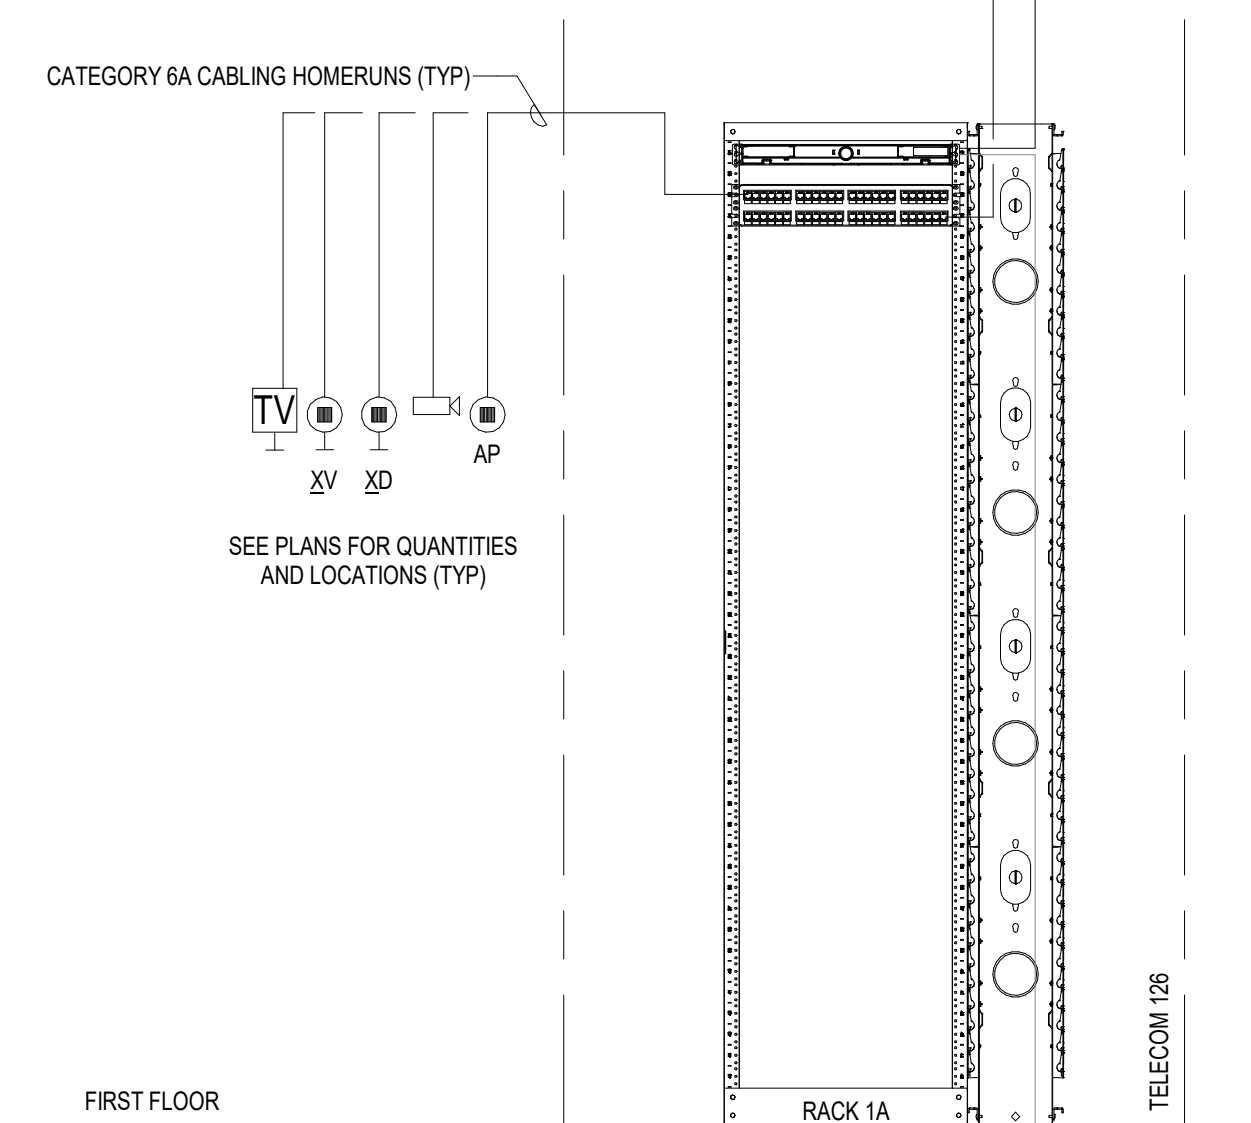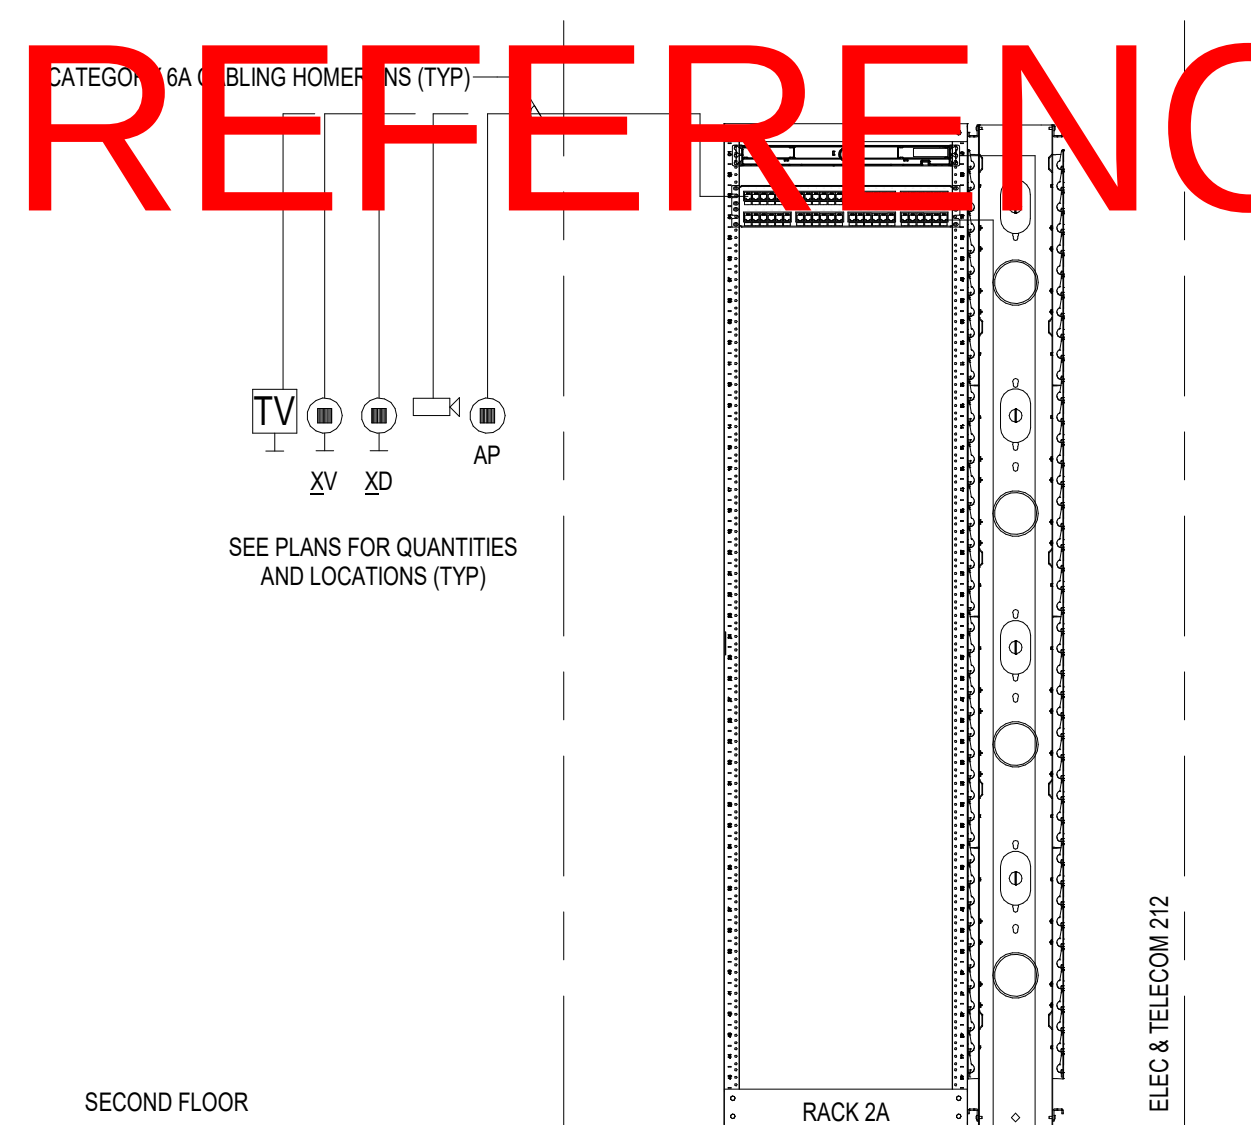

3 TELECOM CONNECTIVITY SCHEMATIC1
T2.0 SCALE: 1/2" = 1'-0"

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE


REVISION DATE
Project Number: 21064
Date: MARCH 10, 2023
COPYRIGHT © 2022

TELECOM DETAILS


NOT FOR CONSTRUCTION

T2.0


KEYNOTES
E322 PROVIDE ACCESS CONTROL WIRING TO ELEVATOR CARD READER. COORDINATE INSTALLATION REQUIREMENTS WITH ELEVATOR MANUFACTURER. INTERFACE WITH ELEVATOR CONTROLLER TO LIMIT ELEVATOR OPERATION.

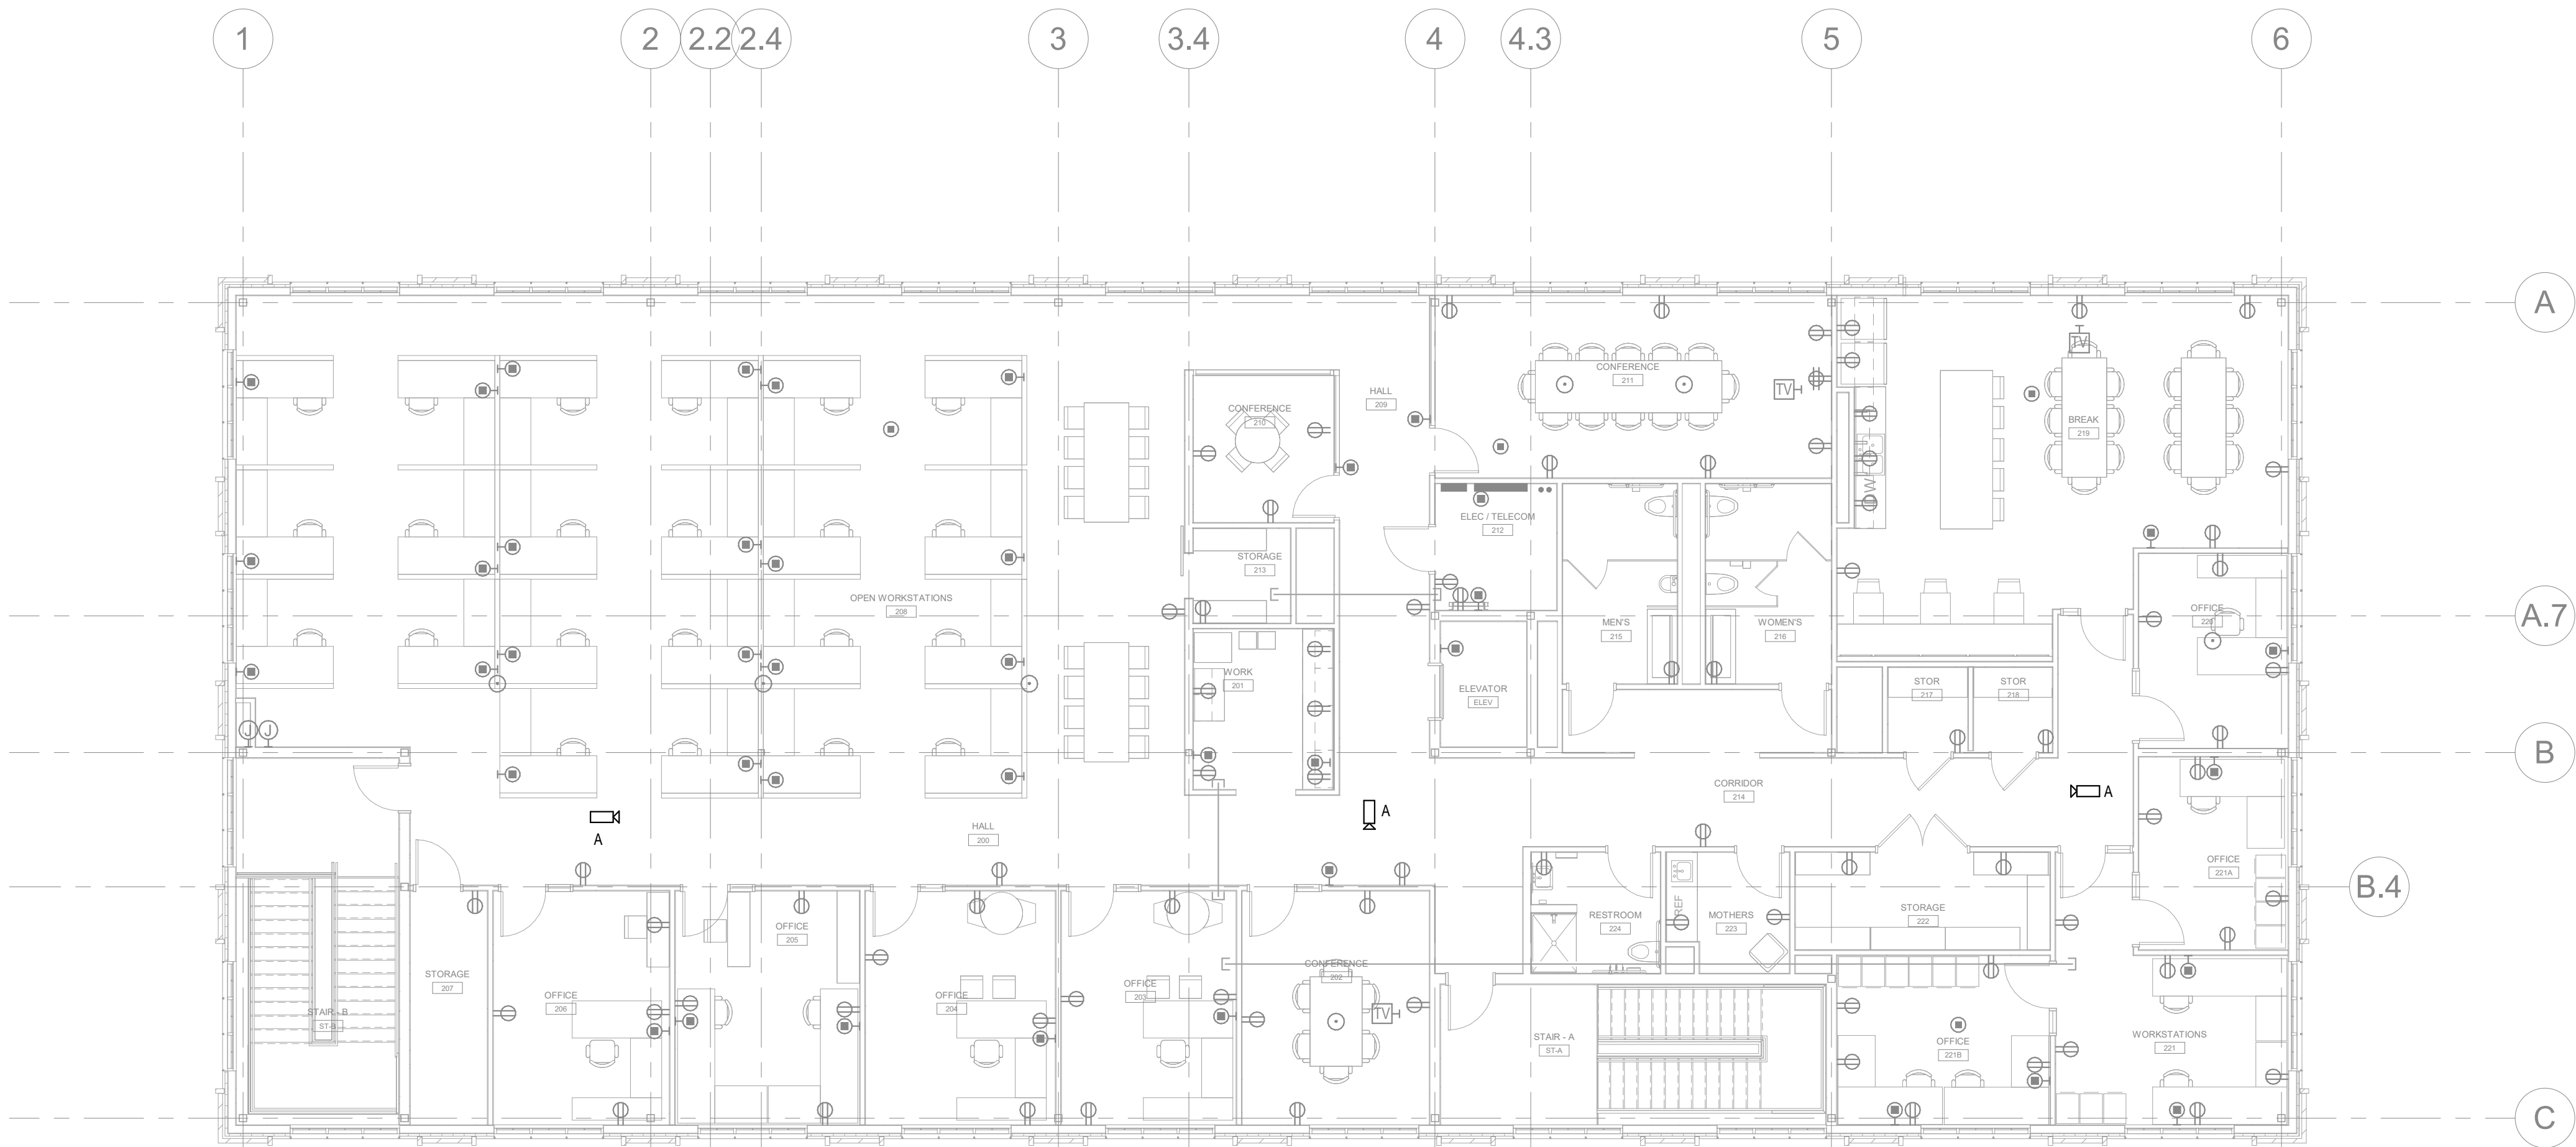

2 FLOOR PLAN - LEVEL 02 - SECURITY
TY1.1 SCALE: 1/8" = 1'-0"

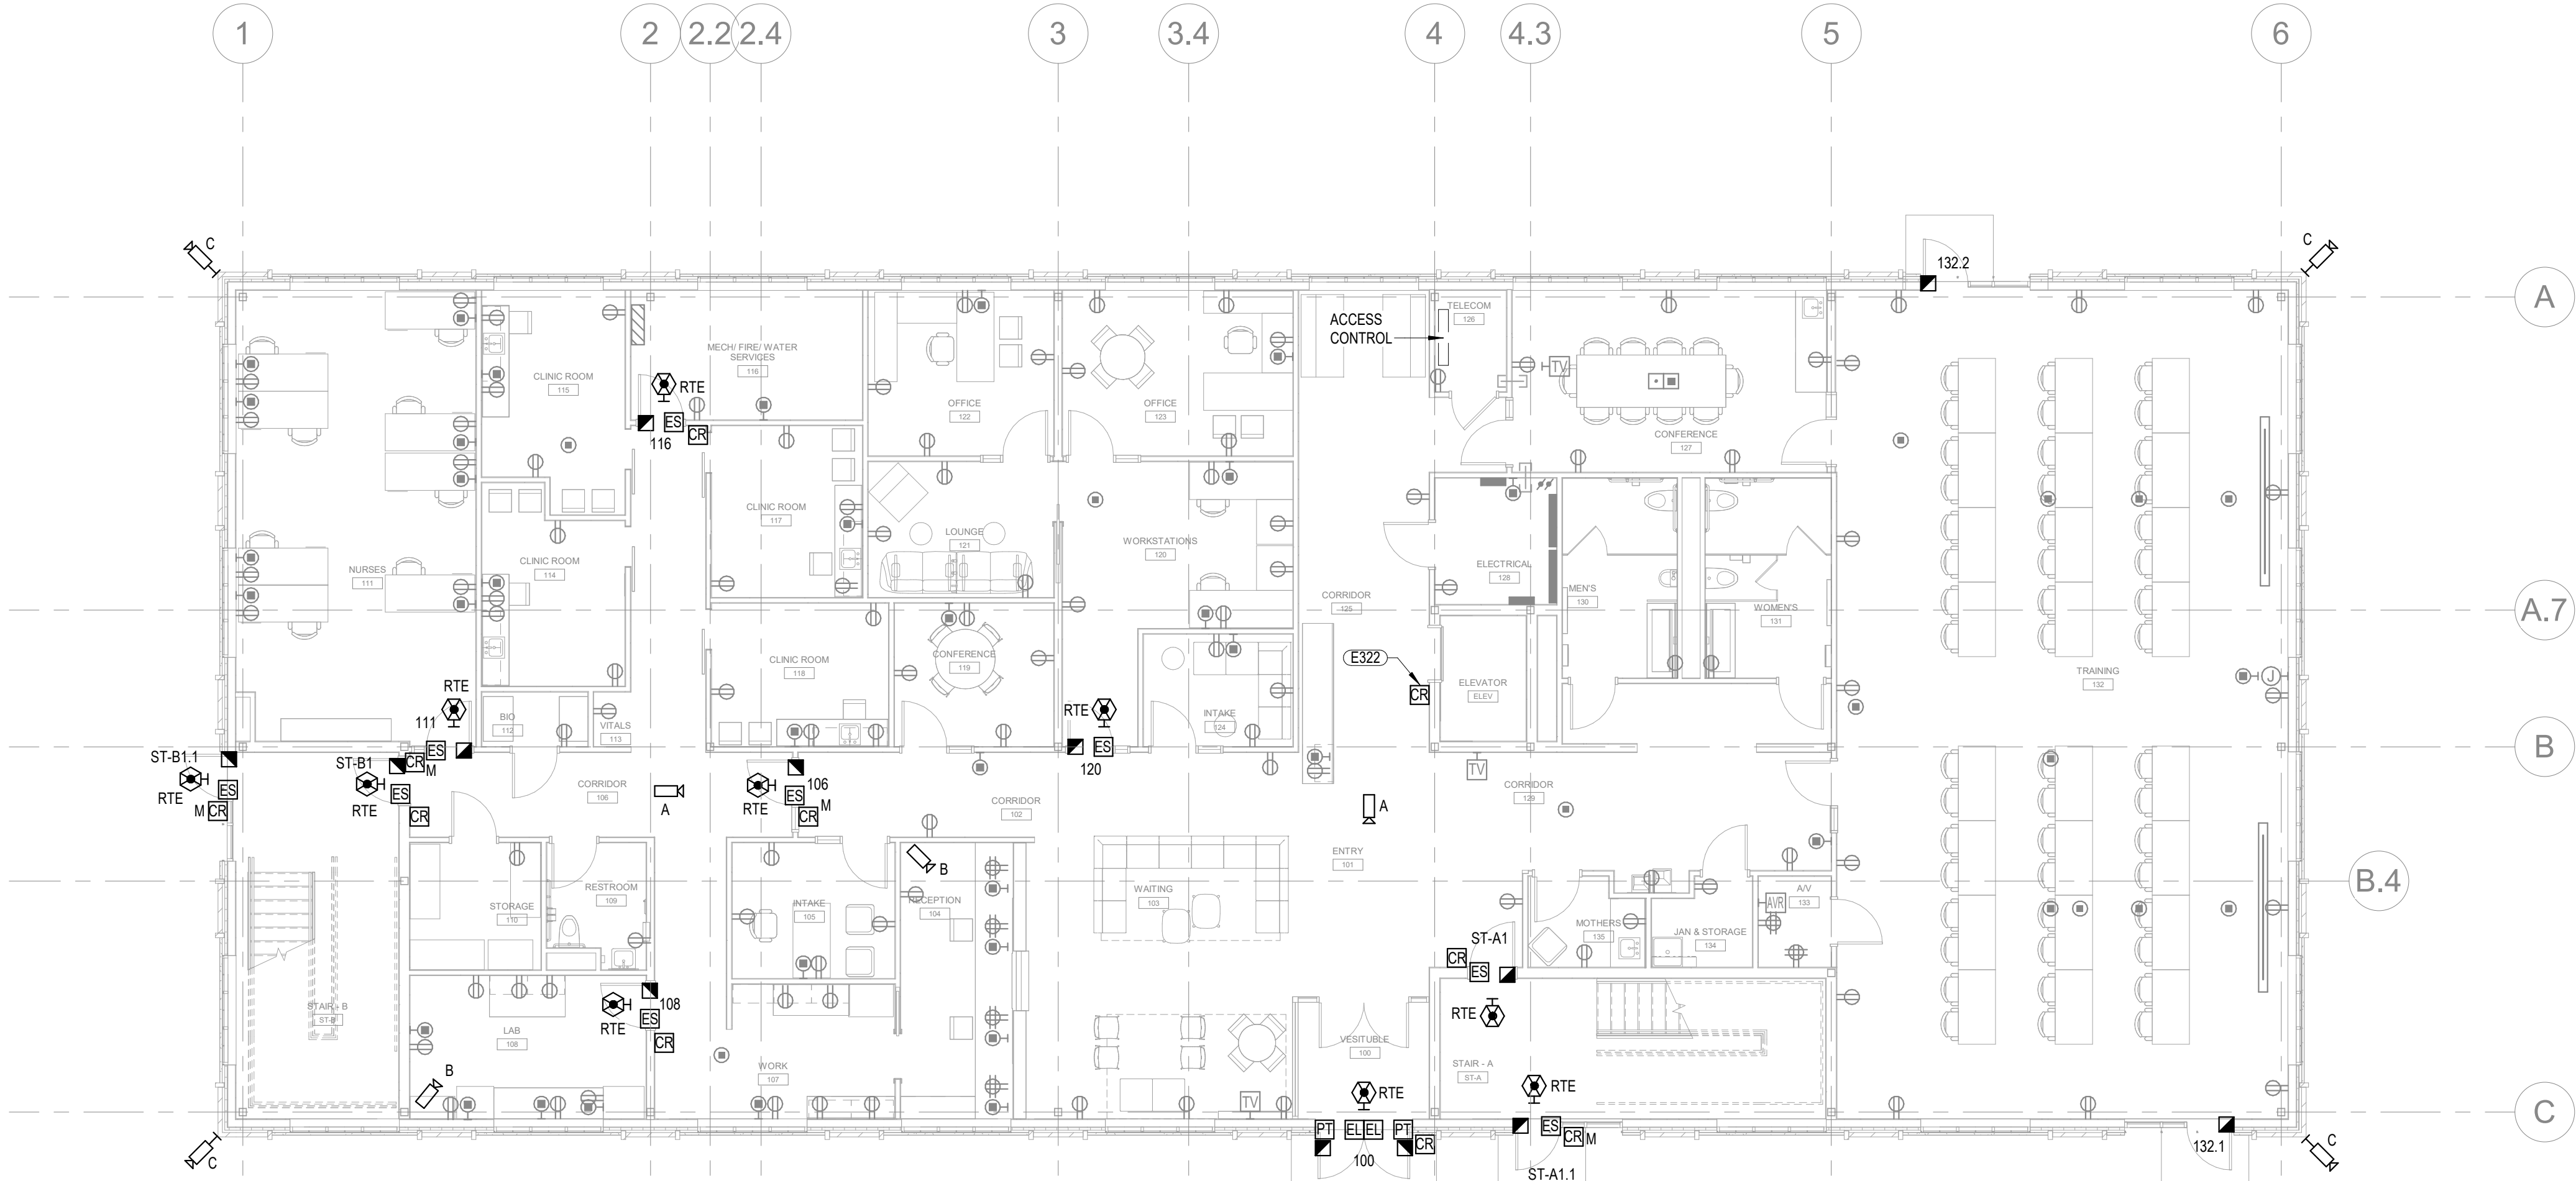

1 FLOOR PLAN - LEVEL 01 - SECURITY
TY1.1 SCALE: 1/8" = 1'-0"

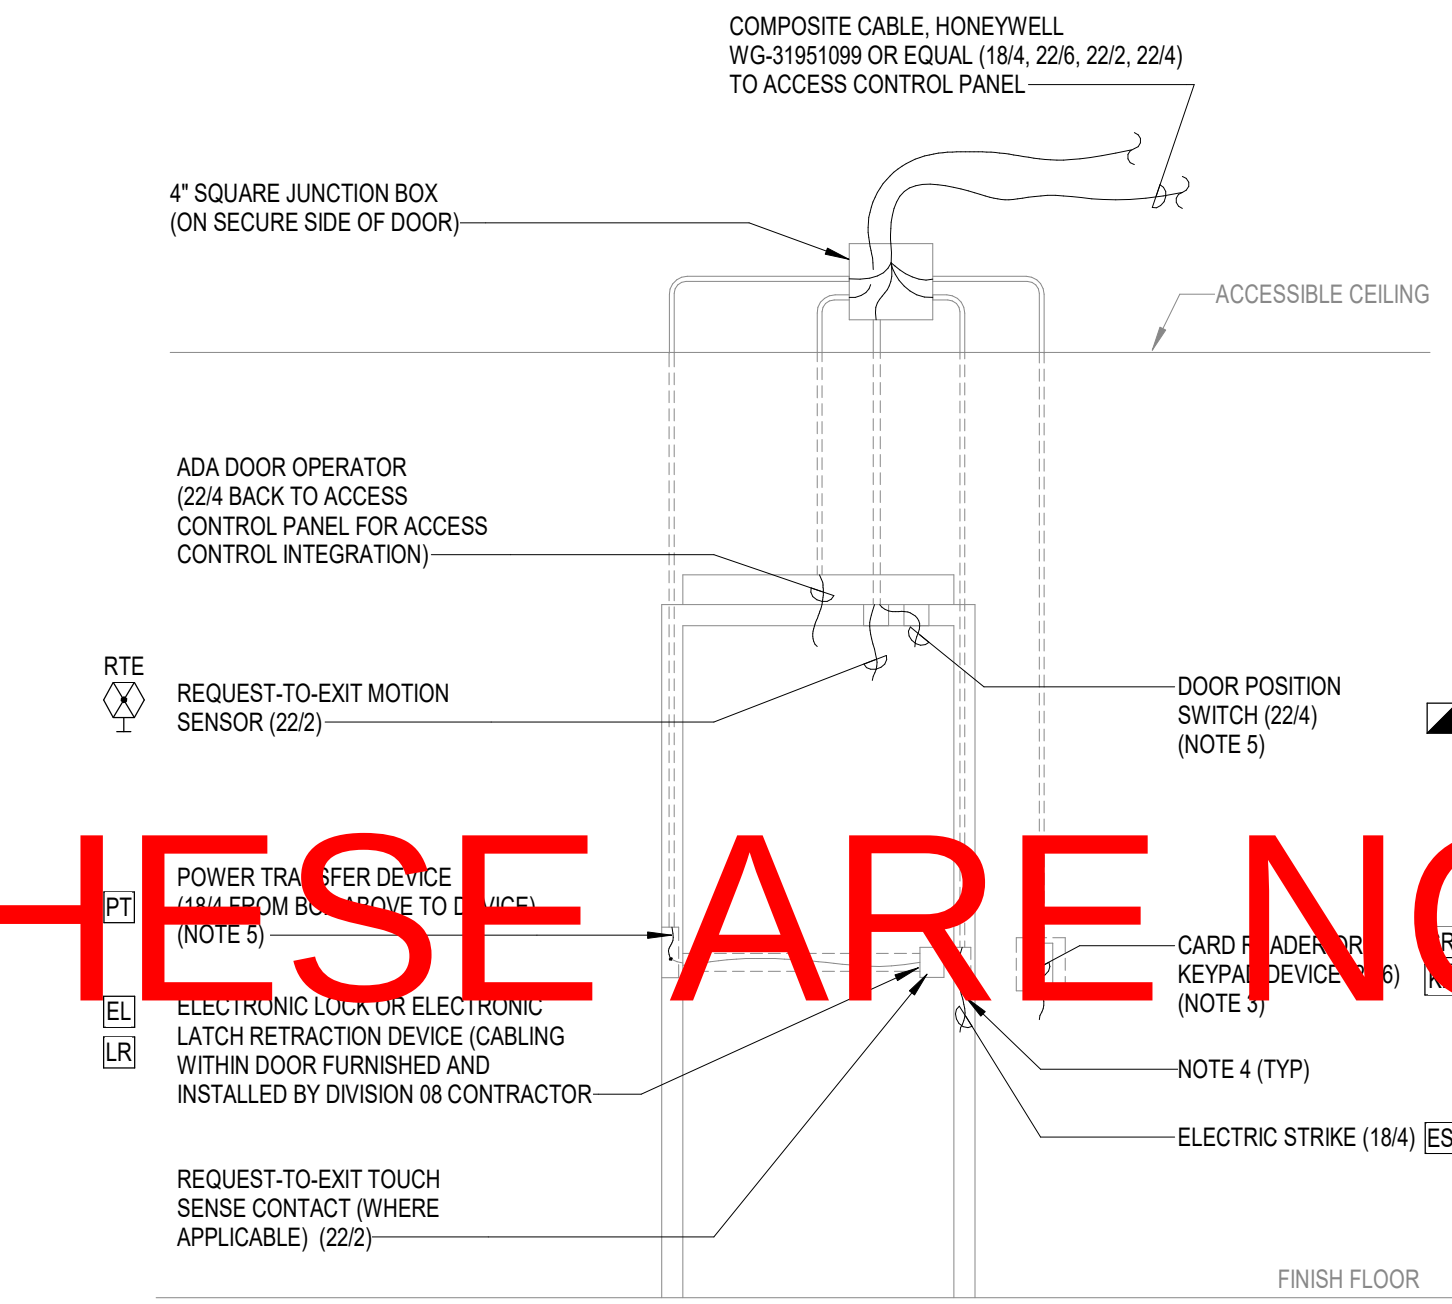

3 ACCESS CONTROL CABLING DETAIL
TY1.1 SCALE: NOT TO SCALE

- NOTES**
1. NOT ALL DEVICES REQUIRED AT ALL DOORS. SEE PLANS FOR QUANTITIES AND LOCATIONS OF DEVICES.
 2. ALL CABLING SHALL BE FURNISHED AND INSTALLED BY 281100 SECURITY CABLING CONTRACTOR. ALL DEVICES AND DEVICE TERMINATIONS WILL BE PROVIDED BY OWNER'S SECURITY VENDOR. TEST CABLING FOR CONTINUITY AND MECHANICALLY LABEL EACH CABLE.
 3. FOR READ IN / READ OUT DOORS, PROVIDE ADDITIONAL 22/6 CABLE FOR SECOND READER.
 4. PULL WIRING THROUGH ENDPOINT DEVICE OPENINGS. PROVIDE SUFFICIENT SLACK LOOP SO THAT CABLING WILL REACH THE FLOOR BELOW THE DEVICE.
 5. FOR DOUBLE DOORS, PROVIDE ADDITIONAL 22/2 CABLE FROM 4" SQUARE J-BOX TO SECOND DOOR POSITION SWITCH AND PROVIDE ADDITIONAL 18/4 CABLE FROM 4" SQUARE J-BOX TO SECOND POWER TRANSFER DEVICE.

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE


REVISION	DATE
Project Number:	21064
Date:	MARCH 10, 2023
COPYRIGHT © 2022	

FLOOR PLANS - SECURITY


TY1.1

NOT FOR CONSTRUCTION

KEYNOTES

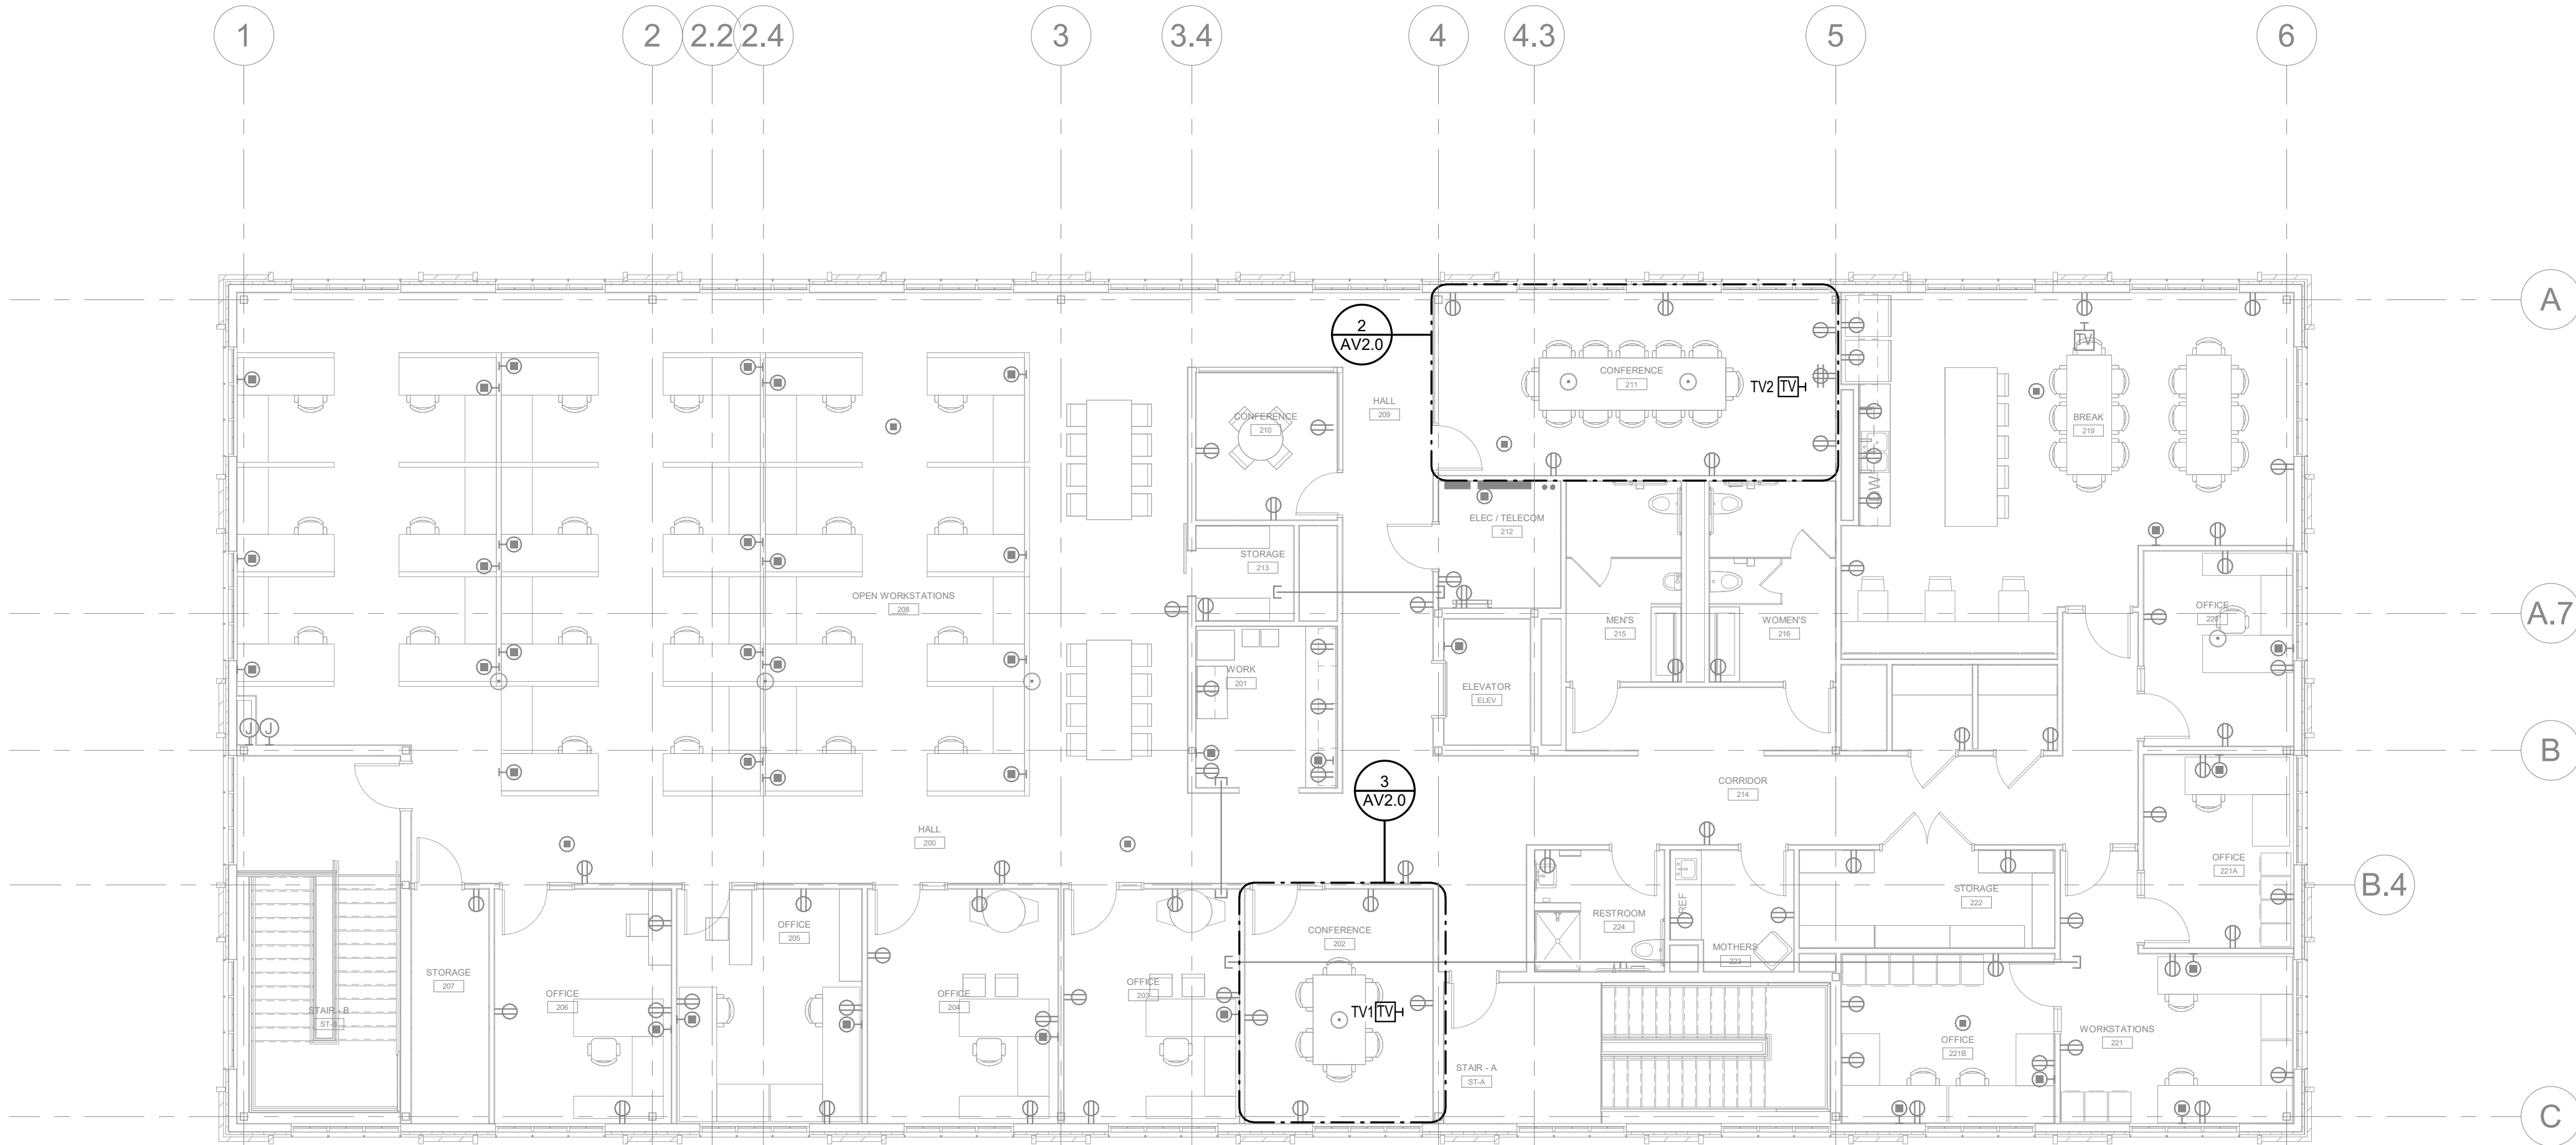

2 FLOOR PLAN - LEVEL 02 - AV
AV1.1 SCALE: 1/8" = 1'-0"

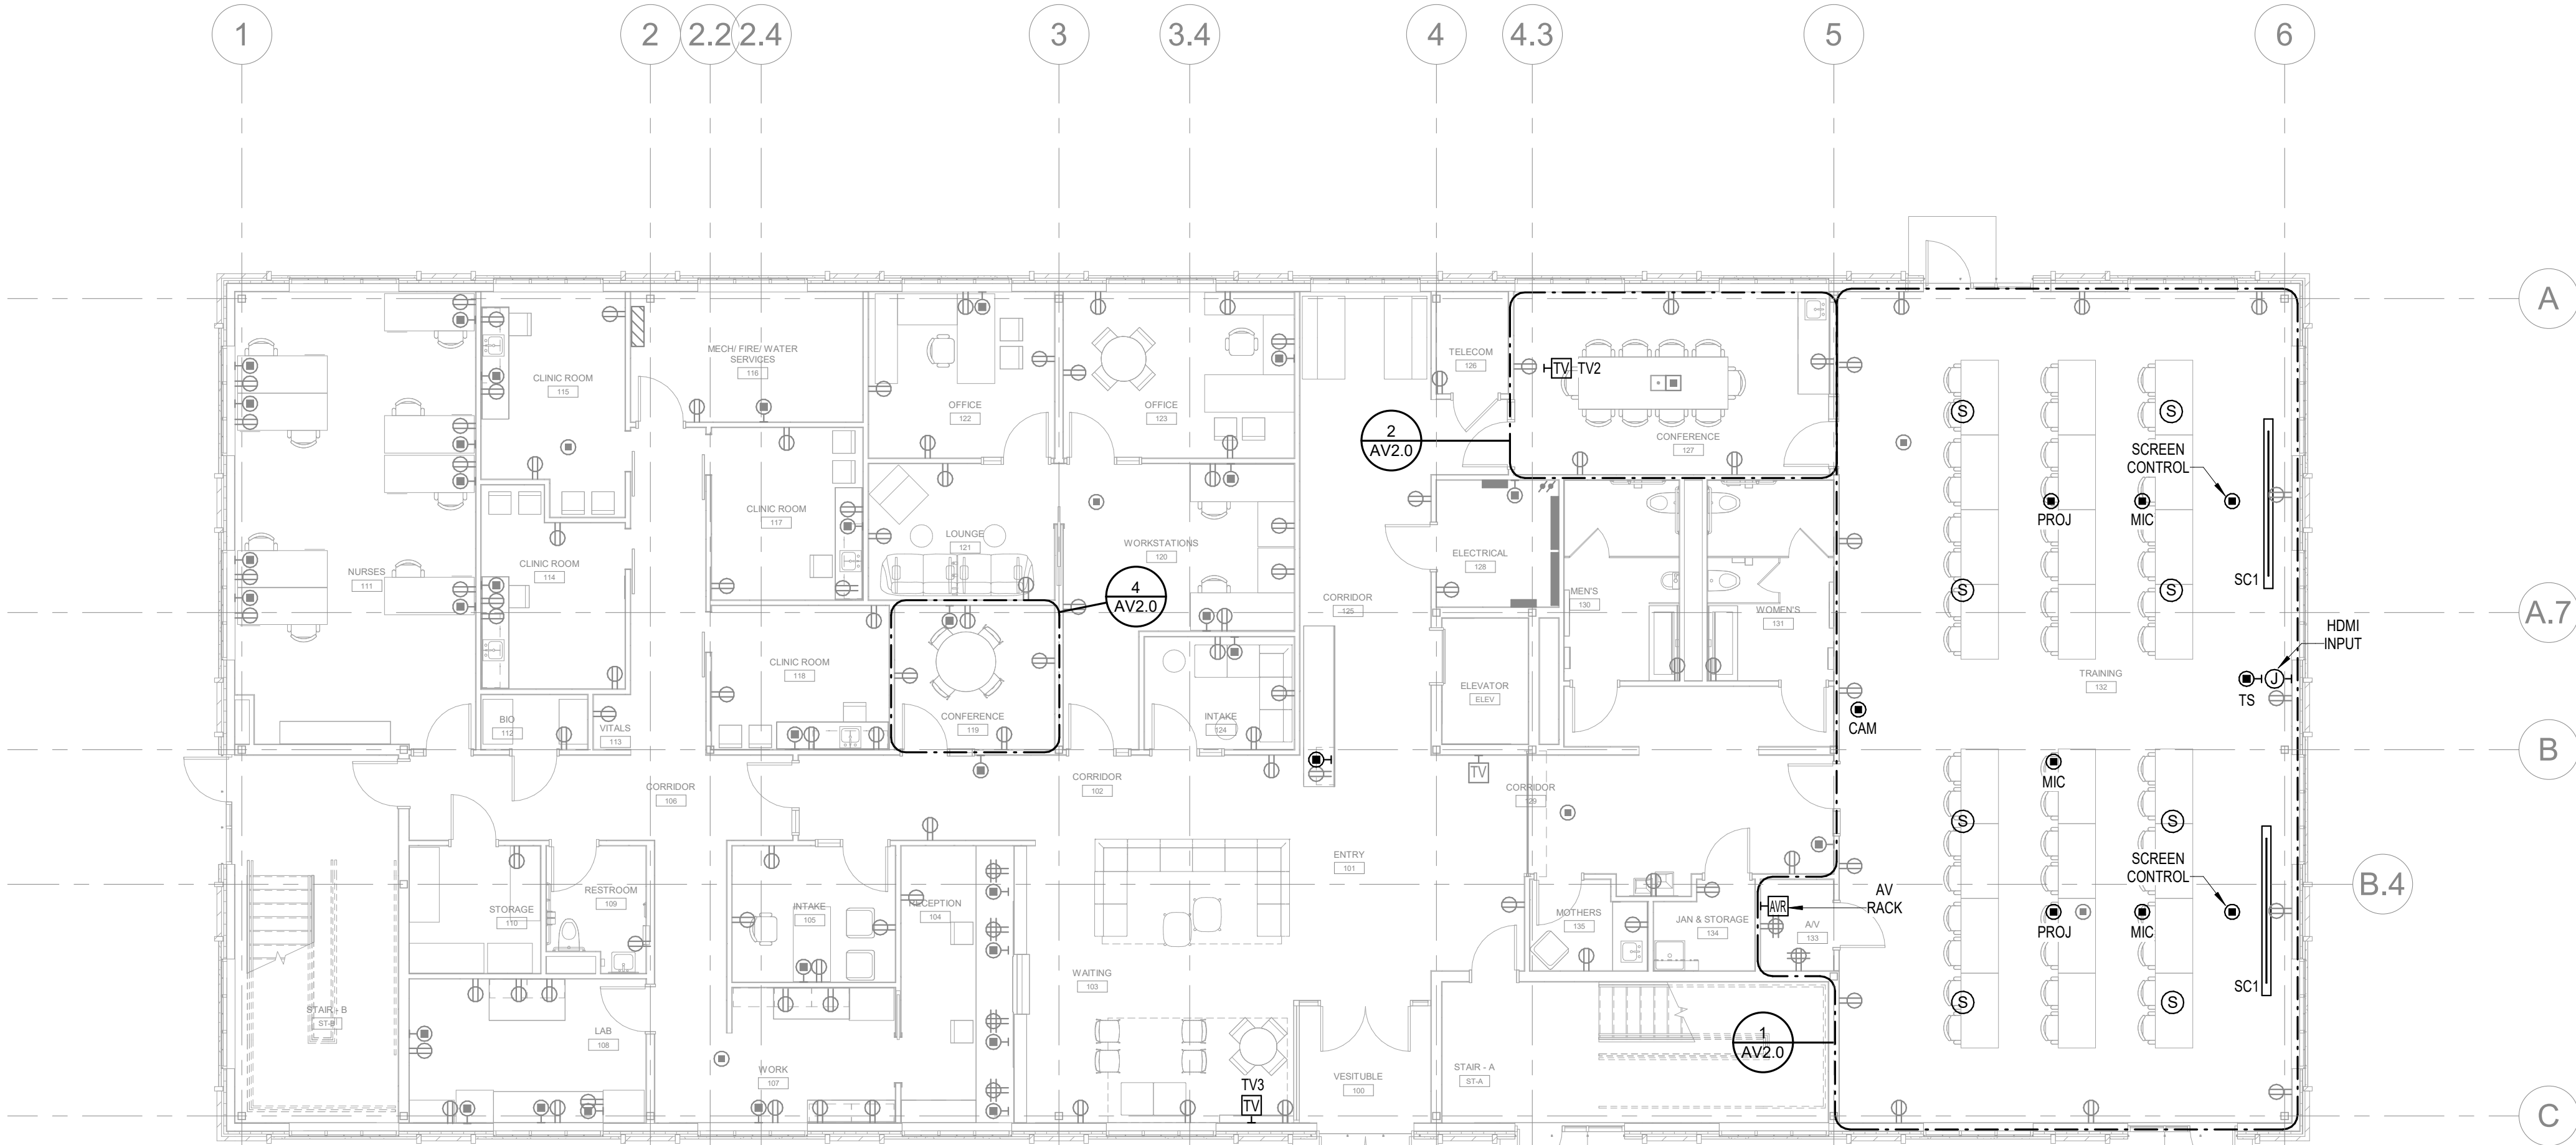

1 FLOOR PLAN - LEVEL 01 - AV
AV1.1 SCALE: 1/8" = 1'-0"

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE

REVISION	DATE
Project Number:	21064
Date:	MARCH 10, 2023
COPYRIGHT © 2022	

FLOOR PLANS -
AUDIOVISUAL

AV1.1

NOT FOR CONSTRUCTION

3/10/2023 10:08:07 AM

AV DISPLAY SCHEDULE

TAG	MODEL/PART NUMBER	DESCRIPTION	DESCRIPTION
TV1	SAMSUNG #QBR SERIES	55" 4K DISPLAY	CHEF #LTM1U, #CSPR
TV2	SAMSUNG #QBR SERIES	75" 4K DISPLAY	CHEF #LTM1U, #CSPR
TV3	SAMSUNG #QBR SERIES	43" 4K DISPLAY	CHEF #LTM1U, #CSPR

TRAINING ROOM AV COMPONENTS LIST:

- (2) MOTORIZED SCREENS (SC1), 133" SCREEN INNOVATIONS #SOLO 3, SLATE 1.2, 16:9 WITH P CONTROL BOARD
VERIFY SCREEN SIZE WITH ENGINEER PRIOR TO ORDERING.

- (2) PROJECTORS (P), EPSON #EB-PJ1008V (WHITE) WUXGA WITH LENS.

- (2) UNIVERSAL CEILING BOX, CHEF #CMS452C WITH UNIVERSAL MOUNT #RPAUW AND EXTENSION COLUMN

- (1) PRESENTATION SWITCHER, CRESTRON #HD-PS62Z

- (1) HDMI INPUT PLATE, CRESTRON #HC-TX-4KZ-101-1G-W

- (1) CONTROL PROCESSOR, CRESTRON #C4N

- (8) CEILING SPEAKERS, SONANCE #C63RT

- (1) AUDIO AMPLIFIER, POWERSOFT #MEZZO 604A

- (1) AUDIO PROCESSOR, QSC #QORE 110F

- (1) CONFERENCE CAMERA (CAM), QSC #Q-SYS PTZ 20X60

- (1) WIRELESS MICROPHONE ACCESS POINTS, SHURE #MXWAPT4

- (1) LAVALIER MICROPHONE, SHURE #MX185

- (1) BODYPACK TRANSMITTER, SHURE #MXW1

- (1) HANDHELD MICROPHONE, SHURE #MXV2SM58

- (2) RECHARGEABLE BATTERIES, SHURE #SB901A

- (2) RECHARGEABLE BATTERIES, SHURE #SB902A

- (1) NETWORK CHARGING STATION, SHURE #MXWVCS4 (INSTALLED NEAR AVR)

- (2) ARRAY MICROPHONE, SHURE #MXA920

- (1) ROOM SCHEDULING PANEL, CRESTRON #TSW-1060-W-S

- (1) ROOM CONTROLLER TOUCH SCREEN (TS), CRESTRON #TSW-770-W WITH UNIVERSAL WALL MOUNTING BRACKET

1 TRAINING ROOM AV

AV2.0 SCALE: NOT TO SCALE

LARGE CONFERENCE ROOM AV COMPONENTS LIST:

- (1) CRESTRON FLEX TABLETOP ROOM CONFERENCE SYSTEM (#UC-MX50-U)

- (1) HUDDLY CAMERA MOUNT (#709004379019)

- (1) ADAPTER RING (LIBERTY AV #DL-ARZ789)

- (1) DISPLAY (TV TYPE 2, SEE SCHEDULE)

- (2) CRESTRON TABLE TOP MICROPHONE EXTENSIONS, #CCS-UCA-MIC

- (1) ROOM SCHEDULING PANEL, CRESTRON #TSW-1060-W-S. PROVIDE WITH MULLION MOUNT BRACKET / KIT WHERE SHOWN ON GLASS.

INSTALL CRESTRON HD-RX-USB-2000-C BEHIND DISPLAY AND CONNECT TO DISPLAY USING AN HDMI CABLE. PROVIDE DATA CABLE FROM CCS-UC-1-X TABLETOP DEVICE TO RECEIVER BEHIND TV. INSTALL CAMERA BELOW DISPLAY AND CONNECT CAMERA TO RECEIVER VIA USB CABLE. CONNECT RECEIVER AND TABLE TOP DISPLAY TO OWNER NETWORK. CONNECT TWO EXTENSION MICROPHONE PODS TO TABLETOP DEVICE.

TURN OVER ADAPTER RING TO OWNER.

INSTALL ROOM SCHEDULING PANEL. CONNECT TO OWNER NETWORK, SOFTWARE TO BE INSTALLED BY OWNER.

2 LARGE CONFERENCE ROOM AV

AV2.0 SCALE: NOT TO SCALE

SMALL CONFERENCE ROOM COMPONENTS LIST:

- (1) CRESTRON FLEX TABLETOP ROOM CONFERENCE SYSTEM (#UC-MX50-U)

- (1) HUDDLY CAMERA MOUNT (#709004379019)

- (1) ADAPTER RING (LIBERTY AV #DL-ARZ789)

- (1) DISPLAY (TV TYPE 1, SEE SCHEDULE)

- (1) ROOM SCHEDULING PANEL, CRESTRON #TSW-1060-W-S

INSTALL CRESTRON HD-RX-USB-2000-C BEHIND DISPLAY AND CONNECT TO DISPLAY USING AN HDMI CABLE. PROVIDE DATA CABLE FROM CCS-UC-1-X TABLETOP DEVICE TO RECEIVER BEHIND TV. INSTALL CAMERA BELOW DISPLAY AND CONNECT CAMERA TO RECEIVER VIA USB CABLE. CONNECT RECEIVER AND TABLE TOP DISPLAY TO OWNER NETWORK.

TURN OVER ADAPTER RING TO OWNER.

INSTALL ROOM SCHEDULING PANEL. CONNECT TO OWNER NETWORK, SOFTWARE TO BE INSTALLED BY OWNER.

3 SMALL CONFERENCE ROOM AV

AV2.0 SCALE: NOT TO SCALE

SCHEDULER ROOM COMPONENTS LIST:

- (1) ROOM SCHEDULING PANEL, CRESTRON #TSW-1060-W-S

INSTALL ROOM SCHEDULING PANEL. CONNECT TO OWNER NETWORK, SOFTWARE TO BE INSTALLED BY OWNER.

4 SMALL CONFERENCE ROOM AV

AV2.0 SCALE: NOT TO SCALE

AGENCY APPROVAL

ALLEY POYNER
MACCHIETTO
ARCHITECTURE

REVISION	DATE
Project Number:	21064
Date:	MARCH 10, 2023
COPYRIGHT © 2022	

AUDIO/VISUAL DETAILS

AV2.0

NOT FOR CONSTRUCTION