


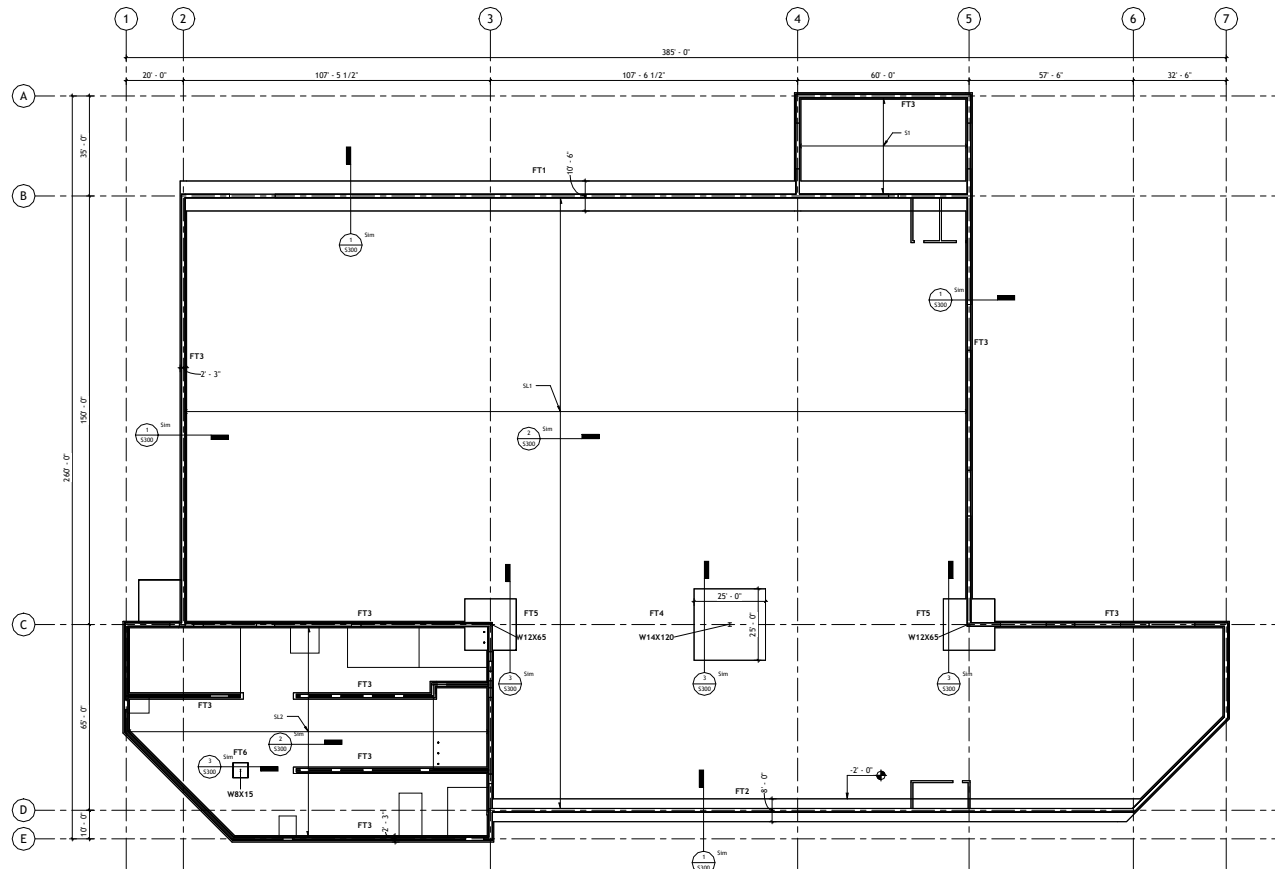

① FOUNDATION PLAN
1/16" = 1'-0"

FOUNDATION NOTES

- FOOTING SHALL BE CENTERED UNDER WALLS AND COLUMNS UNLESS NOTED OTHERWISE.
FOOTING ELEVATIONS SHOWN DESIGNATE THE MINIMUM DEPTH OF THE FOOTING WHERE THE ALLOWABLE SOIL BEARING IS EXPECTED.
- ACCEPTABLE BACKFILL MATERIAL SHALL BE PLACED IN LIFTS NOT TO EXCEED EIGHT (8) INCHES IN LOOSE THICKNESS.
- FOR FOOTING AND FOUNDATIONS, THE SUBGRADE OR FILL MATERIAL SHALL BE COMPACTED AND VERIFIED TO MEET 98% STANDARD PROCTOR MAXIMUM DRY DENSITY ACCORDANCE WITH ASTM D698. FOR RELATIVELY COHESIONLESS GRANULAR FILL WHICH HAS A PERCENT PASSING THE #200 SIEVE LESS THAN 10 PERCENT AND HAS ONLY A SLIGHT SENSITIVITY TO MOISTURE CHANGES, COMPACTION SHALL BE 75 PERCENT RELATIVE DENSITY IN ACCORDANCE WITH ASTM D4253 AND D4254. IF COMPACTION DOES NOT COMPLY, CONTRACTOR SHALL RECOMPACT AREA AND UNTIL TEST RESULTS ARE PASSING. AN AREA EXHIBITING WEAKNESS SUCH AS RUTTING OR PUMPING SHALL BE REMOVED AND REPLACED WITH COMPACTED GRANULAR FILL.
- CONTINUOUS WALL FOOTING REINFORCING SHALL EXTEND THROUGH COLUMN SPREAD FOOTINGS UNLESS NOTED OTHERWISE.

FOUNDATION SCHEDULE

Type Mark	Longitudinal Rebar	Traverse Rebar	Width	Foundation Thickness
FT1	(10) #5	#5 @ 12" O.C.	10' - 6"	1' - 6"
FT2	(8) #5	#5 @ 12" O.C.	8' - 0"	1' - 6"
FT3	(3) #5	#5 @ 12" O.C.	2' - 3"	1' - 6"
FT4	#5 @ 12" O.C.	#5 @ 12" O.C.	25' - 0"	1' - 6"
FT5	#5 @ 12" O.C.	#5 @ 12" O.C.	18' - 0"	1' - 6"
FT6	#5 @ 12" O.C.	#5 @ 12" O.C.	5' - 3"	1' - 6"
SL1	#4 @ 18" O.C.	#4 @ 18" O.C	<varies>	0' - 8"
SL2	#4 @ 18" O.C.	#4 @ 18" O.C	73' - 9"	0' - 5"

CITY OF BONDURANT

PUBLIC WORKS
FACILITY

FOUNDATION PLAN

Project Number 01092001
Date 05/05/2024
Drawn By LWM
Checked By OGM
S100
Scale As indicated

5/9/2024 4:17:06 PM