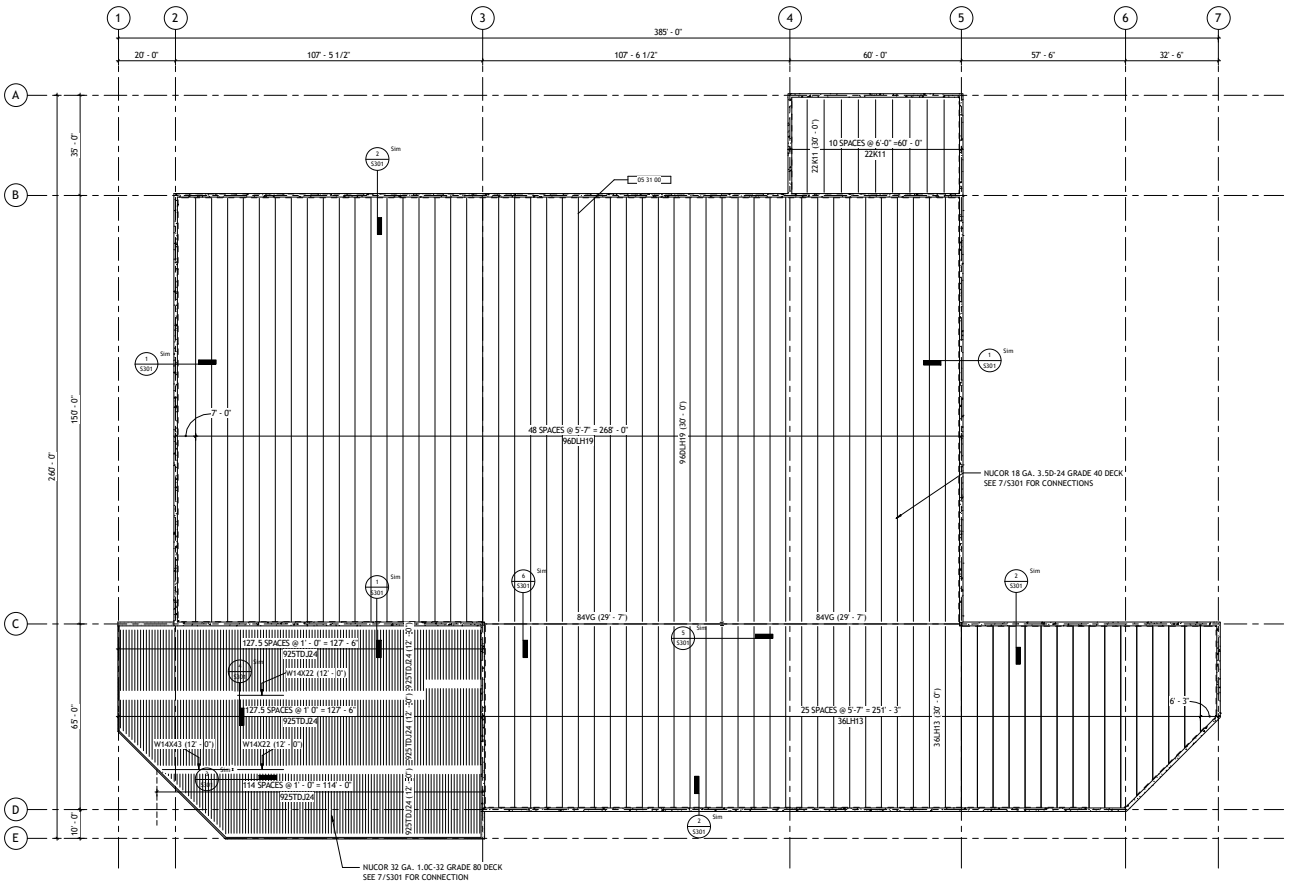


1 Structural Framing
1/16" = 1'-0"

ROOF FRAMING NOTES

1. ALL TRUSS JOISTS AND JOIST GIRDERS WERE DESIGNED IN ACCORDANCE WITH THE STEEL JOIST INSTITUTE (SJI).
2.
3. THE EQUIPMENT AREA FRAMING ARE MANUFACTORED BY NUCOR VULCRAFT AND THE OFFICE AREA FRAMING IS MANUFACTORED BY CLARKDIETRICH.
4. THE INTENT OF THESE PLANS AND NOTES IS TO PRESENT THE PROJECT REQUIREMENTS. MAJOR DETAILS HAVE BEEN SHOWN ON THE DRAWINGS. HOWEVER, CERTAIN MINOR DETAILS MUST BE WORKED OUT IN THE FIELD OR SHOP DRAWING PROCESS BY THE CONTRACTOR.
5. ELEVATIONS GIVEN ON PLANS ARE IN REFERENCE TO THE FINISHED FLOOR ELEVATION (+0'-0")
6. UNLESS NOTED OTHERWISE, DETAILS SHOWN ON DRAWINGS ARE TO BE CONSIDERED TYPICAL FOR ALL SIMILAR CONDITIONS.
7. THE STRUCTURE IS DESIGNED TO BE STABLE AND SELF-SUPPORTING AFTER THE BUILDING IS FULLY ERECTED AND ALL CONNECTIONS ARE COMPLETED. UNLESS NOTED OTHERWISE, THE DRAWINGS DO NOT INDICATE THE MEANS AND METHODS OF CONSTRUCTION.

STRUCTURAL FRAMING SCHEDULE

TYPE	USAGE	Length	TOP ELEVATION	COUNT
22K11	Joist	34' - 3 1/2"	30'-0"	9
36LH13	Joist	<varies>	30'-0"	61
84VG	Girder	83' - 9"	29'-7"	2
96DLH19	Joist	<varies>	30'-0"	48
925TDJ24	Joist	<varies>	12'-0"	367
L6X6X1/2	Horizontal Bracing	35' - 0"	30'-3 1/2"	1
L6X6X1/2	Horizontal Bracing	274' - 7 1/32"	30'-3 7/8"	2
L6X6X1/2	Horizontal Bracing	33' - 11"	30'-4 3/8"	1
L8X8X1	Horizontal Bracing	<varies>	30'-2"	8
L8X8X1	Horizontal Bracing	148' - 5 1/32"	30'-7"	1
W14X22	Girder	19' - 6"	12'-0"	2
W14X43	Girder	26' - 6"	12'-0"	1

No.	Description	Date

CITY OF BONDURANT

PUBLIC WORKS FACILITY

FRAMING PLAN

Project Number	01092001
Date	05/05/2024
Drawn By	LWM
Checked By	OGM
Scale	As indicated

S200

4/17/2024 6:11:56 AM