

THE HODSON RESIDENCE #2 - D300 (2386) NG, DUPLEX

PROJECT DESCRIPTION

AREAS:
TOTAL LIVING - 2,418 SF TOTAL
MAIN FLOOR - 612 SF PER UNIT
UPPER FLOOR - 597 SF PER UNIT
GARAGE - NA
COVERED EXTERIORS - 70 SF PER UNIT
STORIES: 2
CONSTRUCTION: WOOD, LIGHT FRAME
SITE ADDRESS: 411 TALENT AVE
TALENT, OR 97540
CITY OF TALENT



DRAWINGS INDEX

CS	COVER SHEET
N	NOTES
EO	ENERGY PATH - OREGON
A1	EXTERIOR ELEVATIONS
A2	MAIN FLOOR PLAN
A2.1	UPPER FLOOR PLAN
A3	FOUNDATION PLAN
A3.1	MAIN FLOOR JOIST PLAN
A4	MAIN FLOOR FRAMING PLAN
A4.1	UPPER FLOOR JOIST PLAN
A4.2	UPPER FLOOR FRAMING
A5	ROOF PLAN
A6	BUILDING SECTION A
A7	CABINET DETAILS
AD1	DETAILS
AD2	DETAILS
AD3	DETAILS
AD4	DETAILS
AD5	DETAILS
AD6	DETAILS
AD7	DETAILS
AD8	DETAILS
AD9	DETAILS
AD10	DETAILS
AD11	DETAILS
FJ	IWP MAIN FLOOR JOIST LAYOUT
FJ2	IWP UPPER FLOOR JOIST LAYOUT
S0	CORE STRUCTURAL GENERAL NOTES
S0.1	CORE STRUCTURAL GENERAL NOTES
S1	CORE STRUCTURAL FOUNDATION PLAN
S1.1	CORE STRUCTURAL 2ND FLOOR / LOW ROOF FRAMING PLAN
S1.2	CORE STRUCTURAL HIGH ROOF FRAMING PLAN
S2	CORE STRUCTURAL DETAILS
S2.1	CORE STRUCTURAL DETAILS

CODE INFORMATION

2023 ORSC
2023 ORSC - CHAPTER 11 ENERGY CODE

GENERAL NOTES

- 1) CONTRACTOR TO FIELD VERIFY ALL EXISTING CONDITIONS AND THE CONSTRUCTION DRAWINGS PRIOR TO COMMENCING WORK. CONTRACTOR TO NOTIFY ADAIR HOMES IMMEDIATELY OF ANY DISCREPANCIES, ERRORS OR OMISSIONS.
- 2) DO NOT SCALE DRAWINGS. USE DIMENSIONS SHOWN. IT IS THE CONTRACTOR'S RESPONSIBILITY TO CROSS CHECK DETAILS AND DIMENSIONS SHOWN ON THE ARCHITECTURAL DRAWINGS WITH RELATED REQUIREMENTS ON THE STRUCTURAL AND OTHER DRAWINGS AS APPLICABLE. NOTIFY ADAIR HOMES OF ANY DISCREPANCIES BEFORE COMMENCING WORK
- 3) WHERE NO SPECIFIC STANDARDS ARE APPLIED TO A MATERIAL OR METHOD OF CONSTRUCTION TO BE USED IN THE WORK, ALL SUCH MATERIALS AND METHODS ARE TO MAINTAIN THE STANDARDS OF THE INDUSTRY.
- 4) ALL CONSTRUCTION WORK SHALL BE DONE IN COMPLIANCE WITH THE LATEST EDITION OF THE APPLICABLE BUILDING CODE AS AMENDED BY THE STATE AND ALL OTHER STATE AND LOCAL REQUIREMENTS THAT APPLY.
- 5) MATERIALS, EQUIPMENT, ETC. , NOT INDICATED ON DRAWINGS OR SPECIFIED HEREIN BUT REQUIRED FOR THE SUCCESSFUL COMPLETION OF THE INSTALLATION SHALL BE HELD TO BE IMPLIED AND SHALL BE FURNISHED BY THE CONTRACTOR FOR NO ADDITIONAL COST.
- 6) ERRORS OR OMISSIONS IN ANY SCHEDULE OR DRAWING DO NOT RELIEVE THE CONTRACTOR FROM RESPONSIBILITY FOR THE WORK INTENDED IN THE DRAWINGS OR SPECIFICATIONS.

DESIGN CRITERIA

SEISMIC DESIGN CATEGORY: D0
WIND SPEEDS: < OR = TO 95mph Vasd / 120mph Vult
EXPOSURE CATEGORY: B
SOILS BEARING CAPACITY: 1500#
ROOF SNOW LOAD: 28#
FROST DEPTH: 18"

TYPICAL ABBREVIATIONS

CL	CENTER LINE	CPT	CARPET	HVAC	HEATING, VENTILATION & AIR	SYM	SYMBOL OR SYMMETRICAL
°	DEGREE(S)	CTR	CENTER		CONDITIONING	T&B	TOP AND BOTTOM
"	INCH(ES)	CTSK	COUNTERSINK	LTBD	LOCATION TO BE DETERMINED	T&G	TONGUE AND GROOVE
'	FOOT (FEET)	DED	DEDICATED	MAX	MAXIMUM	TEMP	TEMPERED OR TEMPORARY
#	NUMBER OR POUND	DIA	DIAMETER	MIN	MINIMUM	TKC	TIGHT KNOT CEDAR
x	BY (2 x 4)	DIM	DIMENSION	MTL	METAL	TO	TOP OF
AB	ANCHOR BOLT	DN	DOWN	NTS	NOT TO SCALE	TOD	TOP OF DECK
A/C	AIR CONDITIONING	DW	DISHWASHER	OBS	OBSCURE	TOS	TOP OF SLAB
ADJ	ADJUST(ABLE)	EA	EACH	OC	ON CENTER	TOW	TOP OF WALL
AFF	ABOVE FINISHED FLOOR	EXT	EXTERIOR OR EXTENSION	OPP	OPPOSITE	TYP	TYPICAL
ALT	ALTERNATE, ALTERNATIVE	FF	FINISHED FLOOR	OPT.	OPTIONAL	UM.	UNDERMOUNT
BD	BOARD	FDN	FOUNDATION	OSB	ORIENTED STRAND BOARD	UNO	UNLESS NOTED OTHERWISE
BLDG	BUILDING	FLR.	FLOOR	PL	PLATE	VERT	VERTICAL
BLK	BLOCK	FO	FACE OF	PT	PRESSURE TREATED	VIF	VERIFY IN FIELD
BLKG	BLOCKING	FOC	FACE OF CONCRETE	PWD	PLYWOOD	W/	WITH
BS	BOTH SIDES	FOF	FACE OF FINISH	QTY	QUANTITY	WD	WOOD
CL	CENTER LINE	FOS	FACE OF STUD	REQ'D	REQUIRED	WH	WATER HEATER
CLG	CEILING	GYP	GYPSUM	RM	ROOM	W/O	WITHOUT
CLO	CLOSET	GYP BD	GYPSUM BOARD (SHEETROCK)	RO	ROUGH OPENING		
CLR	CLEAR(ANCE)	HDW	HARDWARE	RS	ROUGH SAWN		
CMFT.	COMFORT HEIGHT	HT	HEIGHT	STN	STONE VENEER		
CONC.	CONCRETE			SIM	SIMILAR		

REVISION HISTORY

#	DATE	DESCRIPTION

2023 ORSC

HODSON #1 - 2386

ADAIR HOMES INC.
© COPYRIGHT 2025



ADAIR HOMES, INC
4400 NE 77TH AVE
SUITE 100
VANCOUVER, WA 98662

COMMUNITY CODE / LOT#:

MEME-129

PLAN ORIENTATION:

STANDARD

GARAGE CONFIGURATION:

NONE

COVERSHEET

PAGE:

CS

SCALE:

DATE: 08/26/2025

DRAFTED BY: ES

REV:

ENGINEERED		FRAMING NOTES		FLOOR JOIST NOTES		ELECTRICAL NOTES		OREGON ELECTRICAL NOTES																									
1) THIS PLAN IS Laterally and Vertically Engineered. 2) Engineered Requirements and Details (see 'S' Sheets) supersede Architectural Details for said elements or plan. 3) All Manufacturer's Installation Instructions shall be available on the job site at the time of inspection for the inspector's use and reference.		1) ALL EXTERIOR WALL STUDS, HOUSE AND GARAGE, SHALL BE 2x6 @ 16" OC. 2) WALL STUDS SHALL BE DF/L #2, UNLESS NOTED OTHERWISE. 3) STRUCTURAL MEMBERS (POSTS, BEAMS, ETC) SHALL BE A MIN OF DF/L #2, UNLESS NOTED OTHERWISE. ALL STUDS AT WHERE HOLDOWNS ATTACH SHALL BE DF-L #2. 4) WOOD IN CONTACT WITH CONCRETE SHOULD BE PRESERVATIVE-TREATED (PT) WOOD IN ACCORDANCE WITH AWPA U1 AND M4 STANDARDS. 5) PROVIDE MIN. A SINGLE OR MULTIPLE STUDS UNDER GIRDER BEARING POINTS TO MATCH THE NUMBER OF MEMBERS IN THE TRUSS, UNLESS NOTED OTHERWISE. 6) DOOR ROUGH OPENINGS SHALL BE A MINIMUM OF 3" FROM THE FACE OF ADJACENT WALLS. 7) PROVIDE SOLID HEADERS IN OPENINGS IN INTERIOR BEARING WALLS. 8) BEAMS SHALL BE ATTACHED TO POSTS AND POSTS TO FOOTINGS/SUPPORT MEMBERS WITH APPROPRIATE FASTENERS. FASTENERS INSTALLED IN PRESERVATIVE-TREATED (PT) WOOD SHALL BE HOT-DIPPED ZINC COATED GALVANIZED WITH MIN. COATING WEIGHT COMPLYING WITH ASTM A 153. THIS INCLUDES NUTS AND WASHERS. FASTENERS OTHER THAN NAILS AND TIMBER RIVETS ARE PERMITTED TO BE MECHANICALLY DEPOSITED ZINC-COATED WITH COATING WEIGHTS COMPLYING WITH ASTM B 695, CLASS 55 MIN. PLAIN CARBON STEEL FASTENERS IN PT WOOD WITH SBX/DOT OR ZINC BORATE ARE NOT REQUIRED TO BE GALVANIZED. 9) STUD HEIGHT IS DEPENDENT ON BUILDING PLATE HEIGHT: 92 5/8" TALL STUDS = 8' PLATE 104 5/8" TALL STUDS = 9' PLATE 116 5/8" TALL STUDS = 10' PLATE 10) SEE ENGINEER'S PLANS ('S' SHEETS) FOR WINDOW/ DOOR HEADER CALLOUTS. 10) SEE 'D' SHEETS FOR FRAMING DETAILS AS WELL AS ENGINEER'S 'S' OR 'D' SHEETS. 11) FIREBLOCKING SHALL BE PROVIDED IN THE FOLLOWING LOCATIONS (R302.11): - IN CONCEALED SPACES OF STUD WALLS AND PARTITIONS (VERTICALLY AT CEILING AND FLOOR LEVELS AND HORIZONTALLY AT INTERVALS NOT EXCEEDING 10 FEET) - AT ALL INTERCONNECTIONS BETWEEN CONCEALED VERTICAL AND HORIZONTAL SPACES SUCH AS OCCUR AT SOFFITS, DROP CEILINGS AND COVE CEILINGS. - IN CONCEALED SPACES BETWEEN STAIR STRINGERS AT THE TOP AND BOTTOM OF THE RUN. - AT OPENINGS AROUND VENTS, PIPES, DUCTS, CABLES AND WIRES AT CEILING AND FLOOR LEVEL, WITH AN APPROVED MATERIAL TO RESIST THE FREE PASSAGE OF FLAME AND PRODUCTS OF COMBUSTION. - AT CHIMNEYS AND FIREPLACES.		1) SEE PLANS FOR JOIST LAYOUT. 2) FLOOR JOISTS SHALL BE BLOCKED PER THE JOIST MANUFACTURER'S INSTRUCTIONS. 3) FULL DEPTH BLOCKING SHALL BE PROVIDED AT INTERMEDIATE JOIST SUPPORTS. 4) LATERAL RESTRAINT OF FLOOR JOISTS AT JOIST ENDS TO BE PROVIDED PER DETAIL 1/D1 AND PER THE ENGINEER OF RECORD. 5) JOISTS TO BE HUNG TO BEAMS HELD UP IN FLOOR SYSTEM WITH APPROVED JOIST HANGERS. 6) PENETRATIONS THROUGH JOIST WEBS TO BE PERMITTED PER MANUFACTURER'S SPECIFICATIONS ONLY. 7) OFFSET JOISTS TO AVOID PLUMBING, ETC. PER JOIST LAYOUT AND/OR MANUFACTURER'S SPECIFICATIONS. OFFSETS SHALL NOT EXCEED 3".		1) ACTUAL LOCATION OF ELECTRICAL OUTLETS, ELECTRIC RESISTANCE HEATERS, THERMOSTATS, AND ALL ELECTRICAL COMPONENTS SHALL BE DETERMINED BY THE ELECTRICIAN AND INSTALLED TO CODE. 2) ALL HABITABLE ROOMS, BATHROOMS, HALLWAYS, STAIRWAYS AND GARAGES TO HAVE A MINIMUM OF ONE WALL SWITCH-CONTROLLED LIGHTING FIXTURE OR OUTLET. 3) STAIRWAYS MUST BE ILLUMINATED IN ONE OF TWO WAYS: a) ARTIFICIAL LIGHTING IN THE VICINITY OF EACH LANDING (TOP, BOTTOM, AND INTERMEDIATE). b) ARTIFICIAL LIGHTING OVER EACH INDIVIDUAL STAIRWAY SECTION. 4) STAIRWAYS SHALL HAVE HAVE A CONTROL SWITCH AT EACH FLOOR. 5) AT LEAST ONE WALL-SWITCH-CONTROLLED LIGHTING OUTLET SHALL BE INSTALLED TO PROVIDE ILLUMINATION ON THE EXTERIOR SIDE OF EACH OUTDOOR EGRESS DOOR HAVING GRADE LEVEL ACCESS, INCLUDING OUTDOOR EGRESS DOORS FOR ATTACHED GARAGES AND DETACHED GARAGES WITH ELECTRIC POWER. 5) RANGE HOOD EXHAUST FAN RATE TO BE MIN. 150 CFM. RANGE HOODS CAPABLE OF EXHAUSTING MORE THAN 400 CFM REQUIRE MAKE UP AIR (IRC M1503.6) 6) BATHROOM EXHAUST FAN RATE TO BE MIN. 80 CFM 7) PROVIDE (1) CONTINUOUSLY OPERATING EXHAUST FAN PER HOME. SEE PLANS FOR LOCATION. 8) RECEPTACLE OUTLETS SHALL BE DISTRIBUTED IN EVERY HABITABLE ROOM (KITCHEN, BEDROOM, LIVING ROOM, DINING ROOM, ETC) SO THAT NO POINT MEASURED HORIZONTALLY ALONG THE FLOOR LINE IN ANY WALL SPACE IS MORE THAN 6 FEET FROM A RECEPTACLE OUTLET. 9) COUNTERTOP RECEPTACLES SHALL BE INSTALLED AT EVERY WALL COUNTERTOP SPACE THAT IS 12" OR WIDER AND SO THAT NO POINT ALONG THE WALL LINE IS MORE THAN 24" FROM AN OUTLET IN THAT SPACE. 10) AT LEAST ONE RECEPTACLE OUTLET SHALL BE INSTALLED AT EACH ISLAND OR PENINSULAR COUNTERTOP SPACE WITH A LONG DIMENSION OF 24" OR GREATER AND A SHORT DIMENSION OF 12" OR GREATER. 11) AT LEAST ONE RECEPTACLE OUTLET SHALL BE INSTALLED IN BATHROOMS AND SUCH OUTLET SHALL BE LOCATED WITHIN 36" OF THE OUTSIDE EDGE OF EACH LAVATORY BASIN. THE RECEPTACLE OUTLET SHALL BE LOCATED ON A WALL OR PARTITION THAT IS ADJACENT TO THE LAVATORY BASIN LOCATION. 12) ALL BATHROOM, GARAGE, OUTDOOR, UNFINISHED BASEMENT AND KITCHEN COUNTERTOP RECEPTACLE OUTLETS SHALL HAVE GFCI PROTECTION (IRC E3902). 13) ALL RECEPTACLES THAT ARE LOCATED WITHIN 6' OF THE OUTSIDE EDGE OF A SINK SHALL HAVE GFCI PROTECTION (IRC E3902.7). 14) THE RECEPTACLE SUPPLYING THE DISHWASHER SHALL HAVE GFCI PROTECTION (IRC E3902.10). 15) ALL BRANCH CIRCUITS THAT SUPPLY 120-VOLT, SINGLE PHASE, 15- AND 20-AMP OUTLETS INSTALLED IN KITCHENS, FAMILY ROOMS, DINING ROOMS, LIVING ROOMS, GREAT ROOMS, DENS, BEDROOMS, CLOSETS, LAUNDRY ROOMS, HALLWAYS AND OTHER SIMILAR ROOMS OR AREAS SHALL HAVE ARC-FAULT CIRCUIT-INTERRUPTER PROTECTION PER SECTION E3902.16.		1) ACTUAL LOCATION OF ELECTRICAL OUTLETS, ELECTRIC RESISTANCE HEATERS, THERMOSTATS, AND ALL ELECTRICAL COMPONENTS SHALL BE DETERMINED BY THE ELECTRICIAN AND INSTALLED TO CODE. 2) ALL HABITABLE ROOMS, BATHROOMS, HALLWAYS, STAIRWAYS AND GARAGES TO HAVE A MINIMUM OF ONE WALL SWITCH-CONTROLLED LIGHTING FIXTURE OR OUTLET. 3) STAIRWAYS MUST BE ILLUMINATED IN ONE OF TWO WAYS: a) ARTIFICIAL LIGHTING IN THE VICINITY OF EACH LANDING (TOP, BOTTOM, AND INTERMEDIATE). b) ARTIFICIAL LIGHTING OVER EACH INDIVIDUAL STAIRWAY SECTION. 4) STAIRWAYS SHALL HAVE HAVE A CONTROL SWITCH AT EACH FLOOR. 5) AT LEAST ONE WALL-SWITCH-CONTROLLED LIGHTING OUTLET SHALL BE INSTALLED TO PROVIDE ILLUMINATION ON THE EXTERIOR SIDE OF EACH OUTDOOR EGRESS DOOR HAVING GRADE LEVEL ACCESS, INCLUDING OUTDOOR EGRESS DOORS FOR ATTACHED GARAGES AND DETACHED GARAGES WITH ELECTRIC POWER. 5) RANGE HOOD EXHAUST FAN RATE TO BE MIN. 150 CFM 6) BATHROOM EXHAUST FAN RATE TO BE MIN. 80 CFM 7) PROVIDE (1) CONTINUOUSLY OPERATING EXHAUST FAN PER HOME. SEE PLANS FOR LOCATION. 8) RECEPTACLE OUTLETS SHALL BE DISTRIBUTED IN EVERY HABITABLE ROOM (KITCHEN, BEDROOM, LIVING ROOM, DINING ROOM, ETC) SO THAT NO POINT MEASURED HORIZONTALLY ALONG THE FLOOR LINE IN ANY WALL SPACE IS MORE THAN 6 FEET FROM A RECEPTACLE OUTLET. 9) COUNTERTOP RECEPTACLES SHALL BE INSTALLED AT EVERY WALL COUNTERTOP SPACE THAT IS 12" OR WIDER AND SO THAT NO POINT ALONG THE WALL LINE IS MORE THAN 24" FROM AN OUTLET IN THAT SPACE. 10) AT LEAST ONE RECEPTACLE OUTLET SHALL BE INSTALLED AT EACH ISLAND OR PENINSULAR COUNTERTOP SPACE WITH A LONG DIMENSION OF 24" OR GREATER AND A SHORT DIMENSION OF 12" OR GREATER. 11) AT LEAST ONE RECEPTACLE OUTLET SHALL BE INSTALLED IN BATHROOMS AND SUCH OUTLET SHALL BE LOCATED WITHIN 36" OF THE OUTSIDE EDGE OF EACH LAVATORY BASIN. THE RECEPTACLE OUTLET SHALL BE LOCATED ON A WALL OR PARTITION THAT IS ADJACENT TO THE LAVATORY BASIN LOCATION. 12) ALL BATHROOM, GARAGE, OUTDOOR, UNFINISHED BASEMENT AND KITCHEN COUNTERTOP RECEPTACLE OUTLETS SHALL HAVE GFCI PROTECTION (OESC 210.8(A)(1)). 13) ALL RECEPTACLES THAT ARE LOCATED WITHIN 6' OF THE OUTSIDE EDGE OF A SINK SHALL HAVE GFCI PROTECTION (OESC 210.8(A)(7)). 14) ALL BRANCH CIRCUITS THAT SUPPLY 120-VOLT, SINGLE PHASE, 15- AND 20-AMP OUTLETS INSTALLED IN KITCHENS, FAMILY ROOMS, DINING ROOMS, LIVING ROOMS, GREAT ROOMS, DENS, BEDROOMS, CLOSETS, LAUNDRY ROOMS, HALLWAYS AND OTHER SIMILAR ROOMS OR AREAS SHALL HAVE ARC-FAULT CIRCUIT-INTERRUPTER PROTECTION PER (OESC 210.12(A).) 15) SOLAR READY REQUIREMENTS:ALL NEW CONSTRUCTION SHALL BE SOLAR READY. A SQUARE METAL JUNCTION BOX NOT LESS THAN 4" x 4" WITH A METAL BOX COVER SHALL BE PROVIDED WITHIN 24" HORIZONTALLY OR VERTICALLY OF THE MAIN ELECTRICAL PANEL. A MINIMUM 3/4" NON FLEXIBLE METAL RACEWAY SHALL EXTEND FROM THE JUNCTION BOX TO A CAPPED ROOF TERMINATION OR TO AN ACCESSIBLE LOCATION IN THE ATTIC WITH A VERTICAL CLEARANCE OF NOT LESS THAN 36". WHERE THE RACEWAY TERMINATES IN THE ATTIC, THE TERMINATION SHALL BE LOCATED NOT LESS THAN 6" ABOVE THE INSULATION. THE END OF THE RACEWAY SHALL BE MARKED AS RESERVED FOR SOLAR. ORSC SECTION N1107.4																									
FOUNDATION NOTES				FLOOR PLAN NOTES																													
1) MIN. COMPRESSIVE STRENGTH OF CONCRETE (TABLE R402.2) U.N.O. PER ENGINEER: <table><tr><th>TYPE/LOCATION</th><th colspan="3">WEATHERING POTENTIAL</th></tr><tr><th></th><th>NEGLIGIBLE</th><th>MODERATE</th><th>SEVERE</th></tr><tr><td>FOUNDATIONS, BASEMENT WALLS, CONCRETE NOT EXP. TO WEATHER</td><td>2500 PSI</td><td>2500 PSI</td><td>2500 PSI AIR ENTRAINED</td></tr><tr><td>BASEMENT SLABS</td><td>2500 PSI</td><td>2500 PSI</td><td>2500 PSI AIR ENTRAINED</td></tr><tr><td>FOUNDATIONS, BASEMENT WALLS, OTHER VERT CONC EXPOSED TO WEATHER</td><td>2500 PSI</td><td>3000 PSI AIR ENTRAINED</td><td>3000 PSI AIR ENTRAINED</td></tr><tr><td>GARAGE FLOOR SLABS, PORCHES & STEPS EXP. TO WEATHER</td><td>2500 PSI</td><td>3000 PSI AIR ENTRAINED</td><td>3500 PSI AIR ENTRAINED</td></tr></table> 2) FOUNDATIONS WITH STEM WALLS SHALL HAVE REINFORCEMENT PER ENGINEER. 3) BOTTOM REINFORCEMENT SHALL BE PLACED A MIN OF 3" ABOVE THE BOTTOM OF THE FOOTING. 4) MUDSILLS AT EXTERIOR WALLS, INTERIOR BEARING WALL SOLE PLATES, AND INTERIOR BRACED WALL PLATES THAT ARE SUPPORTED ON CONTINUOUS FOUNDATIONS SHALL BE ANCHORED TO THE FOUNDATION WITH MIN. 5/8" ANCHOR BOLTS @ 4'-0" OC. MIN. ANCHOR BOLTS AT BOARD ENDS ARE TO BE A MAX. OF 12" AND NOT LESS THAN 7 BOLT DIAMETERS FROM EACH END OF THE PLATE SECTION. ANCHOR BOLTS TO HAVE MIN. 7" EMBEDMENT INTO CONCRETE FOUNDATION. OTHER INTERIOR BEARING WALLS NOT DENOTED ON THE PLANS AS REQUIRING ANCHOR BOLTS, SHALL BE CONNECTED TO FOOTINGS WITH APPROVED FASTENERS. (R403.1.6 & R403.1.6.1) 5) CONCRETE PAD FOOTINGS SHALL HAVE REINFORCEMENT PER ENGINEER. 6) A PLATE WASHER CONFORMING TO SECTION R602.11.1 SHALL BE PROVIDED FOR ALL ANCHOR BOLTS. PLATE WASHER TO BE A MIN. OF 0.229 INCH x 3 INCHES x 3 INCHES. 7) ADJUST FOOTING DEPTH AS NECESSARY PER FROST DEPTH REQUIREMENTS. 8) CRAWL SPACE VENTILATION SHALL BE PROVIDED AT A RATIO OF 1/300 PER IRC R408.1. A FOUNDATION VENT SHALL BE PROVIDED WITHIN 3' OF BUILDING CORNERS. INSTALL CLASS 1 VAPOR BARRIER IN CRAWL SPACE PER MANUF. SPECIFICATIONS (JOINTS LAPPED 12" AT SEAMS AND EXTEND MIN. 12" UP FOUNDATION WALLS).		TYPE/LOCATION	WEATHERING POTENTIAL				NEGLIGIBLE	MODERATE	SEVERE	FOUNDATIONS, BASEMENT WALLS, CONCRETE NOT EXP. TO WEATHER	2500 PSI	2500 PSI	2500 PSI AIR ENTRAINED	BASEMENT SLABS	2500 PSI	2500 PSI	2500 PSI AIR ENTRAINED	FOUNDATIONS, BASEMENT WALLS, OTHER VERT CONC EXPOSED TO WEATHER	2500 PSI	3000 PSI AIR ENTRAINED	3000 PSI AIR ENTRAINED	GARAGE FLOOR SLABS, PORCHES & STEPS EXP. TO WEATHER	2500 PSI	3000 PSI AIR ENTRAINED	3500 PSI AIR ENTRAINED			1) BEDROOMS, HABITABLE ATTICS, AND BASEMENTS SHALL HAVE AT LEAST ONE EMERGENCY EGRESS WINDOW. WHERE BASEMENTS HAVE MULTIPLE BEDROOMS, EACH BEDROOM SHALL HAVE AN EGRESS WINDOW. EGRESS WINDOWS SHALL MEET THE FOLLOWING REQUIREMENTS: - SILL HEIGHT NOT MORE THAN 44" AFF - CLEAR NET OPENING AREA OF 5.7 SF - CLEAR NET OPENING HEIGHT OF 24" - CLEAR NET OPENING WIDTH OF 20" 2) WHERE THE OPENING OF AN OPERABLE WINDOW IS MORE THAN 72" ABOVE GRADE, THE SILL SHALL NOT BE LESS THAN 24" AFF. IF THE SILL HEIGHT IS LESS THAN 24", THE WINDOW SHALL BE EQUIPPED WITH AN OPENING CONTROL DEVICE COMPLYING WITH ASTM F 2090. 3) PROVIDE A SMOKE DETECTOR IN EVERY BEDROOM. PROVIDE A COMBINATION CARBON MONOXIDE / SMOKE DETECTOR TO THE COMMON SPACE (HALLWAY, BONUS ROOM, ETC) ON EACH FLOOR. CO/SD DETECTOR TO BE WITHIN 14' OF EACH BEDROOM ENTRANCE. MULTIPLE CO/SD DETECTORS MAY BE NECESSARY ON A SINGLE FLOOR PER PLAN LAYOUT. SMOKE DETECTORS SHALL NOT BE INSTALLED WITHIN 3 FEET HORIZONTALLY FROM THE DOOR OR OPENING OF A BATHROOM THAT CONTAINS A BATHTUB OR SHOWER UNLESS THIS WILL PREVENT THE PLACEMENT OF A REQUIRED SMOKE ALARM. 4) PROVIDE INSULATION DAMS AT ALL CEILING MOUNTED HEATER LOCATIONS (IF APPLICABLE). 5) NATURAL LIGHT TO BE PROVIDED AT A RATIO OF 8% OF FLOOR AREA OF HABITABLE ROOMS. NATURAL VENTILATION TO BE PROVIDED AT A RATIO OF 4% OF FLOOR AREA OF HABITABLE ROOMS. 6) ALL INTERIOR WALL SURFACES AND CEILINGS TO BE SHEETROCKED WITH 1/2" GYP BD, OR AS REQUIRED PER LOCAL JURISDICTIONAL REQUIREMENTS. THIS WILL INCLUDE ANY ACCESSIBLE UNDER-STAIR LOCATIONS. ALL TUB/SHOWER ENCLOSURES SHALL HAVE WATER RESISTANT GYP BD. 7) ACCESS HATCHES & DOORS FROM CONDITIONED SPACES TO UNCONDITIONED SPACES (ATTIC AND CRAWL SPACES) SHALL BE WEATHERSTRIPPED & INSULATED TO A LEVEL EQUIVALENT TO THE INSULATION ON THE SURROUNDING SURFACES (R402.2.4) 8) APPLY 1/2" GYP BD TO GARAGE WALLS AND CEILING. IF THERE IS HABITABLE SPACE ABOVE THE GARAGE, THE LID SHALL HAVE 5/8" TYPE 'X' GYP BD, AND ALL SUPPORTING WALLS 1/2" GYP BD. (LOCAL JURISDICTIONAL REQUIREMENTS MAY SUPERSEDE THESE REQUIREMENTS - CHECK WITH LOCAL JURISDICTION)					
TYPE/LOCATION	WEATHERING POTENTIAL																																
	NEGLIGIBLE	MODERATE	SEVERE																														
FOUNDATIONS, BASEMENT WALLS, CONCRETE NOT EXP. TO WEATHER	2500 PSI	2500 PSI	2500 PSI AIR ENTRAINED																														
BASEMENT SLABS	2500 PSI	2500 PSI	2500 PSI AIR ENTRAINED																														
FOUNDATIONS, BASEMENT WALLS, OTHER VERT CONC EXPOSED TO WEATHER	2500 PSI	3000 PSI AIR ENTRAINED	3000 PSI AIR ENTRAINED																														
GARAGE FLOOR SLABS, PORCHES & STEPS EXP. TO WEATHER	2500 PSI	3000 PSI AIR ENTRAINED	3500 PSI AIR ENTRAINED																														
HVAC NOTES		1) ALL NEW DUCT SYSTEMS AND AIR HANDLING EQUIPMENT AND APPLIANCES SHALL BE LOCATED FULLY WITHIN THE BUILDING THERMAL ENVELOPE N1105.3 EXCEPTIONS: 1. VENTILATION INTAKE DUCTWORK AND EXHAUST DUCTWORK 2. UP TO 5 PERCENT OF THE LENGTH OF AN HVAC SYSTEM DUCTWORK SHALL BE PERMITTED TO BE LOCATED OUTSIDE OF THE THERMAL ENVELOPE 3. DUCTS DEEPLY BURIED IN INSULATION IN ACCORDANCE WITH ALL THE FOLLOWING: 3.1 INSULATION SHALL BE INSTALLED TO FILL GAPS AND VOIDS BETWEEN THE DUCT AND THE CEILING, AND A MINIMUM OF R-19 SHALL BE INSTALLED ABOVE THE DUCT BETWEEN THE DUCT AND UNCONDITIONED ATTIC. 3.2 INSULATION DEPTH MARKER FLAGS SHALL BE INSTALLED ON THE DUCTS EVERY 10 (3048mm) OR AS <i>APPROVED</i> BY THE <i>BUILDING OFFICIAL</i> . 2) BATHROOM EXHAUST FANS AND OUTDOOR VENTILATION SUPPLY FANS SHALL BE ENERGY STAR CERTIFIED																															

ENERGY EFFICIENCY - 2023 ORSC CHAPTER 11

PRESCRIPTIVE ENVELOPE REQUIREMENTS - TABLE N1101.1(1)										
OPTION	GLAZING AREA: % OF FLOOR	GLAZING U-FACTOR	SKYLIGHT U-FACTOR	DOOR U-FACTOR	INSULATION			BASEMENT INS.		DUCTS
					CEILING	WALL	FLOOR	WALL	SLAB	
STD. BASE CASE	UNLIMITED	0.27	0.50	0.20	R-49*	R-21 W/ INS. HEADERS	R-30	R-15 (CONT.)/ R-21 (FRAME)	R-15 2'	R-8

ALL CONDITIONED SPACES WITHIN RESIDENTIAL BUILDINGS SHALL COMPLY WITH TABLE N1101.1(1) (ABOVE) AND TWO ADDITIONAL MEASURES FROM TABLE N1101.1(2) (BELOW)

ADDITIONAL MEASURES - TABLE N1101.1(2):

- 1

HIGH EFFICIENCY HVAC SYSTEM

☐

☒

a.

Gas-fired furnace or boiler AFUE 94 percent, or

b.

Air source heat pump HSPF 10.0/14.0 SEER cooling or 8.5 HSPF2/15.0 SEER2
- 2

HIGH EFFICIENCY WATER HEATING SYSTEM

☐

☐

☐

a.

Natural gas/propane water heater with minimum UEF 0.90, or

b.

Electric heat pump water heater with minimum 3.45 UEF, or

c.

Natural gas/propane tankless/instantaneous heater with minimum 0.80 UEF Drain Water Heat Recovery Unit installed on minimum of one shower/tub-shower
- 5

DUCTLESS HEAT PUMP (DWELLING UNITS WITH ALL-ELECTRIC HEAT)

☐

a.

Provide ductless heat pump of minimum HSPF 10.0 or HSPF2 9.0 in primary zone replaces zonal electric heat sources, and

b.

Provide programmable thermostat for all heaters in bedrooms
- 6

HIGH EFFICIENCY THERMAL ENVELOPE UA

☒

a.

Proposed UA is 8% lower than the code UA

*-TABLE 1101.1(1) VAULTED CEILING SURFACE AREA EXCEEDING 50 PERCENT OF THE TOTAL HEATED SPACE FLOOR AREA SHALL HAVE A U-FACTOR NO GREATER THAN U-0.026 (EQUIVALENT TO R-38 RAFTER OR SCISSOR TRUSS WITH R-38 ADVANCED FRAMING).

N1104.5.2 INTERMEDIATE FRAMING FOR WALLS. INTERMEDIATE FRAMING FOR WALLS IS AN OPTIONAL CONSTRUCTION METHOD. INTERMEDIATE FRAMING, WHEN USED TO ACHIEVE IMPROVED WALL PERFORMANCE UNDER THE REQUIREMENTS OF TABLE 1101.1(1) OR TABLE N1104.1(2), SHALL MEET THE FOLLOWING REQUIREMENTS:

1.

WALLS. WALLS SHALL BE FRAMED WITH 2 X STUDS AT 16 INCHES (406 MM) ON CENTER AND SHALL INCLUDE THE FOLLOWING, AS DETAILED IN ITEMS 2 AND 3.
2.

CORNERS AND INTERSECTIONS. EXTERIOR WALL AND CEILING CORNERS SHALL BE FULLY INSULATED THROUGH THE USE OF THREE-STUD CORNERS CONFIGURED TO ALLOW FULL INSULATION INTO THE CORNER, OR TWO-STUD CORNERS AND DRYWALL BACKUP CLIPS OR OTHER APPROVED TECHNIQUE. INTERSECTIONS OF INTERIOR PARTITION WALLS WITH EXTERIOR WALLS SHALL BE FULLY INSULATED THROUGH THE USE OF SINGLE BACKER BOARDS, MID-HEIGHT BLOCKING WITH DRYWALL CLIPS OR OTHER APPROVED TECHNIQUE.
3.

HEADERS. VOIDS IN HEADERS 1 INCH (25.4 MM) TO 2 INCHES (51 MM) IN THICKNESS SHALL BE INSULATED WITH INSULATION THAT HAS A VALUE OF R-4 OR GREATER PER 1 INCH (25.4 MM) THICKNESS. VOIDS IN HEADERS GREATER THAN 2 INCHES (51 MM) IN DEPTH SHALL BE INSULATED TO A MINIMUM LEVEL OF R-10.

N1104.8.2 SEALING REQUIRED. EXTERIOR JOINTS AROUND WINDOW AND DOOR FRAMES, BETWEEN WALL CAVITIES AND WINDOW OR DOOR FRAMES, BETWEEN WALLS AND FOUNDATION, BETWEEN WALLS AND ROOF, BETWEEN WALL PANELS, AT PENETRATIONS OR UTILITY SERVICES THROUGH WALLS, FLOORS AND ROOFS AND ALL OTHER OPENINGS IN THE EXTERIOR ENVELOPE SHALL BE SEALED IN A MANNER APPROVED BY THE BUILDING OFFICIAL. SEALING FOR THE PURPOSE OF CREATING A CONTINUOUS AIR BARRIER SHALL BE IN ACCORDANCE WITH THE APPLICABLE REQUIREMENTS OF TABLE N1104.8, OR THE DWELLING SHALL BE TESTED TO DEMONSTRATE A BLOWER DOOR RESULT NOT GREATER THAN 3.25 ACH50. N1104.8.2.1 TOP PLATE SEALING. AT ALL WALLS IN CONTACT WITH VENTED ATTICS, THE WALL COVERING (GYPSUM BOARD OR OTHER) SHALL BE SEALED TO THE TOP PLATE WITH CAULK, SEALANT, GASKET OR OTHER APPROVED MATERIAL.

N1105.2 INSULATION OF DUCTS. ALL NEW DUCT SYSTEMS OR NEW PORTIONS OF DUCT SYSTEMS EXPOSED TO UNCONDITIONED SPACES, AND BURIED DUCTWORK WITHIN INSULATION THAT MEETS THE EXCEPTION TO SECTION N1105.3, SHALL BE INSULATED TO MINIMUM R-8. EXCEPTIONS:
1. THE REPLACEMENT OR ADDITION OF A FURNACE, AIR CONDITIONER OR HEAT PUMP SHALL NOT REQUIRE EXISTING DUCTS TO BE INSULATED TO CURRENT CODE.
2. EXHAUST AND INTAKE DUCTWORK.
N1105.3 INSTALLATION OF DUCTS. ALL NEW DUCT SYSTEMS AND AIR HANDLING EQUIPMENT AND APPLIANCES SHALL BE LOCATED FULLY WITHIN THE BUILDING THERMAL ENVELOPE. EXCEPTIONS:
1. VENTILATION INTAKE DUCTWORK AND EXHAUST DUCTWORK.
2. UP TO 10 FEET OF HVAC DUCTWORK.
3. WHERE TWO MEASURES ARE SELECTED FROM TABLE N1101.2(2) AND HVAC SUPPLY AND RETURN DUCTWORK IS INSTALLED IN ACCORDANCE WITH EITHER SECTION N1105.3.1, N1105.3.2 OR N1105.3.3.
N1105.3.1 DEEPLY BURIED DUCT IN ATTIC. DUCTS DEEPLY BURIED IN ATTIC INSULATION SHALL BE IN ACCORDANCE WITH ALL OF THE FOLLOWING WHEN USING SECTION N1105.3, EXCEPTION 3:
1. INSULATION SHALL BE INSTALLED TO FILL GAPS AND VOIDS BETWEEN THE DUCT AND THE CEILING, AND A MINIMUM OF R-19 INSULATION SHALL BE INSTALLED ABOVE THE DUCT BETWEEN THE DUCT AND UNCONDITIONED ATTIC.
2. ALL DUCTWORK IN THE ATTIC SHALL BE INSULATED TO R-8.
3. INSULATION DEPTH MARKER FLAGS SHALL BE INSTALLED ON THE DUCTS EVERY 10 FEET OR AS APPROVED BY THE BUILDING OFFICIAL.
EXCEPTION: HVAC DUCTWORK SHALL BE PERMITTED TO BE LOCATED OUTSIDE OF THE BUILDING THERMAL ENVELOPE WHERE THE DUCT IS INSULATED TO A MIN. R-27 WITH A CLASS II OR III VAPOR RETARDER.

N1105.4.1.2 SMART THERMOSTAT. FOR NEW CONSTRUCTION, THE THERMOSTAT SHALL MEET ENERGY STAR SMART THERMOSTAT CRITERIA WITH MINIMUM CONTROL FEATURE OF EITHER INTEGRAL OCCUPANCY SENSING OR GEOFENCING OR APPROVED EQUIVALENT. EXCEPTION: INDIVIDUAL HEATING OR COOLING UNITS WITH HEATING CAPACITY OF 2 KILOWATTS (6824 BTU/H) OR LESS OR WITH COOLING CAPACITY OF LESS THAN 5.3 KILOWATTS (18,000 BTU/H).

N1106.2 DOMESTIC AND SERVICE HOT WATER SYSTEMS. DOMESTIC HOT WATER PIPING SHALL BE INSULATED TO A MINIMUM OF R-3 AT THE FOLLOWING LOCATIONS:
1. PIPE NOT LOCATED FULLY WITHIN THE CONDITIONED SPACE.
2. THE FIRST 8 FEET (2438 MM) OF PIPE INTO AND OUT OF A WATER HEATER.
3. RECIRCULATING WATER PIPING.

R324.7.2 SOLAR READY CONSTRUCTION. NEW DETACHED ONE- AND TWO-FAMILY DWELLINGS AND TOWNHOUSES CLASSIFIED AS GROUP R3 SHALL COMPLY WITH SECTIONS R324.7.3 AND R324.7.4. EXCEPTIONS
1. NEW DETACHED ONE- AND TWO-DWELLINGS AND TOWNHOUSES WITH A PERMANENTLY INSTALLED ON-SITE RENEWABLE ENERGY SYSTEM, OR AN ACTIVE PERMIT APPLICATION FOR AN ON-SITE PERMANENTLY INSTALLED RENEWABLE ENERGY SYSTEM, AS DETERMINED BY THE BUILDING OFFICIAL.
2. A BUILDING WHERE THERE IS LESS THAN 600 SQUARE FEET OF ROOF AREA ORIENTED BETWEEN 90 DEGREES AND 270 DEGREES OF TRUE NORTH.
3. A BUILDING WITH A TOTAL SOLAR RESOURCE FRACTION (TSRF) OF LESS THAN 80 PERCENT, AS DOCUMENTED AND SUBMITTED AND APPROVED BY THE BUILDING OFFICIAL.
4. WHERE A SOLAR PHOTOVOLTAIC SYSTEM IS INFEASIBLE BECAUSE OF STRUCTURAL CONFIGURATION, EXTENSIVE ROOFTOP EQUIPMENT, SKYLIGHTS, OTHER OBSTRUCTIONS, OR OTHER UNIQUE DESIGN LIMITATIONS, AND WHERE SUCH DOCUMENTATION IS APPROVED.
R324.7.3 SOLAR INTERCONNECTION PATHWAY AND TERMINATION. A SQUARE METAL JUNCTION BOX NOT LESS THAN 4 INCHES BY 4 INCHES WITH A METAL BOX COVER4 SHALL BE PROVIDED WITHIN 24 INCHES HORIZONTALLY OR VERTICALLY OF THE MAIN ELECTRICAL PANEL. A MINIMUM 3/4 INCH NONFLEXIBLE METAL RACEWAY WITH A PULL STRING SHALL EXTEND FROM THE JUNCTION BOX TO A CAPPED ROOF TERMINATION OR TO AN ACCESSIBLE LOCATION IN THE ATTIC WITH A VERTICAL CLEARANCE OF NOT LESS THAN 36 INCHES. WHERE THE RACEWAY TERMINATES IN THE ATTIC, THE TERMINATION SHALL BE IN A METAL JUNCTION BOX NOT LESS THAN 4 INCHES BY 4 INCHES WITH A BOX COVER LOCATED NOT LESS THAN 6 INCHES ABOVE THE INSULATION. THE JUNCTION BOX SHALL BE MARKED AS "RESERVED FOR SOLAR". EXCEPTION: IN LIEU OF ¾" NONFLEXIBLE METAL RACEWAY, A MINIMUM OF TWO NO. 10 COPPER 3-WIRE WITH GROUND METAL CLAD (MC) CABLE SHALL BE INSTALLED BETWEEN THE JUNCTION BOXES WITH 6 INCHES OF FREE CONDUCTOR IN EACH JUNCTION BOX.
R324.7.4 ELECTRICAL SERVICE RESERVED SPACE. THE MAIN ELECTRICAL SERVICE PANEL, OR OTHER APPROVED ELECTRICAL PANEL THAT WOULD SERVE THE SOLAR PHOTOVOLTAIC SYSTEM, SHALL HAVE A RESERVED SPACE TO ALLOW INSTALLATION OF A DUAL-POLE CIRCUIT BREAKER FOR FUTURE SOLAR ELECTRIC AND A DUAL-POLE CIRCUIT BREAKER FOR FUTURE INSTALLATION. THESE SPACES SHALL BE LABELED "RESERVED FOR FUTURE SOLAR".

MECHANICAL VENTILATION - 2023 ORSC CHAPTER 15

M1505.4 WHOLE-HOUSE MECHANICAL VENTILATION SYSTEM. WHOLE-HOUSE MECHANICAL VENTILATION SYSTEMS SHALL BE DESIGNED IN ACCORDANCE WITH SECTIONS M1505.4.1 THROUGH M1505.4.4.

M1505.4.1 SYSTEM DESIGN. THE WHOLE-HOUSE MECHANICAL VENTILATION SYSTEM SHALL BE A BALANCED VENTILATION SYSTEM. LOCAL EXHAUST OR SUPPLY FANS ARE PERMITTED TO SERVE AS SUCH A SYSTEM. OUTDOOR AIR VENTILATION PROVIDED BY A SUPPLY FAN DUCTED RETURN SIDE OF AN AIR HANDLER SHALL BE CONSIDERED AS PROVIDING SUPPLY VENTILATION FOR THE BALANCED VENTILATION SYSTEM.

M1505.4.2 SYSTEM CONTROLS. THE WHOLE-HOUSE MECHANICAL VENTILATION SYSTEM SHALL BE PROVIDED WITH READILY ACCESSIBLE USER CONTROLS THAT ENABLE MANUAL OVERRIDE BY THE OCCUPANT. CONTROLS SHALL INCLUDE TEXT OR A SYMBOL INDICATING THEIR FUNCTION.

M1505.4.3 MECHANICAL VENTILATION RATE. THE WHOLE-HOUSE MECHANICAL VENTILATION SYSTEM SHALL PROVIDE OUTDOOR AIR AT A CONTINUOUS RATE NOT LESS THAN THAT DETERMINED IN ACCORDANCE WITH TABLE M1505.4.3(1) OR EQUATION 15-1. VENTILATION RATE IN CUBIC FEET PER MINUTE = (0.01 × TOTAL SQUARE FOOT AREA OF HOUSE) + [7.5 × (NUMBER OF BEDROOMS + 1)] EXCEPTIONS:
1. VENTILATION RATE CREDIT. THE MINIMUM VENTILATION RATE DETERMINED IN ACCORDANCE WITH TABLE M1505.4.3(1) OR EQUATION 15-1 SHALL BE REDUCED TO 30 PERCENT, PROVIDED THAT BOTH OF THE FOLLOWING CONDITIONS APPLY:
1.1 A DUCTED SYSTEM SUPPLIES VENTILATION AIR DIRECTLY TO EACH BEDROOM AND TO ONE OR MORE OF THE FOLLOWING ROOMS: LIVING ROOM, DINING ROOM AND/OR KITCHEN.
1.2 THE WHOLE-HOUSE MECHANICAL VENTILATION SYSTEM IS A BALANCED VENTILATION SYSTEM.
2. PROGRAMMED INTERMITTENT OPERATION. THE WHOLE-HOUSE MECHANICAL VENTILATION SYSTEM IS PERMITTED TO OPERATE INTERMITTENTLY WHERE THE SYSTEM HAS CONTROLS THAT ENABLE OPERATION FOR NOT LESS THAN 25 PERCENT OF EACH 4-HOUR SEGMENT AND THE VENTILATION RATE PRESCRIBED IN TABLE M1505.4.3(1), BY EQUATION 15-1 OR BY EXCEPTION 1 IS MULTIPLIED BY THE FACTOR DETERMINED IN ACCORDANCE WITH TABLE M1505.4.3(2).

TABLE M1505.4.3(1) CONTINOUS WHOLE HOUSE MECHANICAL VENTILATION SYSTEM AIR FLOW RATE REQUIRMENTS						
DWELLING UNIT FLOOR AREA (square feet)	NUMBER OF BEDROOMS					
	0-1	2-3	4-5	6-7	> 7	
	Airflow in CFM					
< 1,500	30	45	60	75	90	
1,501 - 3,000	45	60	75	90	105	
3,001 - 4,500	60	75	90	105	120	
4,501 - 6,000	75	90	105	120	135	
TABLE M1505.4.3(2) INTERMITTENT WHOLE HOUSE MECHANICAL VENTILATION RATE FACTORS						
RUN-TIME PERCENTAGE IN EACH 4-HOUR SEGMENT	25%	33%	50%	66%	75%	100%
FACTOR	4	3	2	1.5	1.3	1

BUILDING ENVELOPE SCHEDULE	
WALL INSULATION (ABOVE GRADE)	R-23 INTERMEDIATE
WALL INSULATION (BELOW GRADE)	N/A
FLAT CEILINGS	R-49
VAULTED CEILINGS	R-49
UNDER FLOOR (CRAWL SPACE)	R-38
SLAB EDGE PERIMETER	N/A
HEATED SLAB INTERIOR	N/A
WINDOWS	U-0.25
SKYLIGHTS	N/A
EXTERIOR DOORS	U-0.28

2023 ORSC

HODSON #1 - 2386

ADAIR HOMES INC.
© COPYRIGHT 2025

COMMUNITY CODE / LOT#:

MEME-129

PLAN ORIENTATION:

STANDARD

GARAGE CONFIGURATION:

NONE

OREGON ENERGY

PAGE:

EO

SCALE:

DATE: 08/26/2025


DRAFTED BY: ES

REV:


ADAIR HOMES, INC
4400 NE 77TH AVE

SUITE 100


VANCOUVER, WA 98662

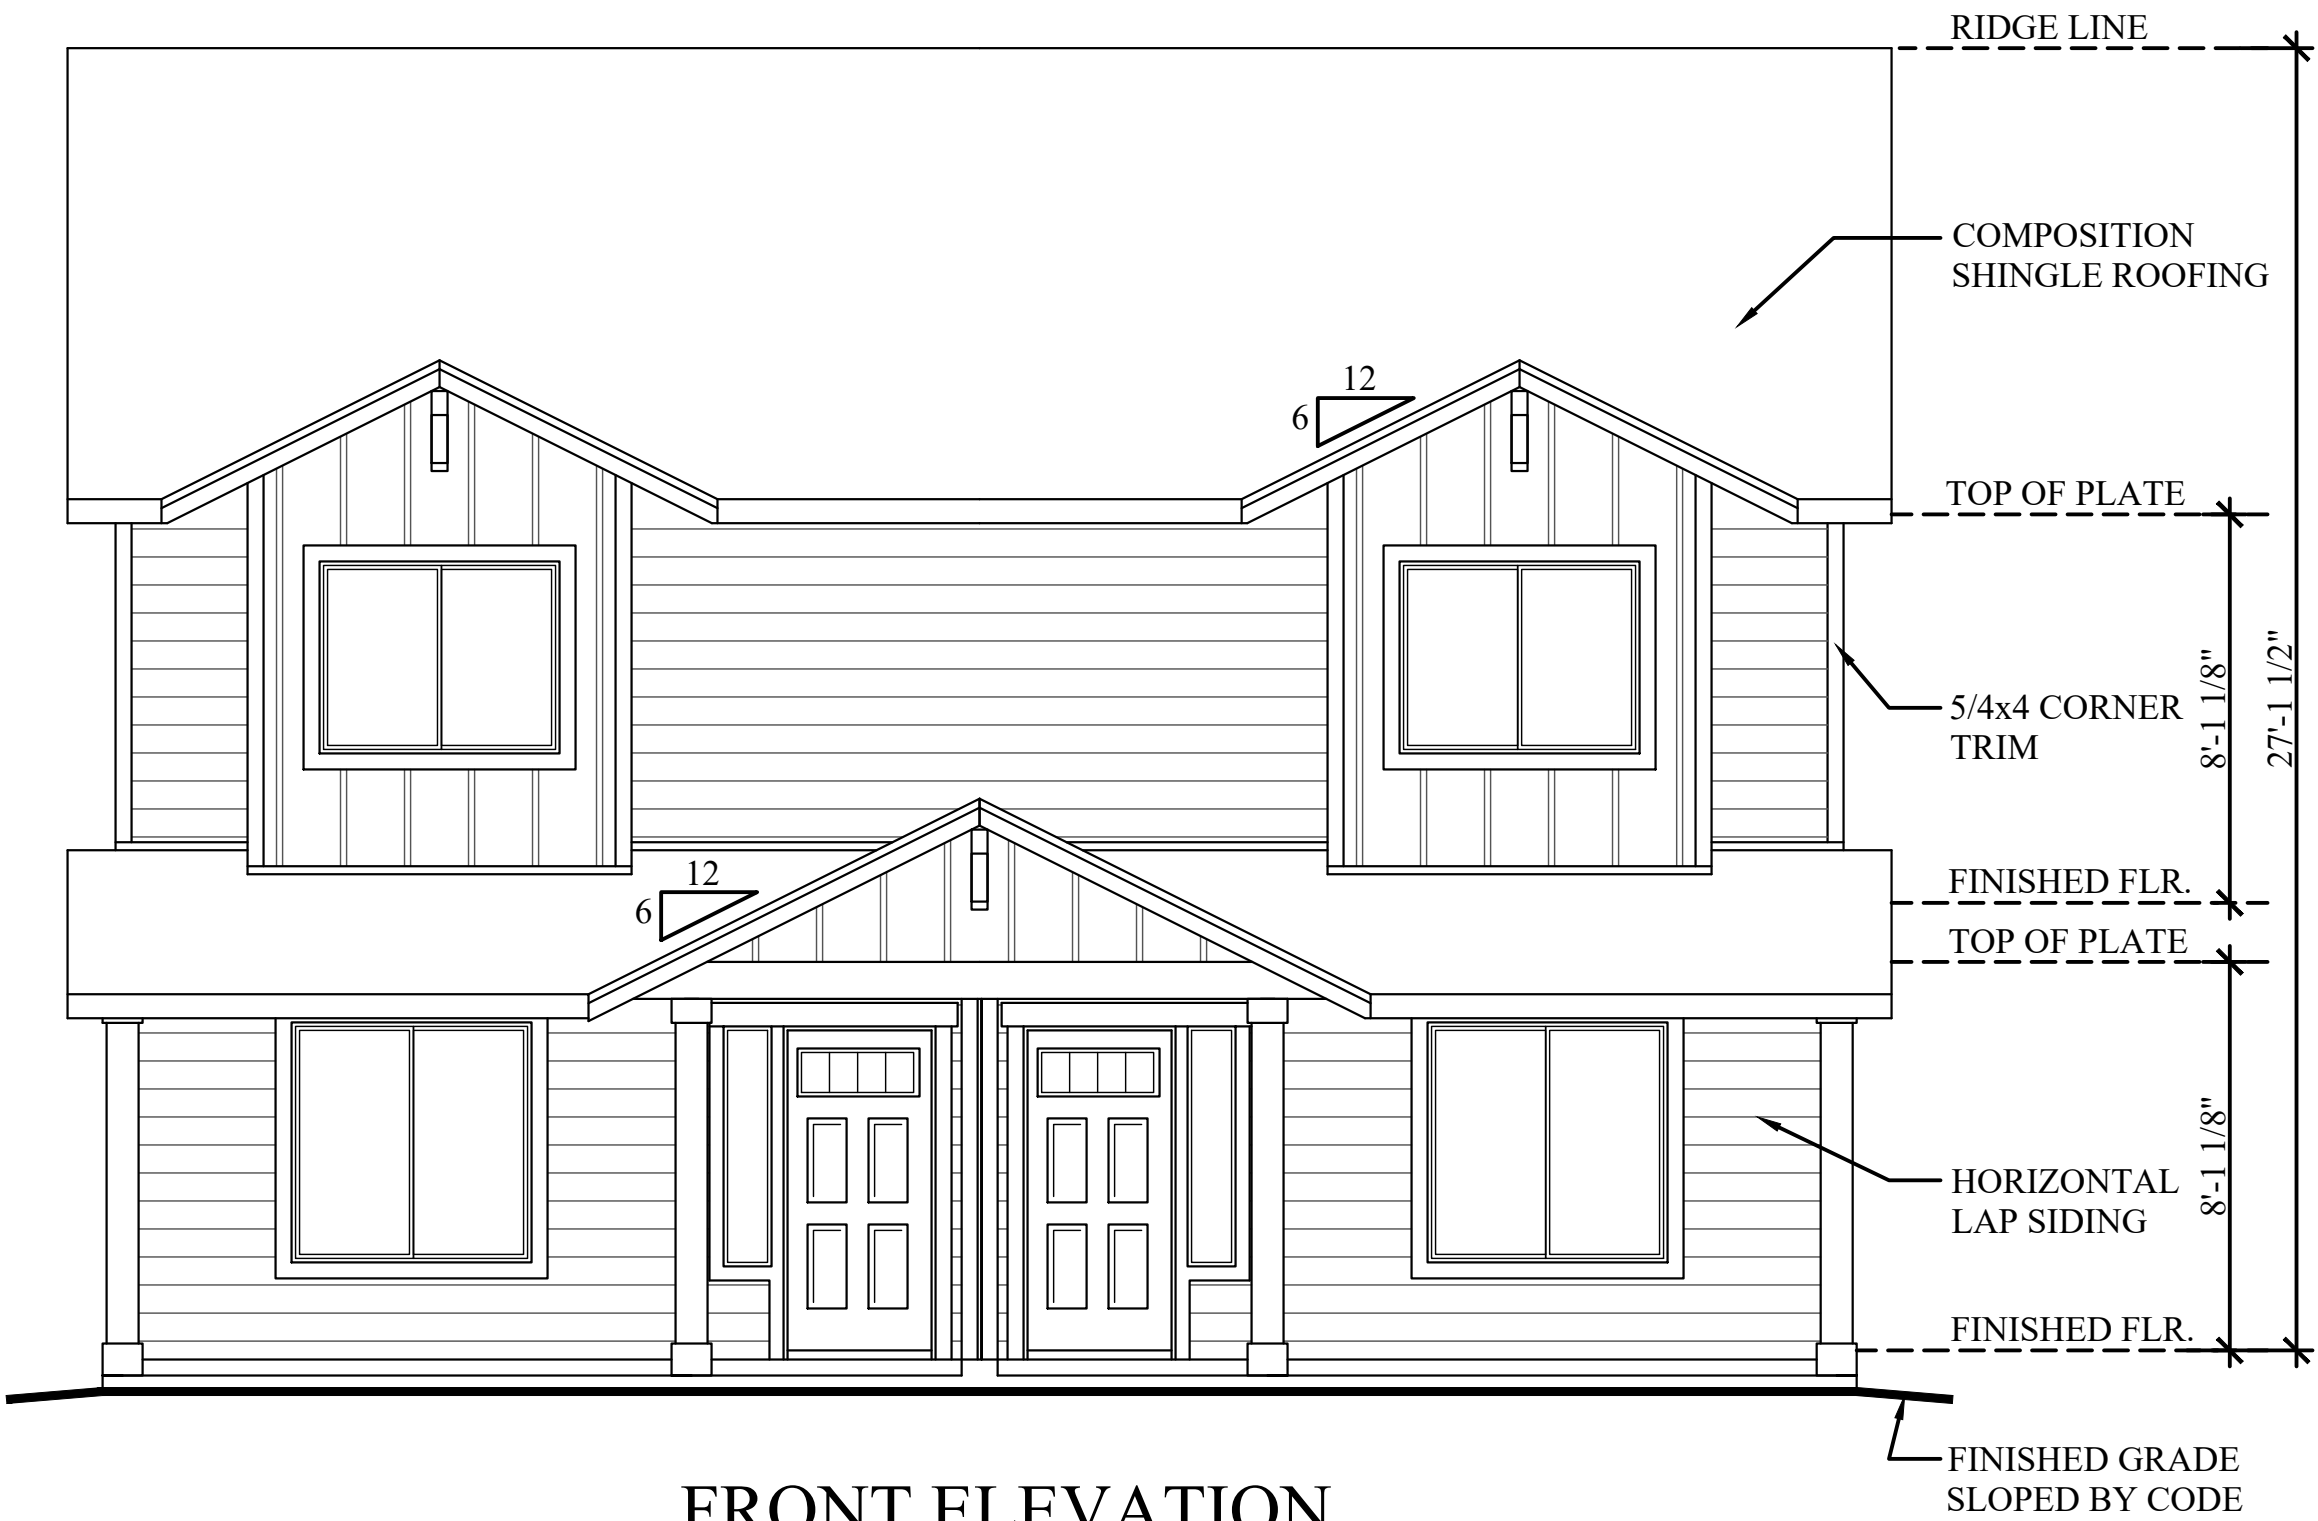


FRONT ELEVATION
1/4" = 1'-0"

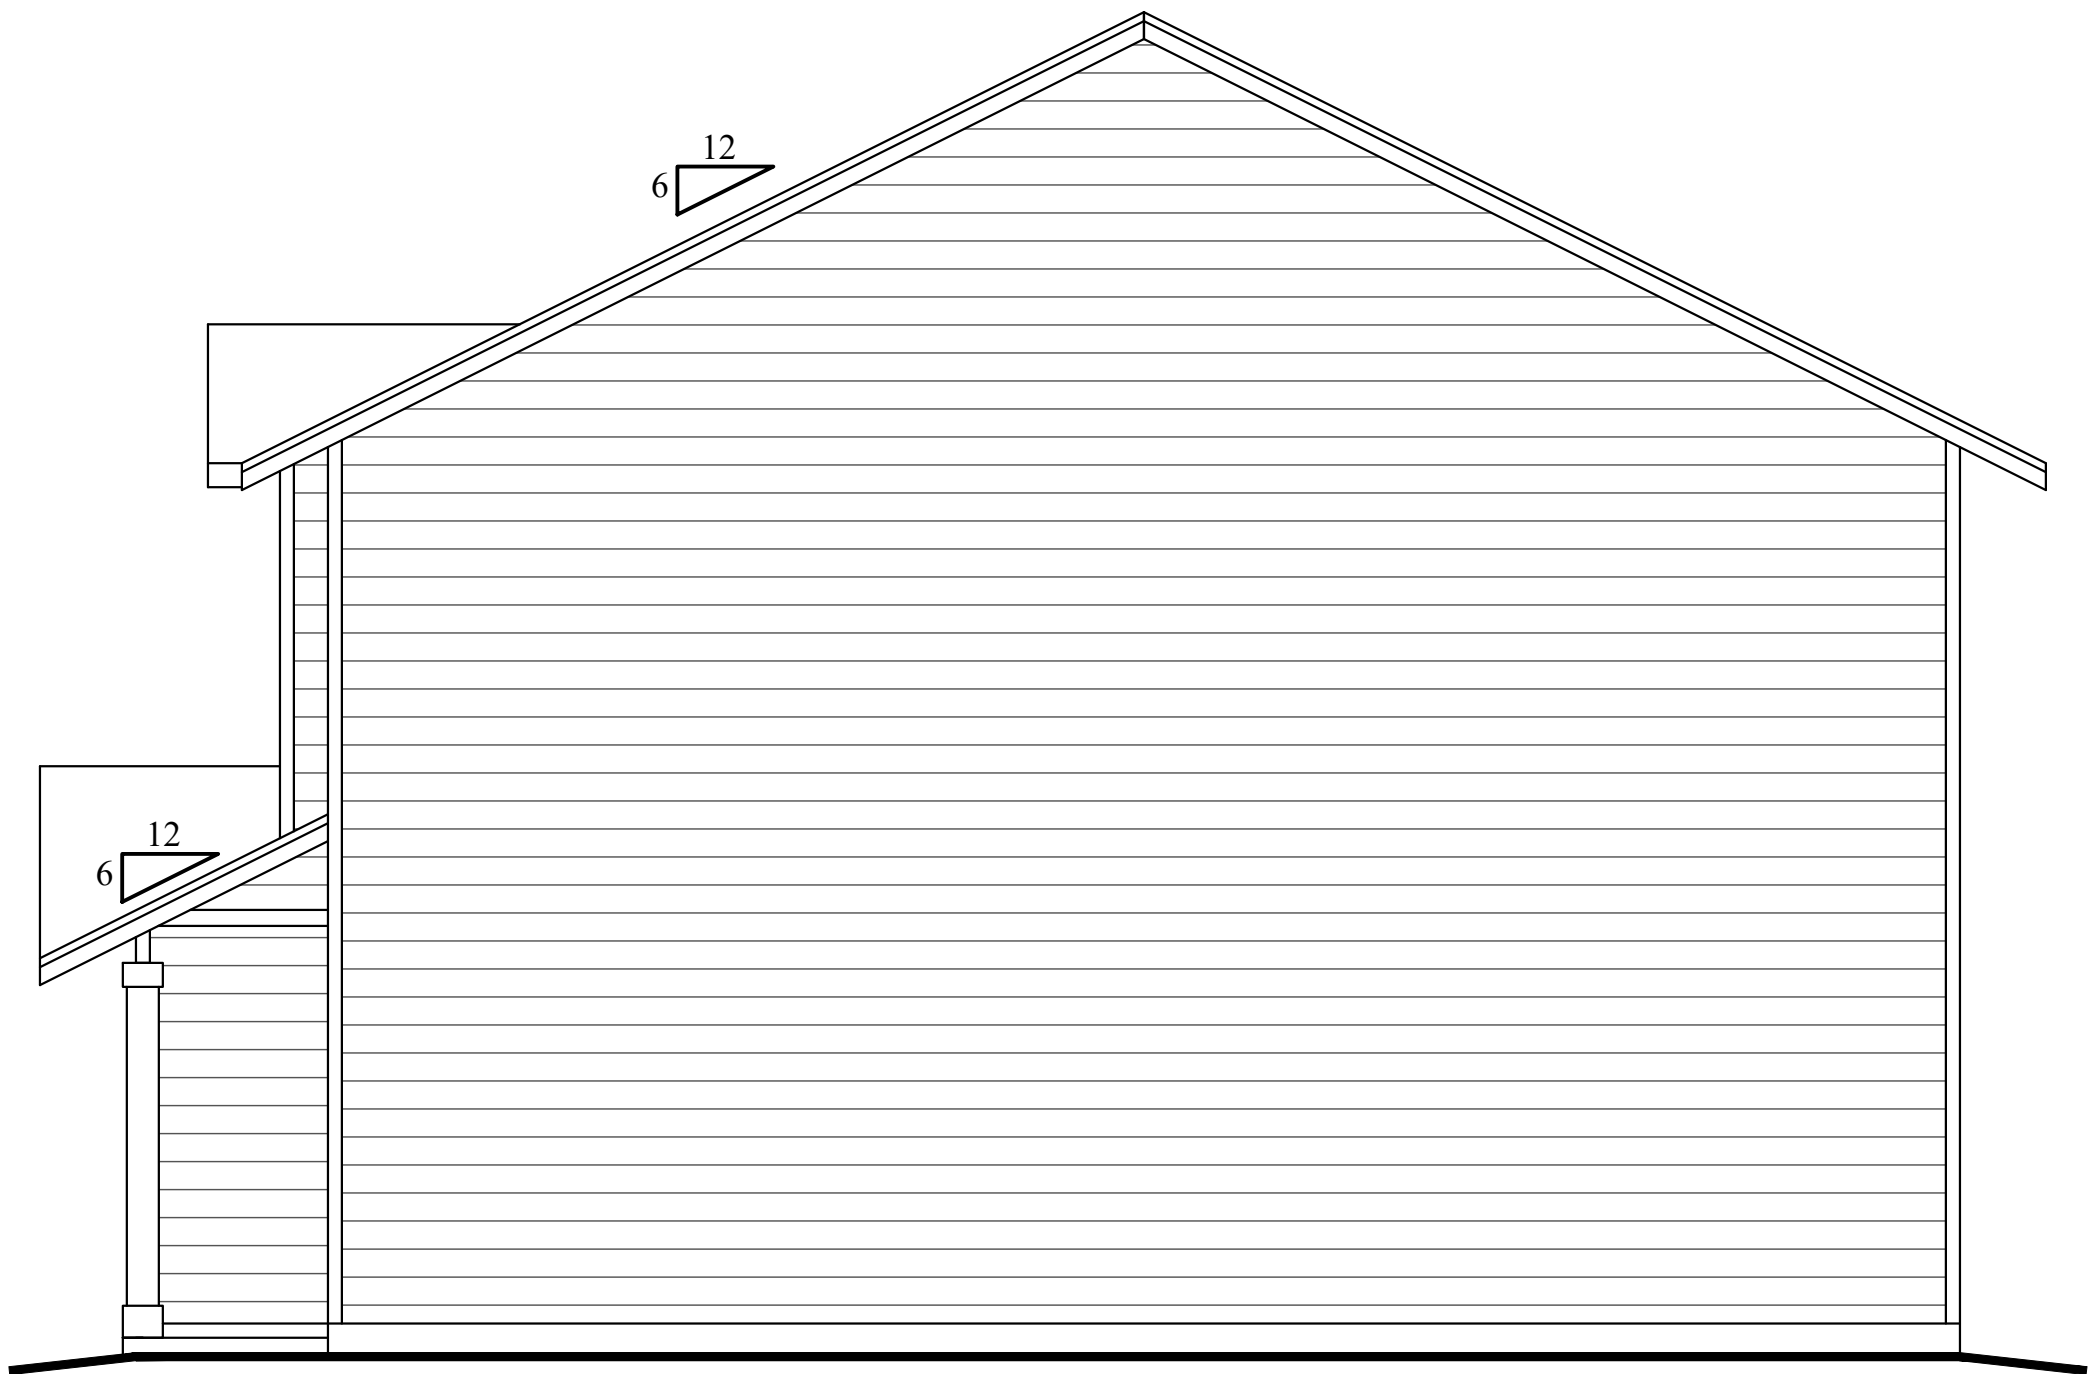

RIGHT ELEVATION
1/4" = 1'-0"

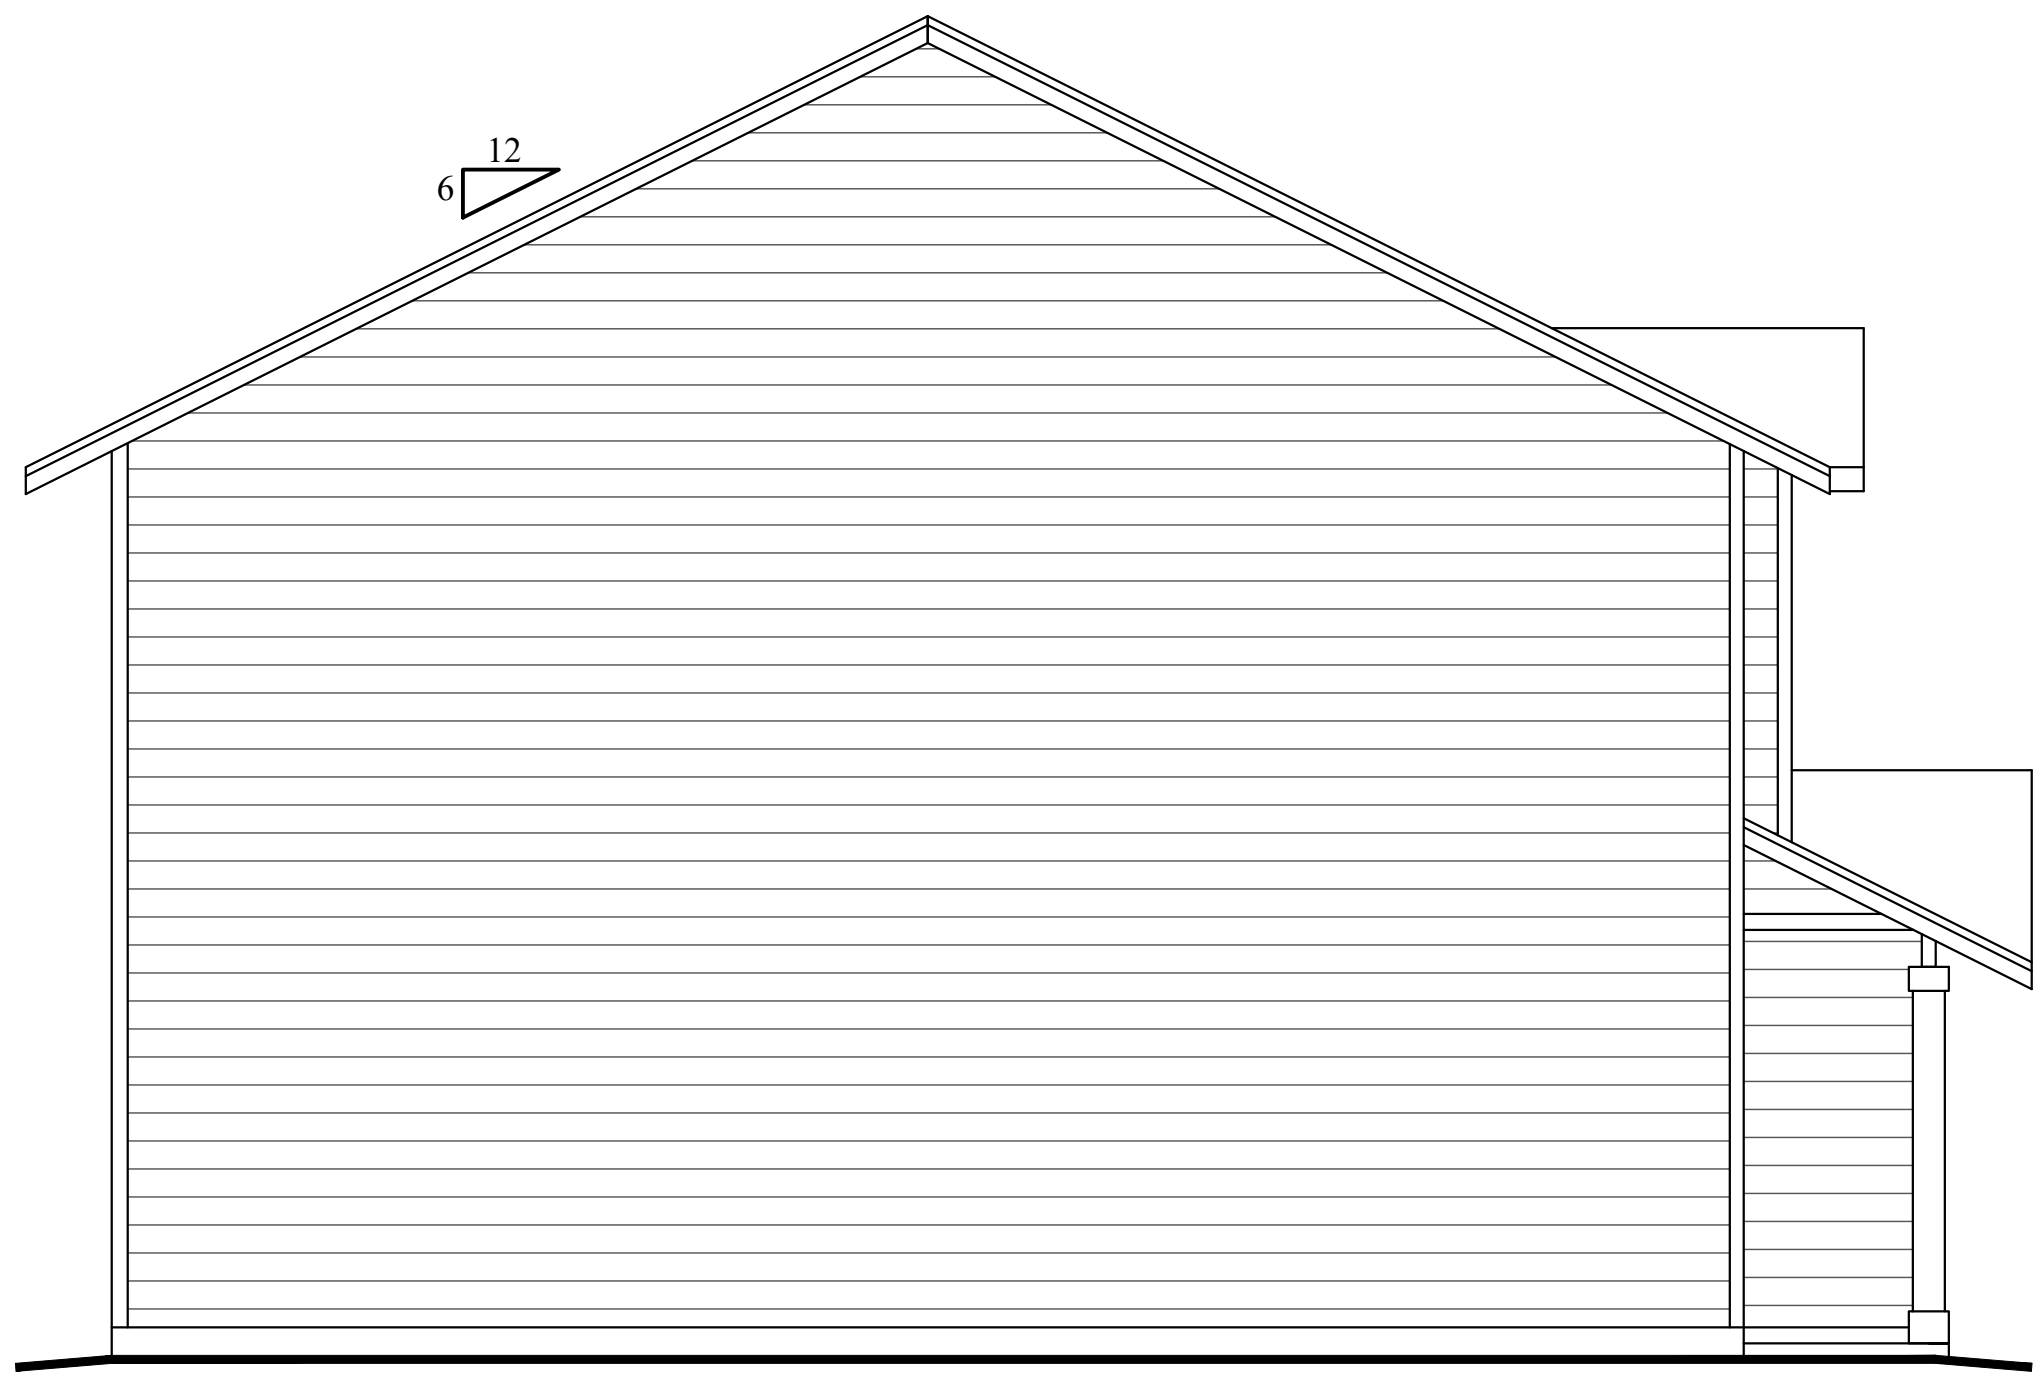

LEFT ELEVATION
1/4" = 1'-0"

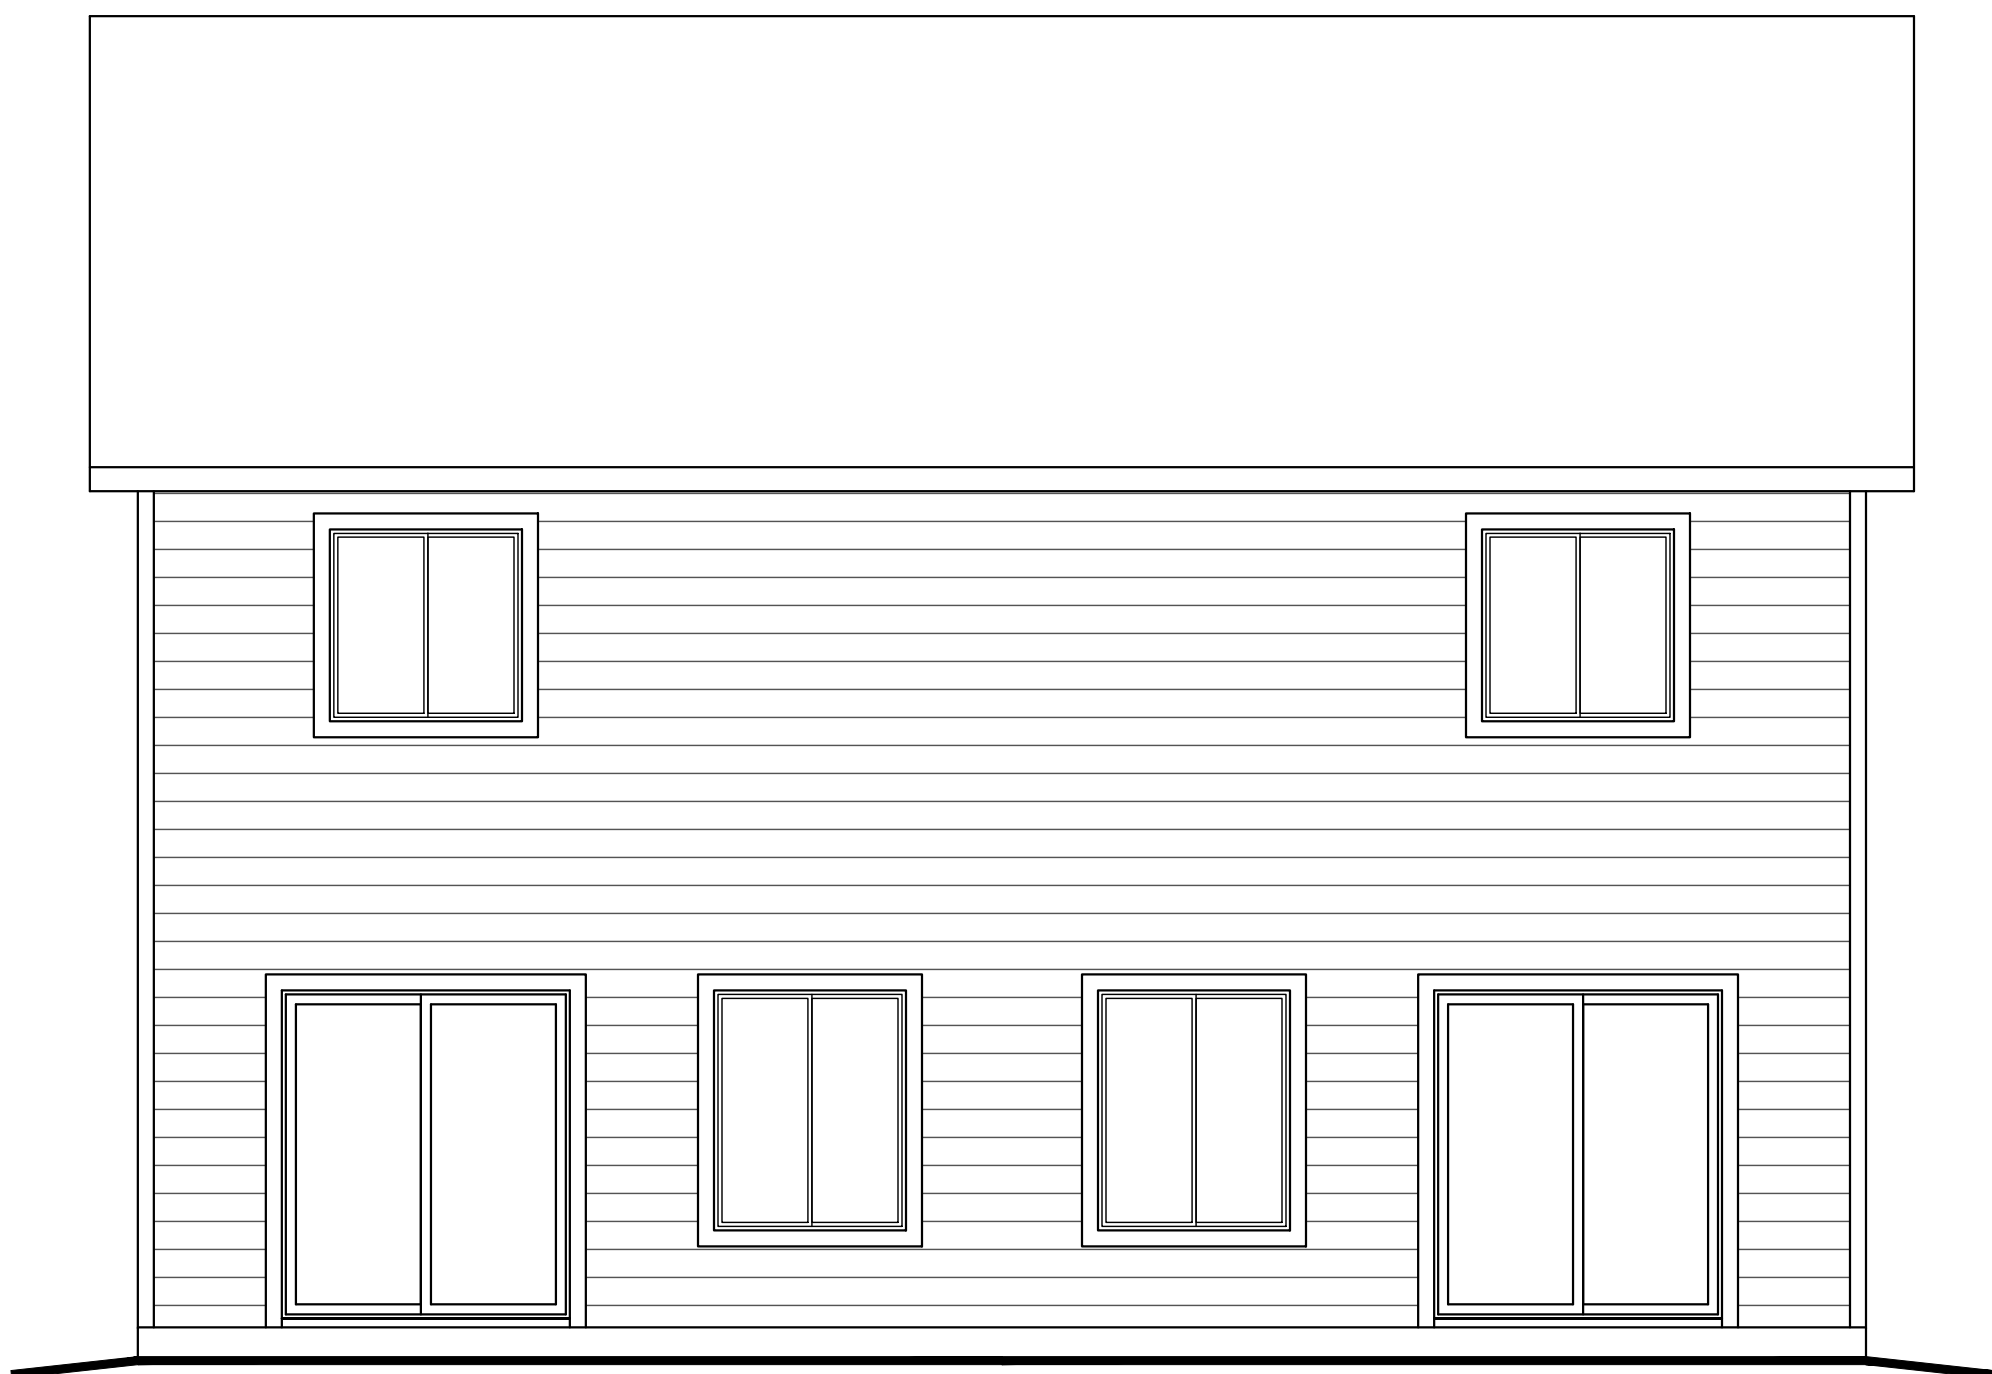

REAR ELEVATION
1/4" = 1'-0"

TRADITIONS ELEV. NOTES

EXTERIOR SIDING & TRIM SPECIFICATIONS

- 1) SIDING ON WALLS: HORIZONTAL LAP SIDING.
- 2) SIDING IN GABLES WHERE SHOWN ON PLANS (TYP. FRONT ONLY): PLAIN PANEL SIDING W/ VERTICAL BATTS AT 16" O.C. OR SHAKE SIDING W/ STAGGERED BOTTOM EDGE.
- 3) TRIM AT EXTERIOR CORNERS: 5/4x4 EACH WAY.
- 4) BELLY BAND AT THE BOTTOM OF DESIGNATED GABLES: 5/4x6 TRIM (METAL HEAD FLASHING TO MATCH).
- 5) LOOK-OUT BEAM AT PEAK OF DESIGNATED GABLE ENDS: 4x6 BEAM, 4x4 ANGLED BRACE, AND 2x4 BACK PLATE.
- 6) WINDOWS: 5/4x4 TRIM ALL SIDES. ON GROUPED WINDOWS THE VERTICAL CENTER MULLIONS WILL BE 5/4x8 RIPPED TO FIT THE WIDTH BETWEEN WINDOWS.
- 7) GARAGE AND FRONT ENTRY DOOR TRIM: 5/4x4 TRIM EACH SIDE AND 5/4x6 HEADER TRIM. HEADER TRIM OVERHANGS EACH SIDE 1 1/2". (DOES NOT APPLY TO OTHER EXTERIOR DOORS)
- 8) SOFFITED AREAS: PLAIN PANEL SIDING WITH 4-4x3 TRIM AT THE PERIMETER.
- 9) EXTERIOR BEAMS: DF#2 SIZED PER STRUCTURAL ENGINEER
- 10) POSTS TO BE 4x4 OR 6x6 PT POSTS PER STRUCTURAL ENGINEER
- 11) WRAPPED PORCH SUPPORT BEAM AND PILLARS: FRONT, BACK, BOTTOM (BETWEEN POSTS) AND EXPOSED ENDS OF THE SUPPORT BEAM TO BE COVERED WITH PLAIN (NO GROOVE) PANEL SIDING. PILLAR COVER TO TERMINATE AT THE BOTTOM 8" BELOW THE TOP OF THE ROUGH FLOOR ELEVATION OF THE HOME. THE OWNER WILL PROVIDE THE FRONT PORCH (WOOD DECK OR CONCRETE SLAB). BASE TRIM TO BE ADJUSTED AS NEEDED.

NOTE:
ALL SIDING IS TO BE CEMENT FIBER BOARD AND THEREFORE FIRE-RESISTANT PER THE MANUFACTURER'S SPECIFICATIONS.

NOTE:
EXTERIOR ELEVATIONS ARE DRAWN W/ ESTIMATED GRADES. ONCE SITE CLEARING & EXCAVATION IS COMPLETE, SOME ADJUSTMENTS MAY BE NECESSARY.

ADAIR HOMES INC.
© COPYRIGHT 2025

ADAIR HOMES, INC
4400 NE 77TH AVE
SUITE 100
VANCOUVER, WA 98662

HODSON #1 - 2386

GARAGE CONFIGURATION:
NONE

PLAN ORIENTATION:
STANDARD

COMMUNITY CODE / LOT#:
MEME-129

ELEVATIONS


2023 ORSC

SCALE: 1/4" = 1'-0"
DATE: 08/26/2025
DRAFTED BY: ES
REV:

PAGE:
A1

WHOLE HOUSE VENTILATION

PER TABLE M1505.4.3(1) OR M1505.4.3(2) PAGE EO, PROVIDE CONTINUOUS OR INTERMITTANT EXHAUST FAN INTERCONNECTED TO HVAC SYSTEM FAN AT SAME RATE PER ORSC SECTION M1505.4. MANUAL OVERRIDE TO BE PROVIDED PER SECTION M1505.4.2

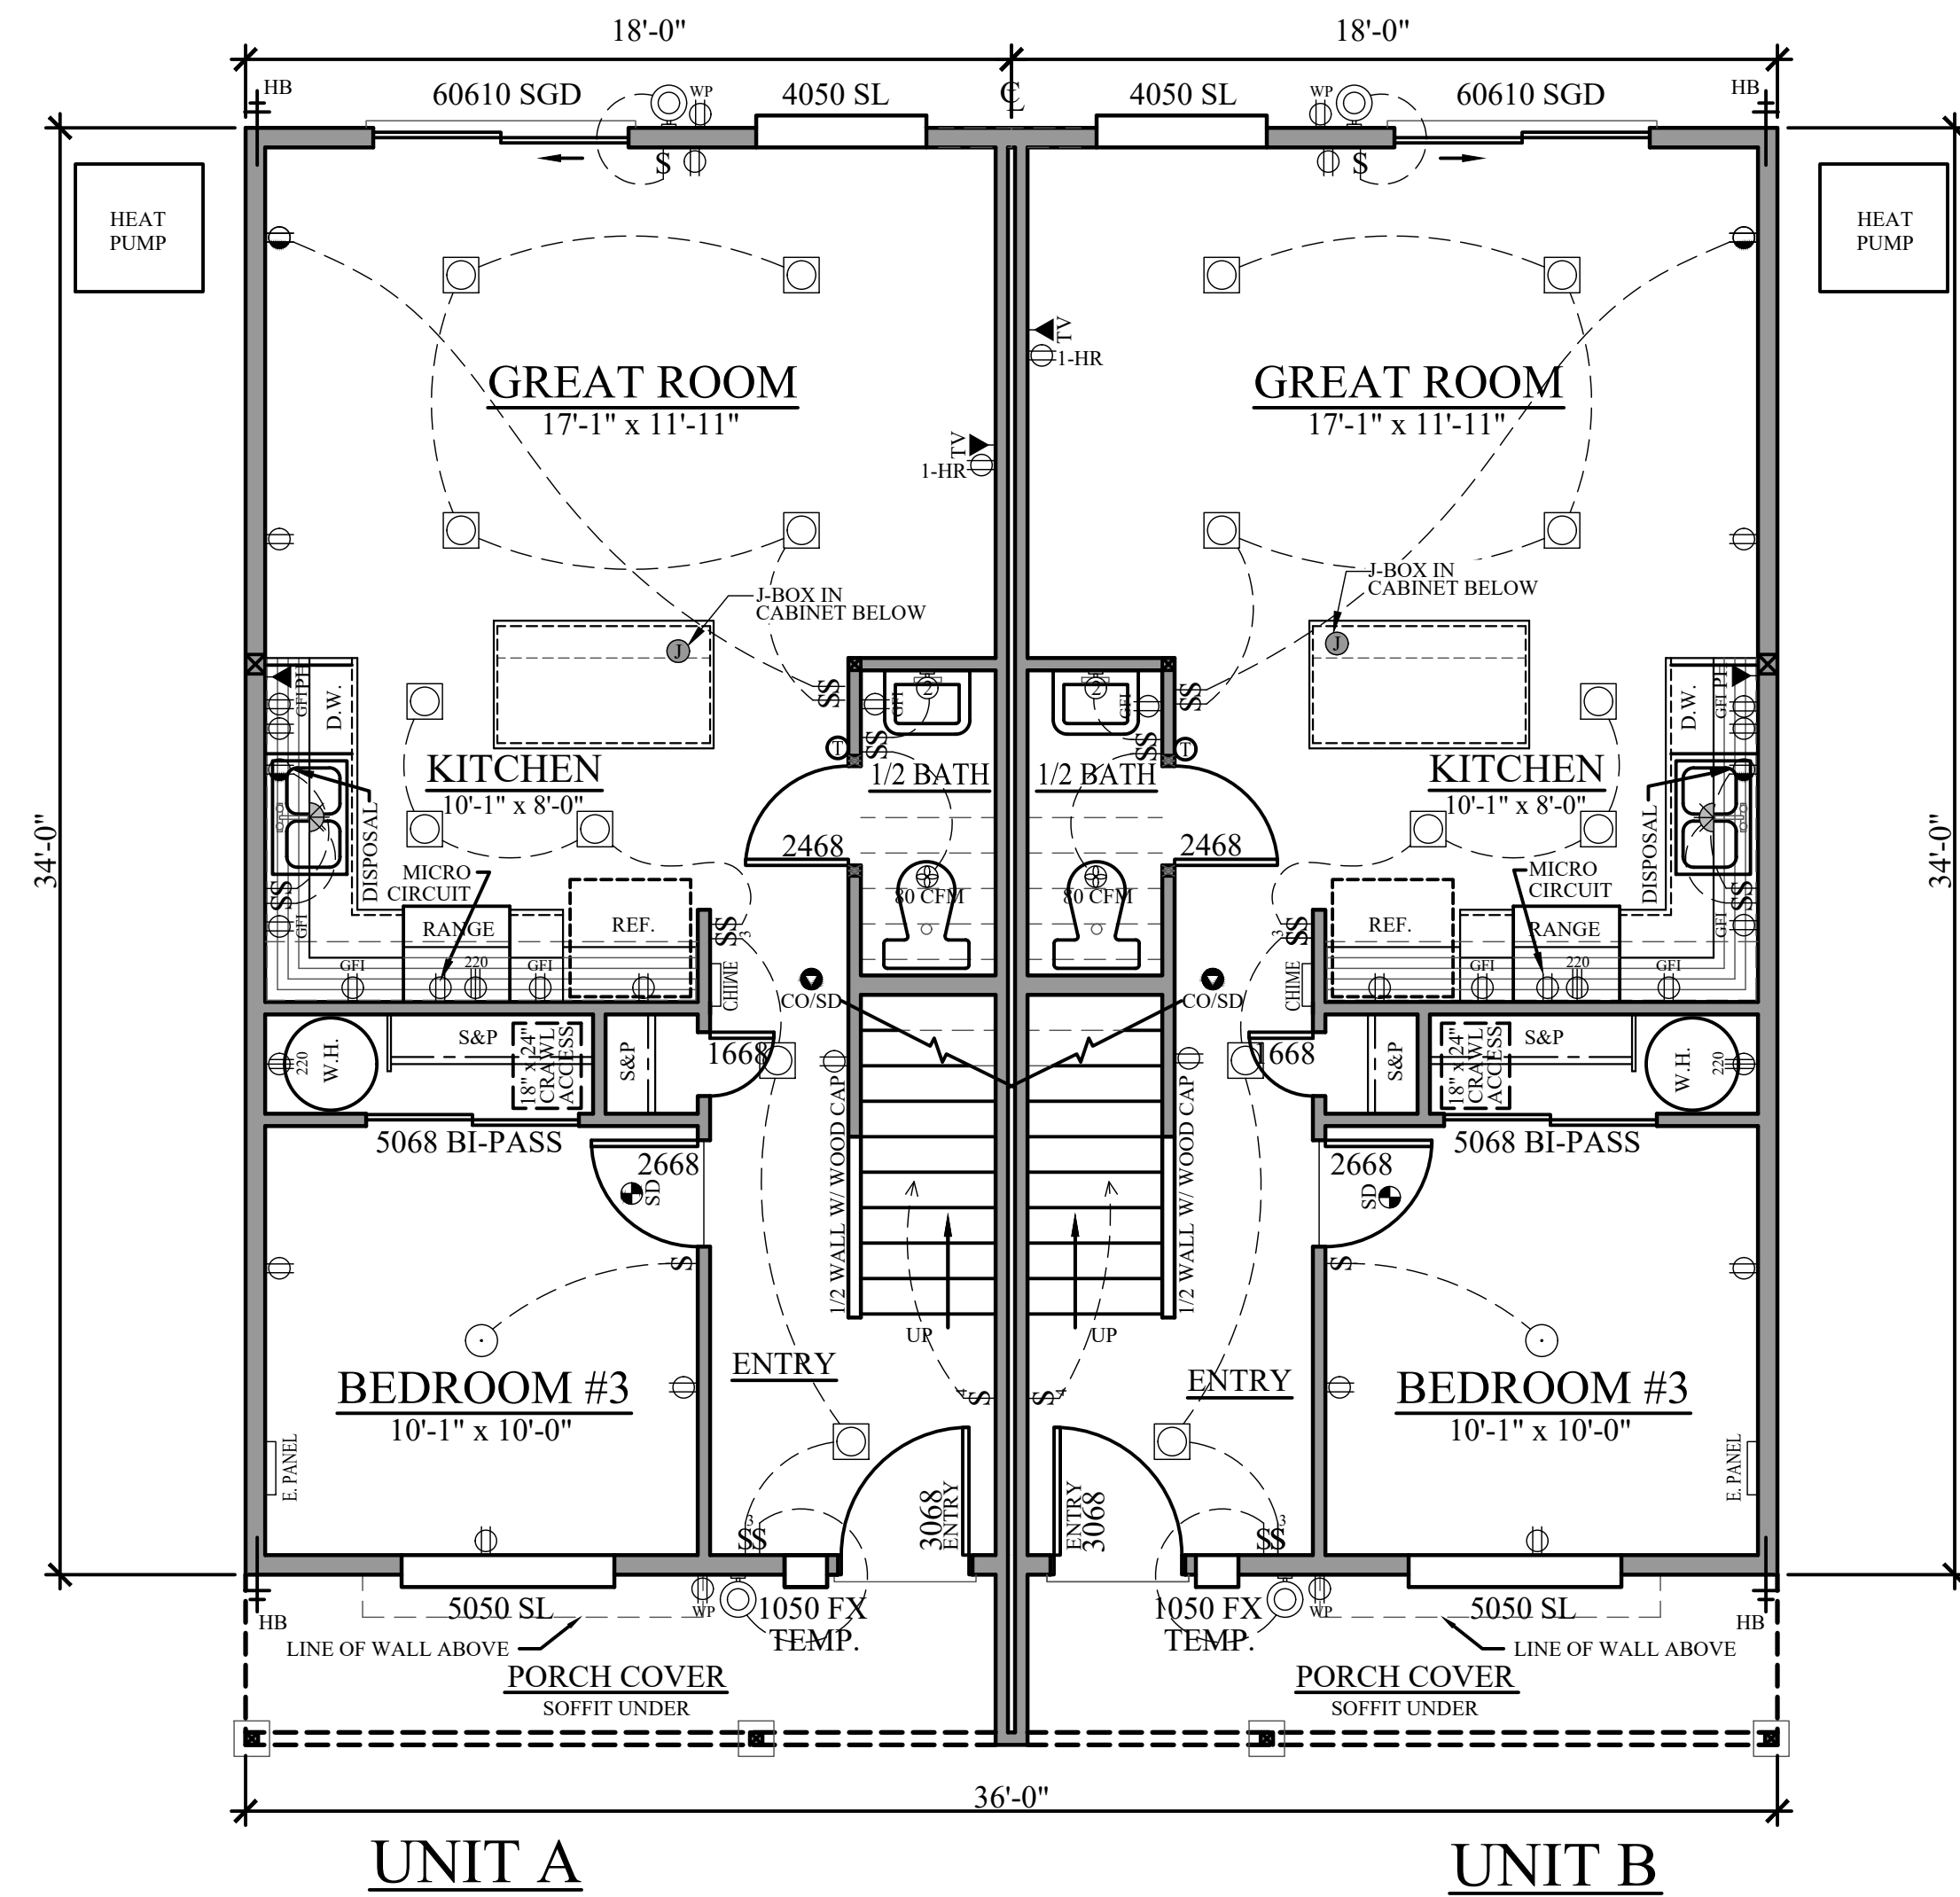

MAIN FLOOR PLAN

612 SQ FT PER UNIT 1/4" = 1'-0"

TOTAL SQUARE FOOTAGE: 1209 SF PER UNIT (2418 SF BUILDING)

FLOOR PLAN NOTES

- 1) SEE NOTES SHEET (SHEET 'N') FOR GENERAL FLOOR PLAN NOTES.
- 2) FOR STRUCTURAL REQUIREMENTS SEE FRAMING PLANS.
- 3) FOR LATERAL ENGINEERING INFORMATION SEE ALL "S" SHEETS

SQUARE FOOTAGE

SQUARE FOOTAGE TABLE - PER UNIT	
GARAGE	N/A
MAIN FLOOR	612 SF
UPPER FLOOR	597 SF
TOTAL LIVING	1209 SF

ELECTRICAL LEGEND	
ELECTRICAL	SYMBOL
DUCTLESS HEAT PUMP HEAD	MINI SPLIT
CADET - 1600W	1600 W
CADET - 700W	700 W
CADET - 900W	900 W
CADET - 1600W - CEILING	1600 W
CADET - 700W - CEILING	700 W
CADET - 900W - CEILING	900 W
THERMOSTAT	ⓘ
FAN - CONTINUOUS OPERATING	45 CFM CONT. OP.
FAN - 80 CFM	80 CFM
FAN - CEILING ROUGH-IN	
LIGHT - WALL MOUNT - EXT.	
LIGHT - DINING ROOM	
LIGHT - KEYLESS	
LIGHT - FOYER - 1 OR 2 STORY	
LIGHT - MUSHROOM	
LIGHT - PENDANT	
LIGHT - LIGHT ROUGH-IN	
LIGHT - UNDER CABINET	
LIGHT - LOW PROFILE LED	
LIGHT - W. M. - VANITY - 2, 3, OR 4B	
OUTLET - CEILING GFI	GFI
OUTLET - 110	
OUTLET - 110 QUADPLEX	
OUTLET - JUNCTION BOX	
OUTLET - WATER PROOF	
OUTLET - 220	
OUTLET - GFI	
OUTLET - HALF HOT	
OUTLET - 3 PRONG RV EXTR. (120v)	
OUTLET - PHONE	
OUTLET - TV	
HEAT DETECTOR	
SMOKE DETECTOR	
SMOKE/CO DETECTOR	CO/SD
SWITCH - 1, 3, OR 4 WAY	\$\$\$
SWITCH - DIMMER	⚡



ADAIR HOMES, INC
4400 NE 77TH AVE
SUITE 100
VANCOUVER, WA 98662

HODSON #1 - 2386

2023 ORSC

COMMUNITY CODE / LOT#:

MEME-129

PLAN ORIENTATION:

STANDARD

GARAGE CONFIGURATION:

NONE

IPS FLOORING LAYOUT

PAGE:

A2

SCALE: 1/4" = 1'-0"


DATE: 08/26/2025

DRAFTED BY: ES

REV:

WHOLE HOUSE VENTILATION

PER TABLE M1505.4.3(1) OR M1505.4.3(2) PAGE EO, PROVIDE CONTINUOUS OR INTERMITTANT EXHAUST FAN INTERCONNECTED TO HVAC SYSTEM FAN AT SAME RATE PER ORSC SECTION M1505.4. MANUAL OVERRIDE TO BE PROVIDED PER SECTION M1505.4.2

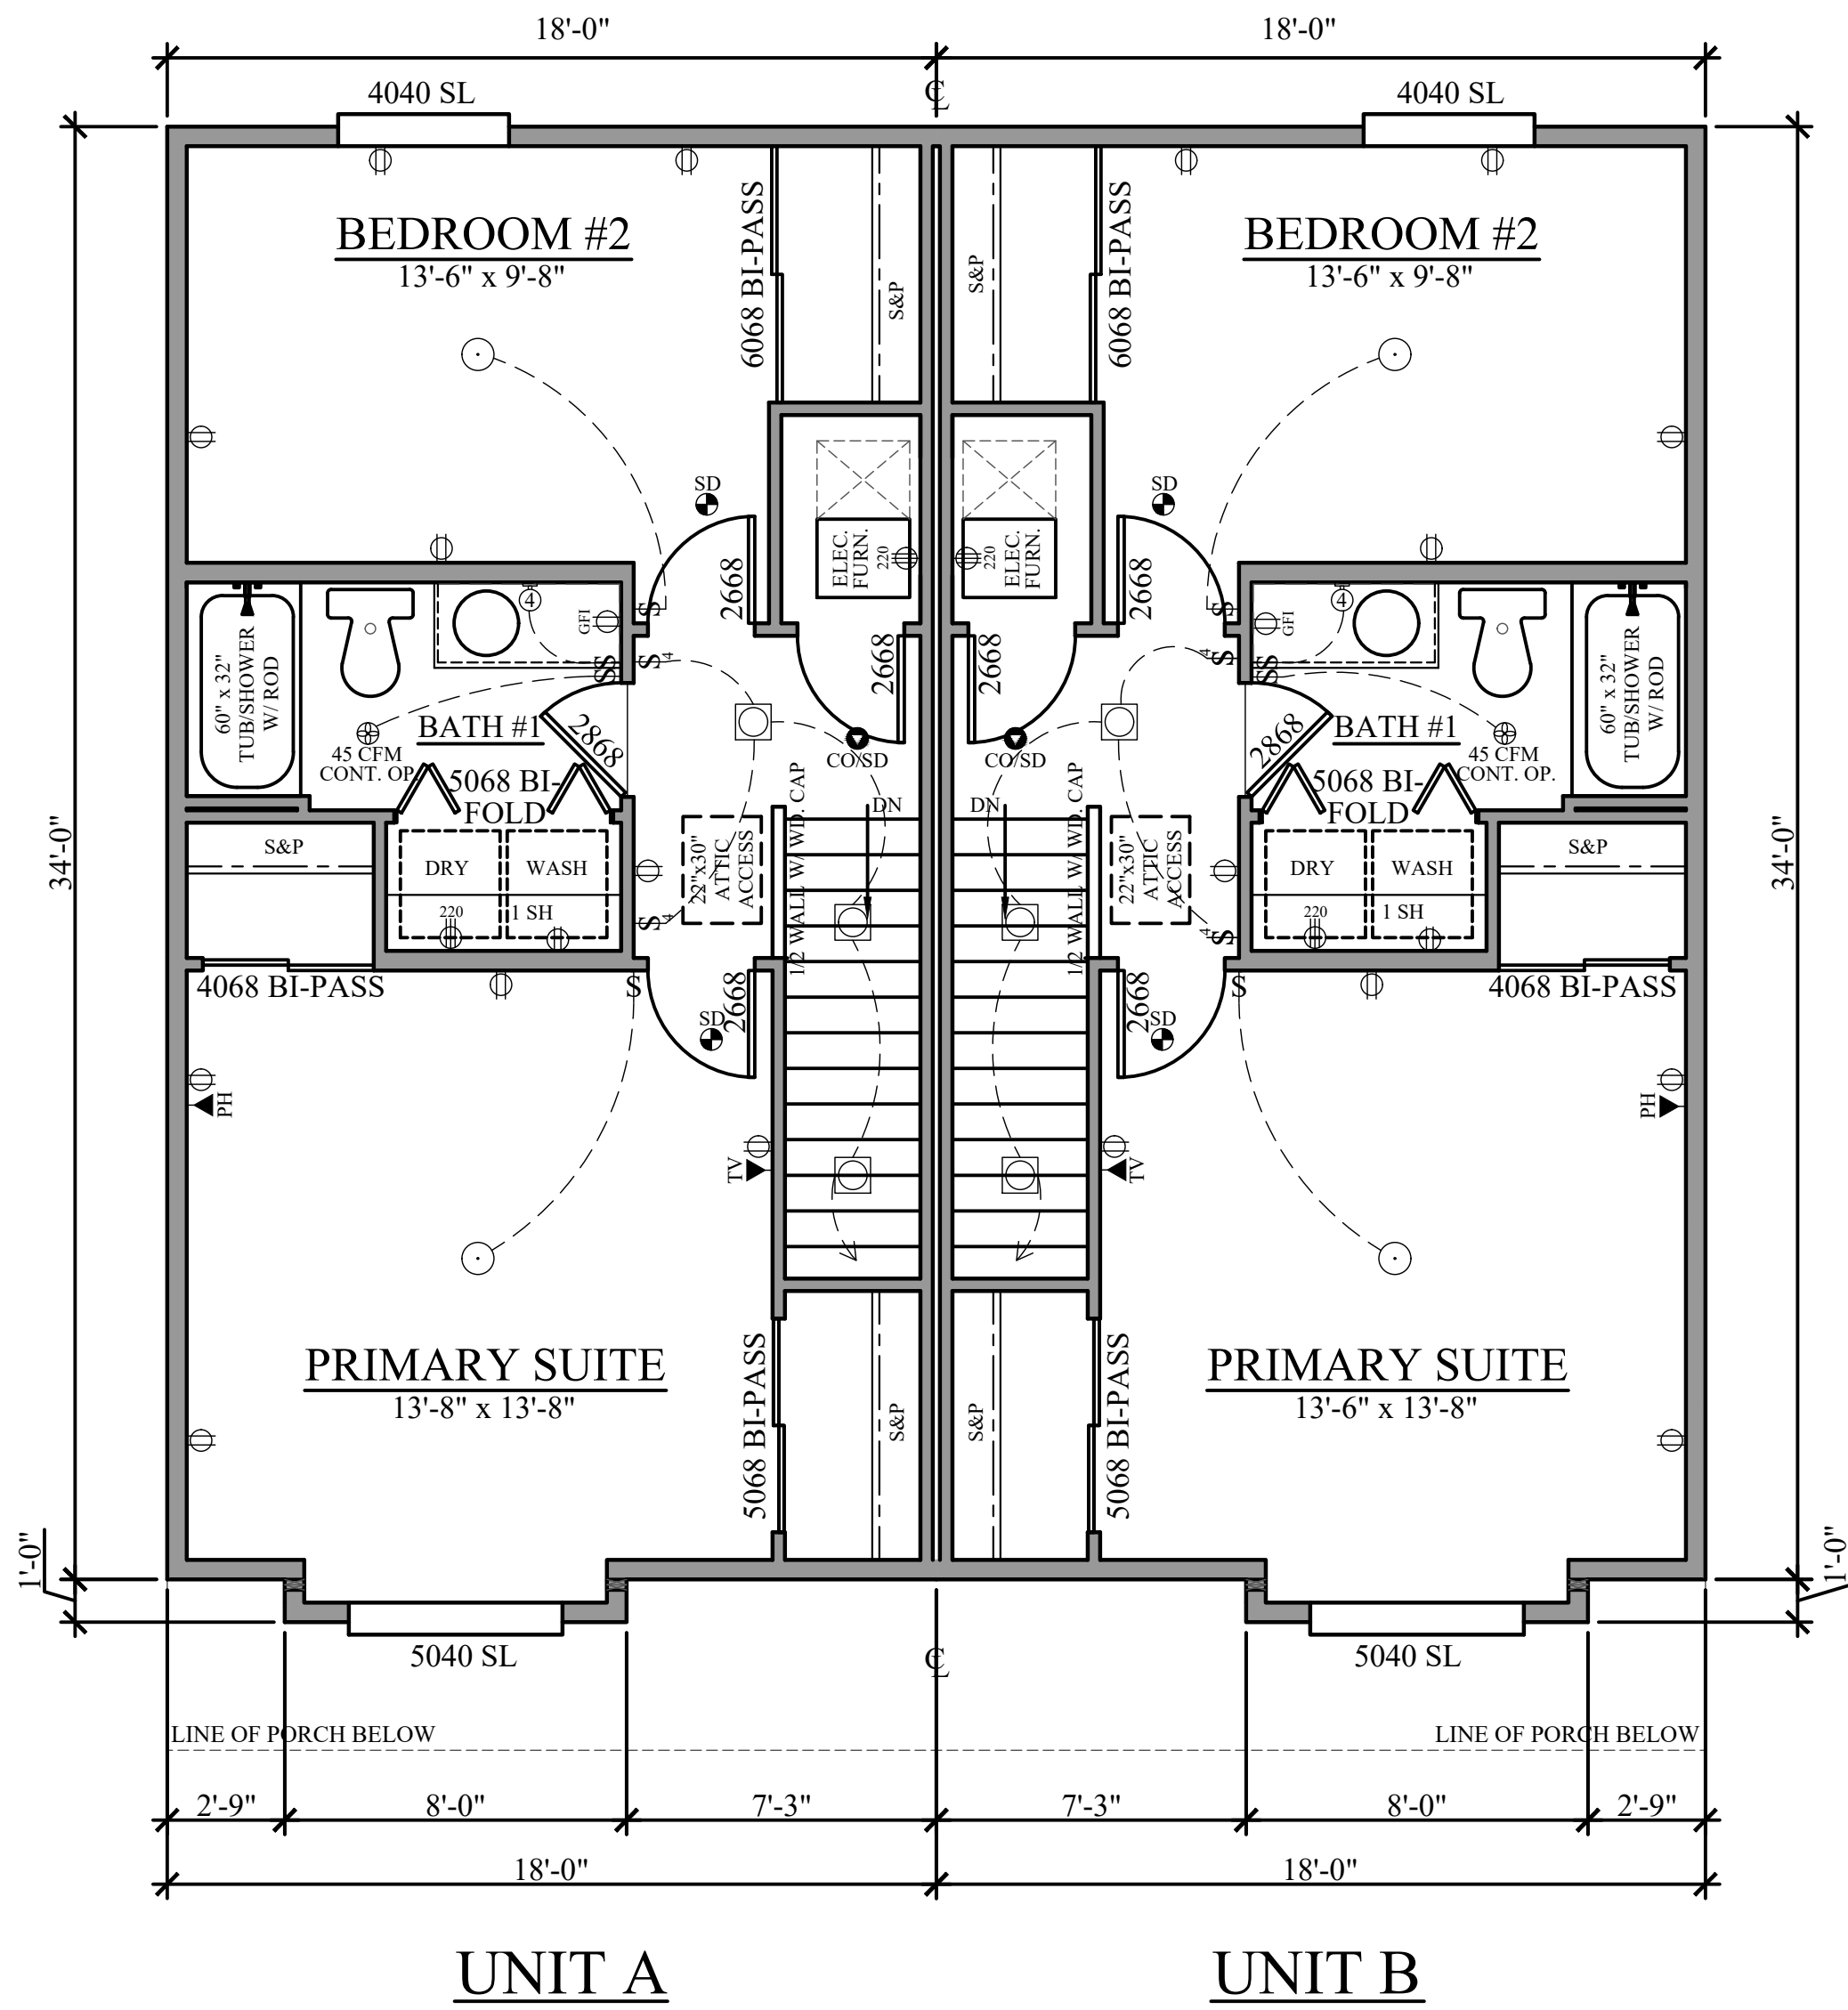

UPPER FLOOR PLAN

597 SQ FT PER UNIT 1/4" = 1'-0"

FLOOR PLAN NOTES

- 1) SEE NOTES SHEET (SHEET 'N') FOR GENERAL FLOOR PLAN NOTES.
- 2) FOR STRUCTURAL REQUIREMENTS SEE FRAMING PLANS.
- 3) FOR LATERAL ENGINEERING INFORMATION SEE ALL "S" SHEETS

SQUARE FOOTAGE

SQUARE FOOTAGE TABLE - PER UNIT	
GARAGE	N/A
MAIN FLOOR	612 SF
UPPER FLOOR	597 SF
TOTAL LIVING	1209 SF

ELECTRICAL LEGEND	
ELECTRICAL	SYMBOL
DUCTLESS HEAT PUMP HEAD	MINI SPLIT
CADET - 1600W	1600 W
CADET - 700W	700 W
CADET - 900W	900 W
CADET - 1600W - CEILING	1600 W
CADET - 700W - CEILING	700 W
CADET - 900W - CEILING	900 W
THERMOSTAT	
FAN - CONTINUOUS OPERATING	45 CFM CONT. OP.
FAN - 80 CFM	80 CFM
FAN - CEILING ROUGH-IN	
LIGHT - WALL MOUNT - EXT.	
LIGHT - DINING ROOM	
LIGHT - KEYLESS	
LIGHT - FOYER - 1 OR 2 STORY	
LIGHT - MUSHROOM	
LIGHT - PENDANT	
LIGHT - LIGHT ROUGH-IN	
LIGHT - UNDER CABINET	
LIGHT - LOW PROFILE LED	
LIGHT - W. M. - VANITY - 2, 3, OR 4B	
OUTLET - CEILING GFI	
OUTLET - 110	
OUTLET - 110 QUADPLEX	
OUTLET - JUNCTION BOX	
OUTLET - WATER PROOF	
OUTLET - 220	
OUTLET - GFI	
OUTLET - HALF HOT	
OUTLET - 3 PRONG RV EXTR. (120v)	
OUTLET - PHONE	
OUTLET - TV	
HEAT DETECTOR	
SMOKE DETECTOR	
SMOKE/CO DETECTOR	
SWITCH - 1, 3, OR 4 WAY	
SWITCH - DIMMER	



ADAIR HOMES, INC
4400 NE 77TH AVE
SUITE 100
VANCOUVER, WA 98662

HODSON #1 - 2386

COMMUNITY CODE / LOT#:
MEME-129

PLAN ORIENTATION:
STANDARD

GARAGE CONFIGURATION:
NONE

UPPER FLOOR PLAN

2023 ORSC

SCALE: 1/4" = 1'-0"
DATE: 08/26/2025
DRAFTED BY: ES
REV:

PAGE:

A2.1



- 1) SEE NOTES SHEET (SHEET "N") AND/OR ENGINEER'S "S" SHEETS FOR GENERAL FOUNDATION PLAN NOTES & REQUIREMENTS.
- 2) = BEARING WALLS THAT ARE SUPPORTED ON CONTINUOUS FTGS. & REQUIRE ANCHOR BOLT CONNECTION (PLATE TO FOOTING). ALL OTHER CRIPPLE WALLS ARE TO BE ATTACHED TO FTG. W/ POWDER ACTUATED FASTENERS @ MIN. 32" O.C. WHERE ANCHOR BOLTS DO NOT OCCUR.
- 3) 2" DIAMETER WATER LINE BLOCKOUT & 5" DIAMETER SEWER LINE BLOCKOUT LOCATION(S) TO BE IDENTIFIED ON SITE IF REQUIRED.
- 4) = VENTS PROHIBITED IN DOOR SITES.
- 5) CRIPPLE WALLS W/ A STUD HEIGHT LESS THAN 14" SHALL BE CONTINUOUSLY SHEATHED ON ONE SIDE W/ WOOD STRUCTURAL PANELS FASTENED TO BOTH TOP & BOTTOM PLATES.
- 6) ALL POSTS AS WELL AS ANY BEARING WALLS PARALLEL TO THE FLOOR JOISTS ARE TO EXTEND TO DECKING.
- 7) PROVIDE (2) UFER GROUNDS TIED INTO REBAR GRID. (1) AT PANEL LOCATION & (1) AT MIN. 20 FT. SEPARATION.

1) THE TOTAL NET FREE VENTILATION AREA SHALL NOT BE LESS THAN 1/300 OF THE AREA OF THE CRAWLSPACE WITH THE USE OF A CLASS 1 VAPOR RETARDER MATERIAL. THERE SHALL BE ONE VENT MIN. WITHIN 3' OF EACH BUILDING CORNER.

FOUNDATION VENTS ARE BASED ON A SCREENED 16" x 6" VENT WITH A NET-FREE VENTILATING AREA OF 72 SQ IN PER VENT.

CRAWLSPACE (PER SIDE):

AREA	79,772 SQ IN
REQUIRED VENTING	266 SQ IN
VENTS REQUIRED	4 VENTS
VENTS PROVIDED	5 VENTS

ADAIR HOMES, INC
4400 NE 77TH AVE
SUITE 100
VANCOUVER, WA 98662

HODSON #1 - 2386


PLAN ORIENTATION:	GARAGE CONFIGURATION:
STANDARD	NONE

FOUNDATION PLAN

2023 ORSC

SCALE: 1/4" = 1'-0"
DATE: 08/26/2025
DRAFTED BY: ES
REV:

PAGE:

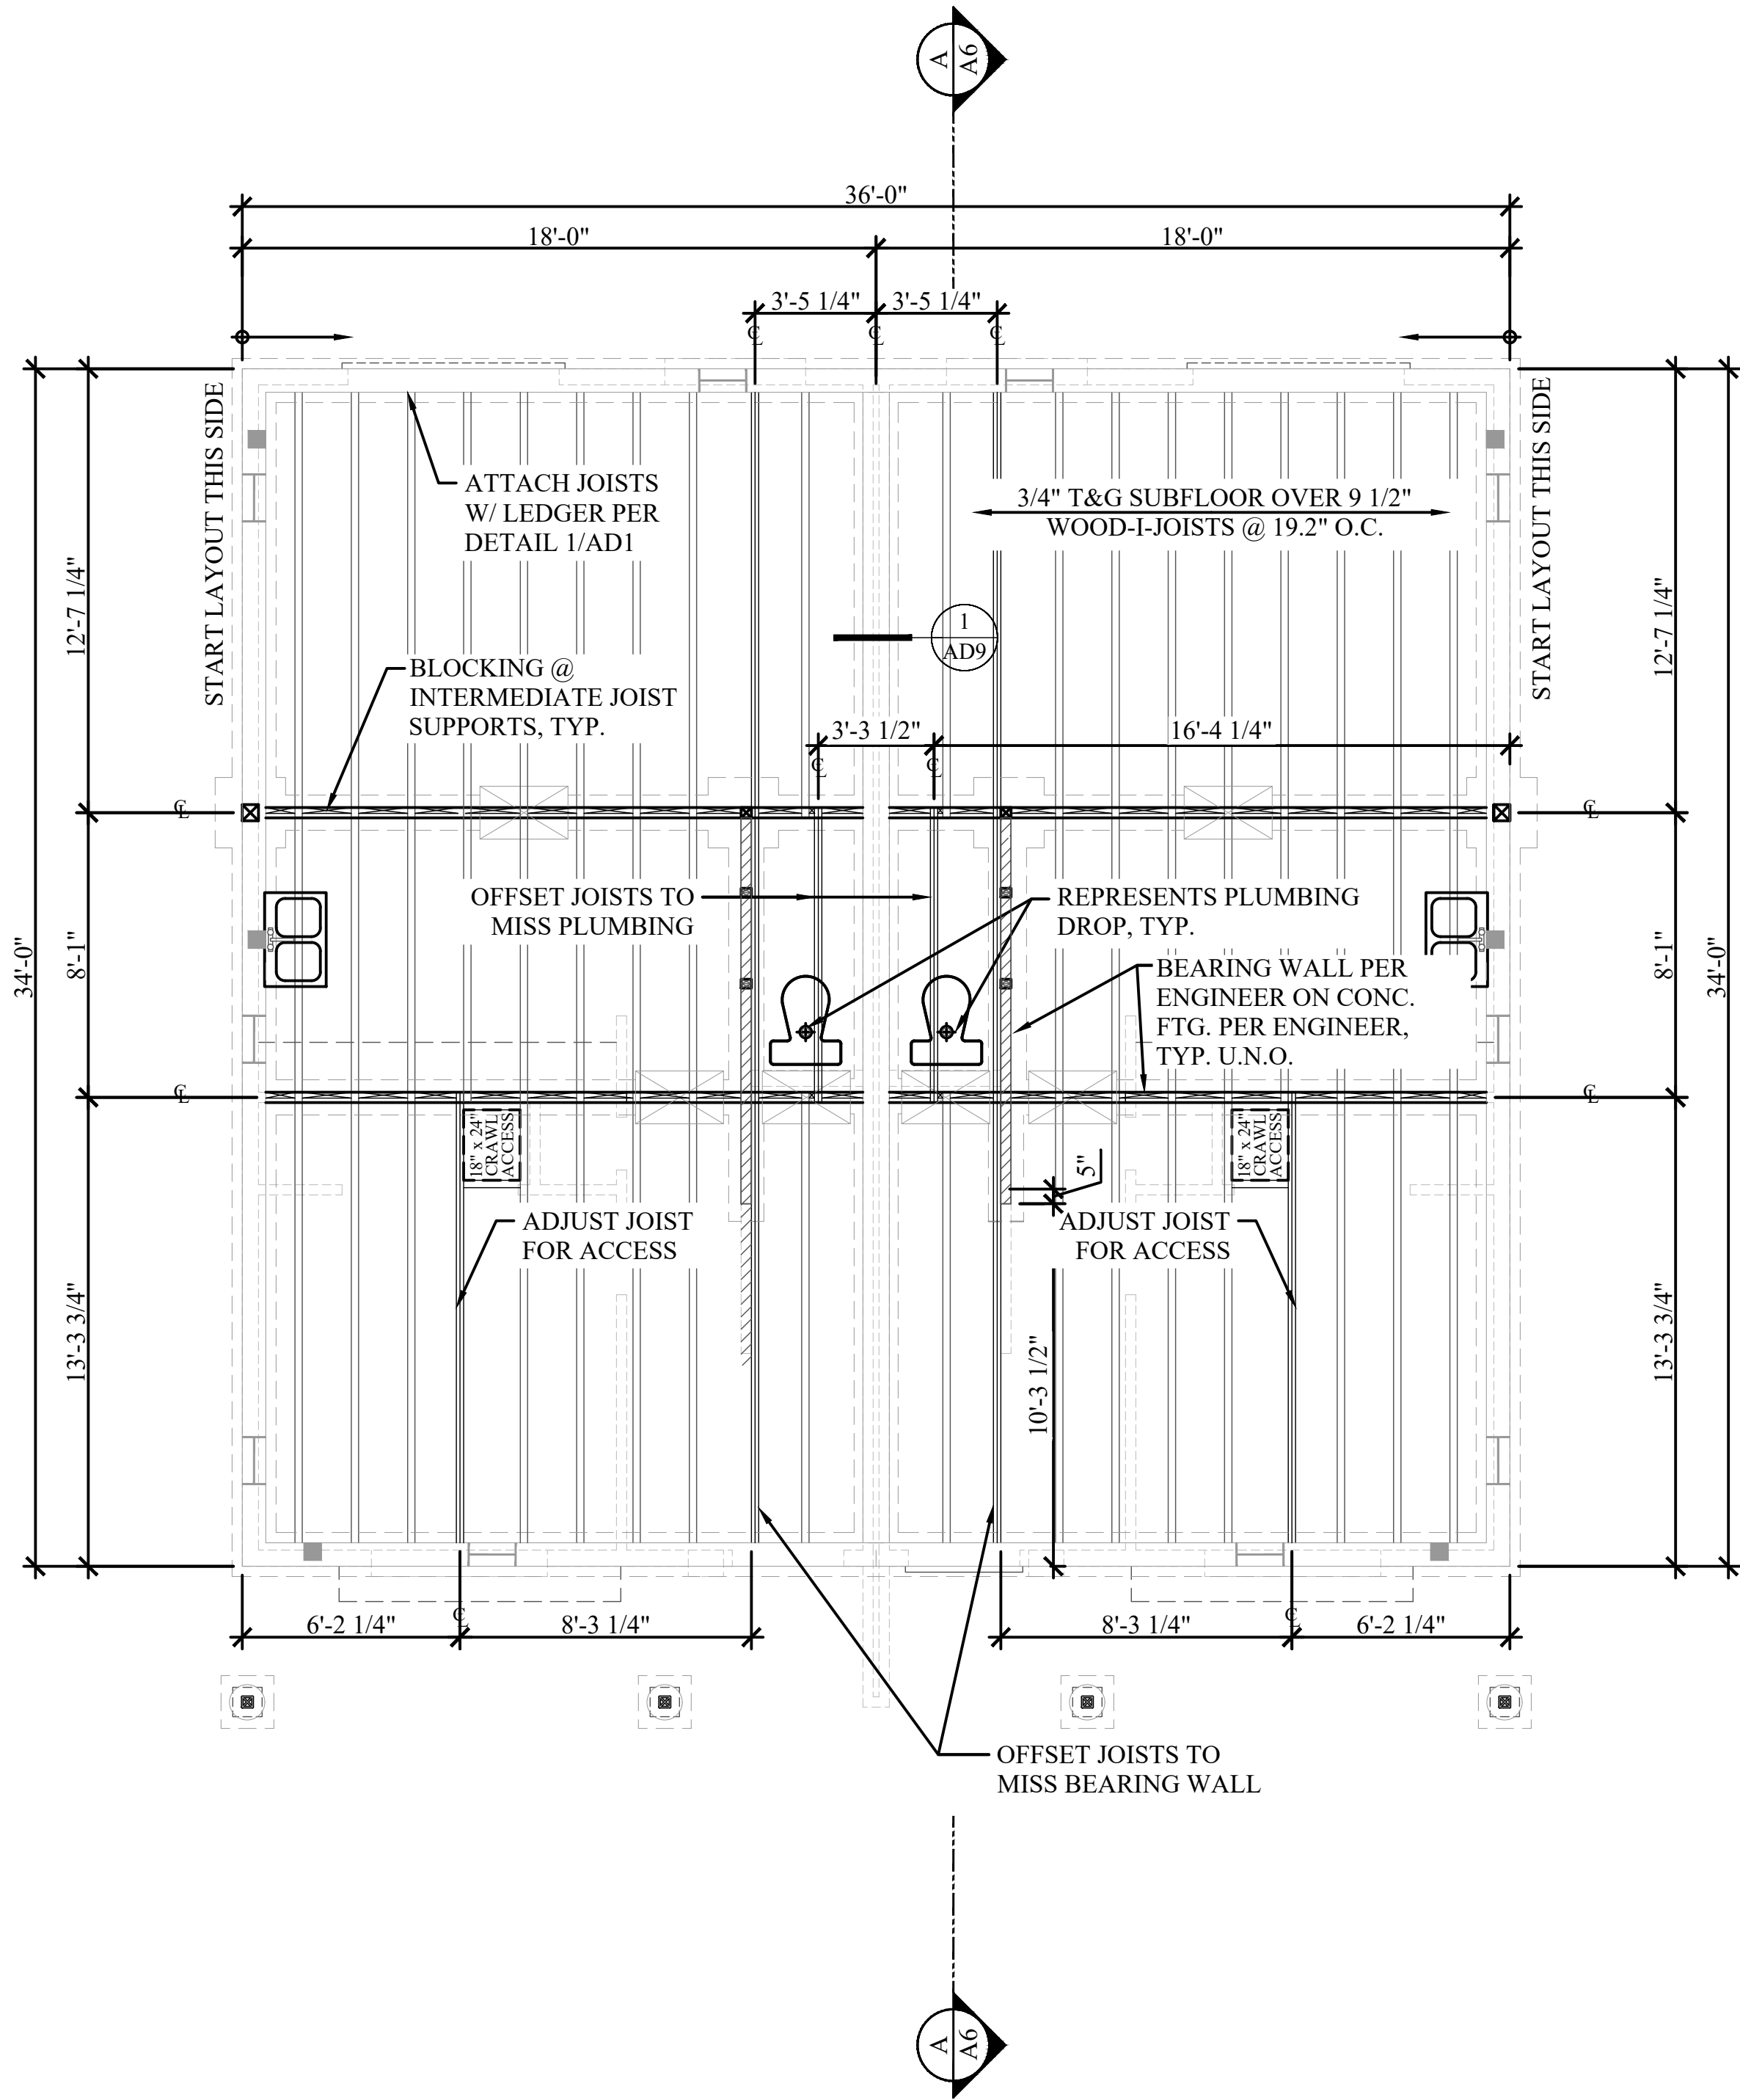

FLOOR JOIST PLAN

1/4" = 1'-0"

JOIST LAYOUT NOTES

- 1)  = REPRESENTS FULL DEPTH BLOCKING AT JOIST ENDS (WHEN JOISTS END AT INTERIOR BEARING WALLS) AND INTERMEDIATE JOIST SUPPORTS.
2) FOR ADDITIONAL NOTES AND INFORMATION SEE FLOOR JOIST NOTES ON SHEET 'N'.
3) REFER TO MANUFACTURER'S SPECIFICATIONS AND DRAWINGS FOR INSTALLATION.

JOIST LAYOUT FOR 19.2" SPACING

1 - 19 3/16"	(1'-7 3/16")	9 - 172 13/16"	(14'-4 13/16")
2 - 38 3/8"	(3'-2 3/8")	16'-10 - 192"	(16'-0")
3 - 57 5/8"	(4'-9 5/8")	11 - 211 3/16"	(17'-7 3/16")
4 - 76 13/16"	(6'-4 13/16")	12 - 230 3/8"	(19'-2 3/8")
8'-5 - 96"	(8'-0")	13 - 249 5/8"	(20'-9 5/8")
6 - 115 3/16"	(9'-7 3/16")	14 - 268 13/16"	(22'-4 13/16")
7 - 134 3/8"	(11'-2 3/8")	24'-15 - 288"	(24'-0")
8 - 153 5/8"	(12'-9 5/8")		

ADAIR HOMES INC.
© COPYRIGHT 2025

ADAIR HOMES, INC
4400 NE 77TH AVE
SUITE 100
VANCOUVER, WA 98662

HODSON #1 - 2386

GARAGE CONFIGURATION: NONE
PLAN ORIENTATION: STANDARD
COMMUNITY CODE / LOT#: MEME-129

FLOOR JOIST PLAN

2023 ORSC

SCALE: 1/4" = 1'-0"
DATE: 08/26/2025
DRAFTED BY: ES
REV:

PAGE:
A3.1



WIDTH - DOOR SIZE PLUS 3"
HEIGHT - DOOR SIZE PLUS 1-1/2" FROM SLAB


ADAIR HOMES, INC
4400 NE 77TH AVE
SUITE 100
VANCOUVER, WA 98005

SCALE: 1/4" = 1'-0"
DATE: 08/26/2025

A4

DRAFTED BY: ES

REV:

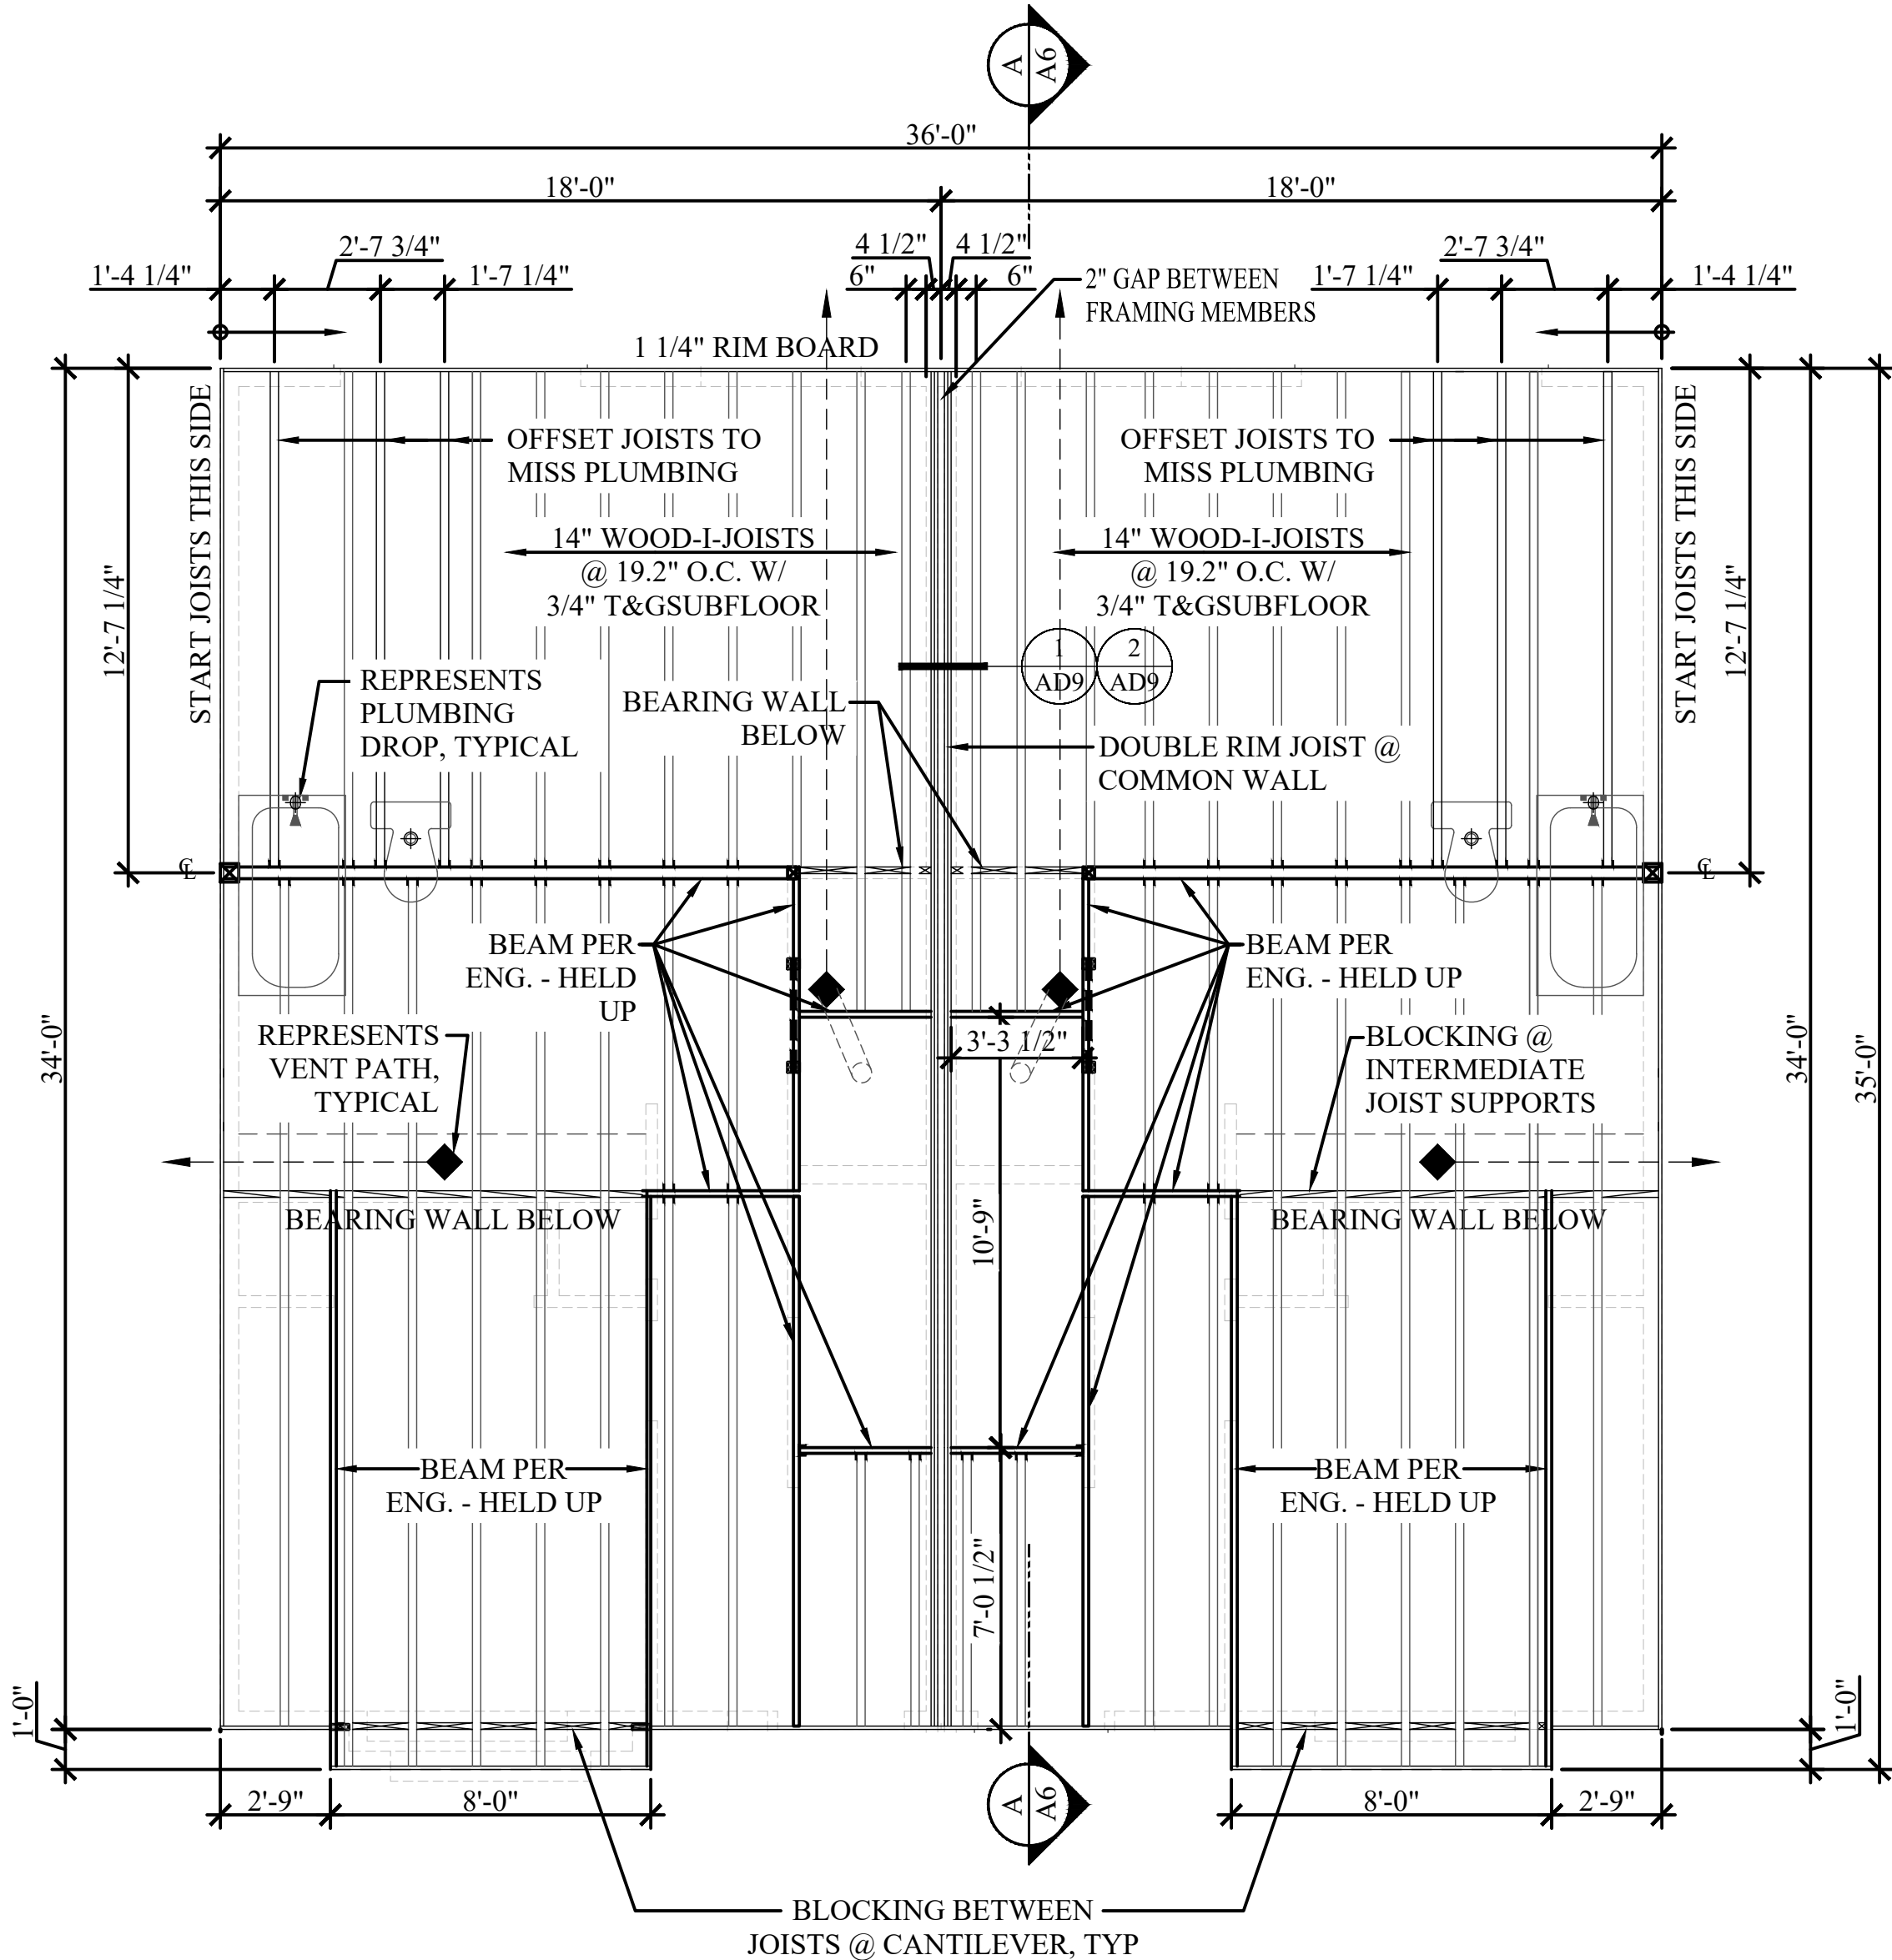

UPPER FLOOR JOIST LAYOUT

1/4" = 1'-0"

JOIST LAYOUT NOTES

- 1) [Symbol] = REPRESENTS FULL DEPTH BLOCKING AT JOIST ENDS (WHEN JOISTS END AT INTERIOR BEARING WALLS) AND INTERMEDIATE JOIST SUPPORTS.
- 2) FOR ADDITIONAL NOTES AND INFORMATION SEE FLOOR JOIST NOTES ON SHEET 'N'.
- 3) REFER TO MANUFACTURER'S SPECIFICATIONS AND DRAWINGS FOR INSTALLATION.

JOIST LAYOUT FOR 19.2" SPACING

1 - 19 3/16"	(1'-7 3/16")	9 - 172 13/16"	(14'-4 13/16")
2 - 38 3/8"	(3'-2 3/8")	16'-10 - 192"	(16'-0")
3 - 57 5/8"	(4'-9 5/8")	11 - 211 3/16"	(17'-7 3/16")
4 - 76 13/16"	(6'-4 13/16")	12 - 230 3/8"	(19'-2 3/8")
8'-5 - 96"	(8'-0")	13 - 249 5/8"	(20'-9 5/8")
6 - 115 3/16"	(9'-7 3/16")	14 - 268 13/16"	(22'-4 13/16")
7 - 134 3/8"	(11'-2 3/8")	24'-15 - 288"	(24'-0")
8 - 153 5/8"	(12'-9 5/8")		

HODSON #1 - 2386

2023 ORSC

ADAIR HOMES INC.
© COPYRIGHT 2025

ADAIR HOMES, INC
4400 NE 77TH AVE
SUITE 100
VANCOUVER, WA 98662

COMMUNITY CODE / LOT#:

MEME-129

PLAN ORIENTATION:

STANDARD

GARAGE CONFIGURATION:

NONE

UPPER FLOOR JOIST LAYOUT

PAGE:


A4.1

SCALE: 1/4" = 1'-0"

DATE: 08/26/2025

DRAFTED BY: ES

REV: 9/17/24 TH

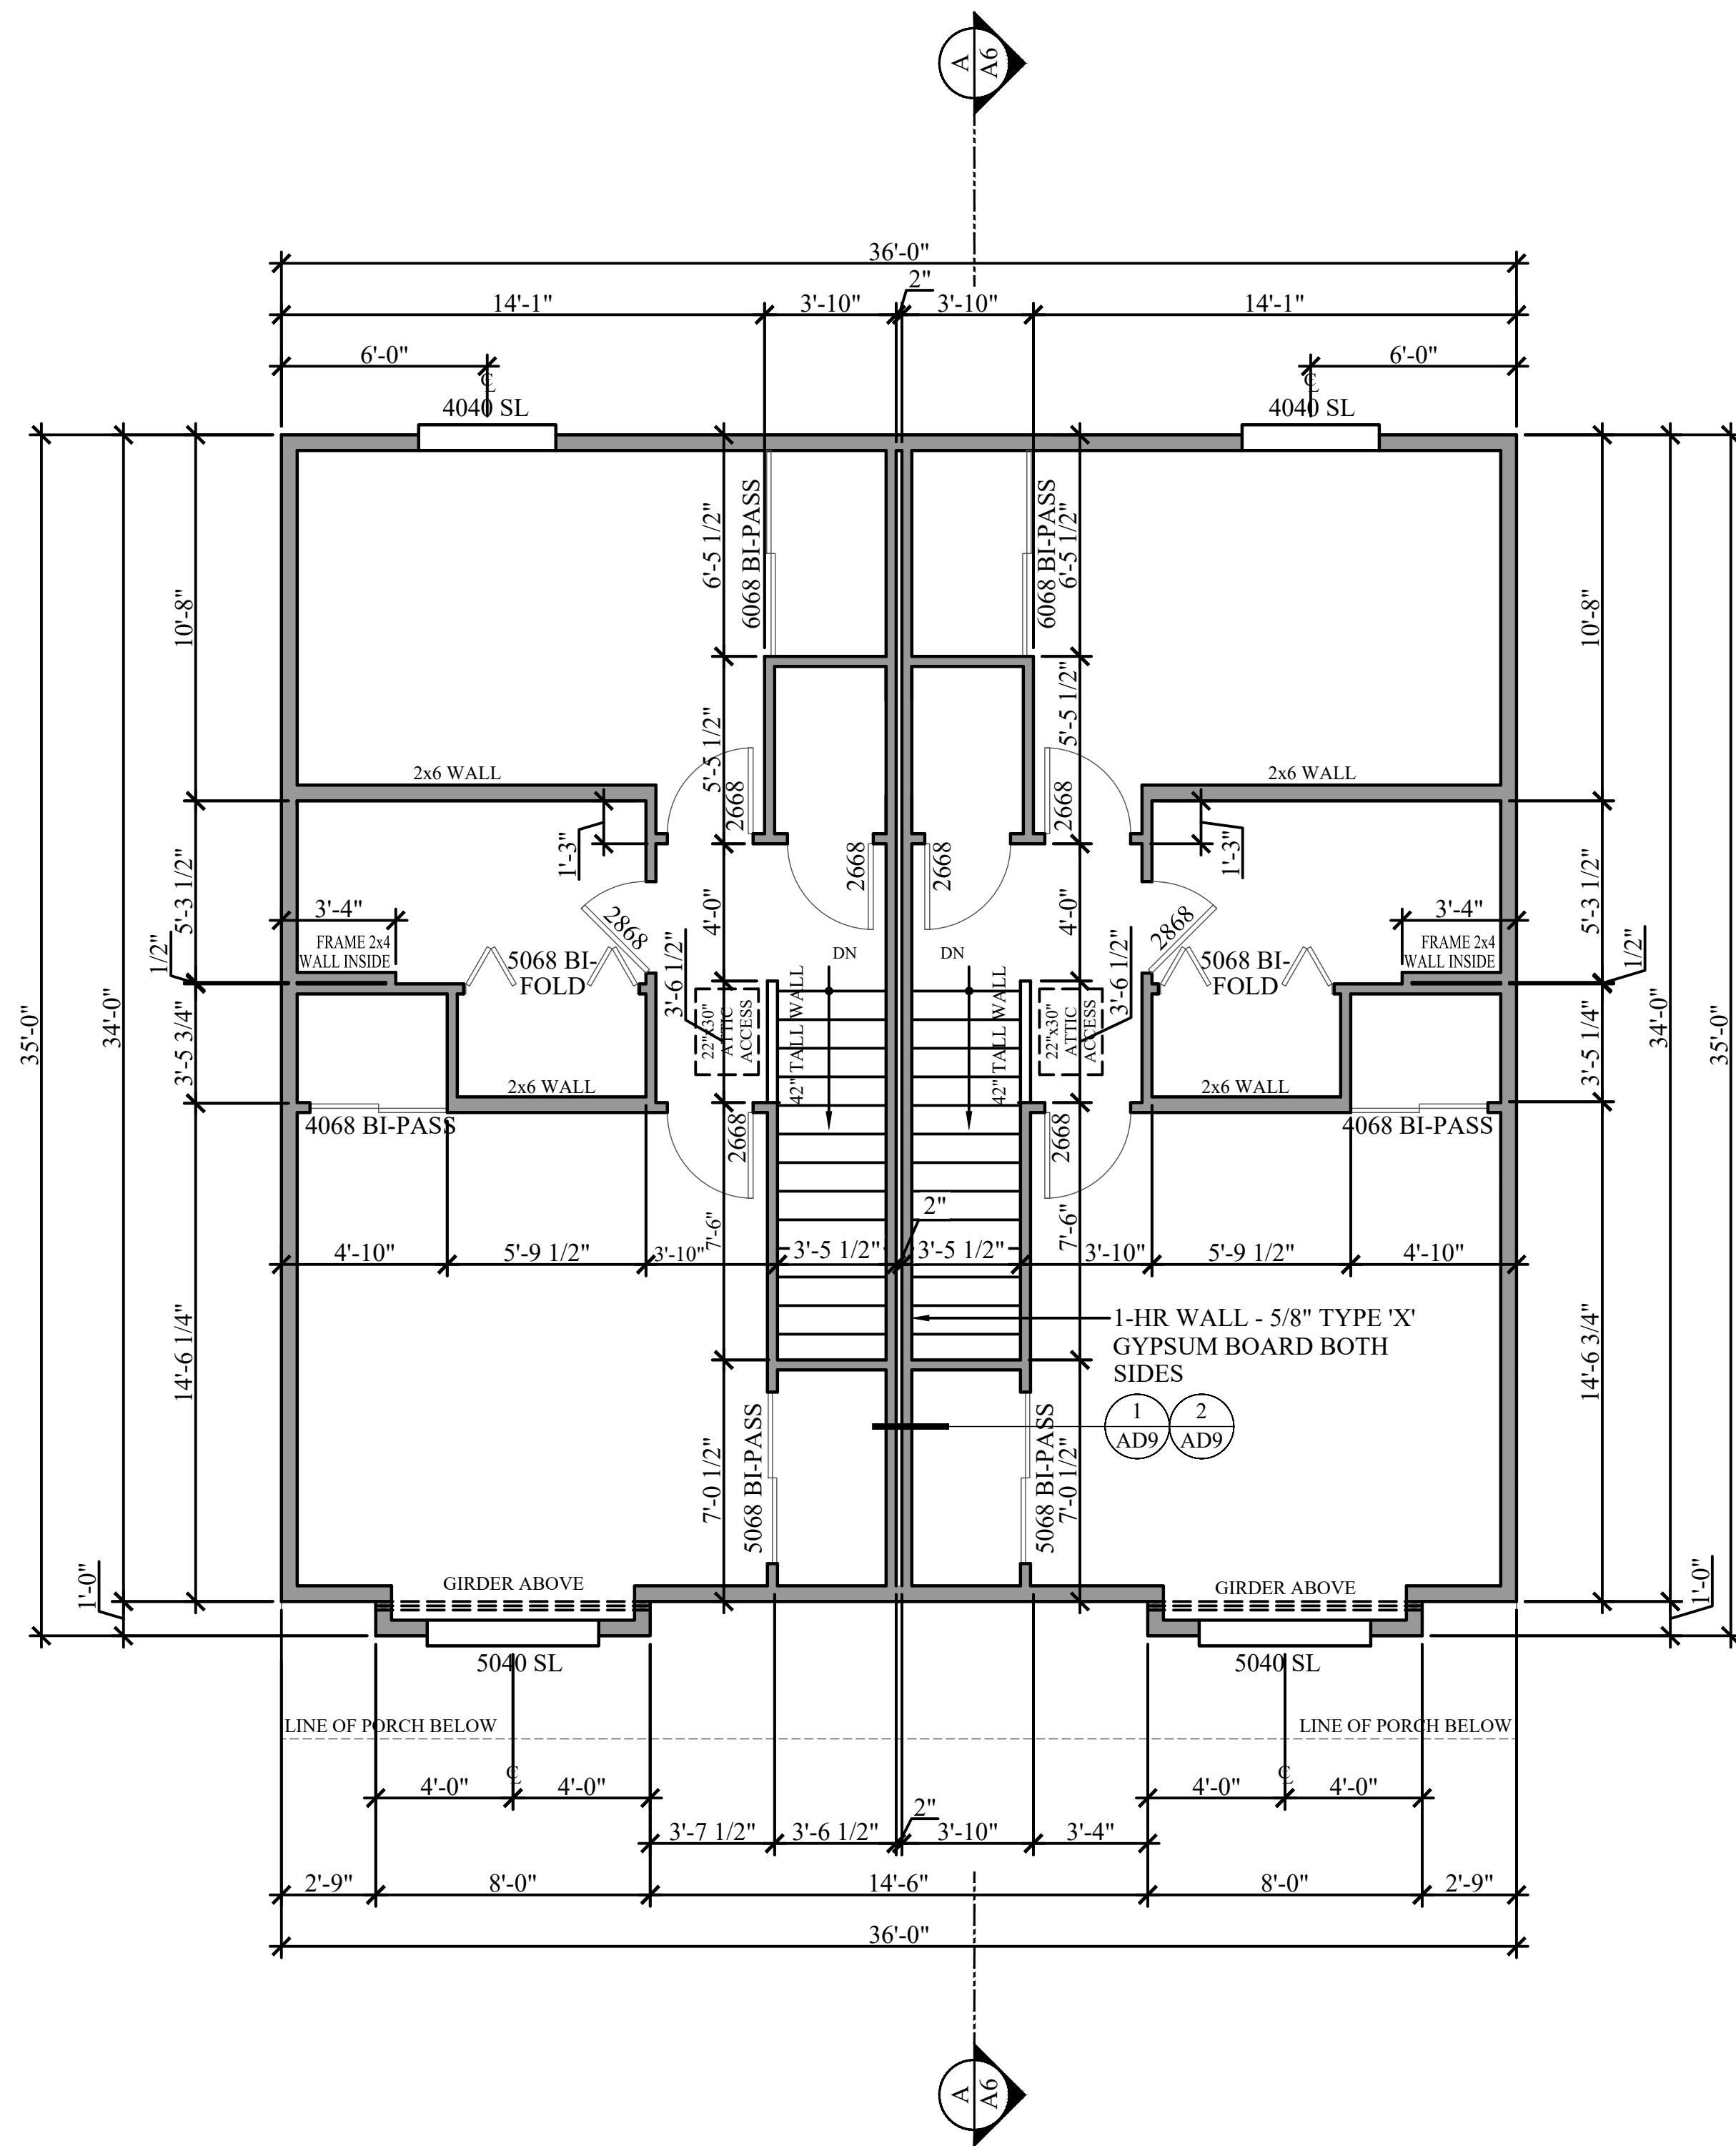

UPPER FRAMING PLAN

1/4" = 1'-0"

FRAMING PLAN NOTES

- 1) BEARING MEMBER SIZES NOTED ON STRUCTURAL ENGINEERING "S" SHEETS ARE TO SUPERCEDE ANY DEPICTED ON THE ARCHITECTURAL SHEETS.
- 2) PROVIDE SINGLE OR MULTIPLE STUDS UNDER BEAMS, HEADERS & GIRDER TRUSSES TO MATCH WIDTH OF SUPPORTED MEMBER UNLESS NOTED OTHERWISE ON ENGINEER'S "S" SHEETS..
- 3) ALL WINDOW & DOOR OPENINGS UNDER 6'-0" WIDE ARE TO HAVE A SINGLE 2x TRIMMER UNLESS NOTED OTHERWISE BY THE ENGINEER.
- 4) PROVIDE DOUBLE 2x TRIMMERS UNDER ALL WINDOW & DOOR OPENINGS 6'-0" OR GREATER.

INT. & EXT. SWING DR. FRAMING

- 1) ROUGH OPENING **WIDTH** TO BE THE **DOOR SIZE +2"** UNLESS NOTED OTHERWISE ON PLAN OR BY MANUFACTURER'S SPECIFICATIONS.
- 2) ROUGH OPENING **HEIGHT** TO BE **82 5/8"** FOR TYP. 6'-8" DOOR, U.N.O. PER PLAN OR MANUFACTURER'S SPECS.
- 3) ROUGH OPENING **HEIGHT** TO BE **98 5/8"** FOR TYP. 8'-0" DOOR, U.N.O. PER PLAN OR MANUFACTURER'S SPECS.

CLOSET DOOR FRAMING NOTES

BI-PASS CLOSETS:
R.O. WIDTH TO MATCH CLOSET WIDTH
R.O. HEIGHT = 83-1/8"

BI-FOLD CLOSETS:
R.O. WIDTH = CLOSET WIDTH + 1-1/2"
R.O. HEIGHT = 81-5/8"

WINDOW FRAMING NOTES

TYPICAL HEADER HEIGHTS TO BE AS FOLLOWS U.N.O. ON PLAN:

MAIN FLOOR - 8'-1 1/8" PLATE: **6'-11 3/8"**
MAIN FLOOR - 9'-1 1/8" PLATE: **7'-11 3/8"**

UPPER FLOOR - 8'-1 1/8" PLATE: **7'-1 3/8"**

GARAGE DOOR FRAMING NOTES

TYPICAL DOOR FRAMING TO BE AS FOLLOWS U.N.O. ON PLAN:

WIDTH - DOOR SIZE PLUS 3"
HEIGHT - DOOR SIZE PLUS 1-1/2" FROM SLAB

2023 ORSC

HODSON #1 - 2386

ADAIR HOMES INC.
© COPYRIGHT 2025

COMMUNITY CODE / LOT#:

MEME-129

GARAGE CONFIGURATION:

NONE

UPPER FLOOR FRAMING

ADAIR HOMES, INC
4400 NE 77TH AVE
SUITE 100
VANCOUVER, WA 98662

PAGE:



A4.2

SCALE: 1/4" = 1'-0"

DATE: 08/26/2025

DRAFTED BY: ES

REV:

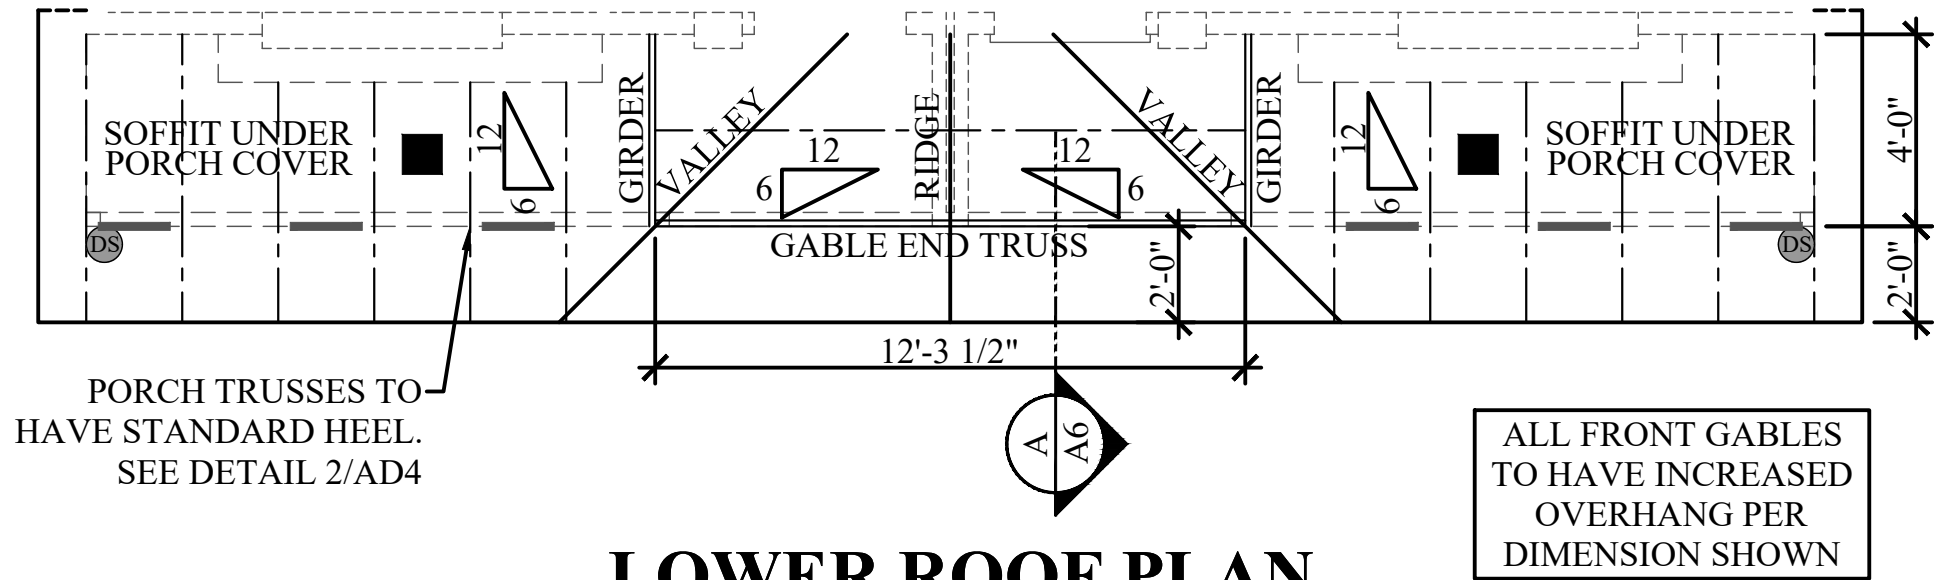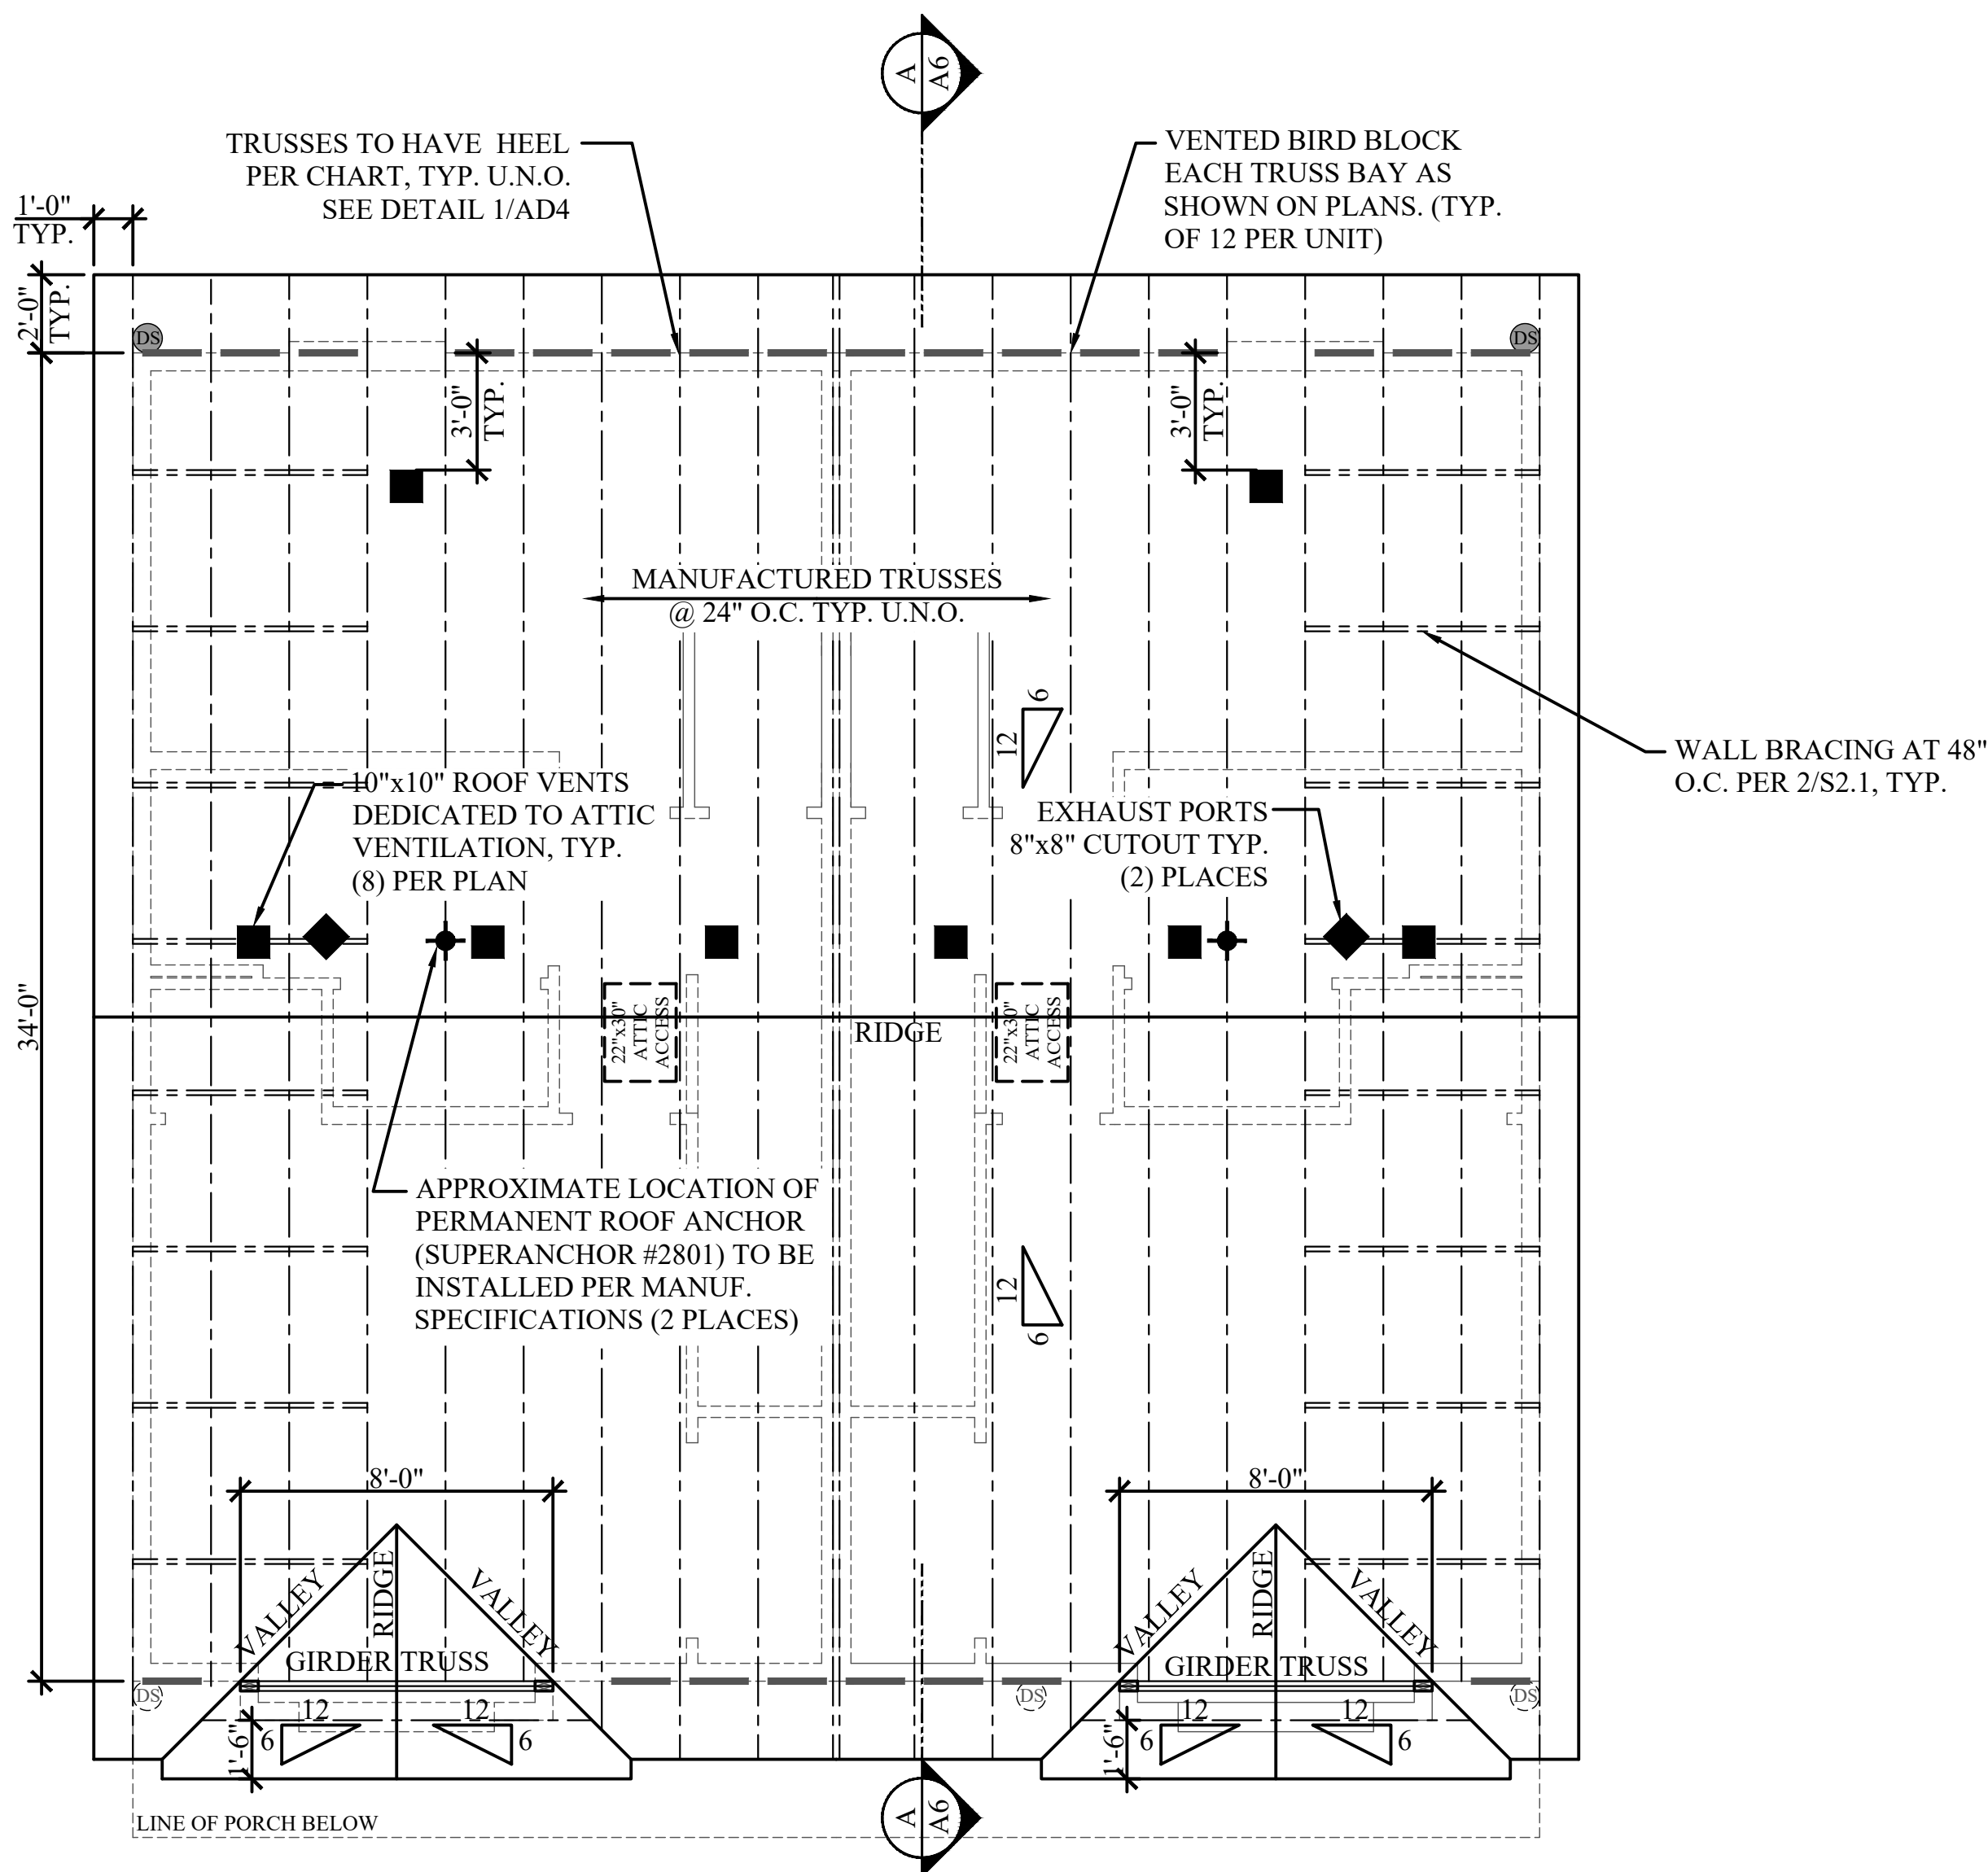

ROOF PLAN

1/4" = 1'-0"

ROOF PLAN NOTES

- 1) PROVIDE PROTECTIVE FLASHING FOR ALL ROOF PENETRATIONS.
- 2) REQUIRED VENTILATION OPENINGS SHALL BE COVERED W/ BUG/INSECT SCREENS.
- 3) REQUIRED VENTILATION OPENINGS SHALL BE PROTECTED AGAINST THE ENTRANCE OF SNOW AND/OR RAIN.
- 4) INSTALL INSULATION SO THAT THE FREE FLOW OF AIR WITHIN THE ATTIC IS NOT BLOCKED.
- 5) COMPOSITION SHINGLE ROOFING TO BE INSTALLED OVER 15# ROOFING FELT PER MANUFACTURER'S SPECIFICATIONS.
- 6) SEE PLAN FOR ROOF PITCH.
- 7) GABLE END OVERHANGS ARE 12", EAVES ARE 2'-0" TYPICAL UNLESS NOTED OTHERWISE.
- 8) PORCH & PATIO COVERS TO BE SOFFITED W/ PLAIN PANEL SIDING, U.N.O., VENT THE ENCLOSED SPACE PER CODE.
- 9) PROVIDE & INSTALL RAIN GUTTERS & DOWNSPOUTS AS REQUIRED PER BUILD LOCATION.

VENTILATION

- 1) THE TOTAL NET FREE VENTILATION AREA SHALL NOT BE LESS THAN 1/300 OF THE AREA OF THE SPACE VENTILATED, PROVIDED A) THAT AT LEAST 40% BUT NOT MORE THAN 50% OF THE REQUIRED AREA IS PROVIDED BY VENTILATORS LOCATED IN THE UPPER PORTION OF THE SPACE BEING VENTILATED. THE REMAINING BALANCE OF THE REQUIRED VENTING WILL BE PROVIDED BY EAVE VENTS AND/OR LOW ROOF VENTS.
- B) A CLASS I OR II VAPOR RETARDER IS INSTALLED ON THE WARM-IN-WINTER SIDE OF THE CEILING
- 2) ALTERNATIVE METHOD: VENTILATION SHALL NOT BE LESS THAN 1/150 OF THE AREA OF THE SPACE VENTILATED.

- VENTS:
- 1) 10"x10" ROOF VENTS ARE BASED ON 51 SQ IN NET FREE VENTILATION AREA PER VENT.
- 2) EAVE VENTS ARE BASED ON 9 SQ IN NET FREE VENTILATION AREA PER VENT.

UPPER ROOF(1 UNIT):	
AREA	89,280 SQ IN
REQUIRED VENTING	298 SQ IN
ROOF VENTS (HIGH)	153 SQ IN (3)
EAVE VENTS	108 SQ IN (12)
ROOF VENTS (LOW)	51 SQ IN (1)

LOWER PORCH ROOF (1 UNIT) (1:150):	
AREA	10,368 SQ IN
REQUIRED VENTING	70 SQ IN
ROOF VENTS	51 SQ IN (1)
EAVE VENTS	27 SQ IN (3)

LEGEND

- DOWNSPOUT ABOVE TO ROOF BELOW
- DOWNSPOUT TO RAIN DRAIN
- 10"x10" STANDARD ATTIC SPACE ROOF VENT
- ◆ 8"x8" EXHAUST PORT
- EAVE VENT
- ✦ ROOF ANCHOR

ADAIR HOMES INC.
© COPYRIGHT 2025



ADAIR HOMES, INC
4400 NE 77TH AVE
SUITE 100
VANCOUVER, WA 98662

HODSON #1 - 2386

PLAN ORIENTATION: STANDARD

COMMUNITY CODE / LOT#: MEME-129


ROOF PLAN

2023 ORSC

SCALE: 1/4" = 1'-0"
DATE: 08/26/2025
DRAFTED BY: ES
REV:

PAGE: A5

BUILDING ENVELOPE SCHEDULE	
WALL INSULATION (ABOVE GRADE)	R-23 INTERMEDIATE
WALL INSULATION (BELOW GRADE)	N/A
FLAT CEILINGS	R-49
VAULTED CEILINGS	R-49
UNDER FLOOR (CRAWL SPACE)	R-38
SLAB EDGE PERIMETER	N/A
HEATED SLAB INTERIOR	N/A
WINDOWS	U-0.25
SKYLIGHTS	N/A
EXTERIOR DOORS	U-0.20

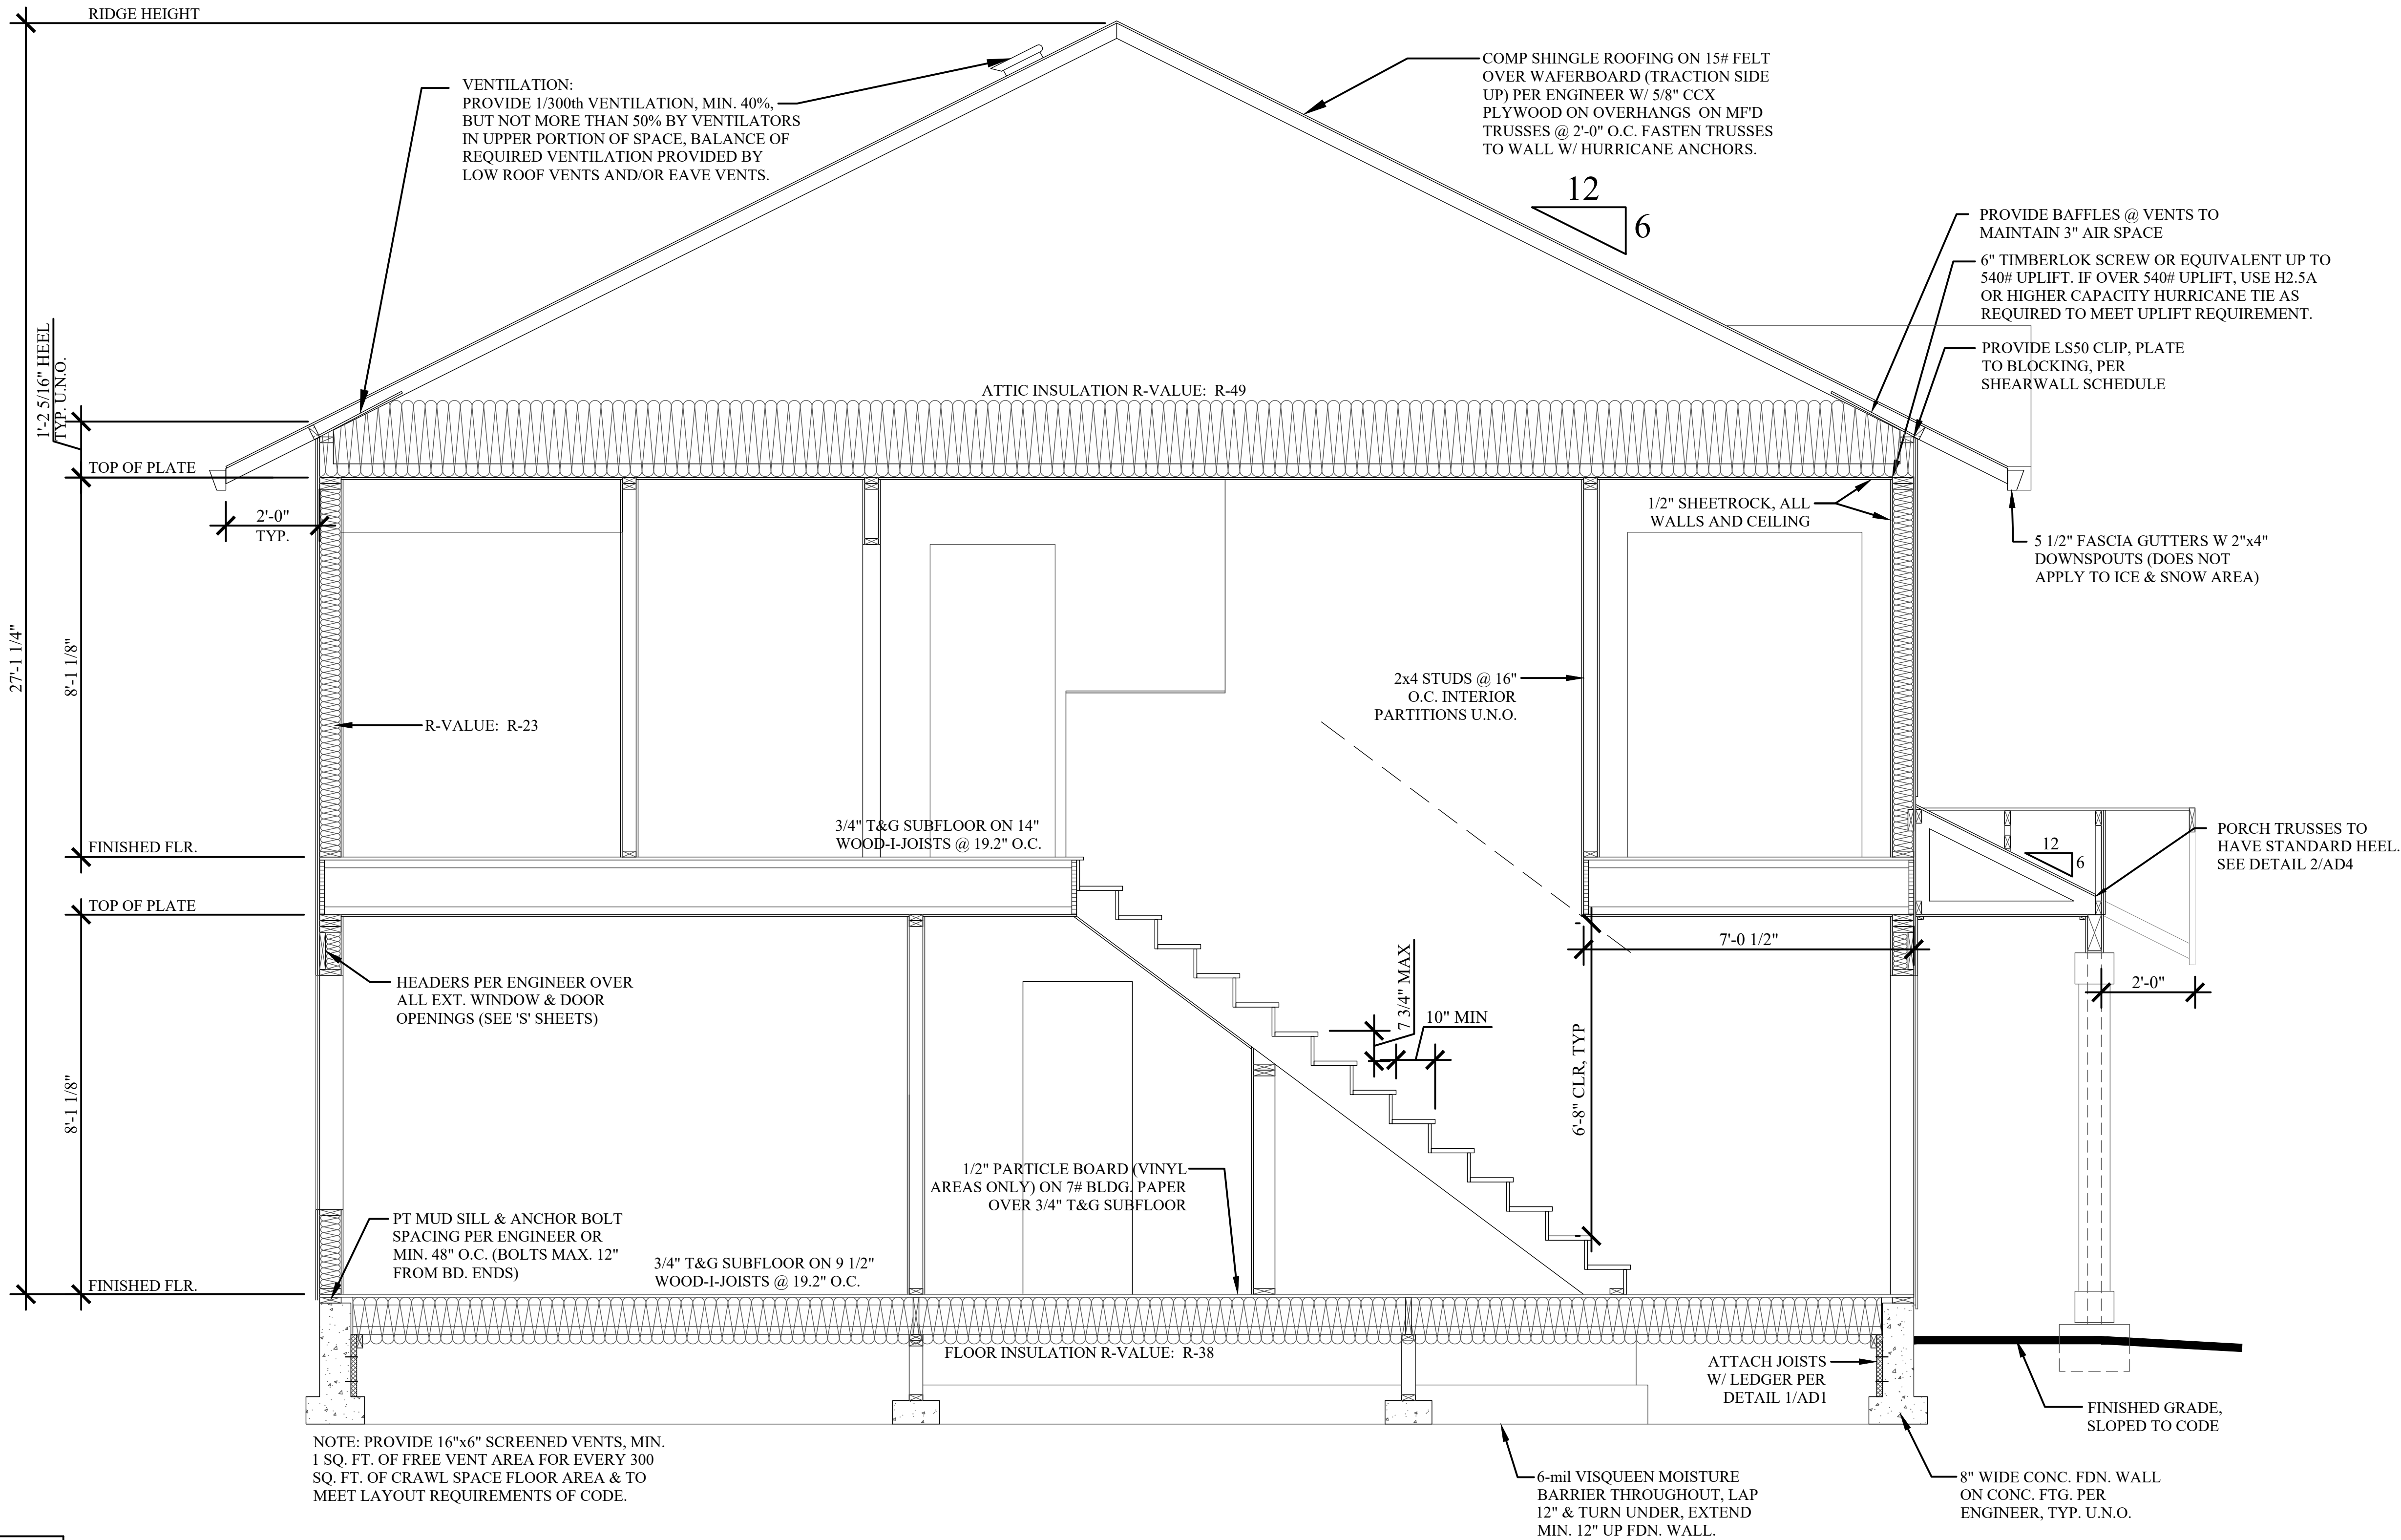

BUILDING SECTION A

1/2" = 1'-0"



ADAIR HOMES, INC
4400 NE 77TH AVE
SUITE 100
VANCOUVER, WA 98662

HODSON #1 - 2386

COMMUNITY CODE / LOT#:

MEME-129

PLAN ORIENTATION:

STANDARD

BUILDING SECTION A

2023 ORSC

SCALE: 3/8" = 1'-0"





DATE: 08/26/2025

DRAFTED BY: ES

REV:

PAGE:

A6

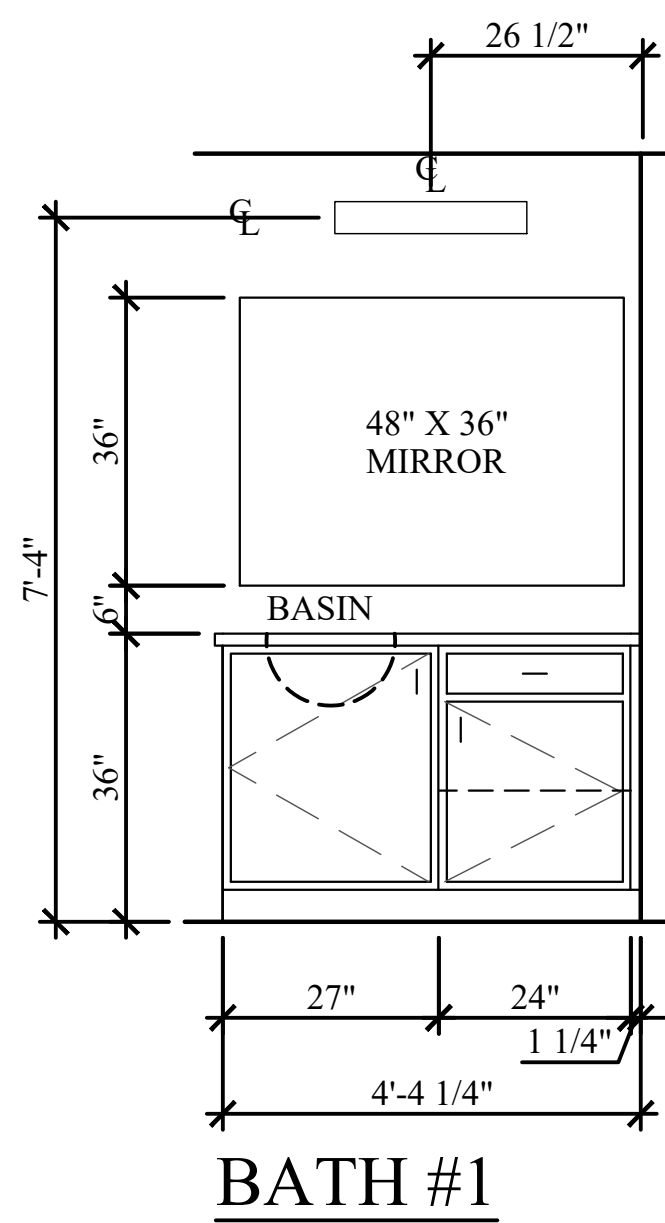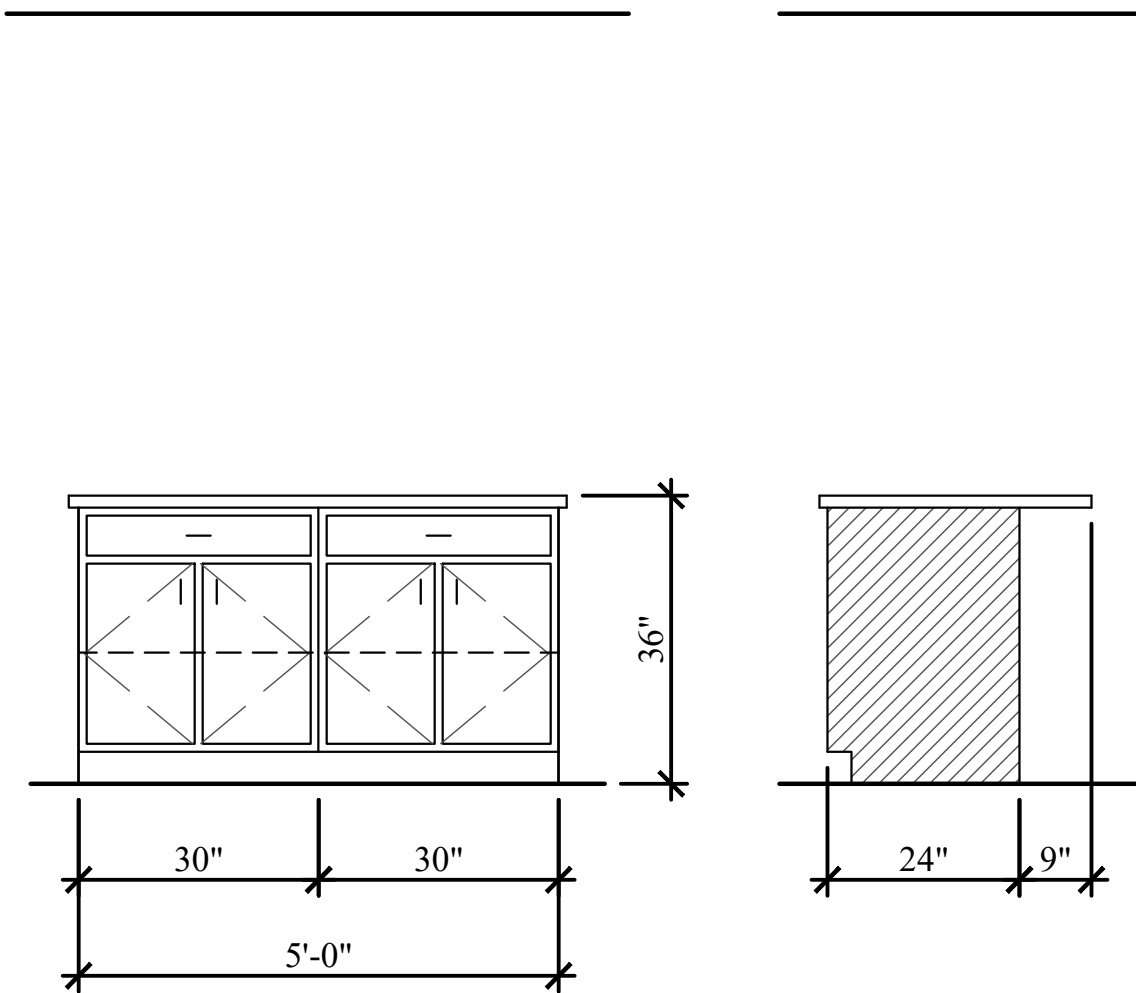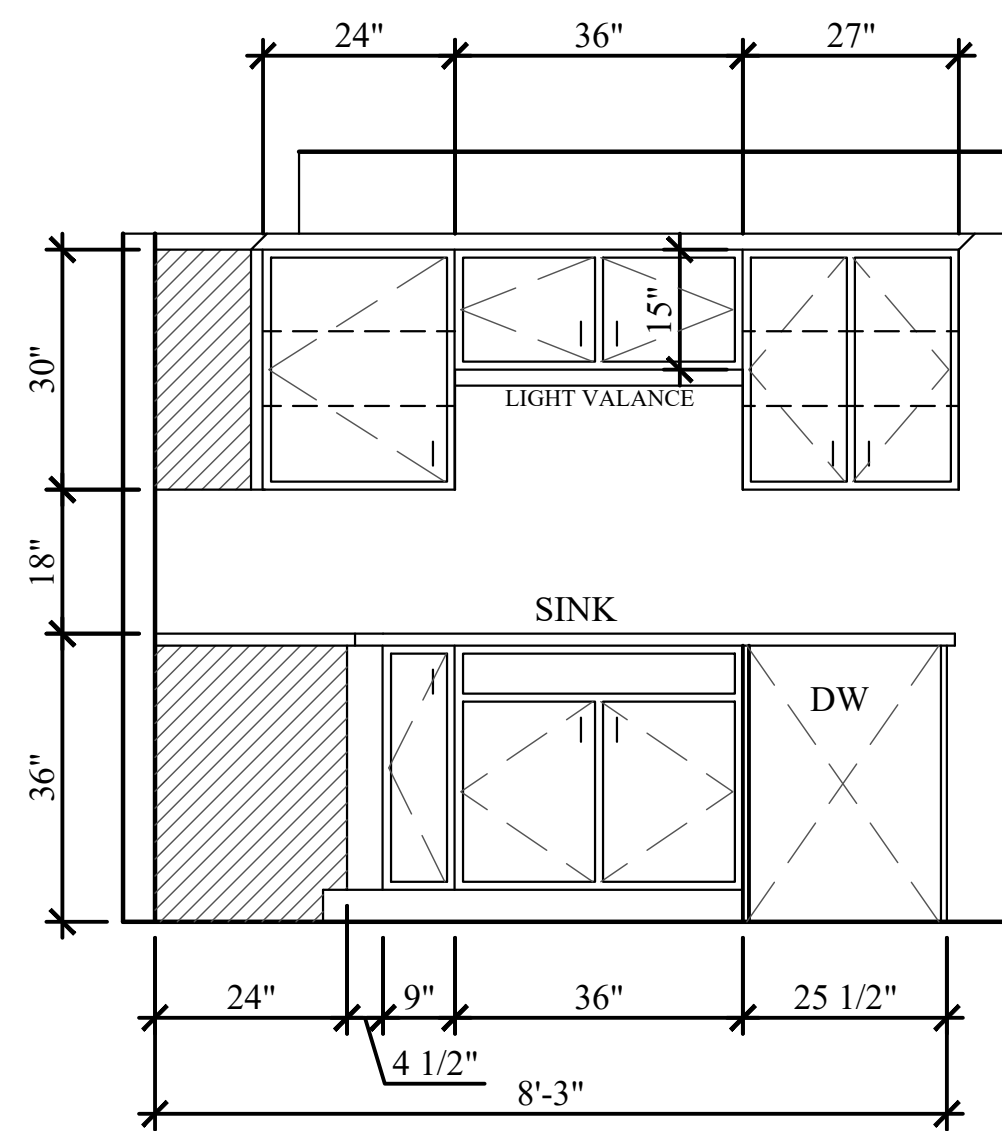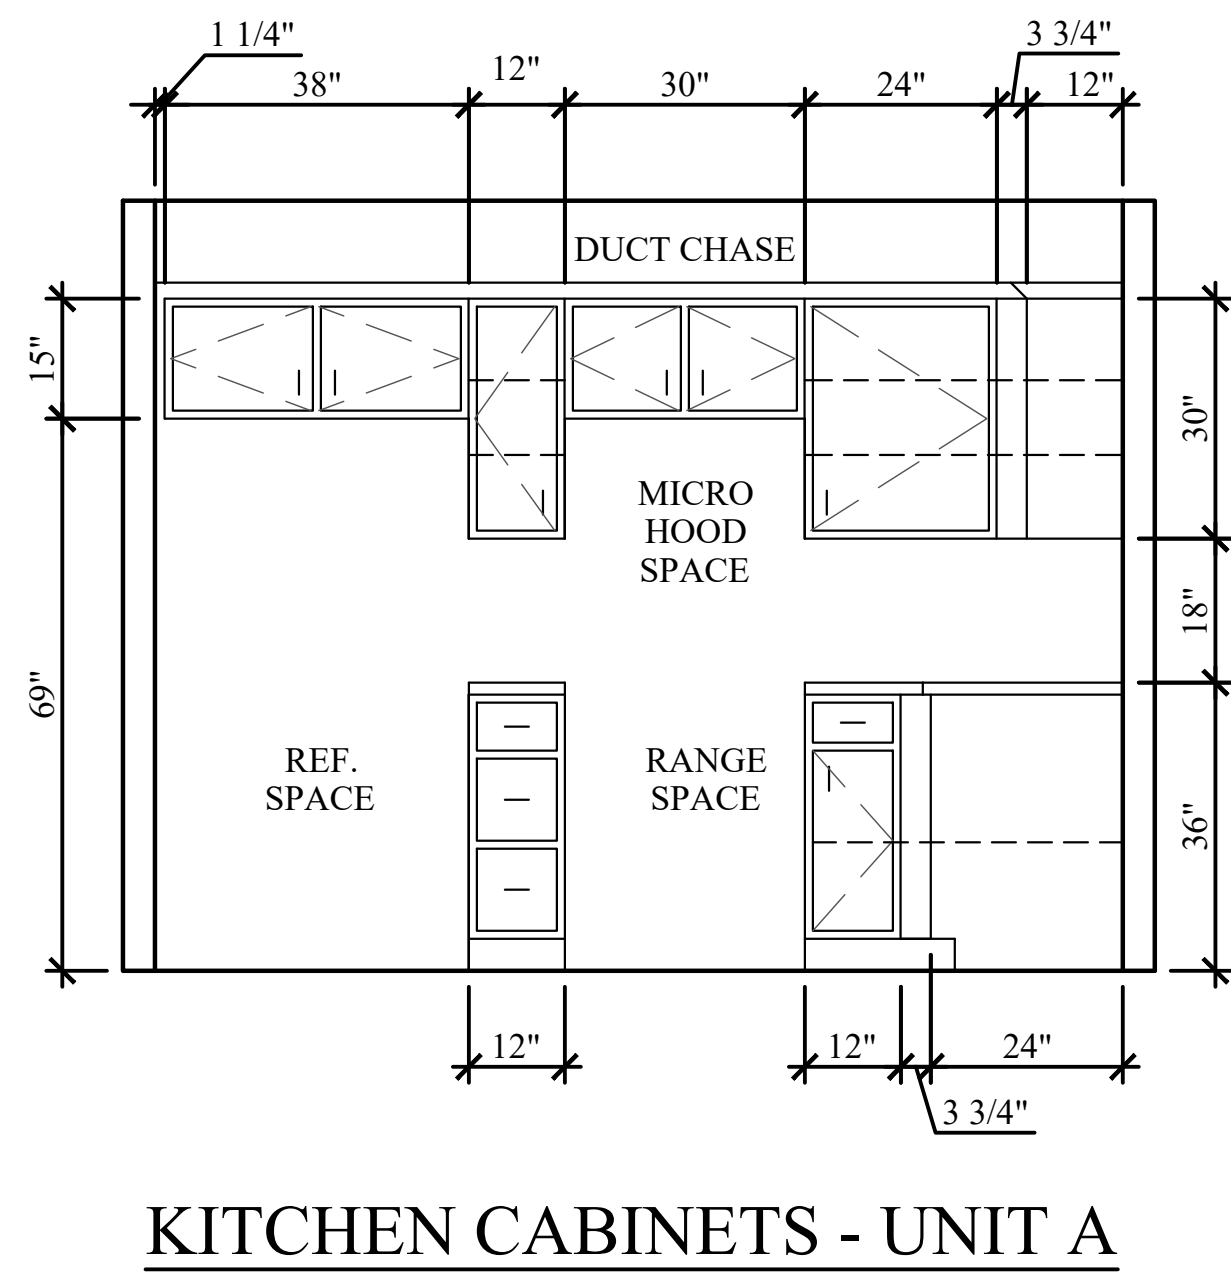

UNIT A CABINETS
(UNIT B IS REVERSE VERSION)

CABINET NOTES

- NOTES
1. ALL CABINET DIMENSIONS SHALL BE CONFIRMED AFTER COMPLETION OF ROUGH FRAMING.
 2. ALL DIMENSIONS MAY VARY, AND THE CABINETS ADJUSTED AS NECESSARY.
 3. ACTUAL CABINET DESIGN TO BE DETERMINED BY THE CABINET MAKER.
 4. MOUNT UPPER CABINETS SO THAT THERE IS 18" CLEAR FROM BASE OF UPPER CABINET TO TOP OF COUNTERTOP (20" CLEAR FROM BASE OF UPPER CABINET TO TOP OF COUNTERTOP WHEN VALANCE IS USED).



ADAIR HOMES, INC
4400 NE 77TH AVE
SUITE 100
VANCOUVER, WA 98662

HODSON #1 - 2386

COMMUNITY CODE / LOT#:

MEME-129

PLAN ORIENTATION:

STANDARD

GARAGE CONFIGURATION:

NONE

CABINET DETAILS

2023 ORSC

SCALE: 1/2" = 1'-0"

DATE: 08/26/2025


DRAFTED BY: ES

REV:


PAGE:

A7


- NOTES FOR FLOOR JOIST BEARING:
1. JOIST SHALL BEAR A MINIMUM OF 1" ON THE VERTICAL 2x4 P.T. STUD WITH AN ADDITIONAL 1 1/2" FROM A HORIZONTAL LEDGER.
 2. TREAT EACH END OF THE 2x4 P.T. STUD WITH APPROVED SOLUTION TO PREVENT DECAY.

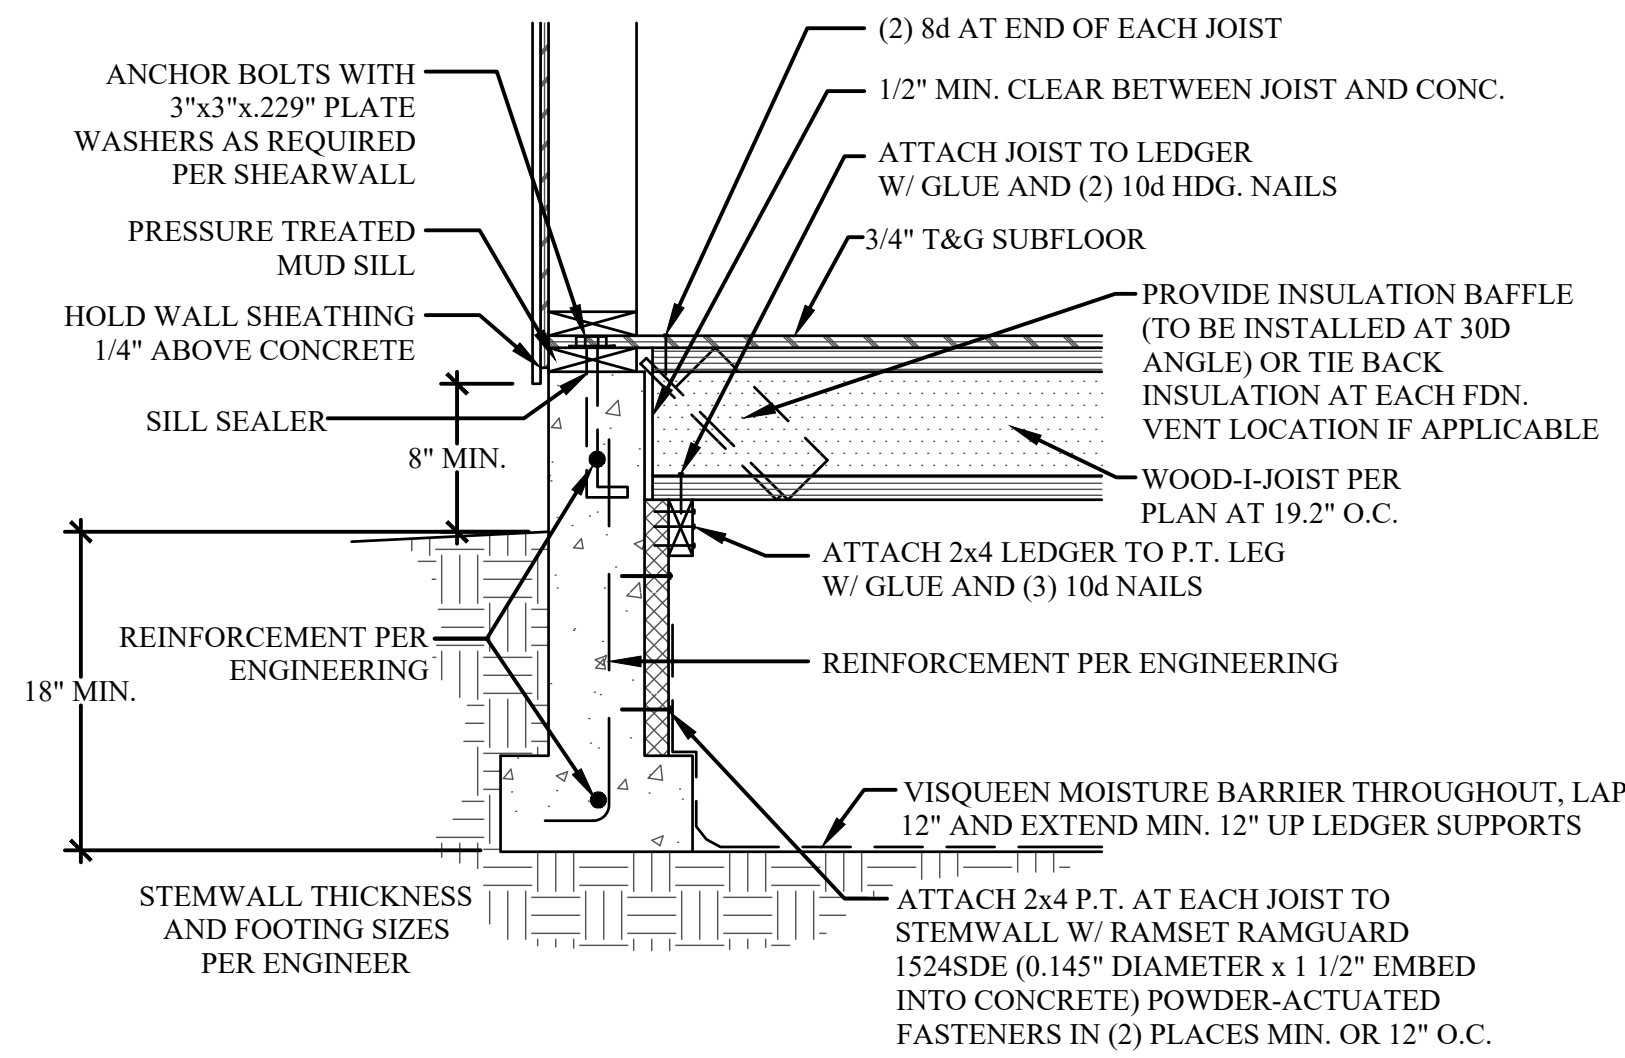


1 FOUNDATION & FLOOR SECTION
SCALE: 1" = 1'-0" FULLY ENGINEERED PLAN

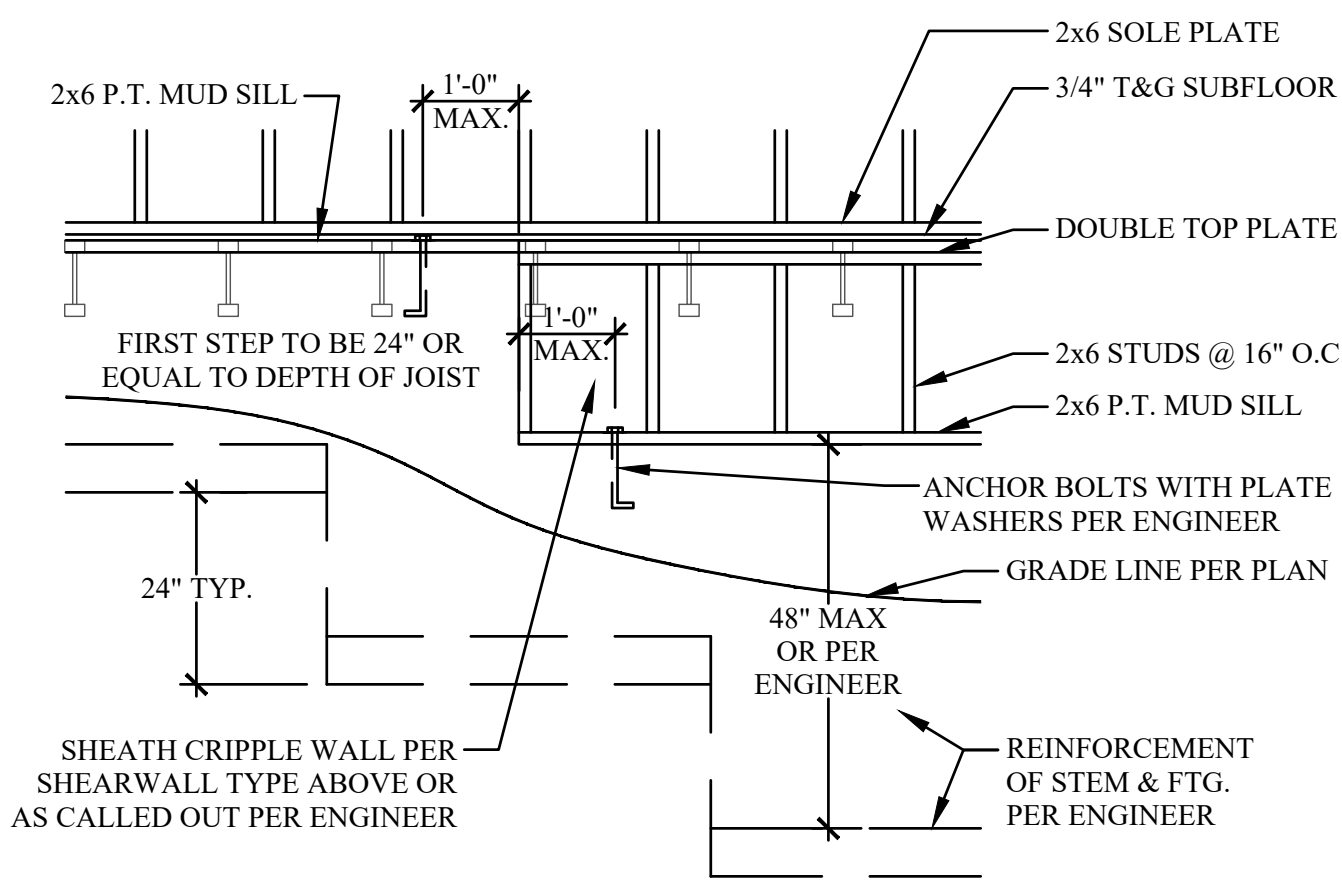


4 STEPPED FOUNDATION
SCALE: 1/4" = 1'-0" PERPENDICULAR JOISTS

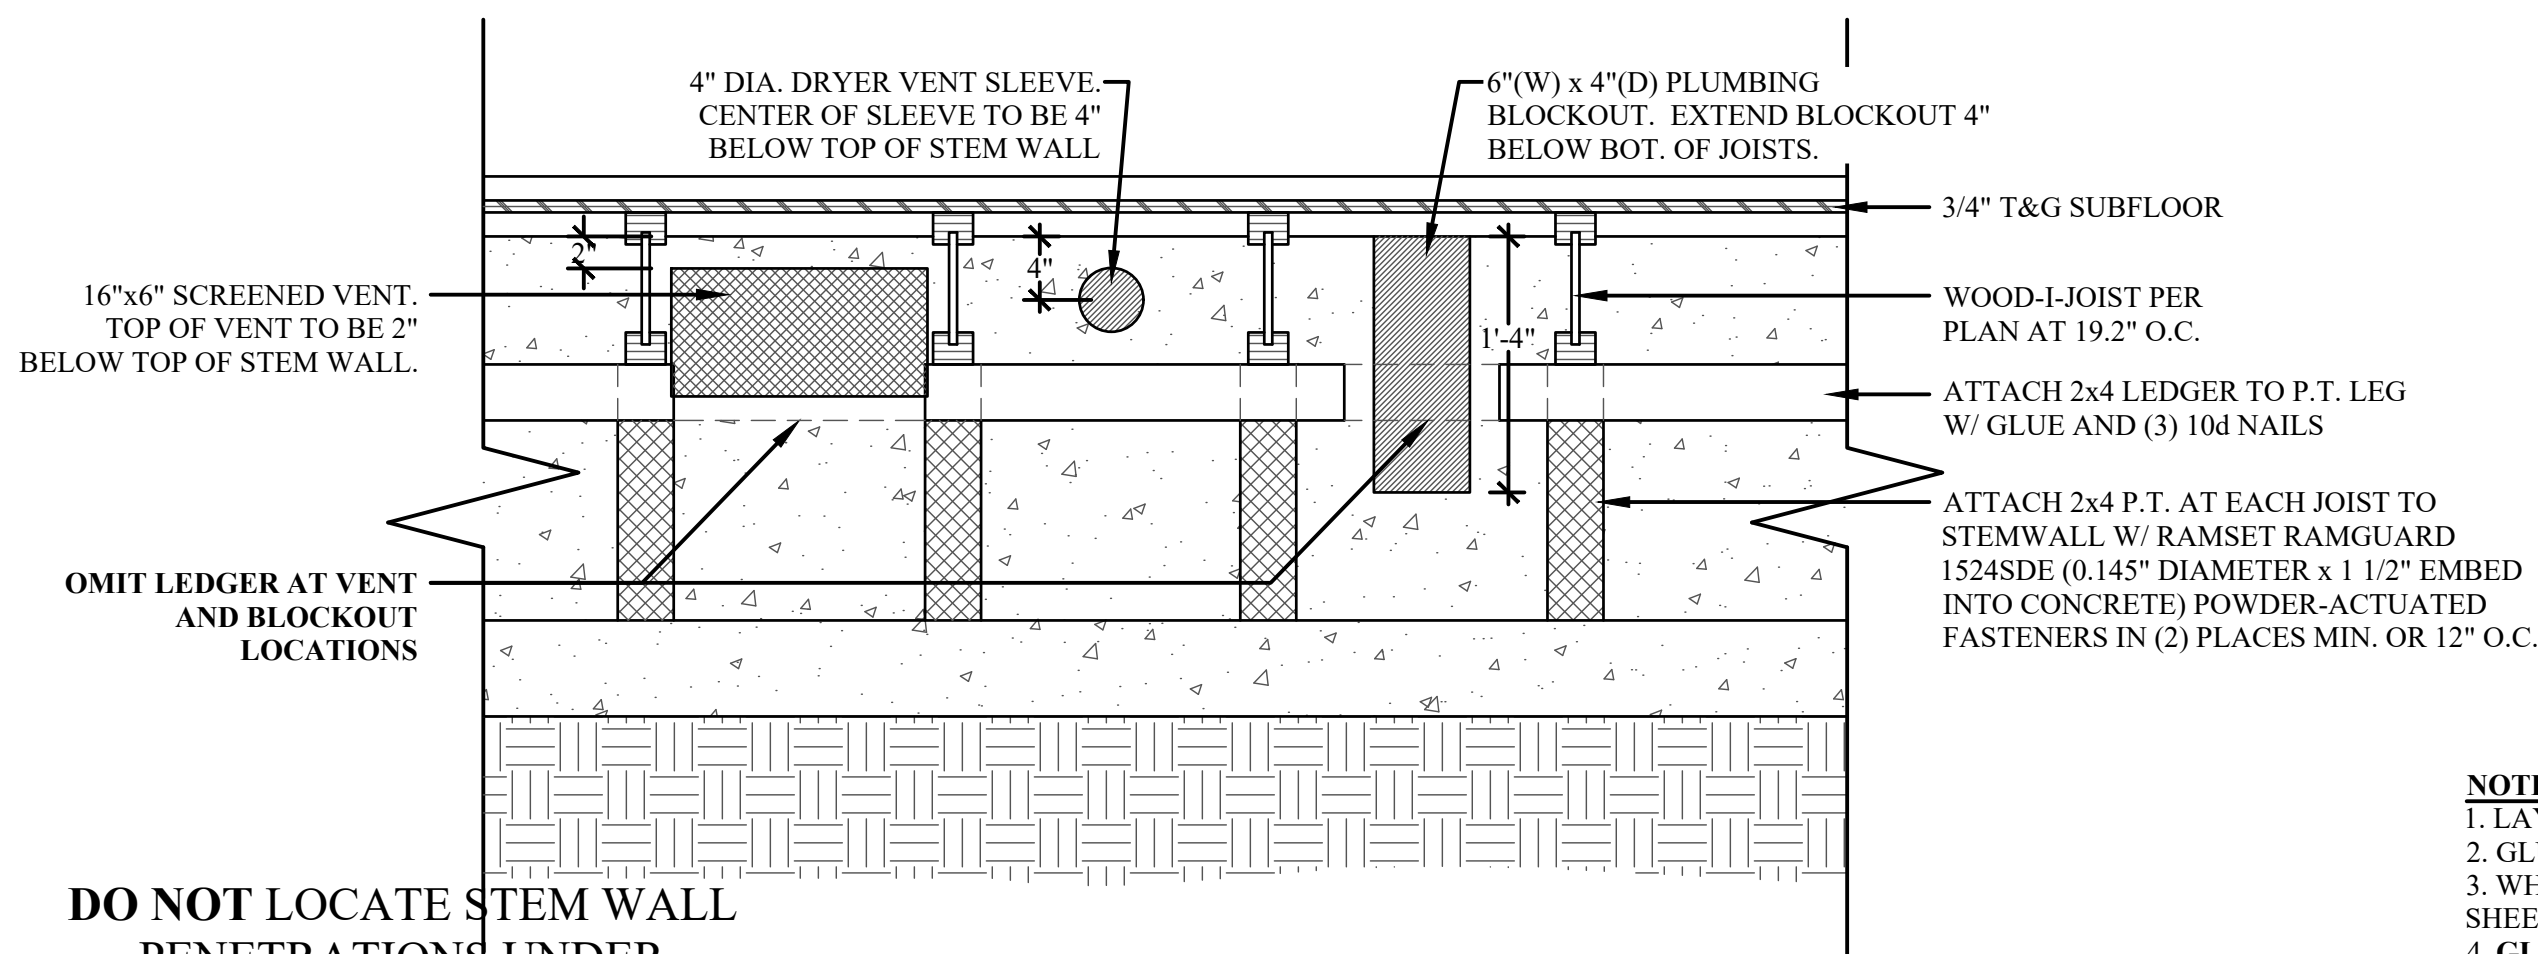

7 FOUNDATION VENTS & BLOCKOUTS
SCALE: 1" = 1'-0"

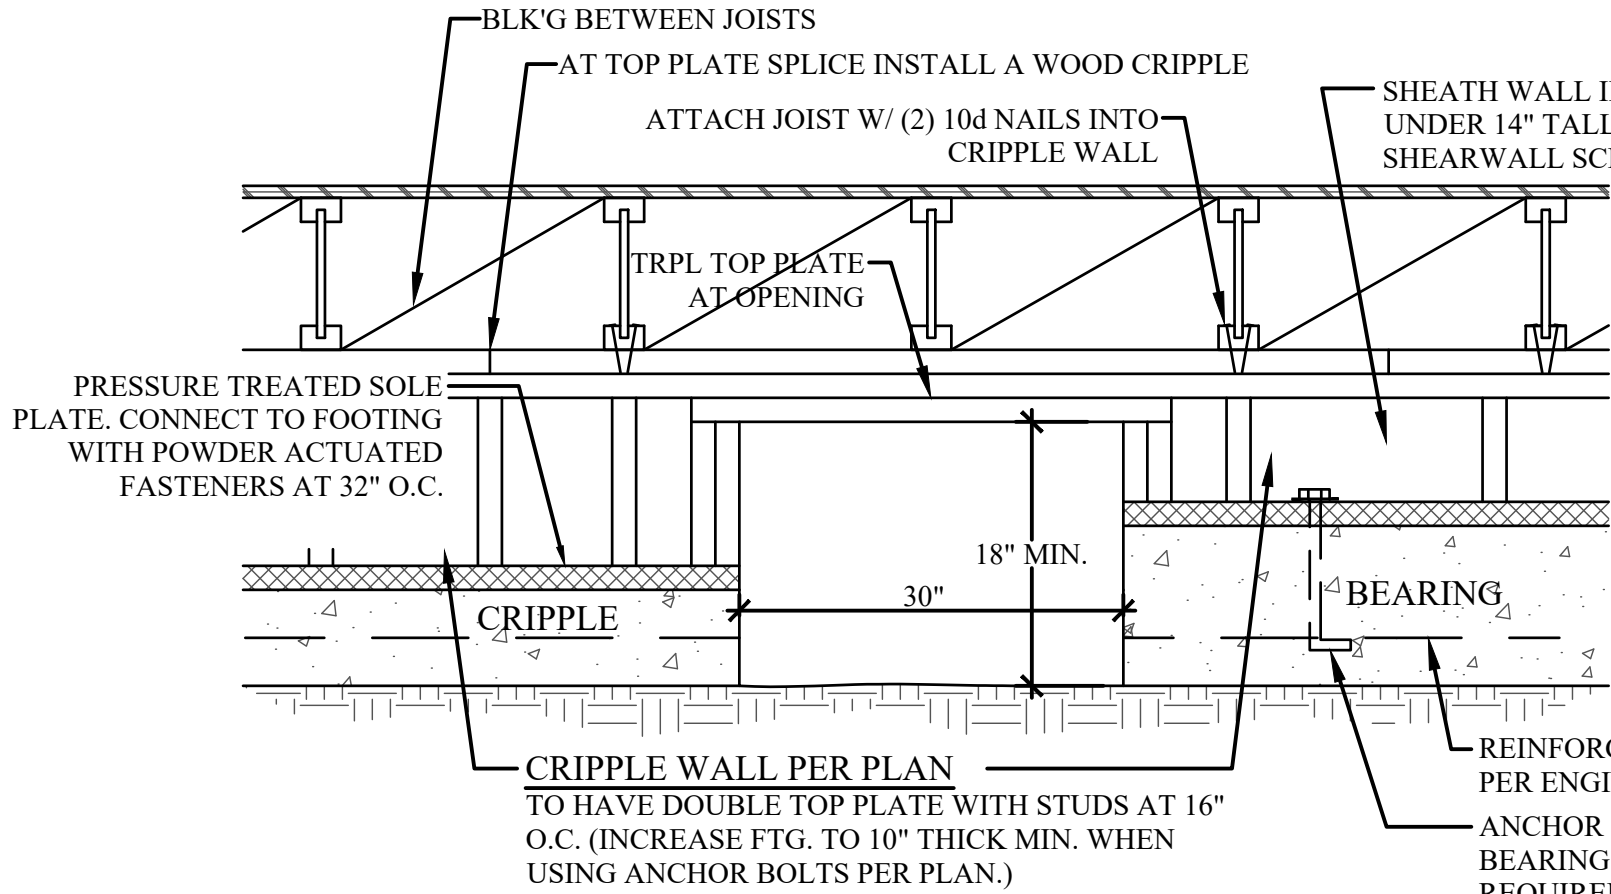


2 JOIST BEARING, PERPENDICULAR WALL
SCALE: 1" = 1'-0" INTERIOR FOOTING AND PONY WALL

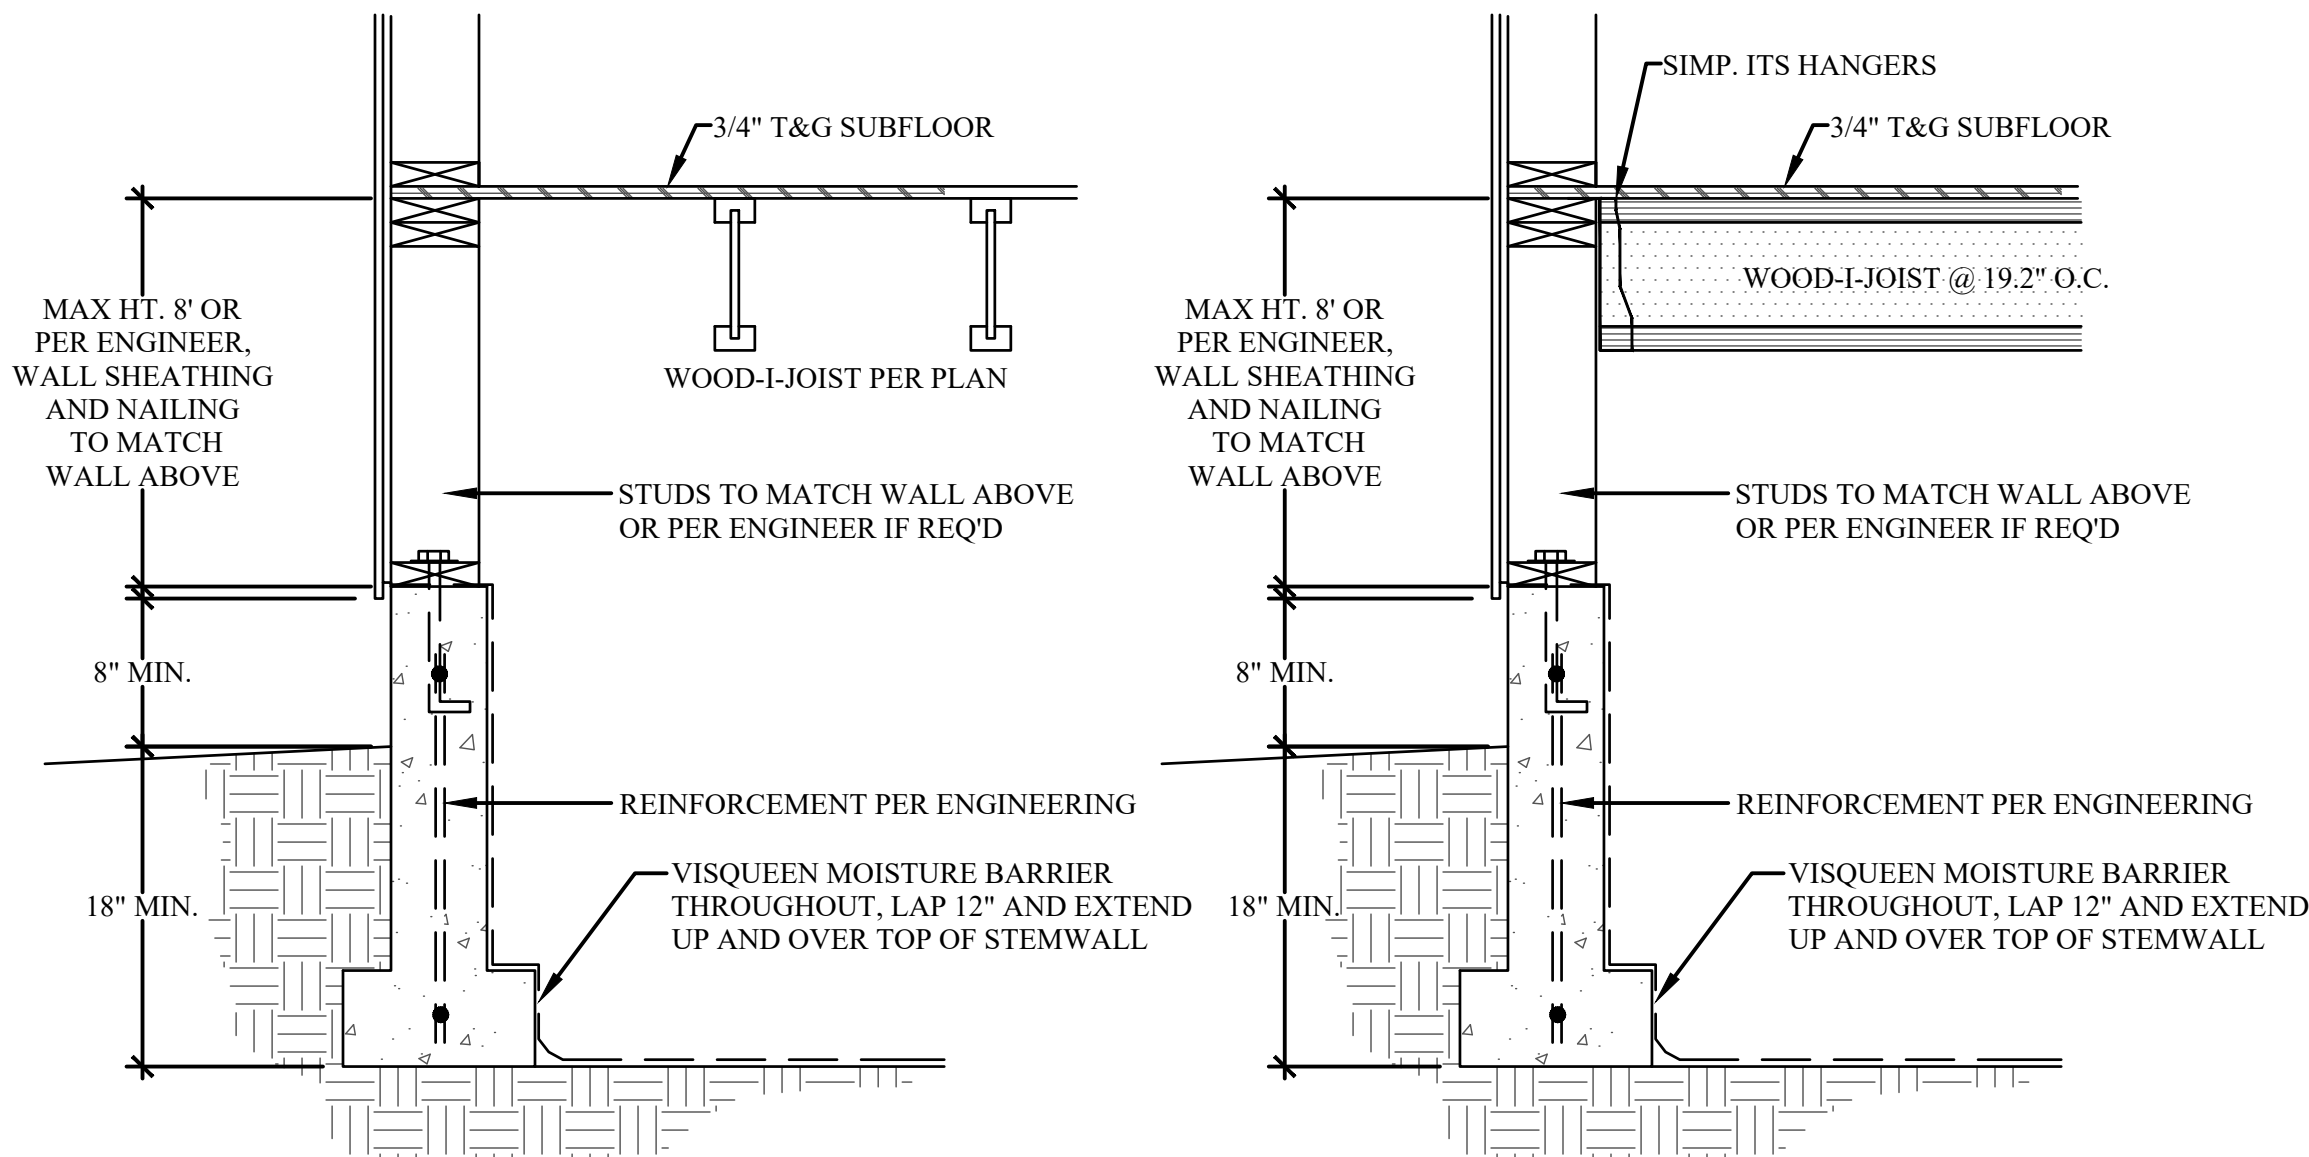


5a STEPPED FOUNDATION
SCALE: 1/4" = 1'-0" PARALLEL JOISTS AS NEEDED

5b STEPPED FOUNDATION
SCALE: 1/4" = 1'-0" PERPENDICULAR JOISTS AS NEEDED

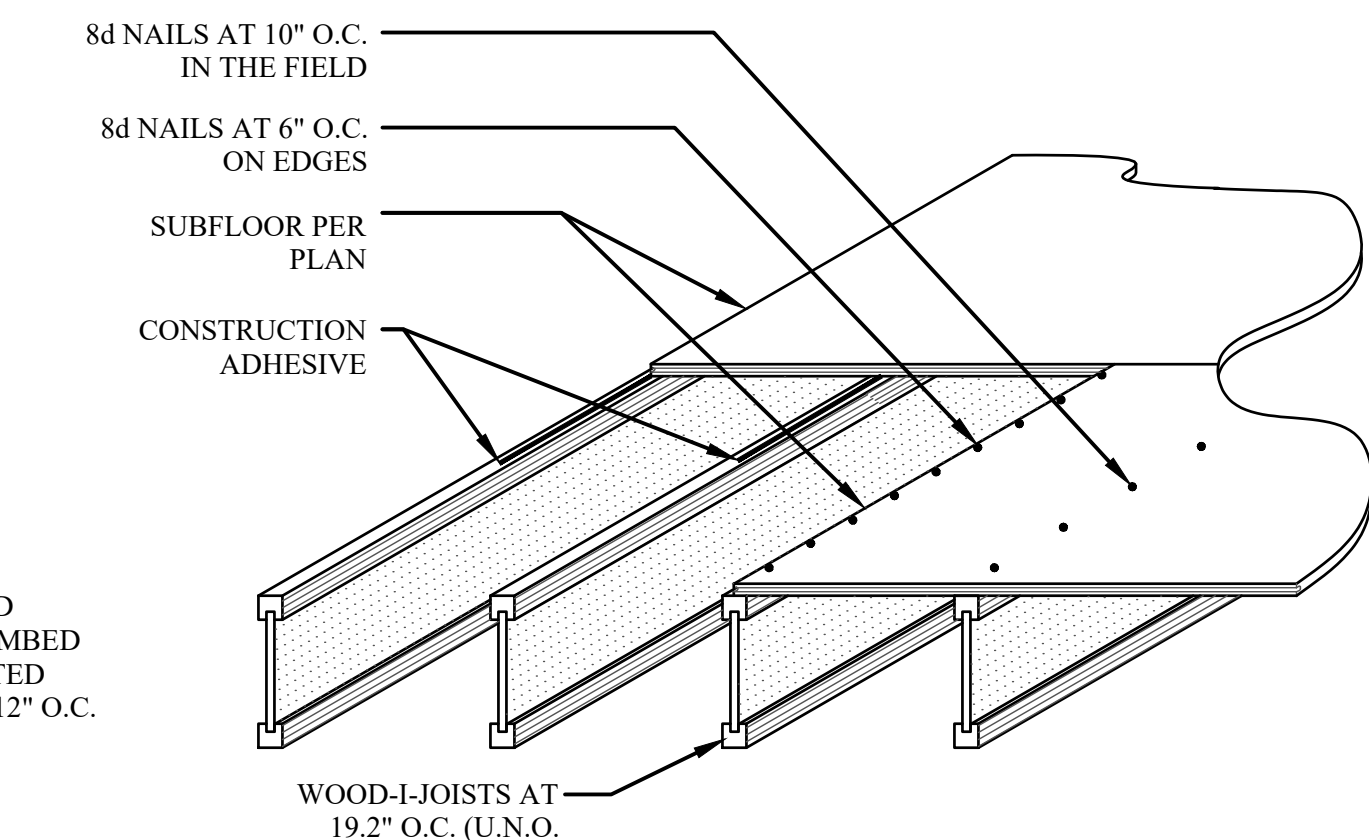


- NOTES:
1. LAY T&G SUBFLOOR WITH THE TOUGUE TOWARD YOU AND THE GROOVE AWAY.
 2. GLUE AND NAIL EACH SHEET BEFORE INSTALLING THE NEXT.
 3. WHEN PUSHING THE SHEETS TOGETHER, PROTECT THE GROOVE EDGE OF THE SHEET WITH A 2x4 LAID ACROSS THE JOISTS
 4. GLUE LINE MUST BE CONTINUOUS FOR THE FULL WIDTH OF THE SHEET.
 5. MAINTAIN 1/8" GAP AT THE END OF SHEETS.


8 SUBFLOOR INSTALLATION
SCALE: NTS

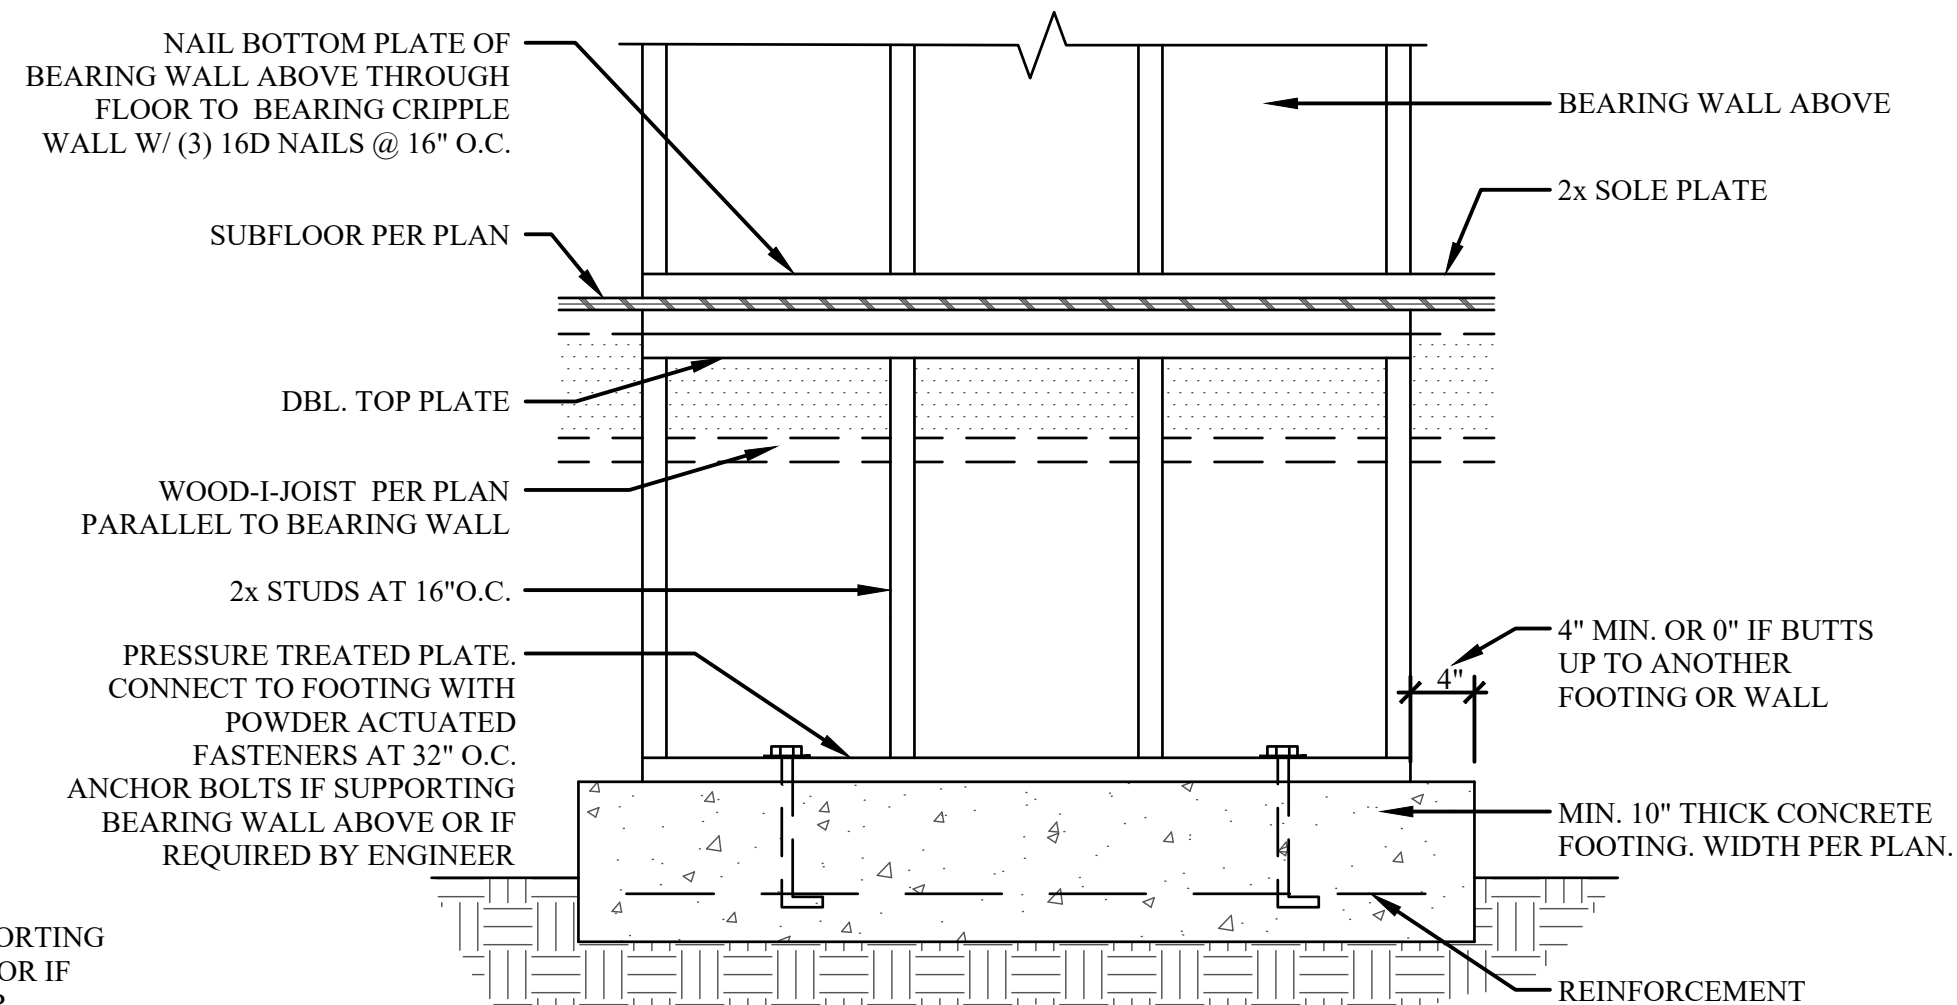

3 BEARING WALL, PARALLEL TO JOISTS
SCALE: 1" = 1'-0" INTERIOR FOOTING AND PONY WALL

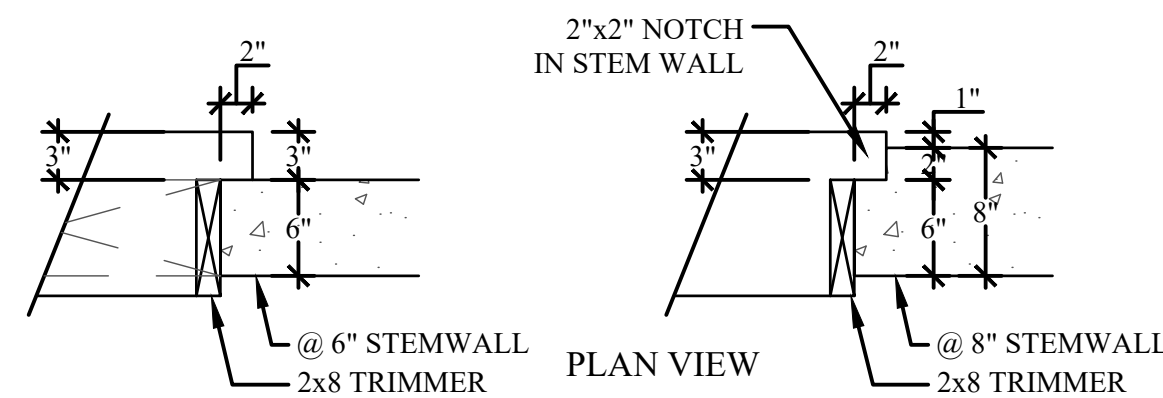

6 FOUNDATION at OVERHEAD GARAGE DOOR
SCALE: 1" = 1'-0"

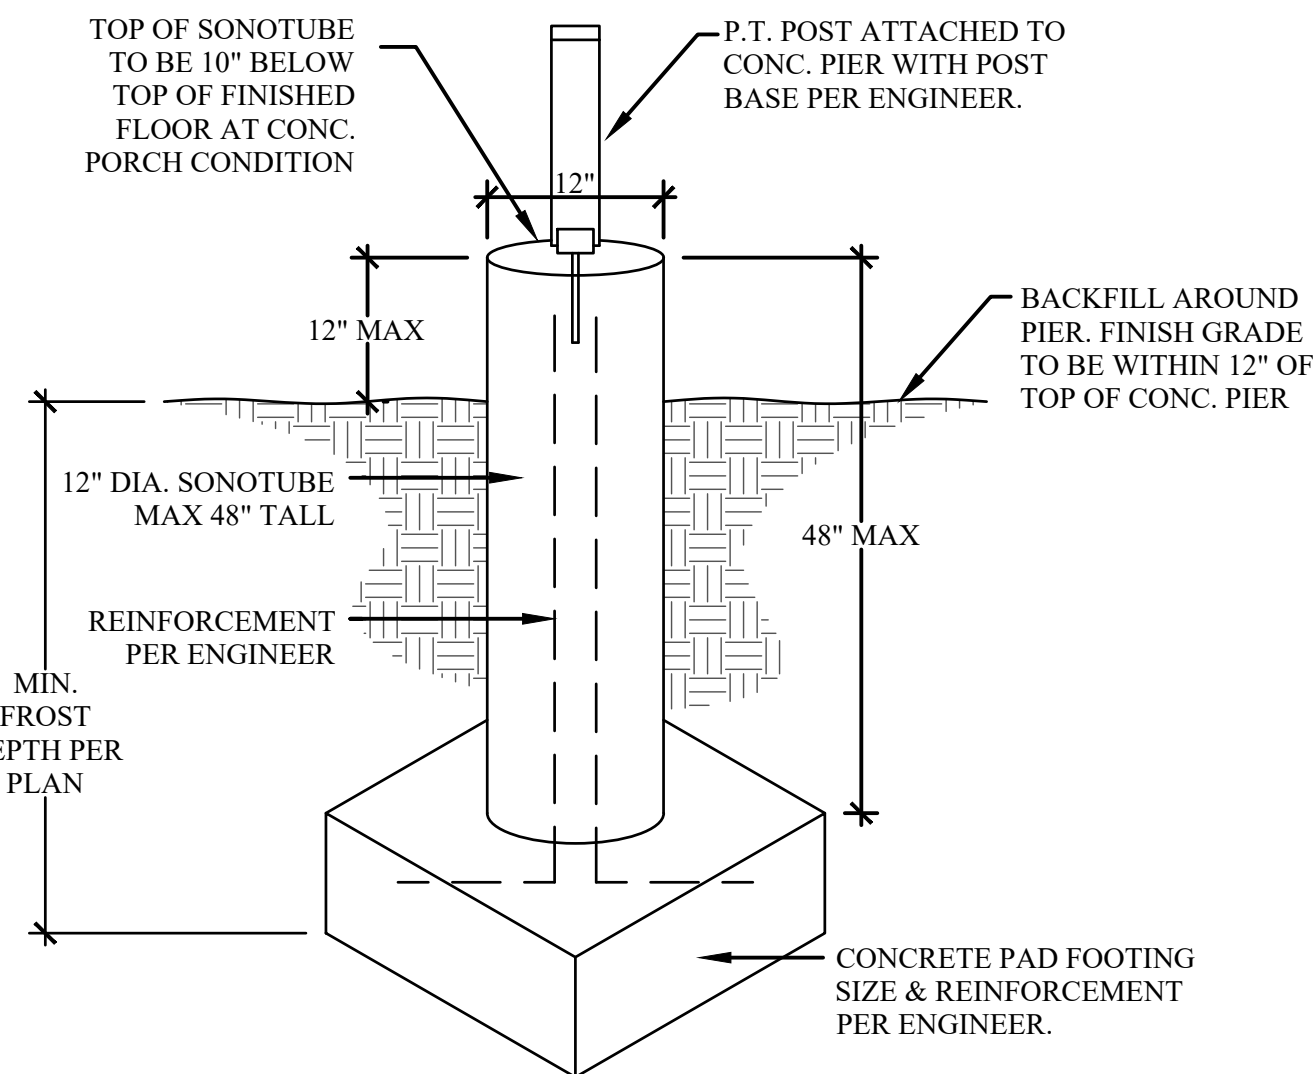

9 SONOTUBE PIER TO PAD FOOTING CONNECTION
SCALE: NTS

2023 ORSC

HODSON #1 - 2386

ADAIR HOMES INC.
© COPYRIGHT 2025

ADAIR HOMES, INC
4400 NE 77TH AVE
SUITE 100
VANCOUVER, WA 98662

COMMUNITY CODE / LOT#:
MEME-129

PLAN ORIENTATION:
STANDARD

GARAGE CONFIGURATION:
NONE

DETAILS


SCALE: AS SHOWN
DATE: 08/26/2025

DRAFTED BY: ES


REV:

PAGE:


AD1

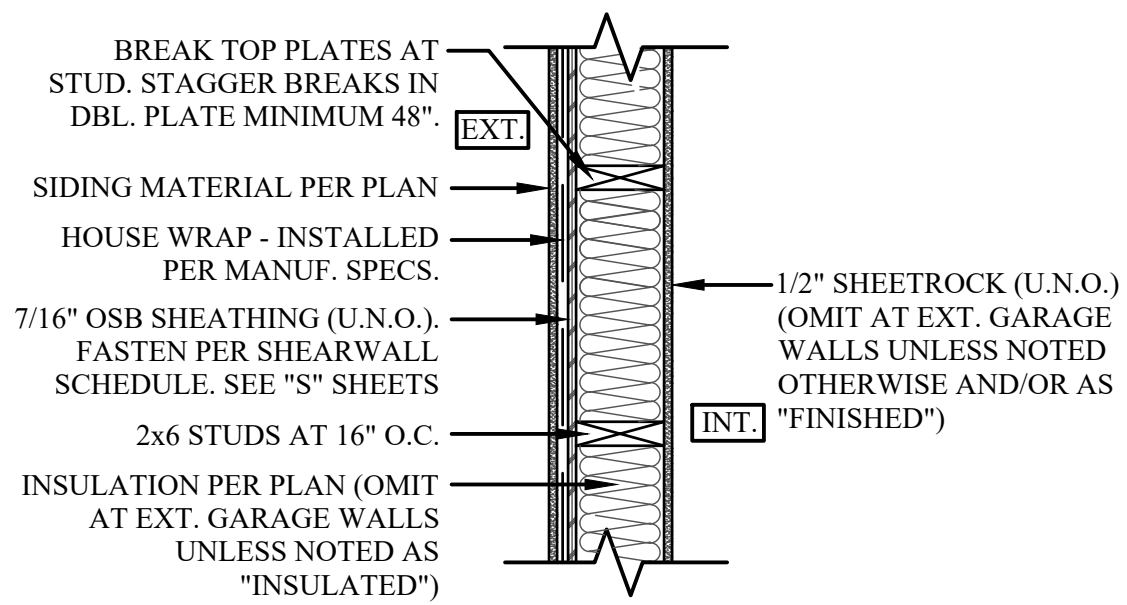


1 EXTERIOR WALL DETAIL
SCALE: 1" = 1'-0"

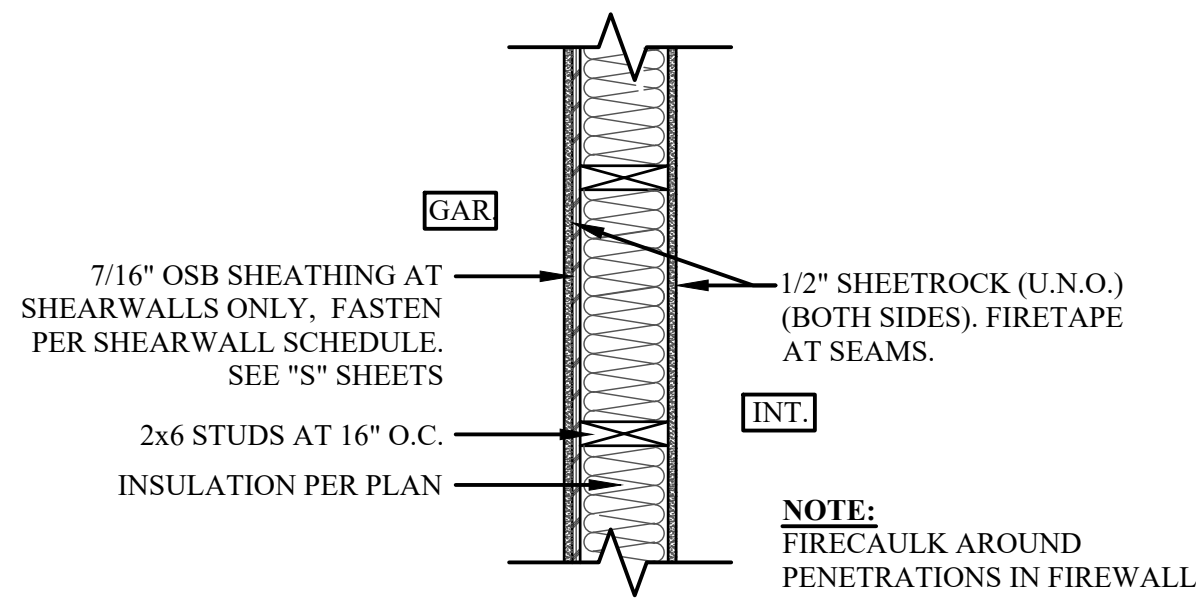


2 INTERIOR/GARAGE TRANSITION WALL
SCALE: 1" = 1'-0"

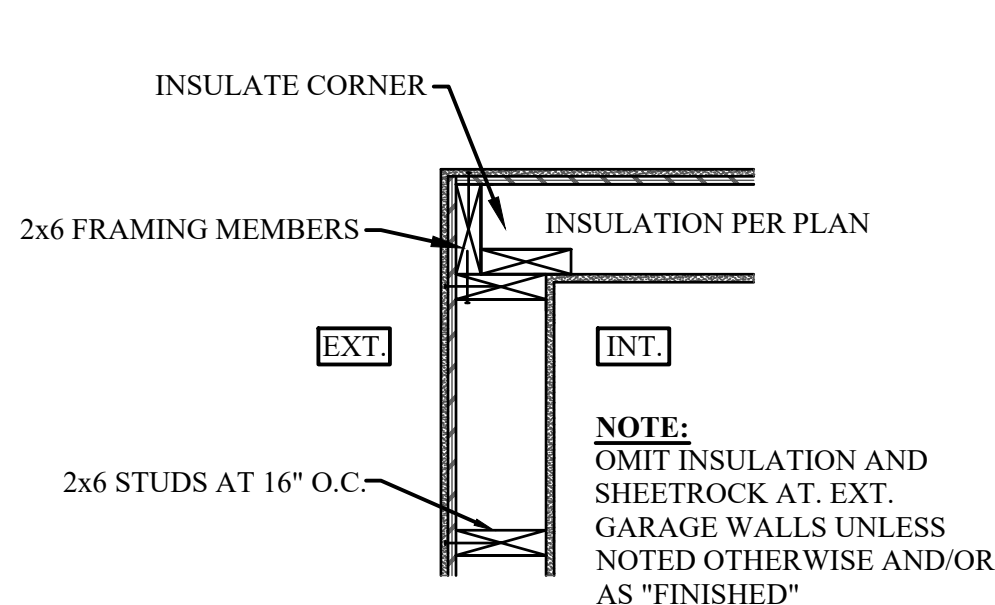


3 THREE STUD CORNER
SCALE: 1" = 1'-0"

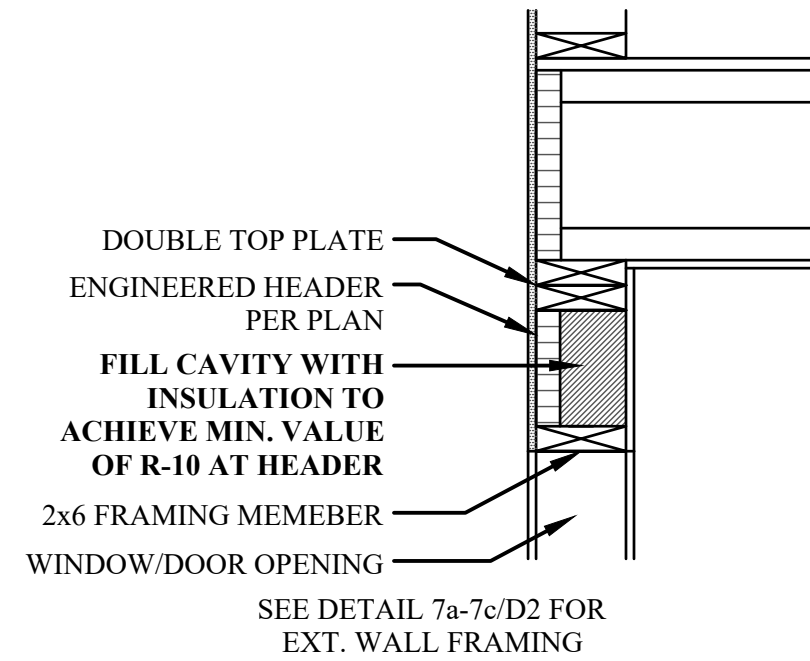


4 INSULATED HEADER
SCALE: 1" = 1'-0"

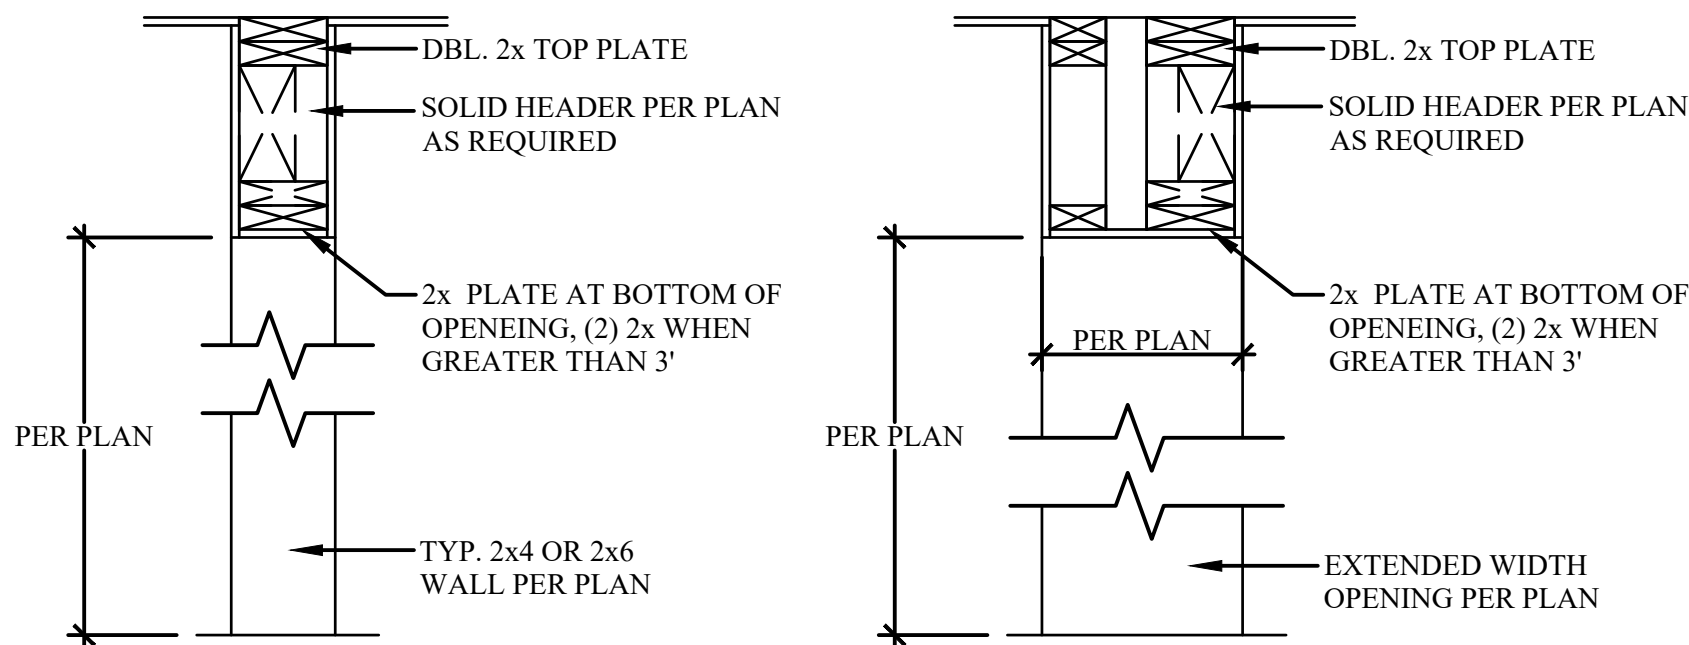


5 FRAME DOWN INTERIOR OPENING DETAIL
SCALE: 1" = 1'-0"

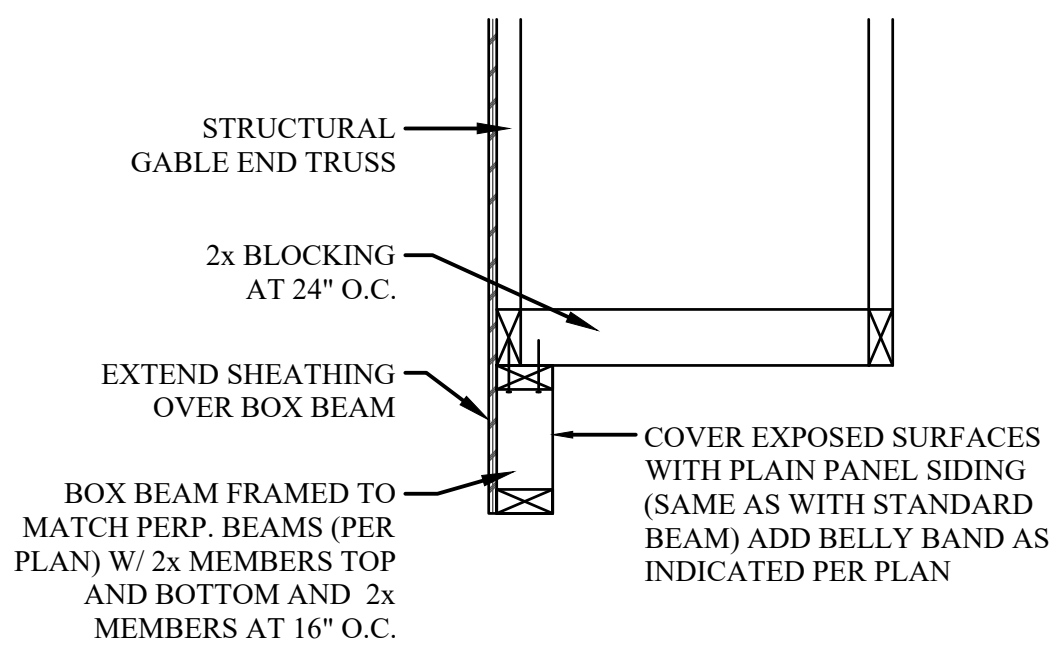


6 BOX BEAM DETAIL
SCALE: 2" = 1'-0"

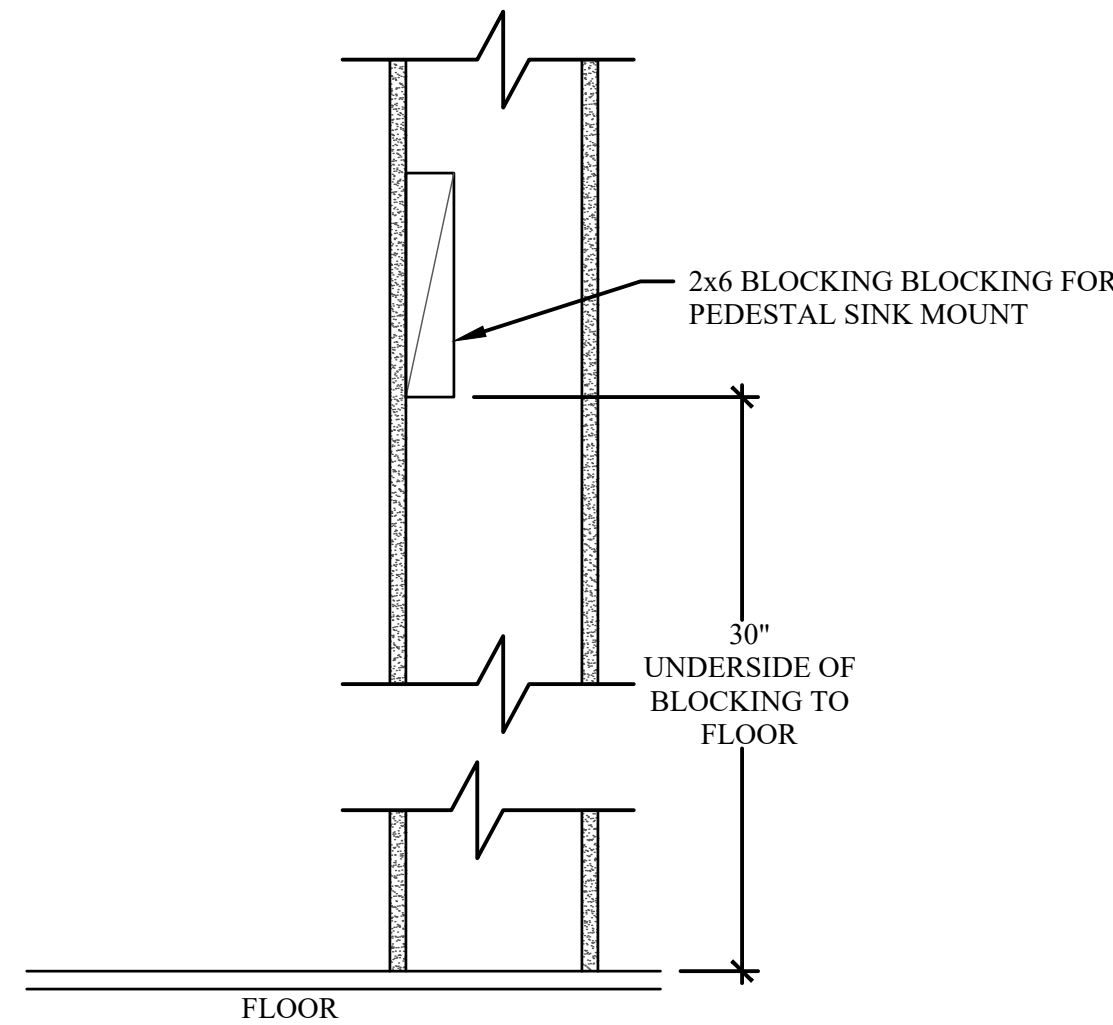


7.2 PEDESTAL SINK BACKING
SCALE: 2" = 1'-0"

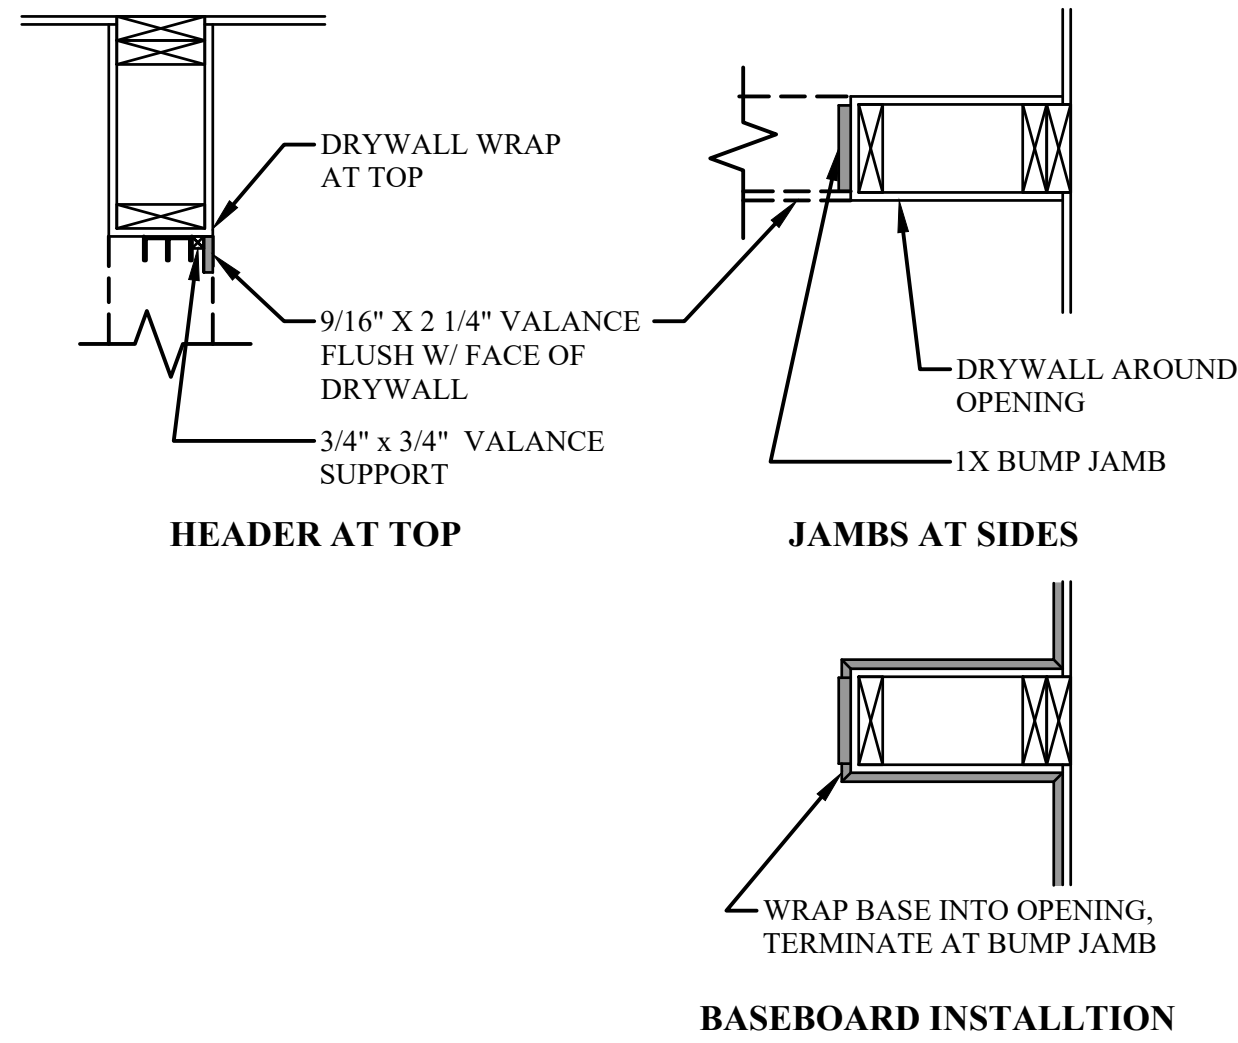


**9a BI-PASS CLOSET DOOR
STD DRYWALL WRAPPED**
SCALE: 1" = 1'-0"

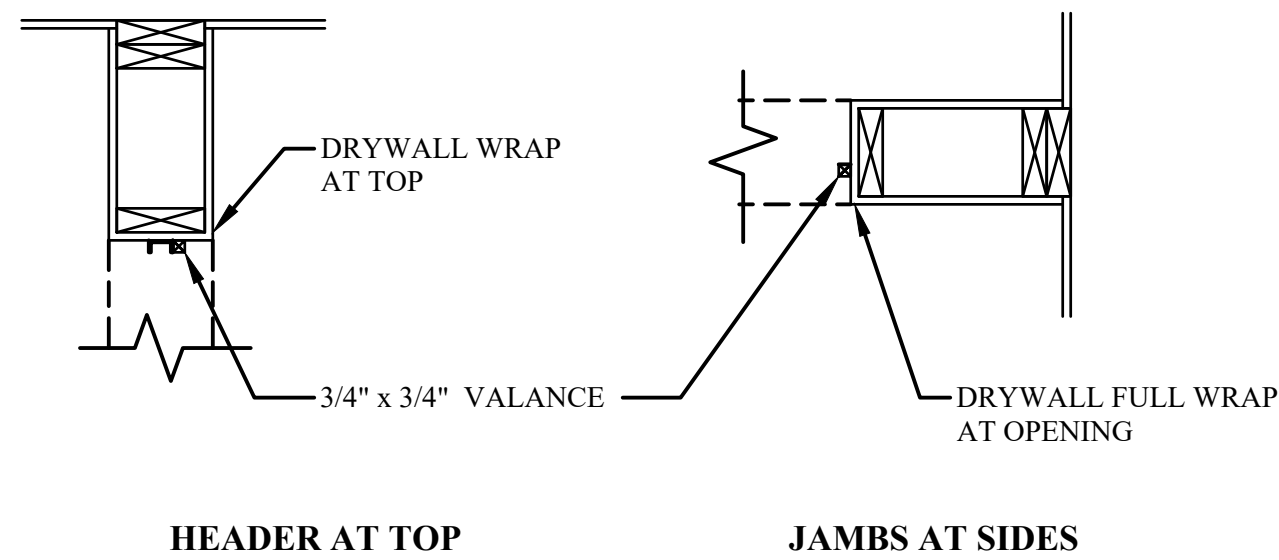

**9b BI-FOLD CLOSET DOOR
STD DRYWALL WRAPPED**
SCALE: 1" = 1'-0"

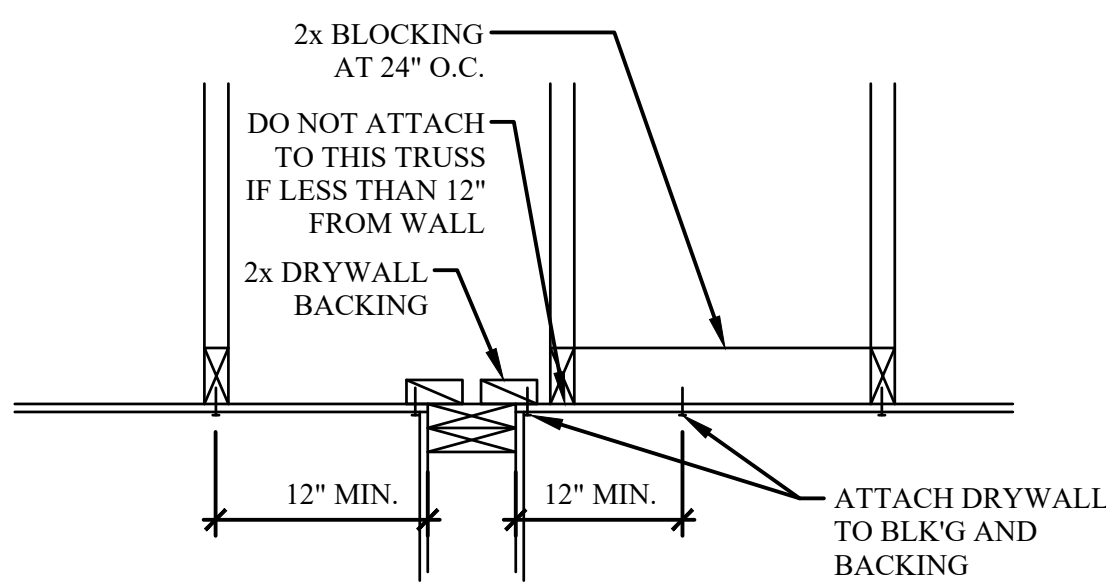

8 DRYWALL BACKING @ INT. WALL
SCALE = 1" = 1'-0" PARALLEL CONDITION

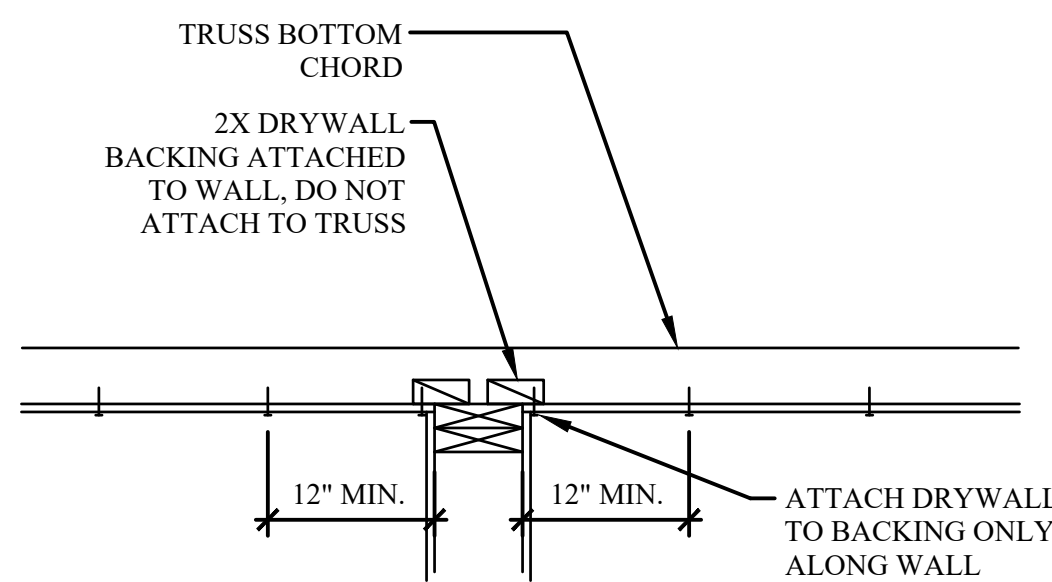

8.1 DRYWALL BACKING @ INT. WALL
SCALE = 1" = 1'-0" PERPENDICULAR CONDITION



ADAIR HOMES, INC
4400 NE 77TH AVE
SUITE 100
VANCOUVER, WA 98662

HODSON #1 - 2386

GARAGE CONFIGURATION:
NONE

PLAN ORIENTATION:
STANDARD









COMMUNITY CODE / LOT#:
MEME-129

DETAILS

2023 ORSC

SCALE: AS SHOWN
DATE: 08/26/2025
DRAFTED BY: ES
REV:

PAGE:
AD2

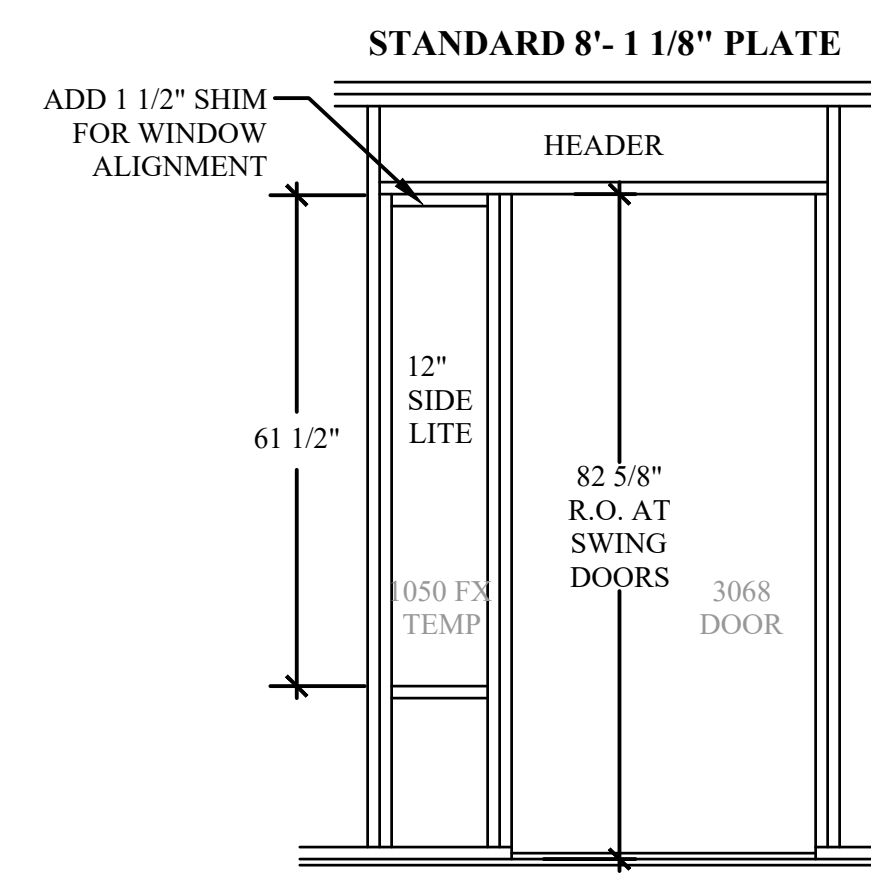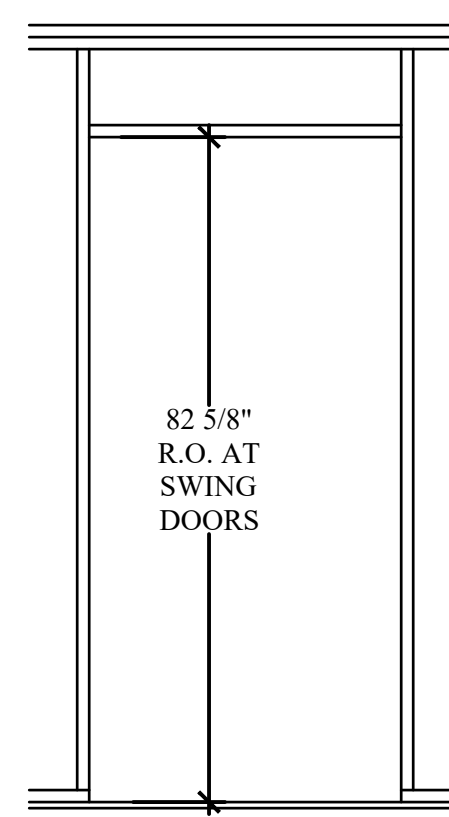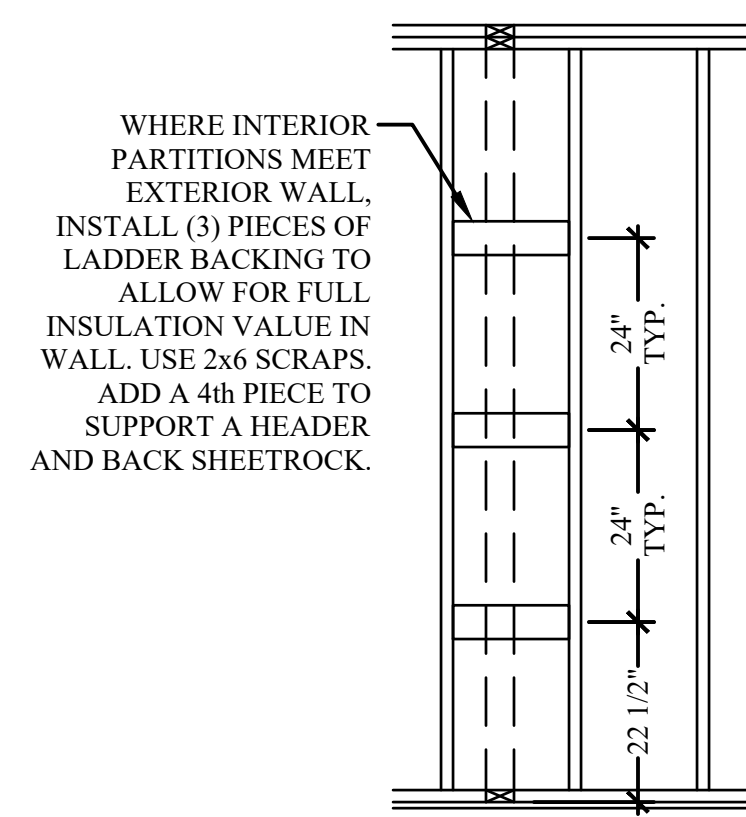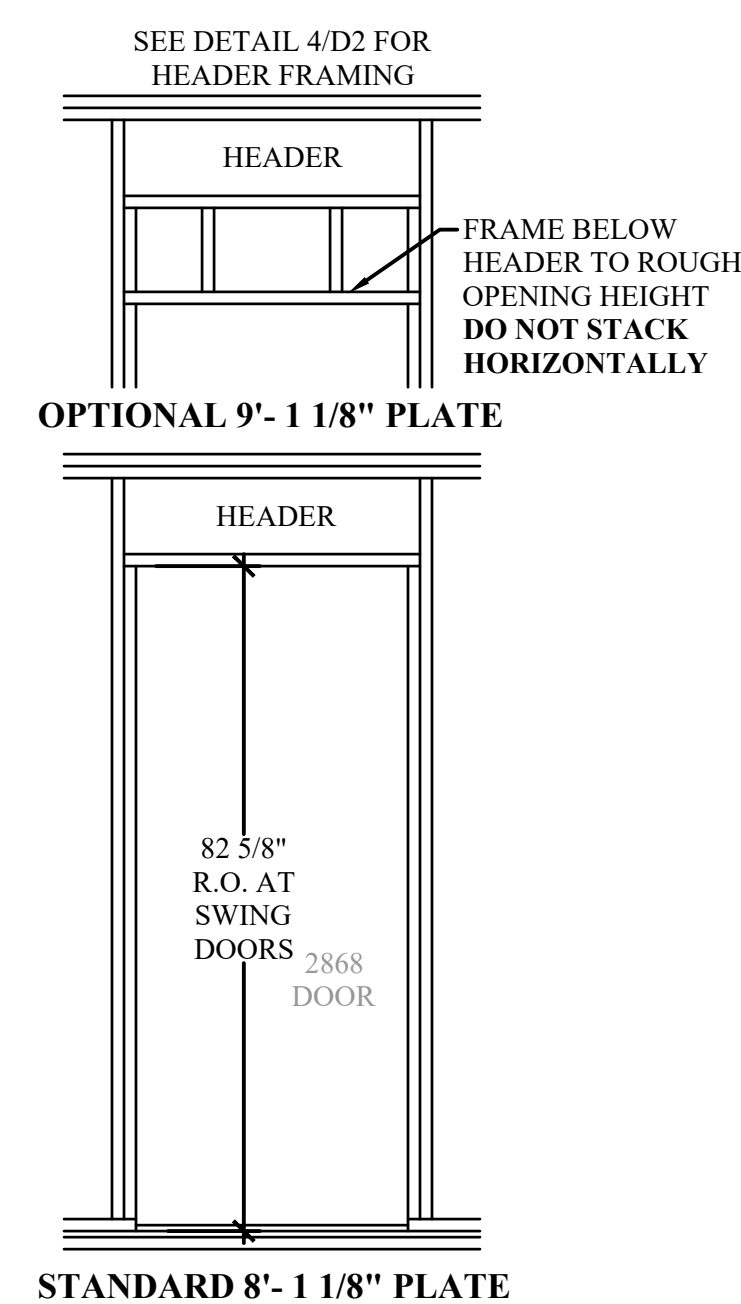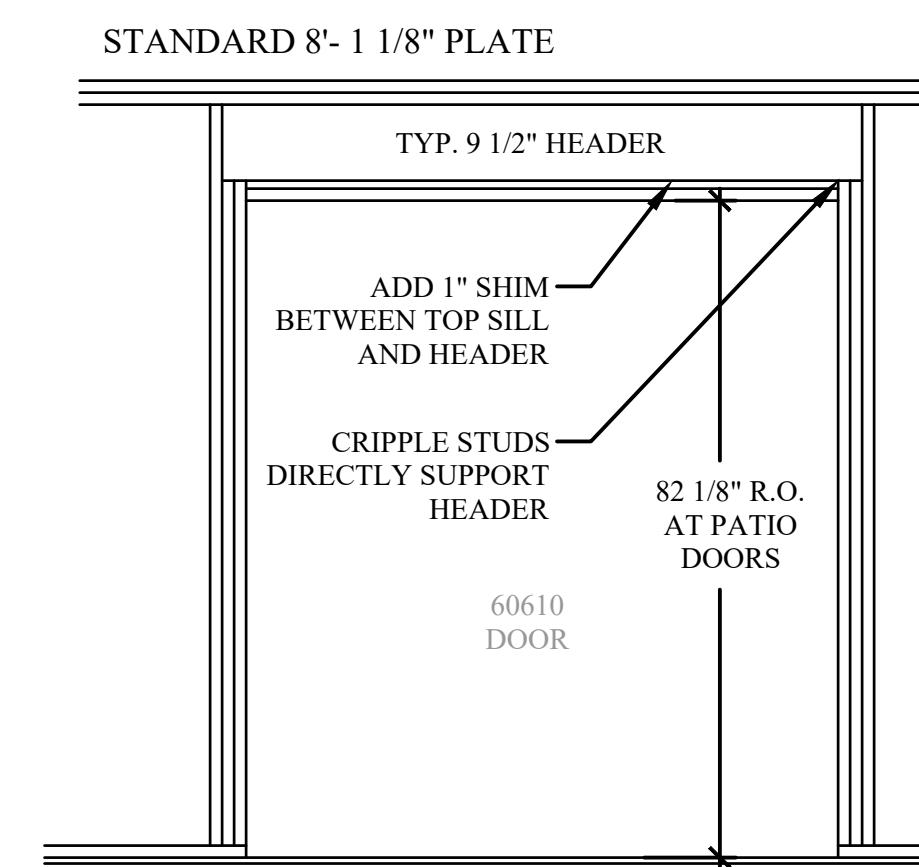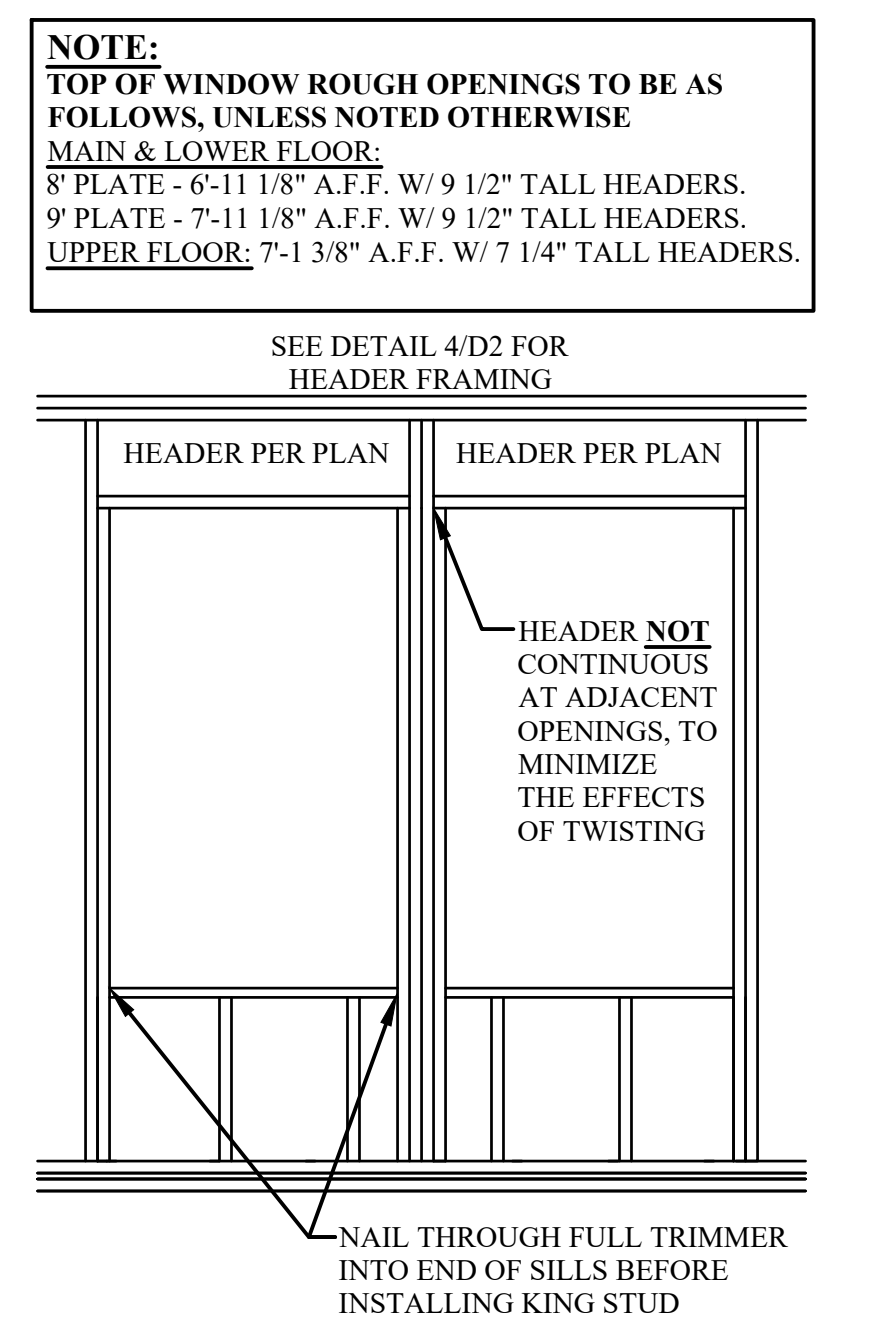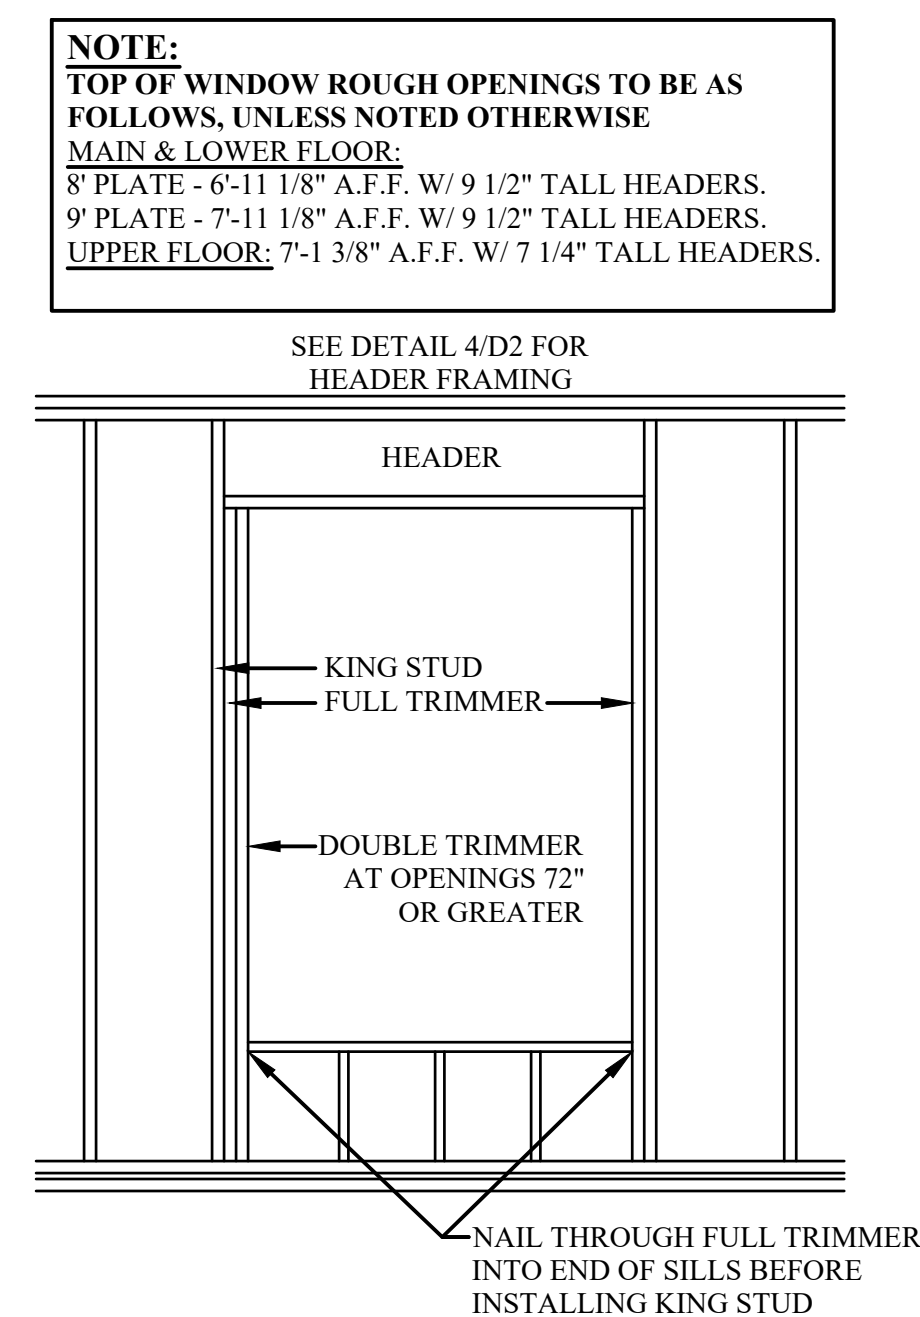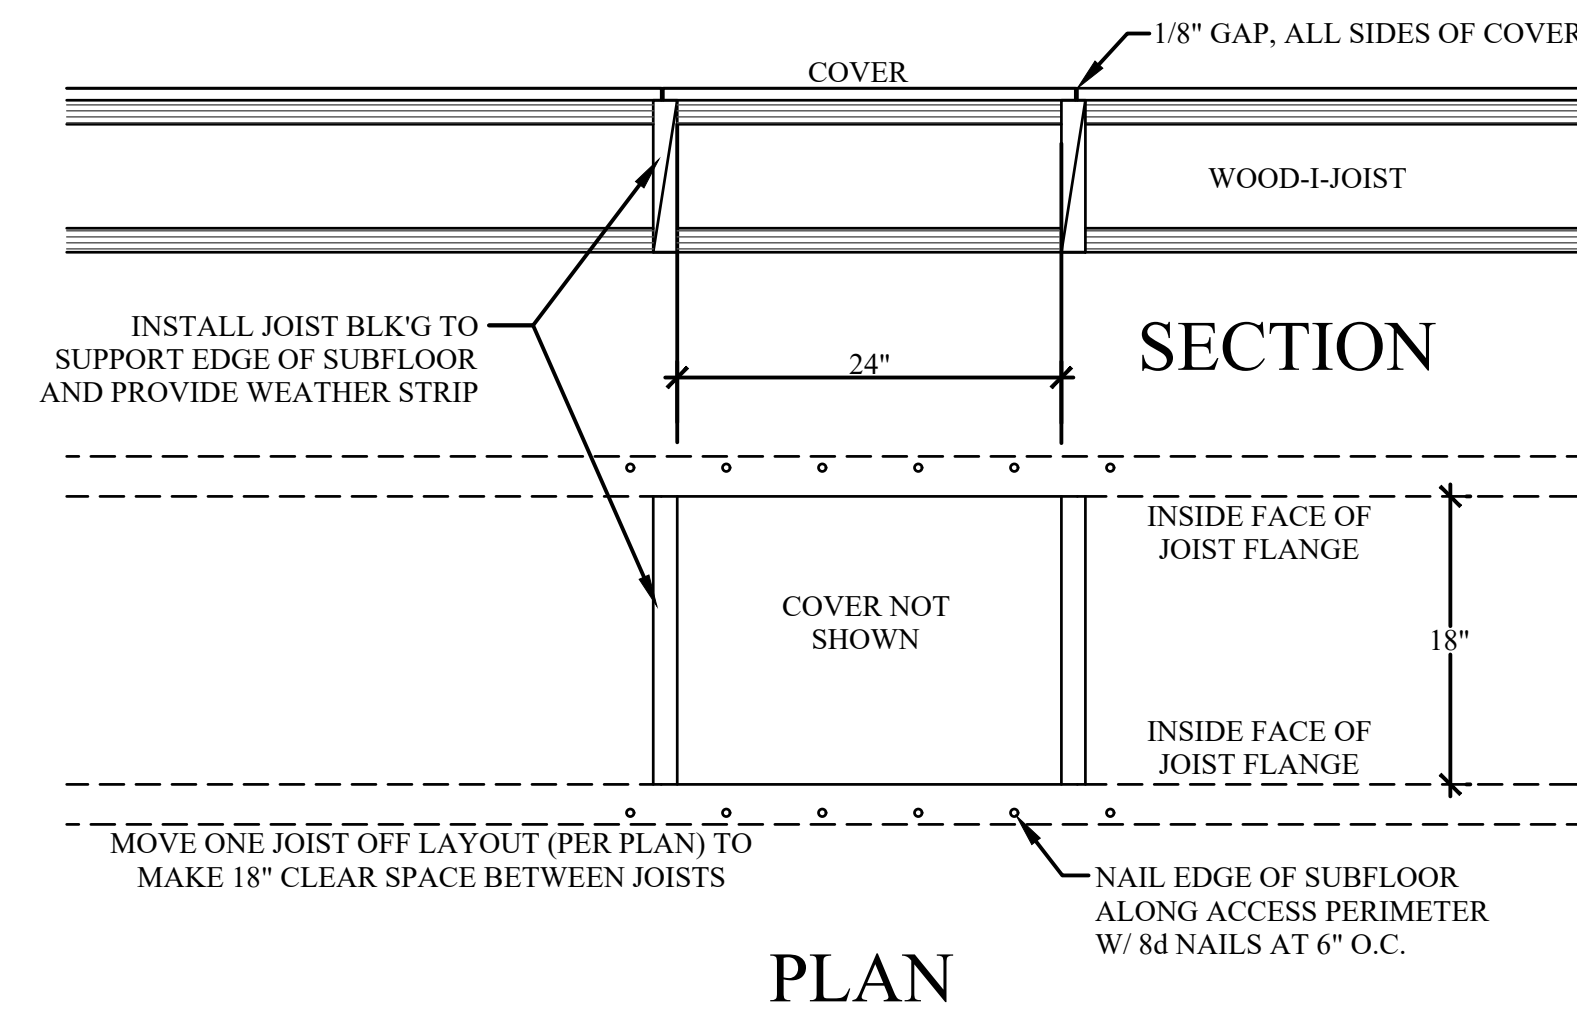

NOTE:
TOP OF WINDOW ROUGH OPENINGS TO BE AS
FOLLOWS, UNLESS NOTED OTHERWISE
MAIN & LOWER FLOOR:
 8' PLATE - 6'-11 1/8" A.F.F. W/ 9 1/2" TALL HEADERS.
 9' PLATE - 7'-11 1/8" A.F.F. W/ 9 1/2" TALL HEADERS.
 UPPER FLOOR: 7'-1 3/8" A.F.F. W/ 7 1/4" TALL HEADERS.

NOTE:
TOP OF WINDOW ROUGH OPENINGS TO BE AS
FOLLOWS, UNLESS NOTED OTHERWISE
MAIN & LOWER FLOOR:
 8' PLATE - 6'-11 1/8" A.F.F. W/ 9 1/2" TALL HEADERS.
 9' PLATE - 7'-11 1/8" A.F.F. W/ 9 1/2" TALL HEADERS.
 UPPER FLOOR: 7'-1 3/8" A.F.F. W/ 7 1/4" TALL HEADERS



ADAIR HOMES INC.
© COPYRIGHT 2025

ADAIR HOMES, INC
4400 NE 77TH AVE
SUITE 100
VANCOUVER, WA 98662

HODSON #1 - 2386

2023 ORSC






GARAGE CONFIGURATION: NONE	PLAN ORIENTATION: STANDARD	COMMUNITY CODE / LOT#: MEME-129
--------------------------------------	--------------------------------------	---

DETAILS

SCALE: AS SHOWN
DATE: 08/26/2025
DRAFTED BY: ES
REV:

PAGE:

AD3

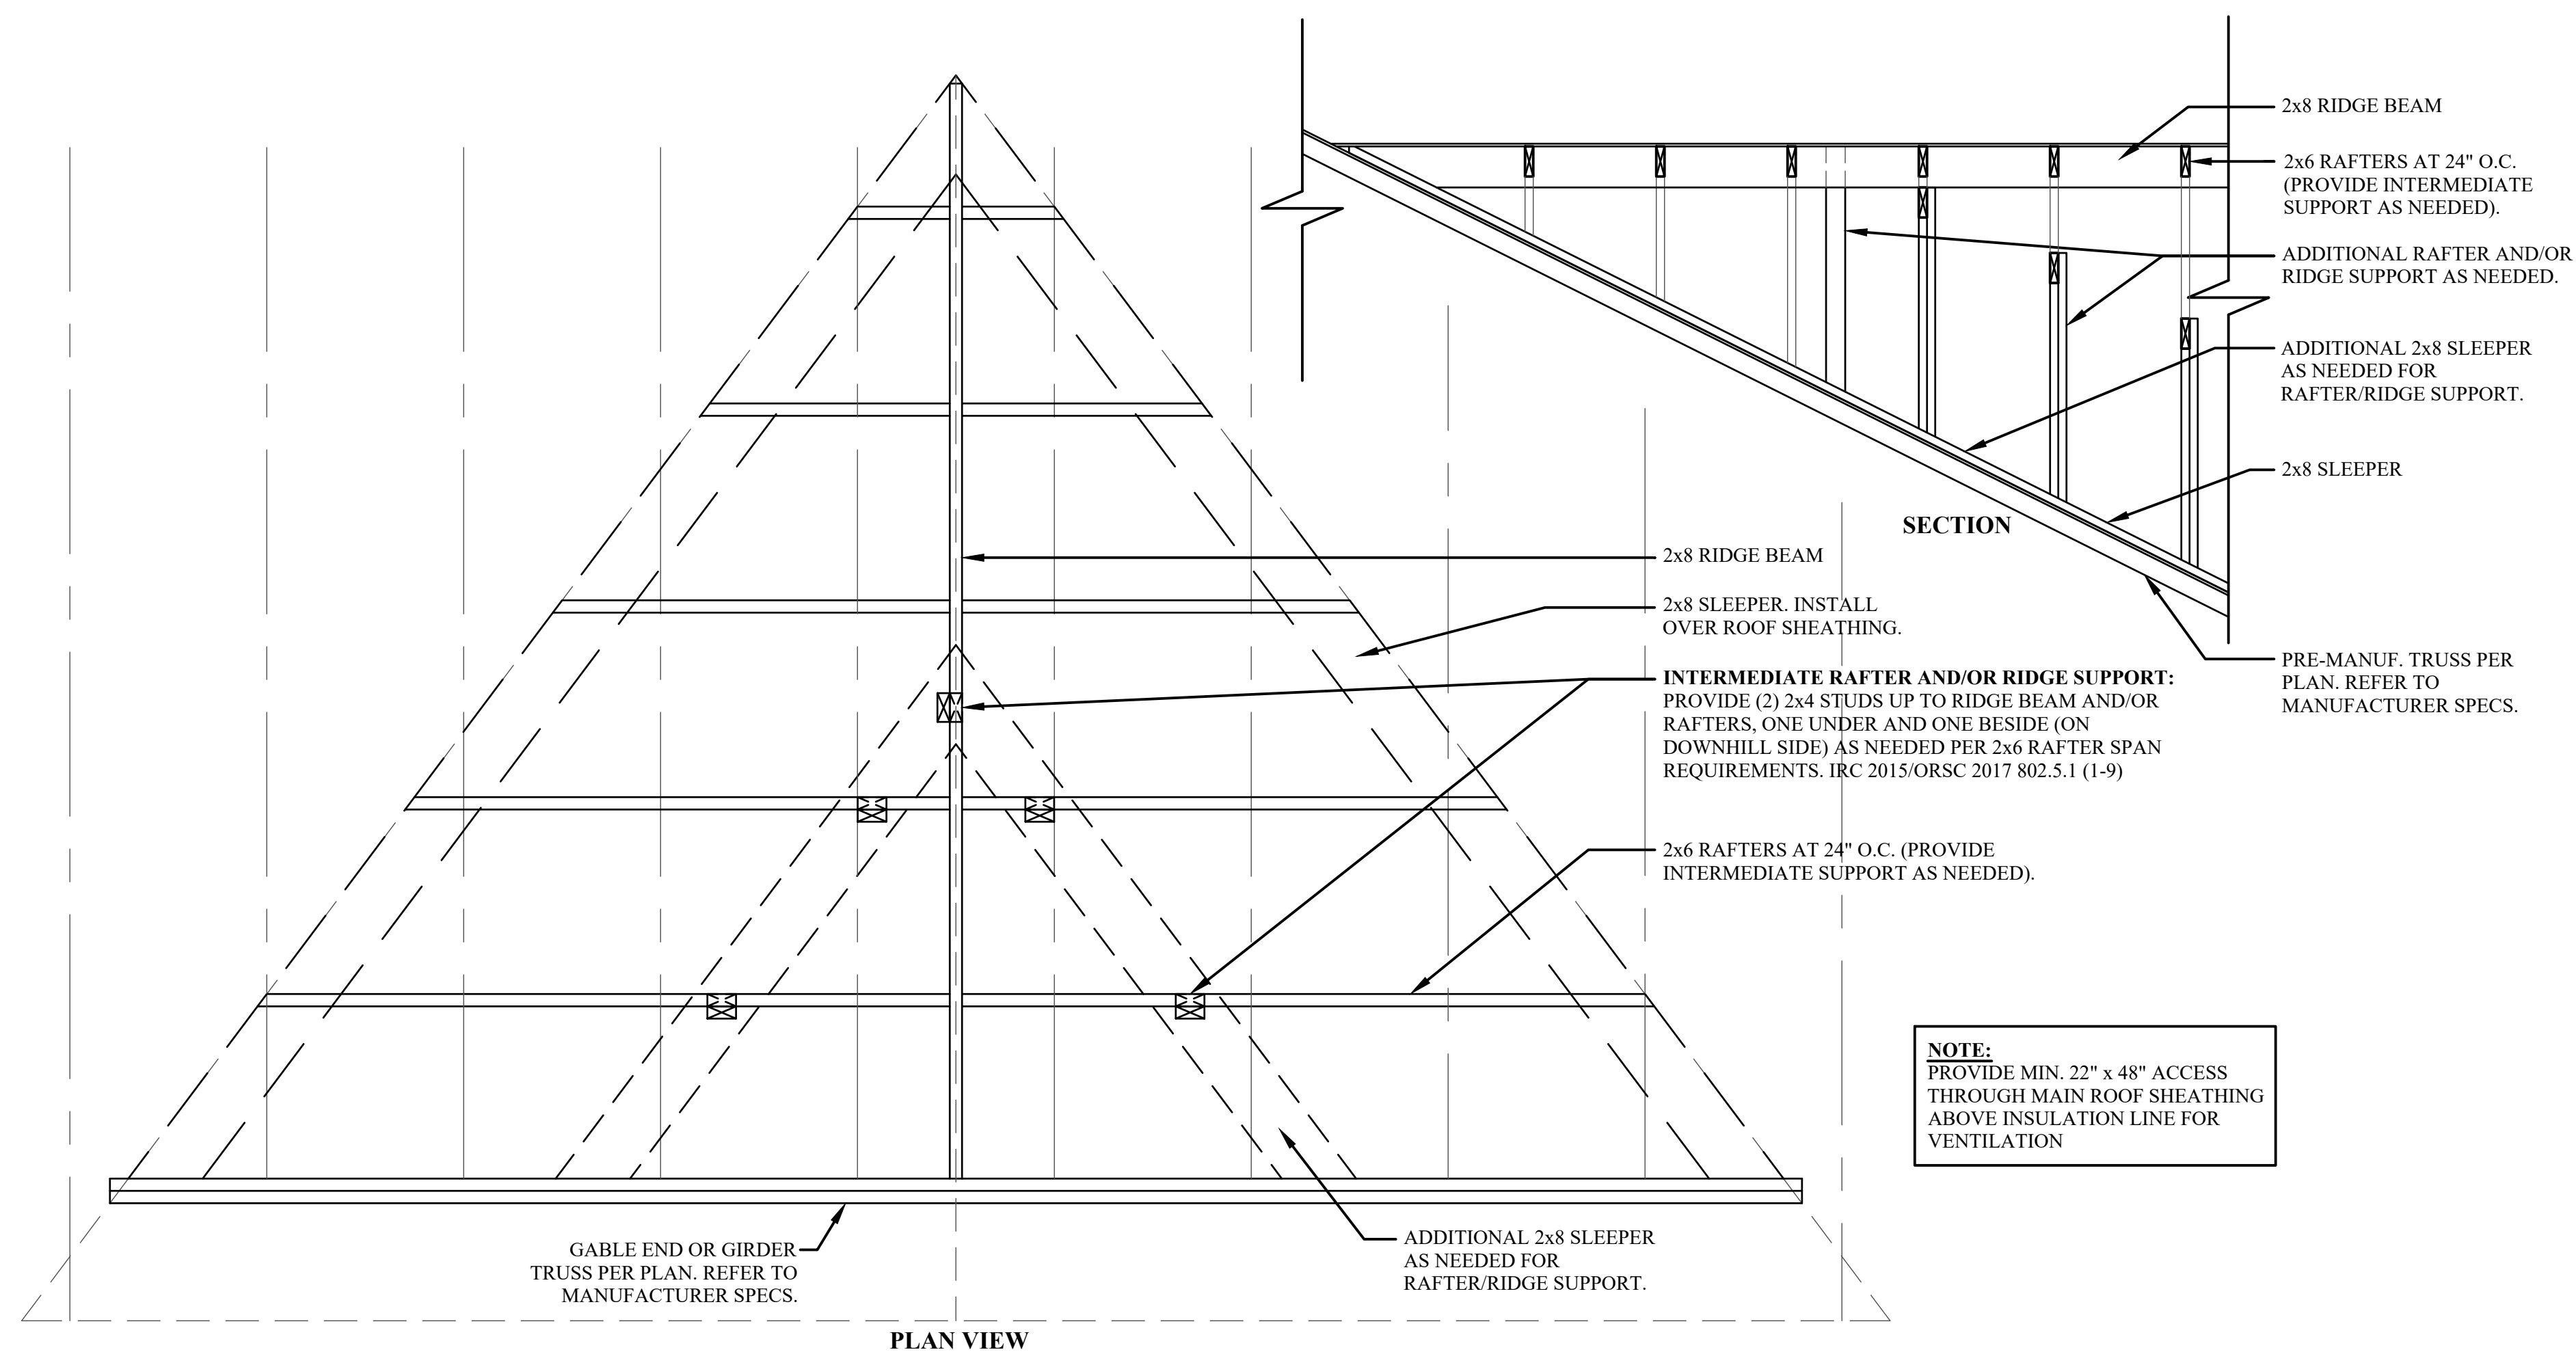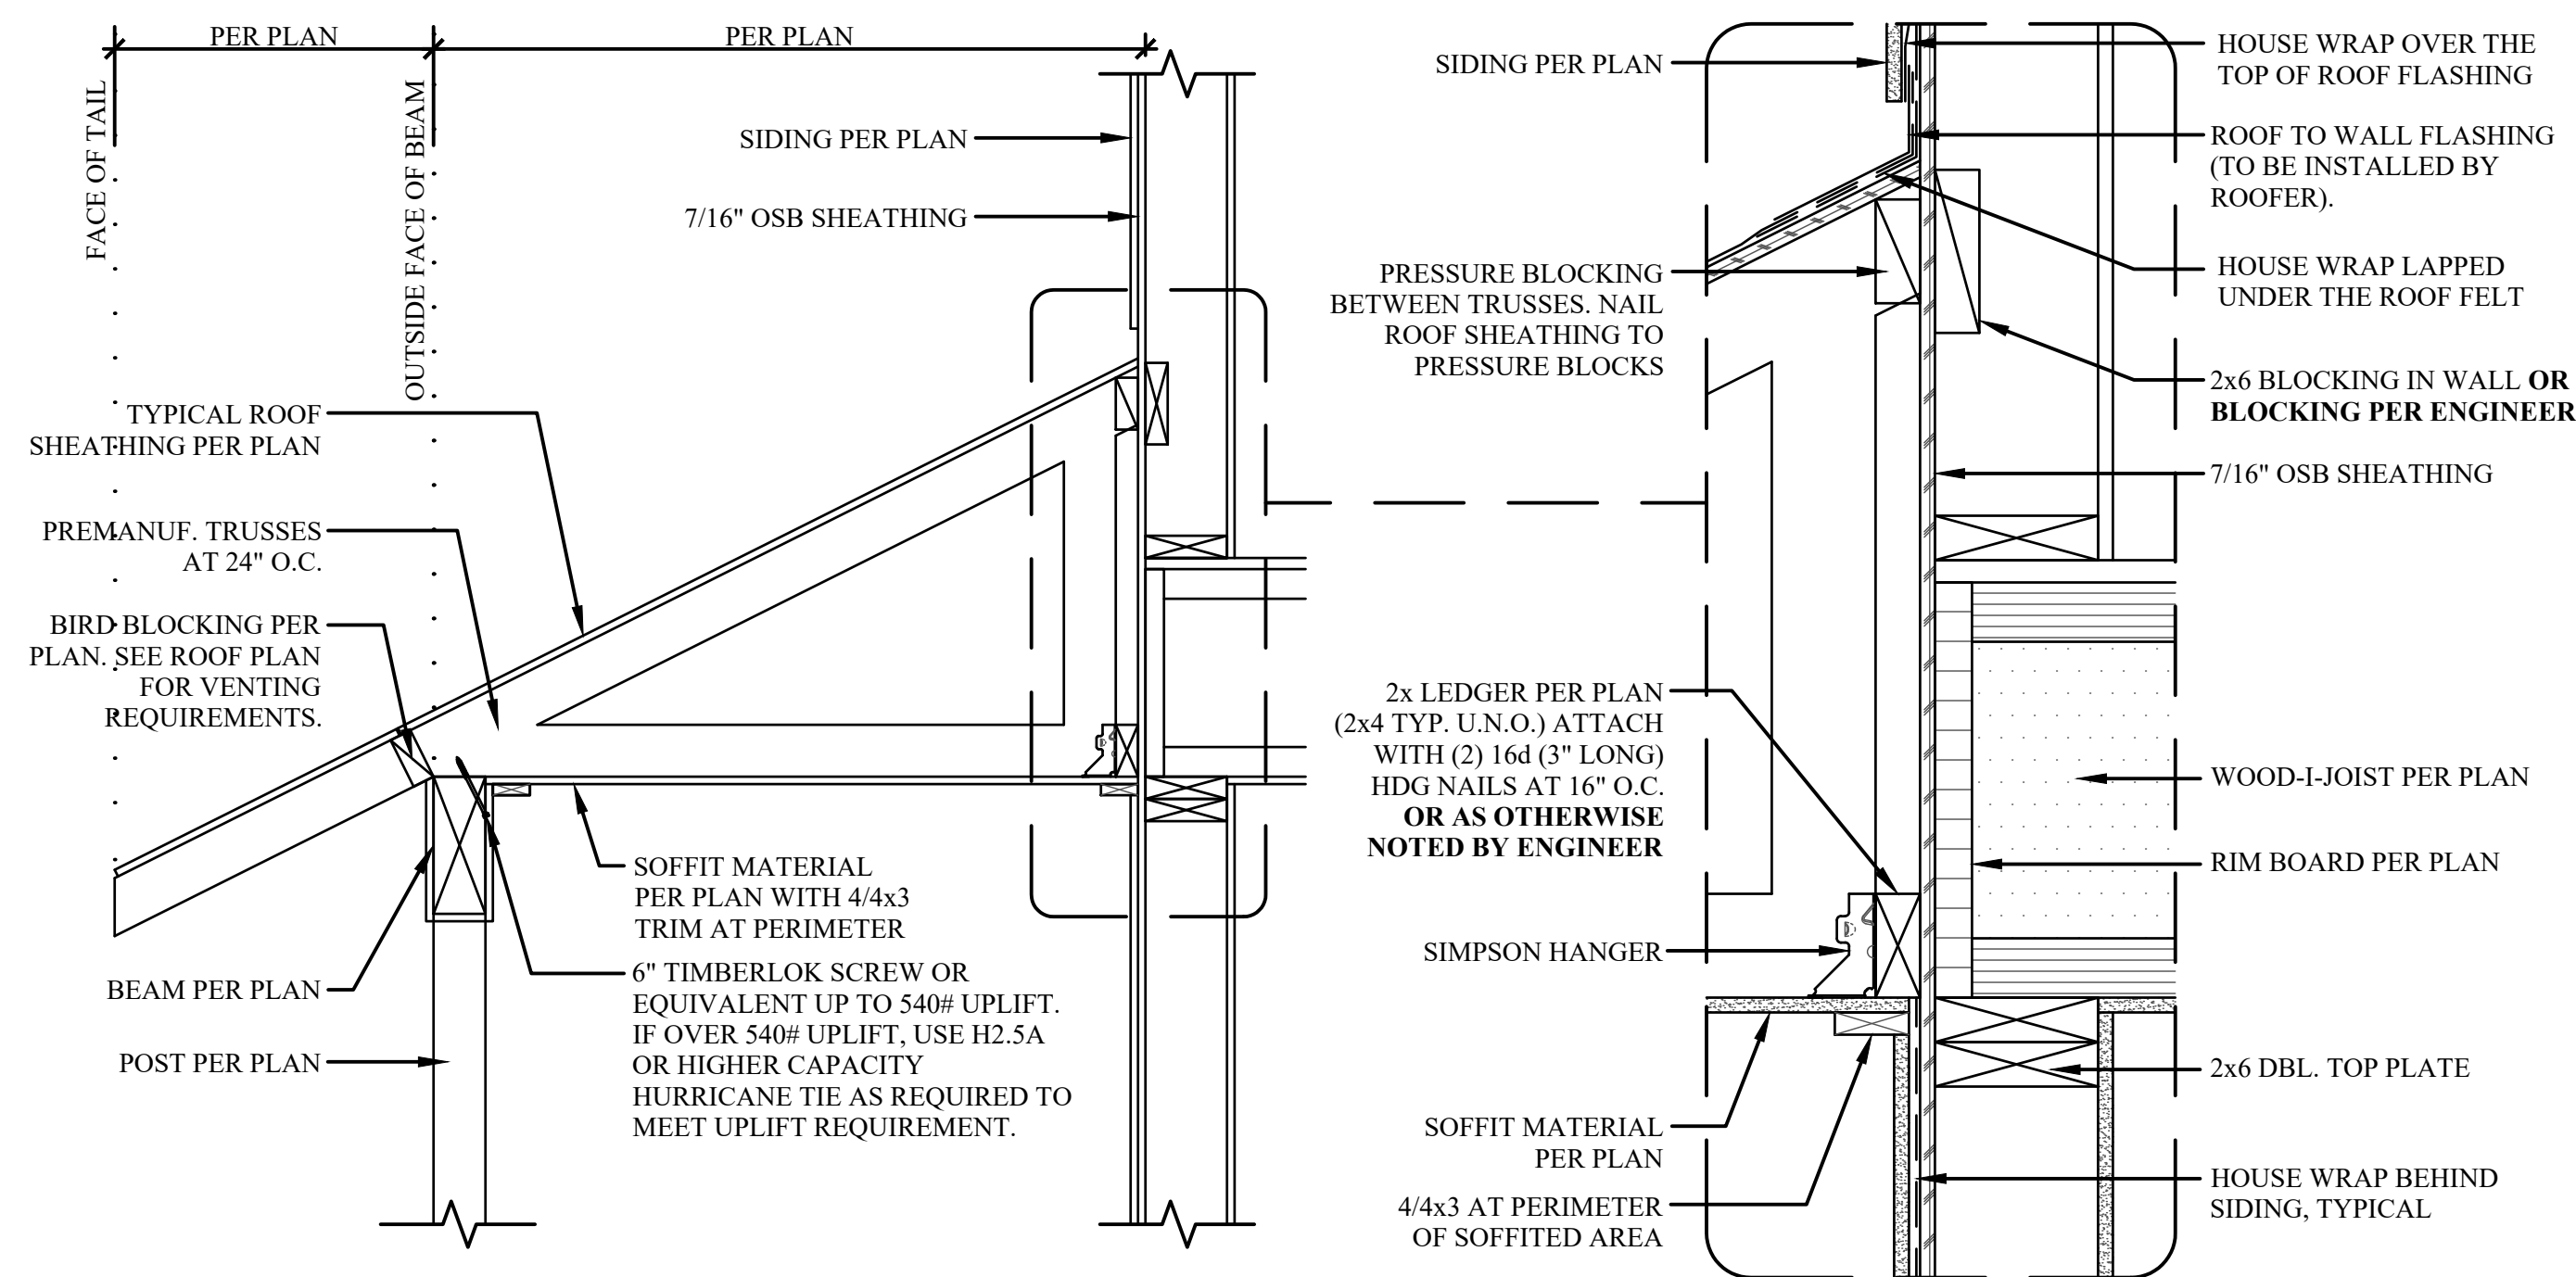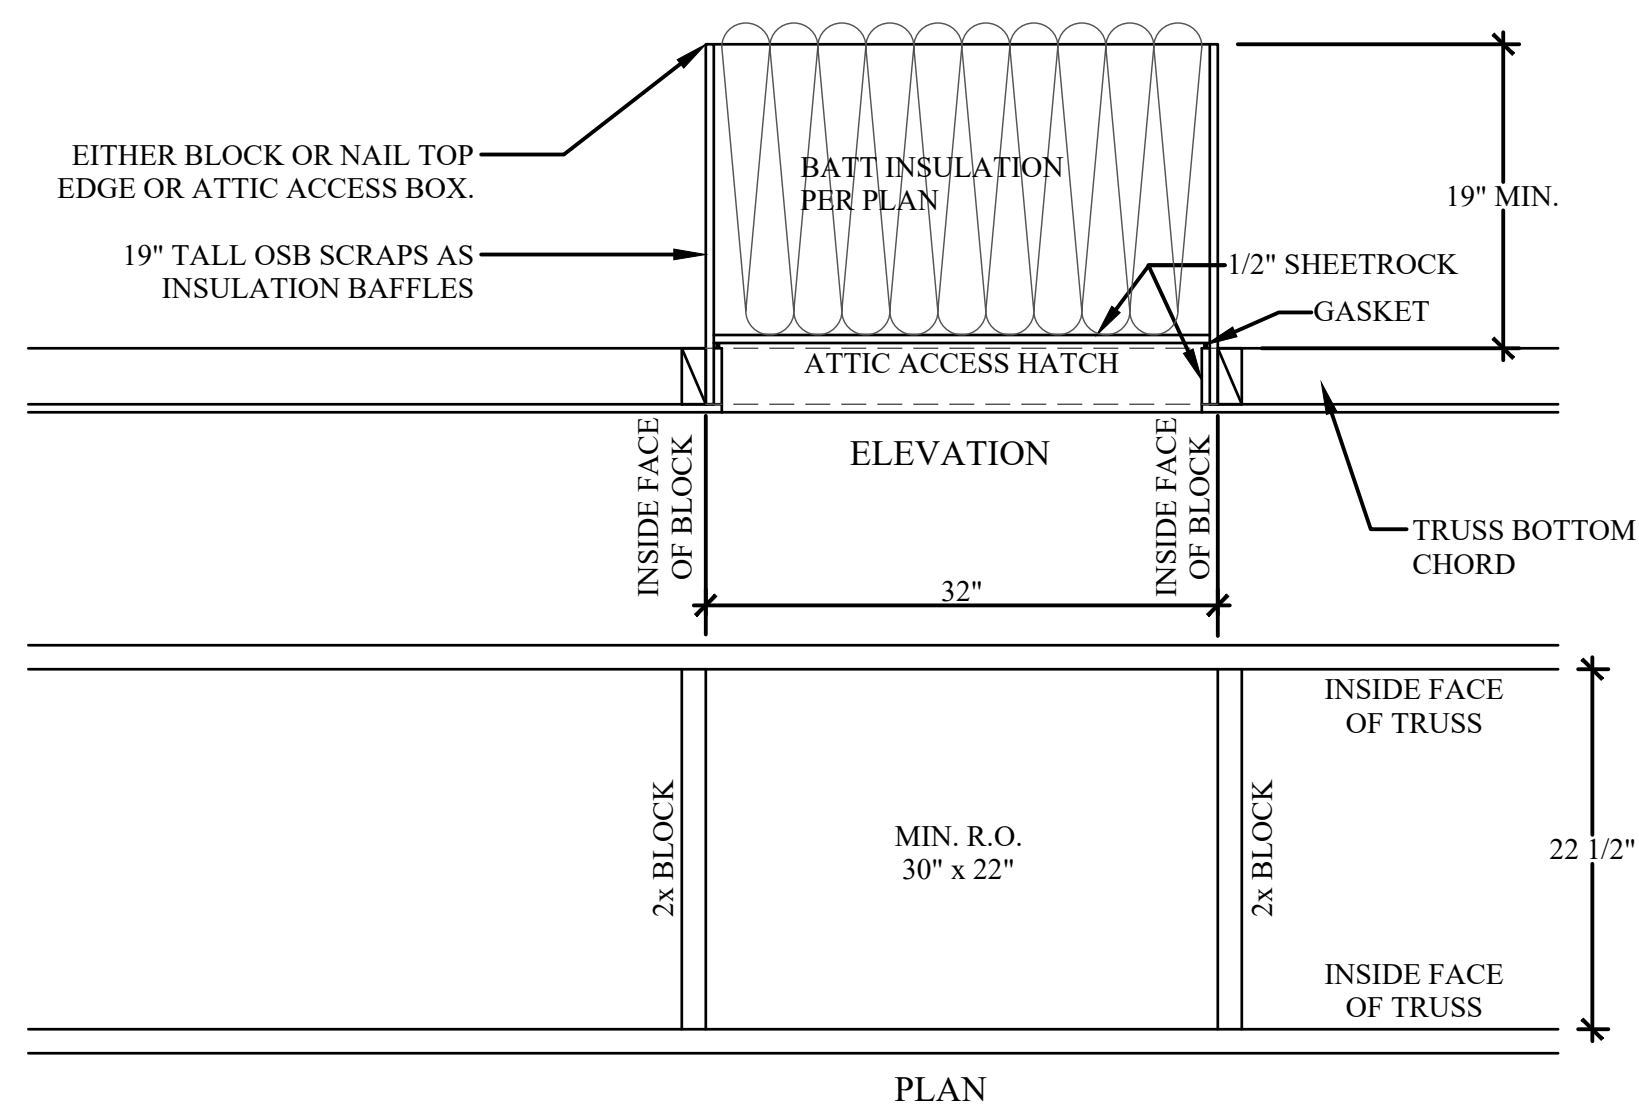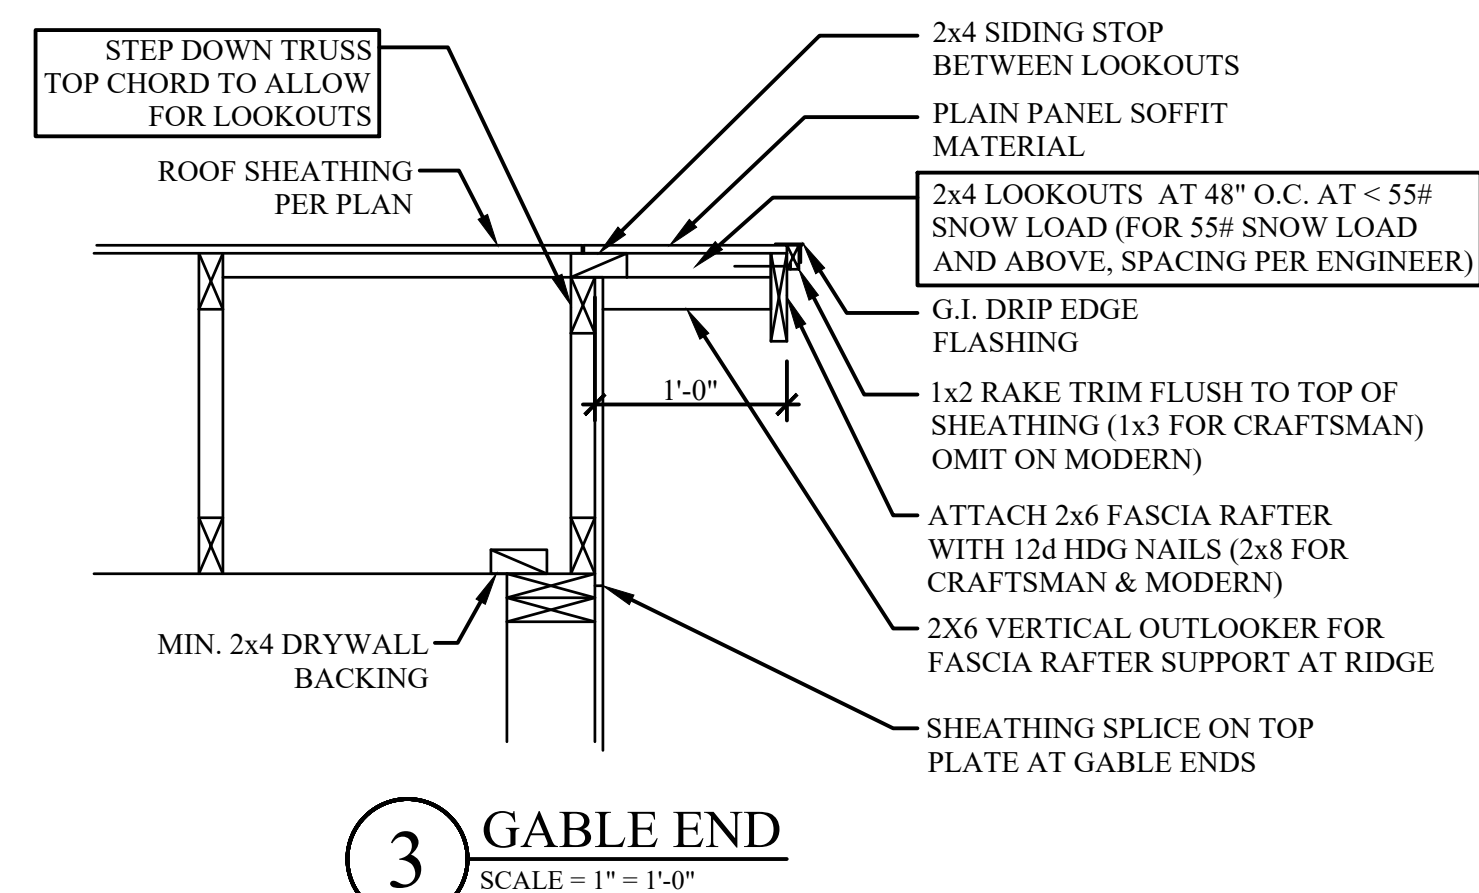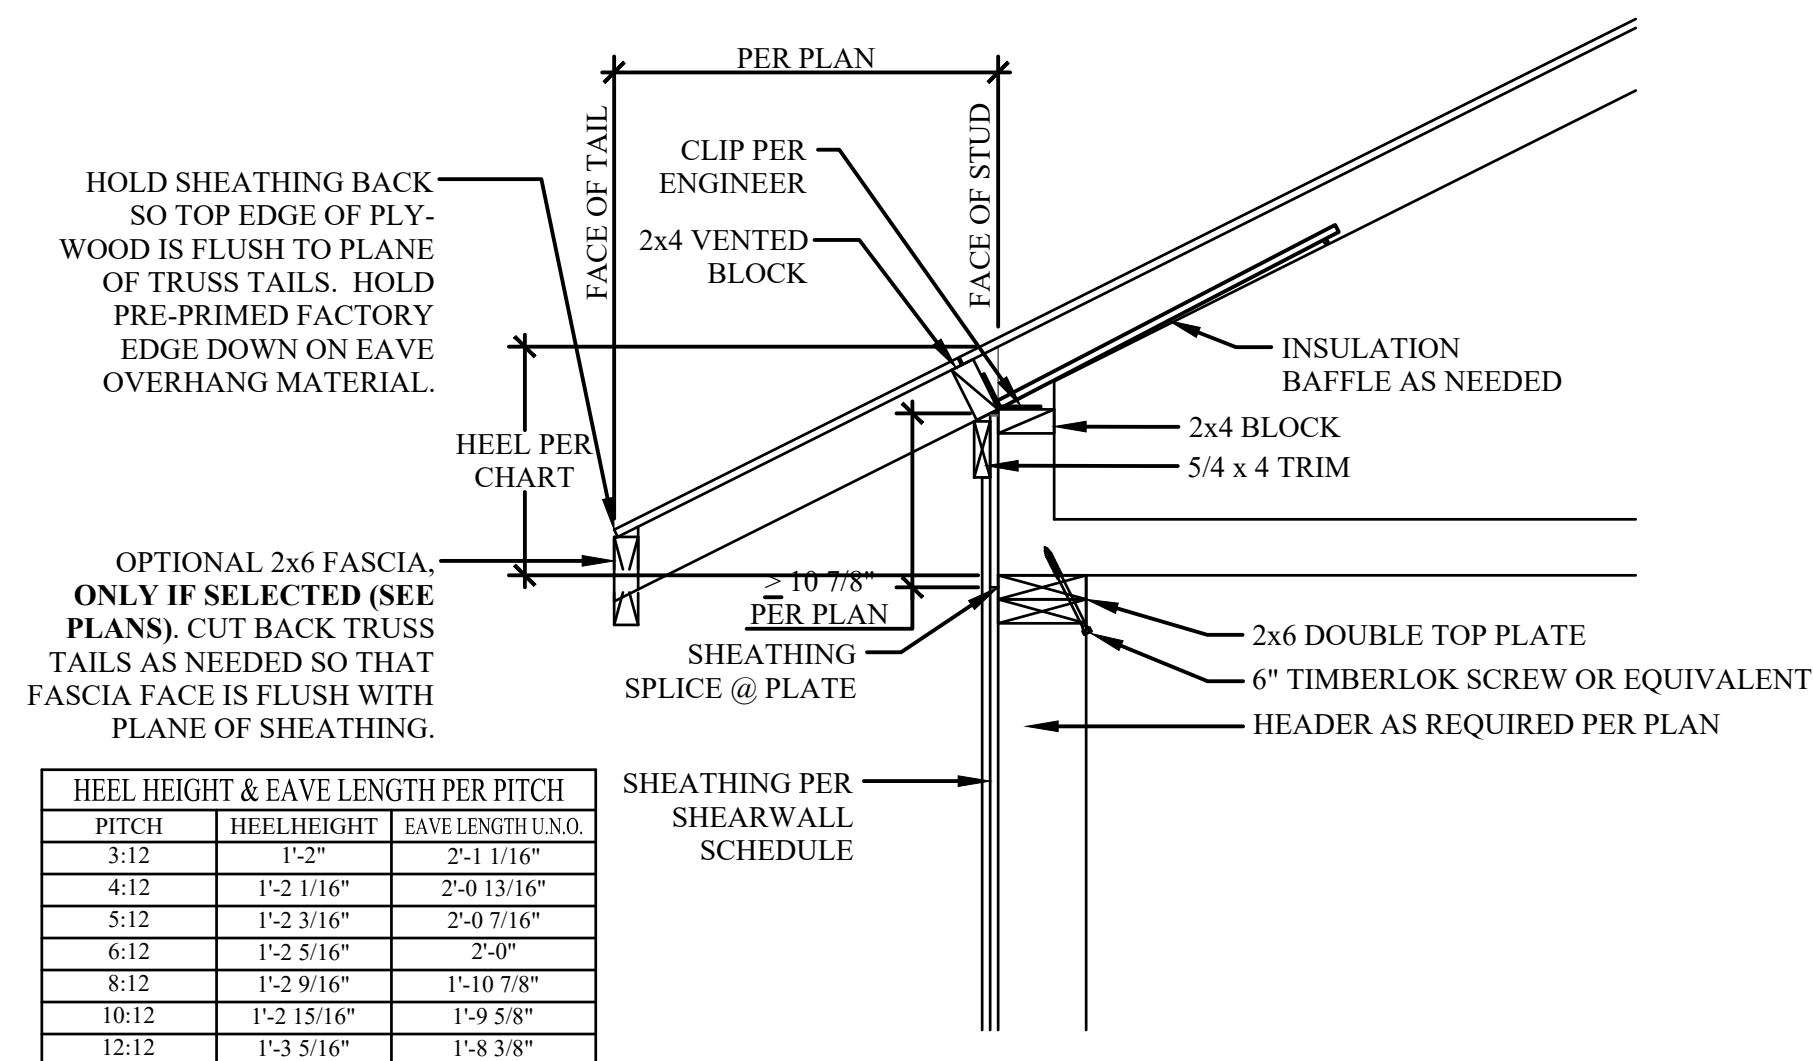

2023 ORSC

HODSON #1 - 2386



ADAIR HOMES INC.
© COPYRIGHT 2025

ADAIR HOMES, INC
4400 NE 77TH AVE
SUITE 100
VANCOUVER, WA 98662

COMMUNITY CODE / LOT#:

MEME-129

PLAN ORIENTATION:

STANDARD

GARAGE CONFIGURATION:

NONE

DETAILS

PAGE:


AD4

SCALE: AS SHOWN


DATE: 08/26/2025

DRAFTED BY: ES


REV:

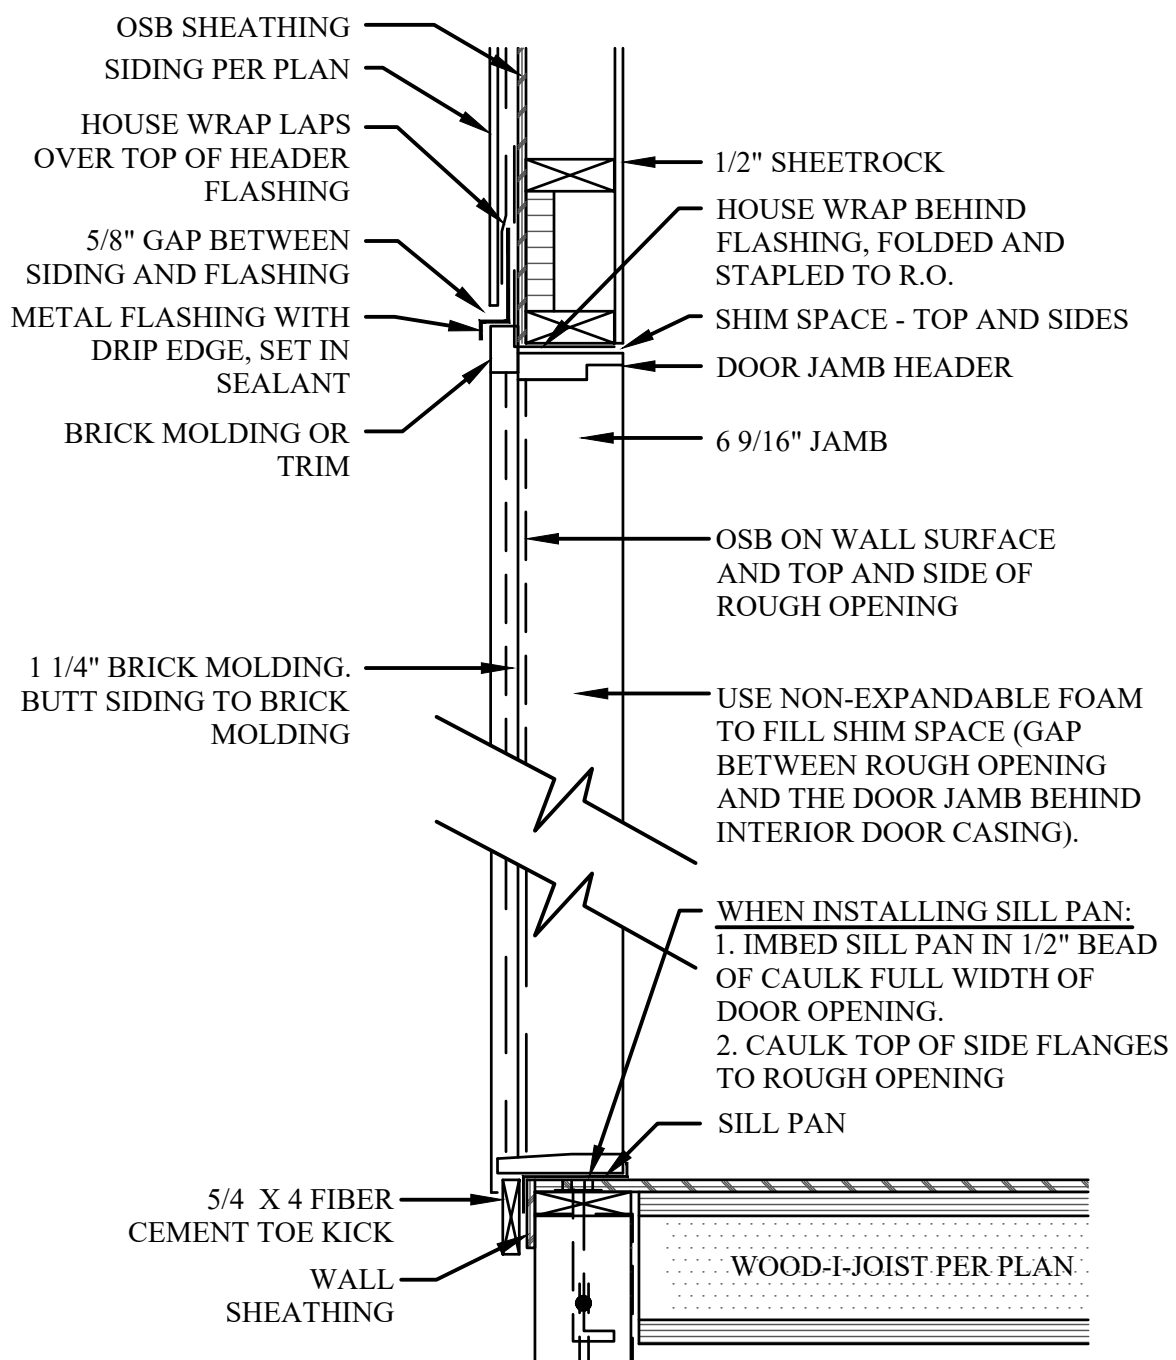


1 EXTERIOR DOOR DETAIL
SCALE: 1" = 1'-0"

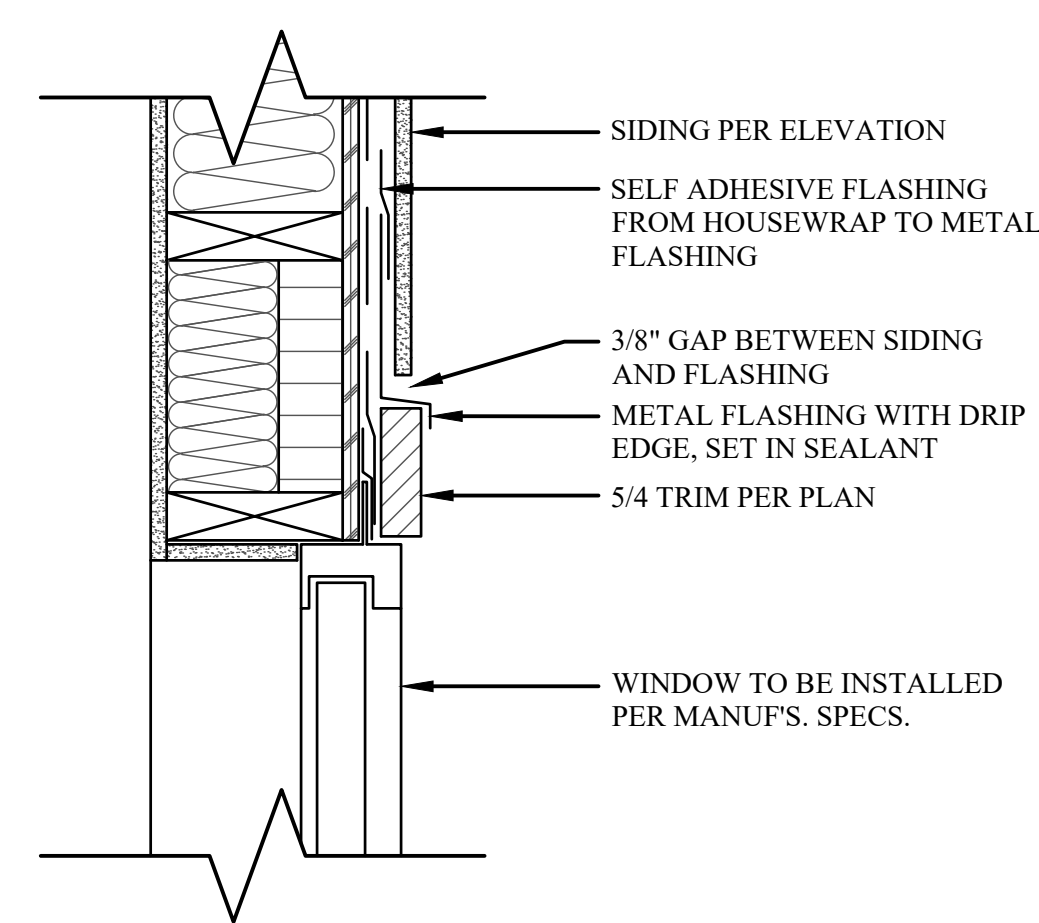


2 WINDOW HEAD FLASHING WITH TRIM
SCALE: 2" = 1'-0"

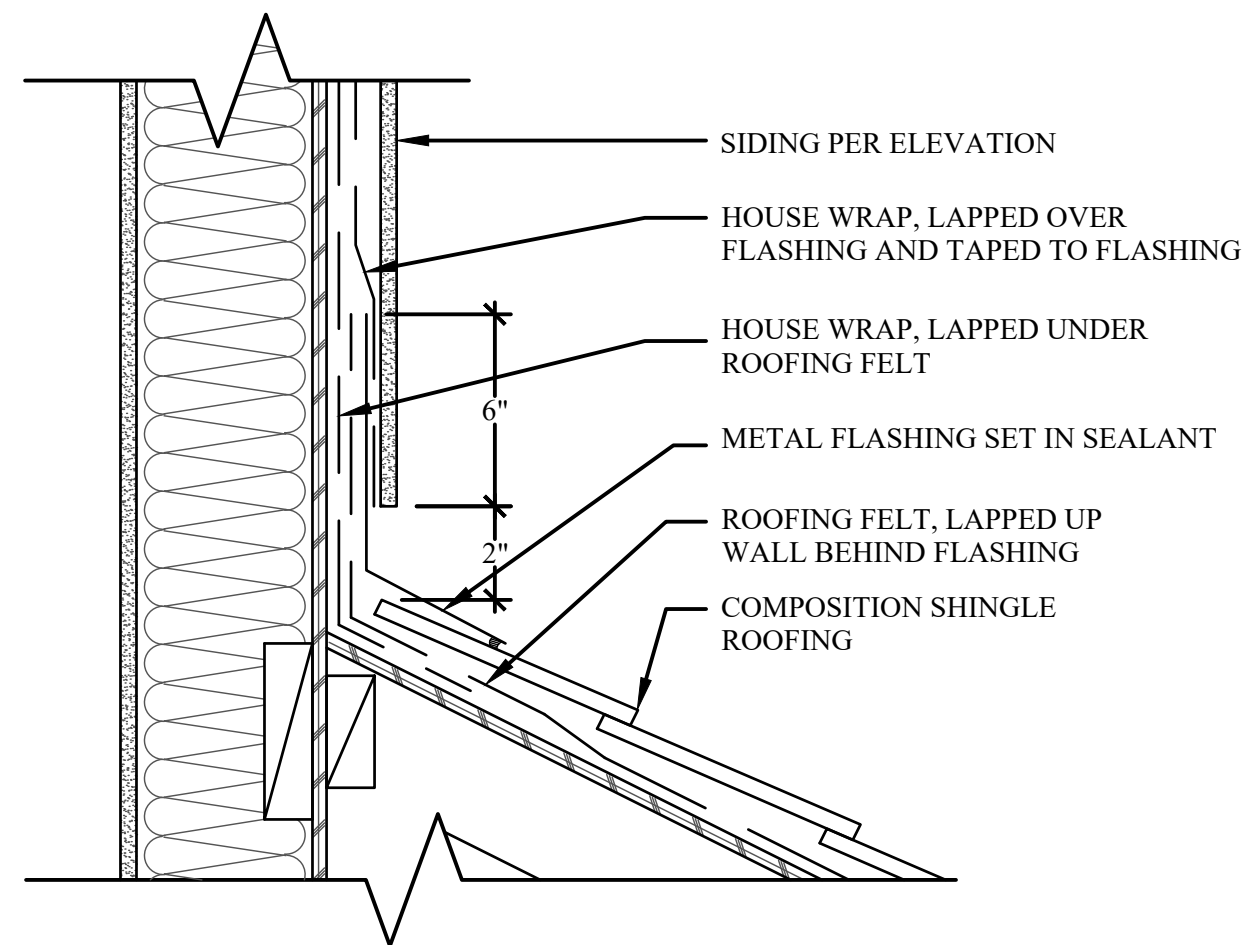


5 FLASHING AT ROOF TO WALL TRANSITION
SCALE: 2" = 1'-0"

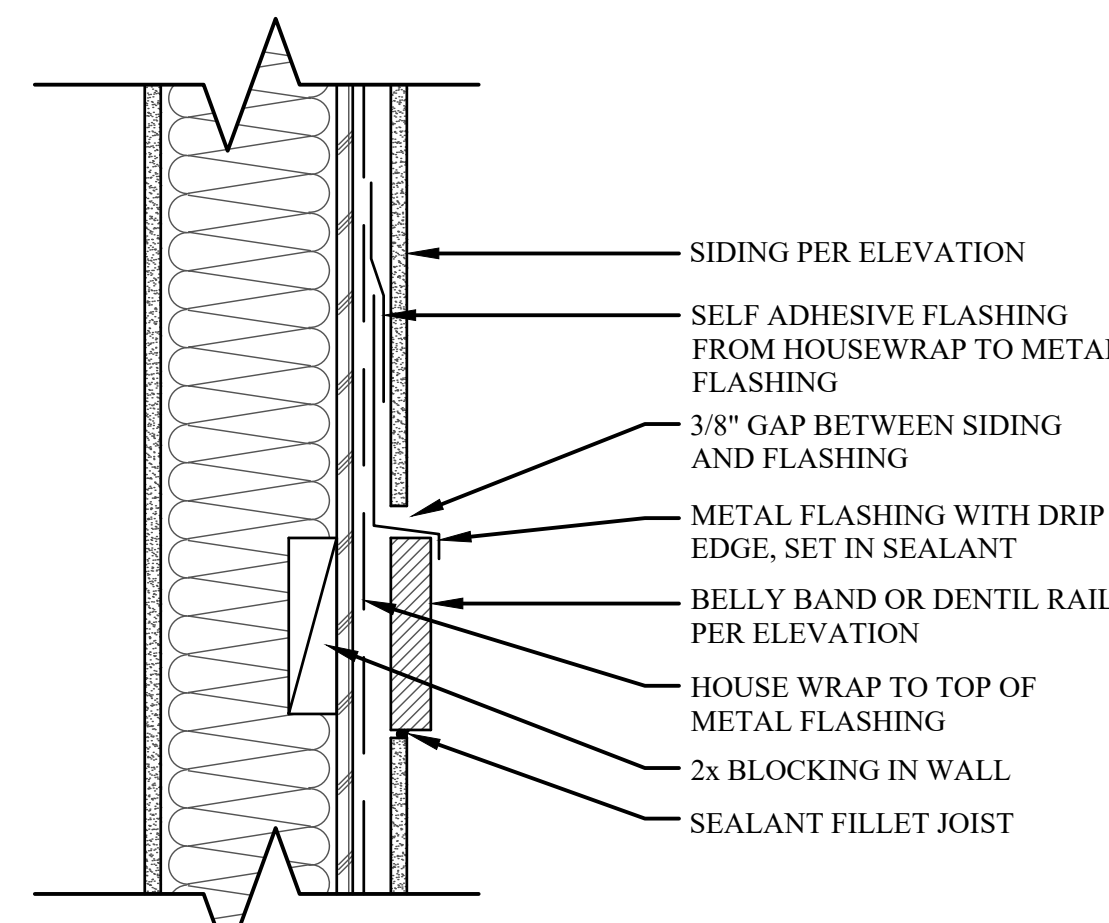


3 FLASHING AT SIDING TRANSITION
SCALE: 2" = 1'-0"

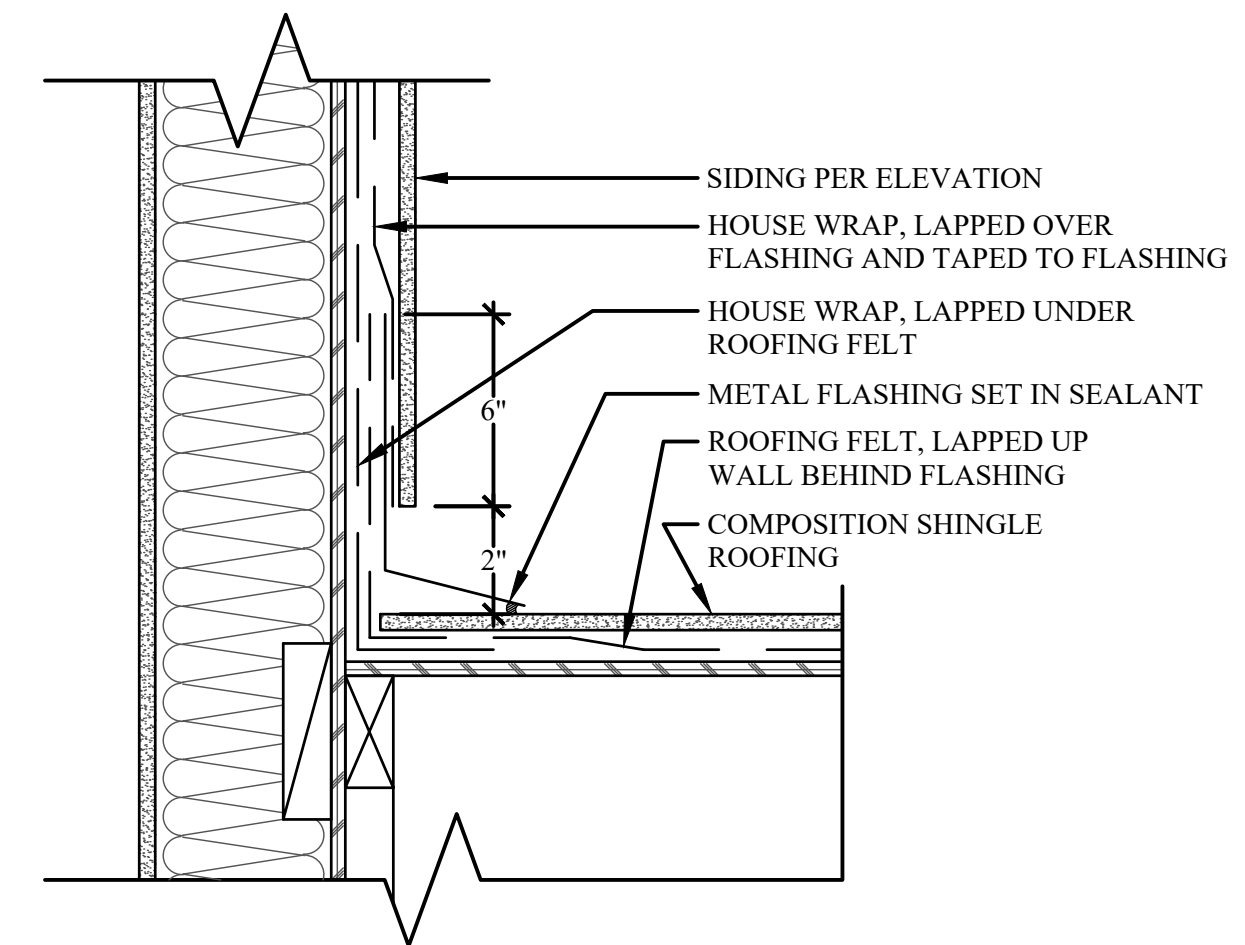


6 FLASHING AT ROOF TO WALL TRANSITION
SCALE: 2" = 1'-0"

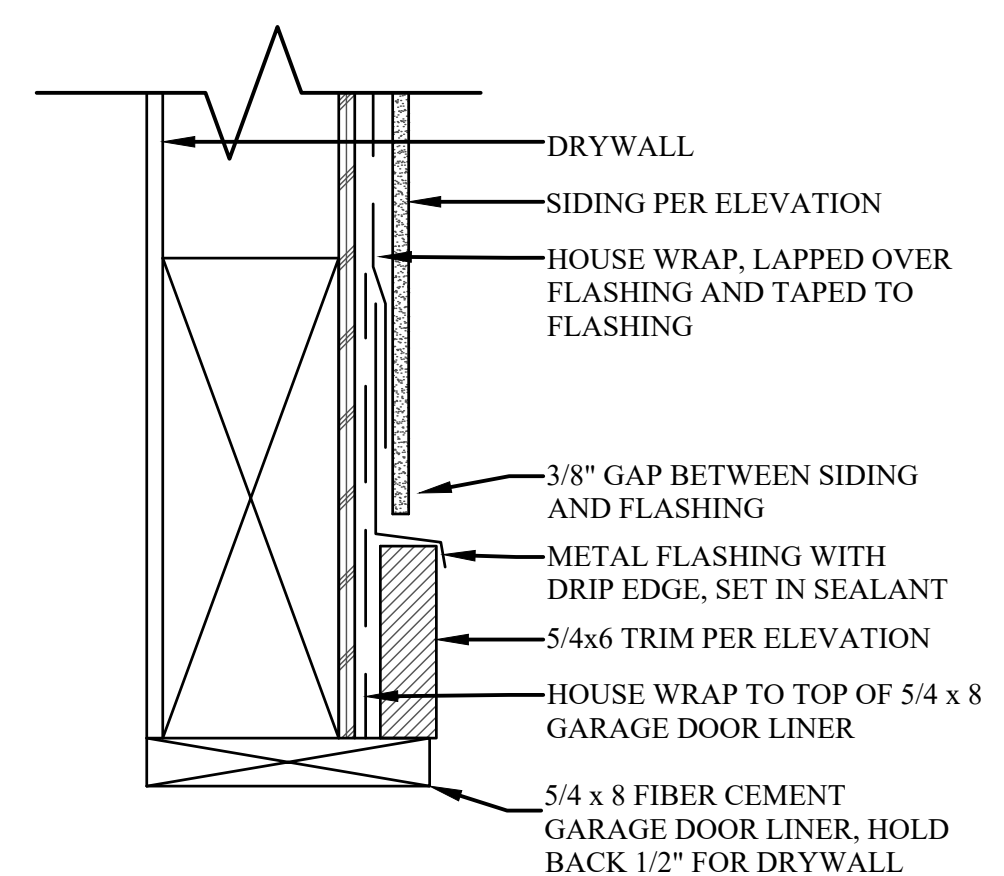


4 GARAGE DOOR LINER AT HEADER WITH TRIM
SCALE: 2" = 1'-0"

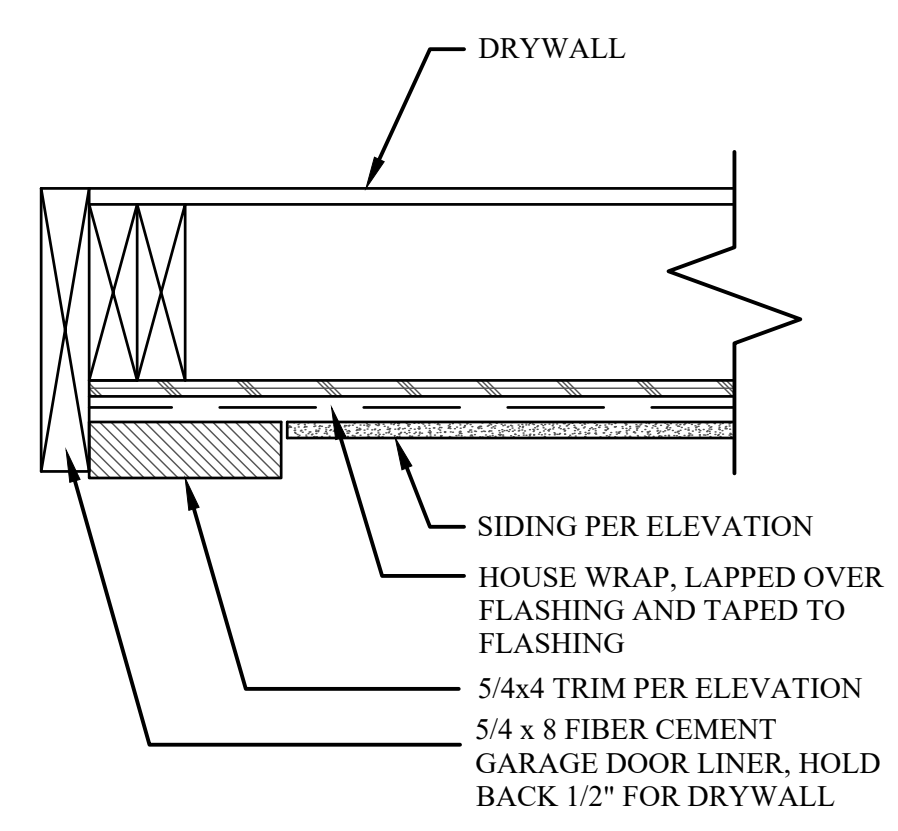


7 GARAGE DOOR LINER AT JAMB WITH TRIM
SCALE: 2" = 1'-0"

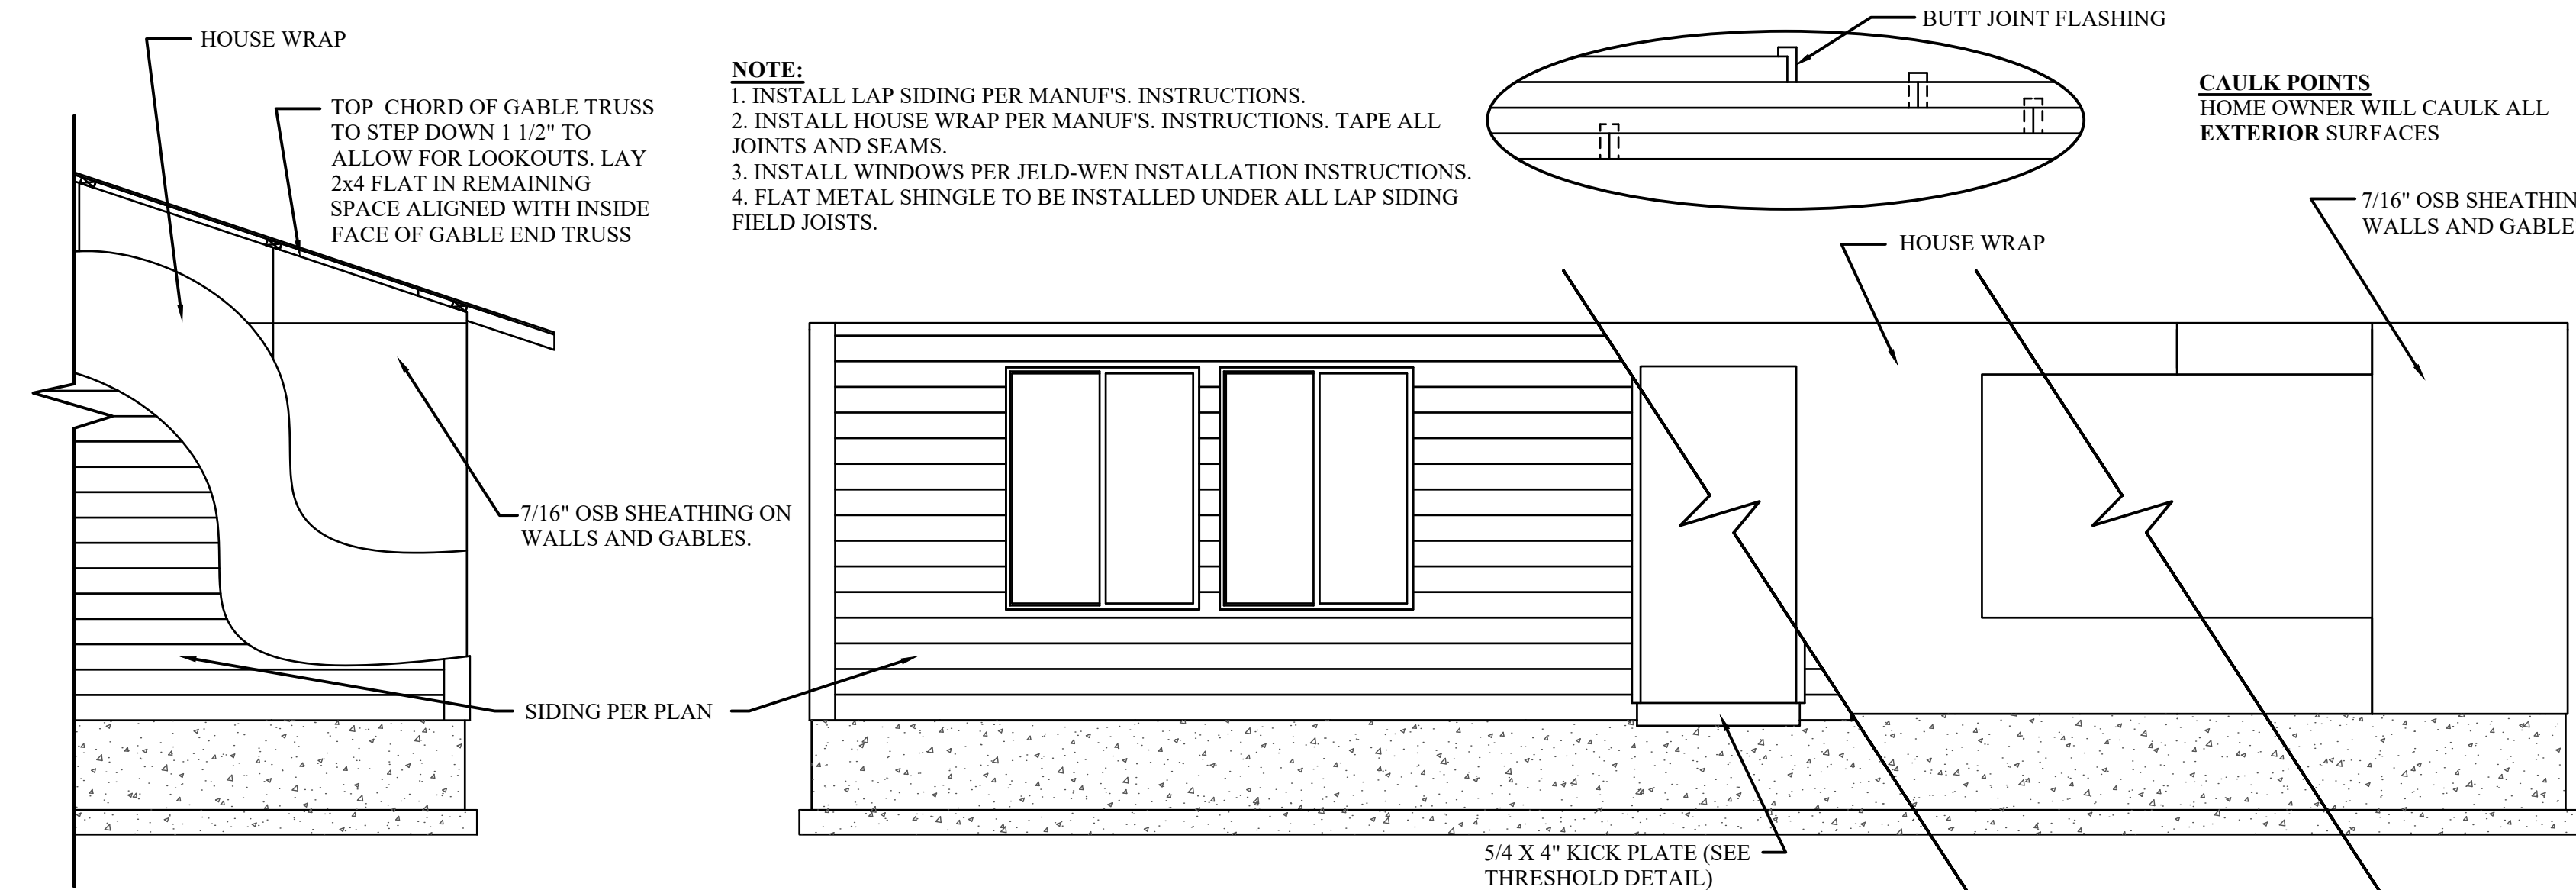


1 SIDING AND SHEATHING
SCALE: NTS

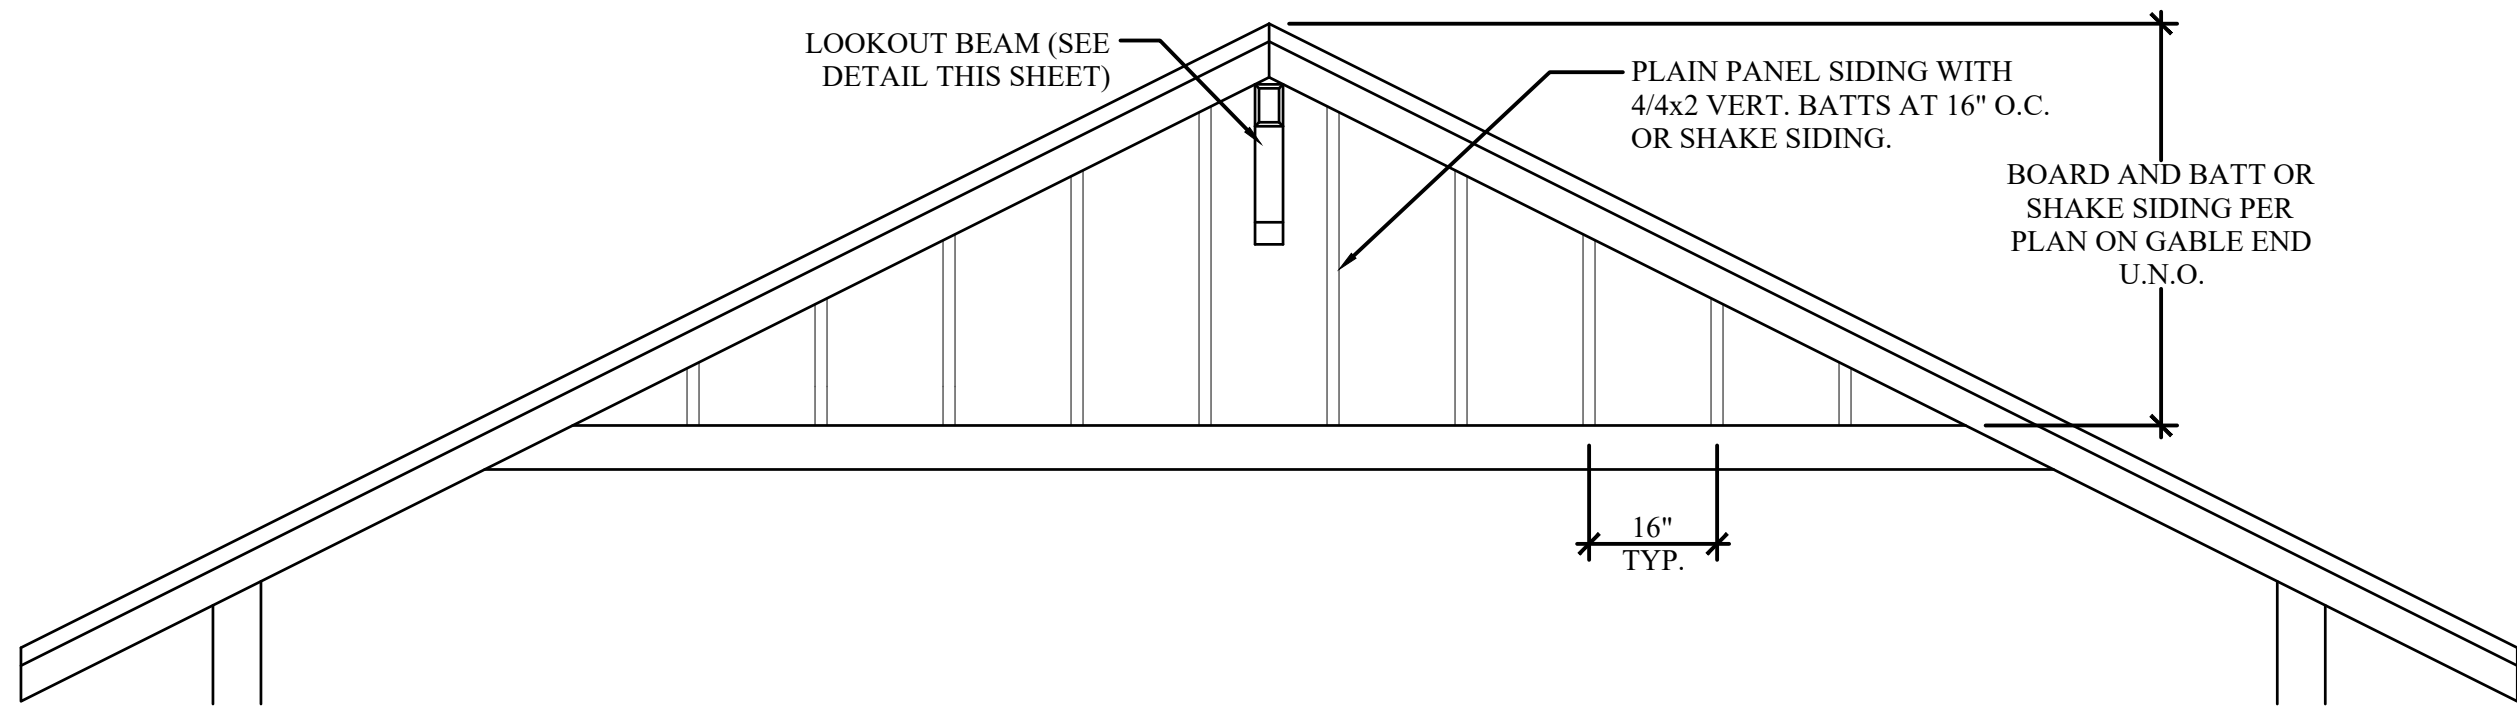


2 GABLE END DETAILING
SCALE: NTS

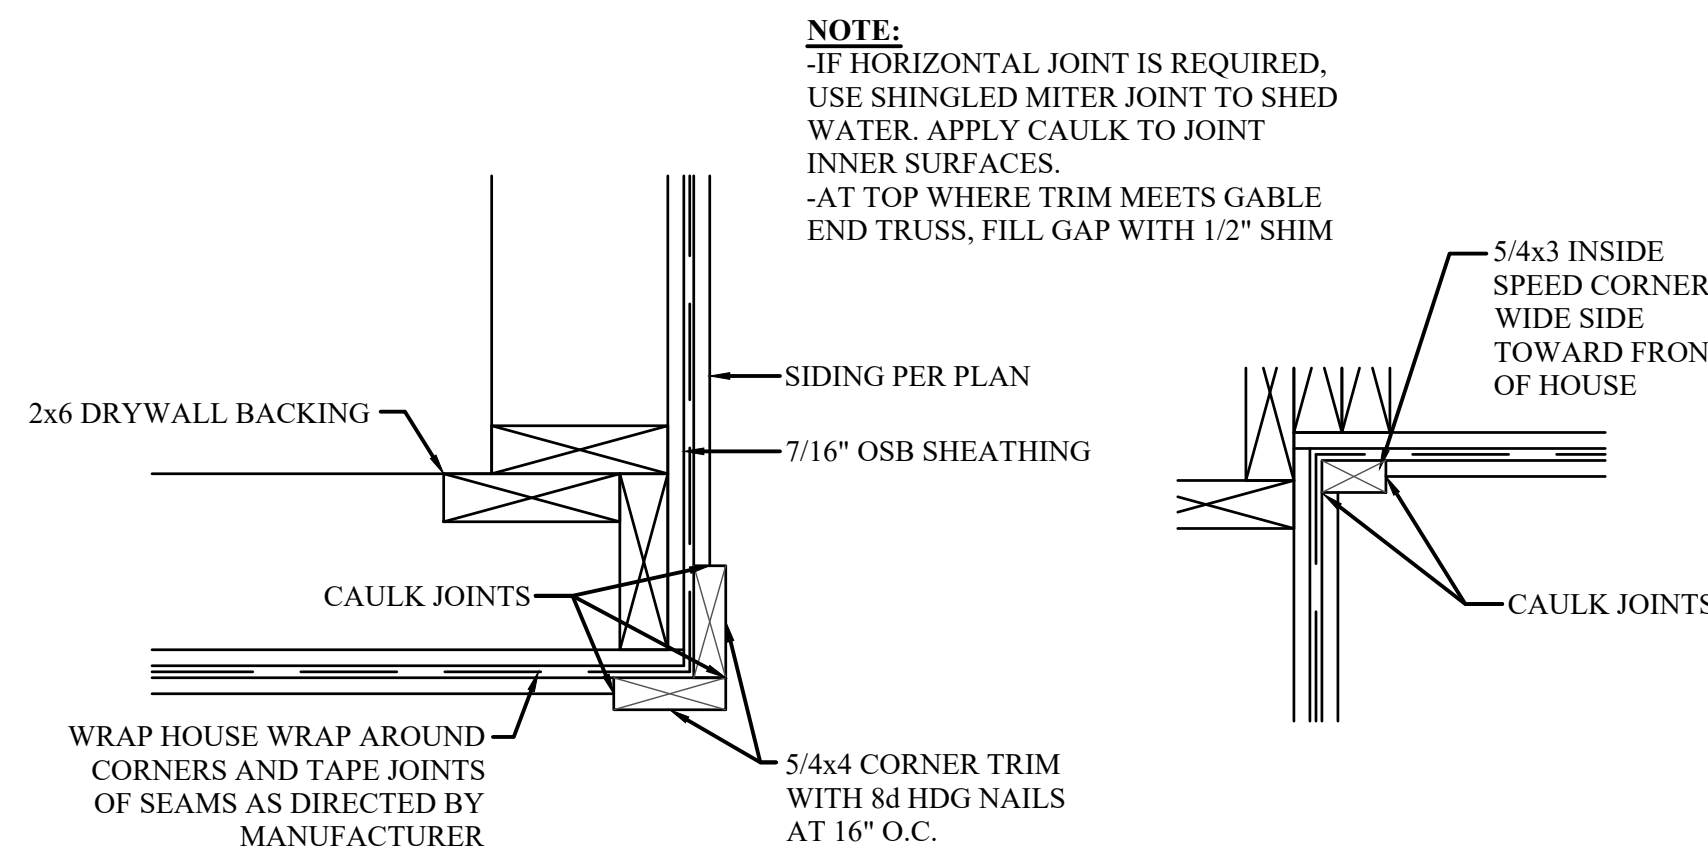


5 CORNERBOARD TRIM
SCALE: 2\"/>

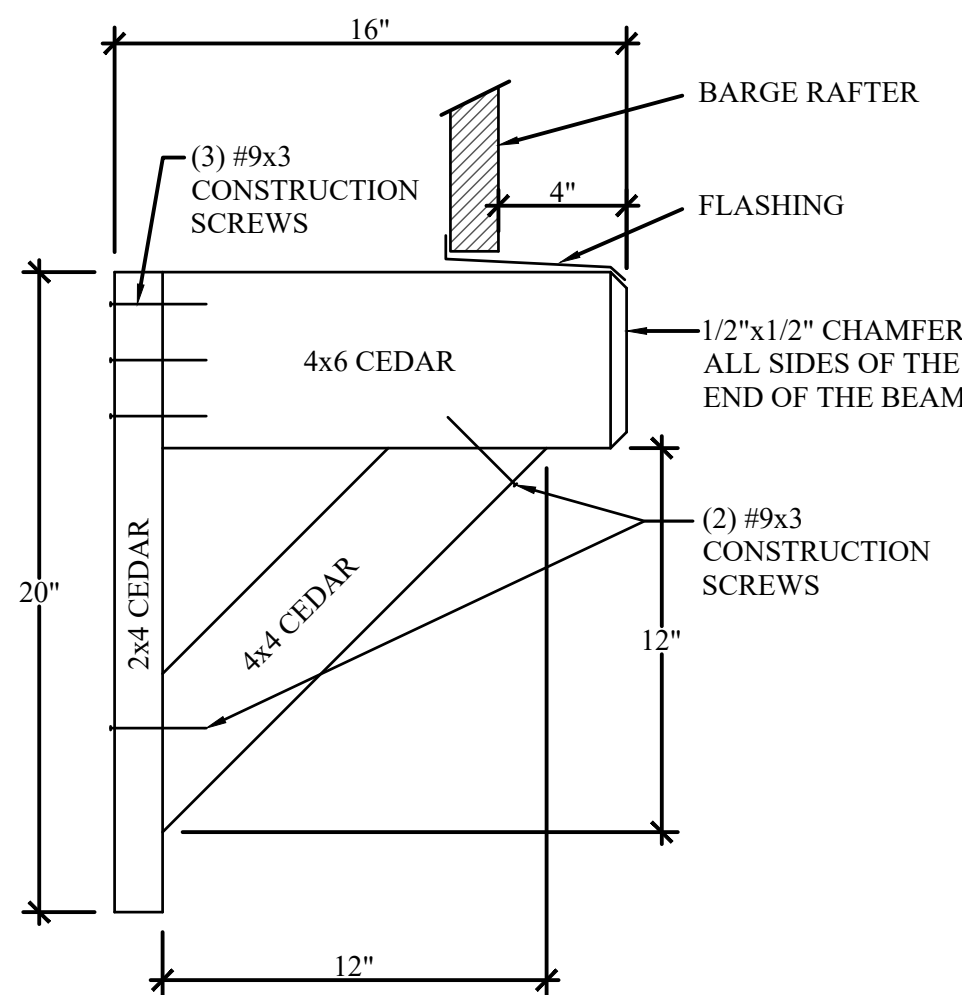


6 LOOKOUT BEAM
SCALE: 2\"/>

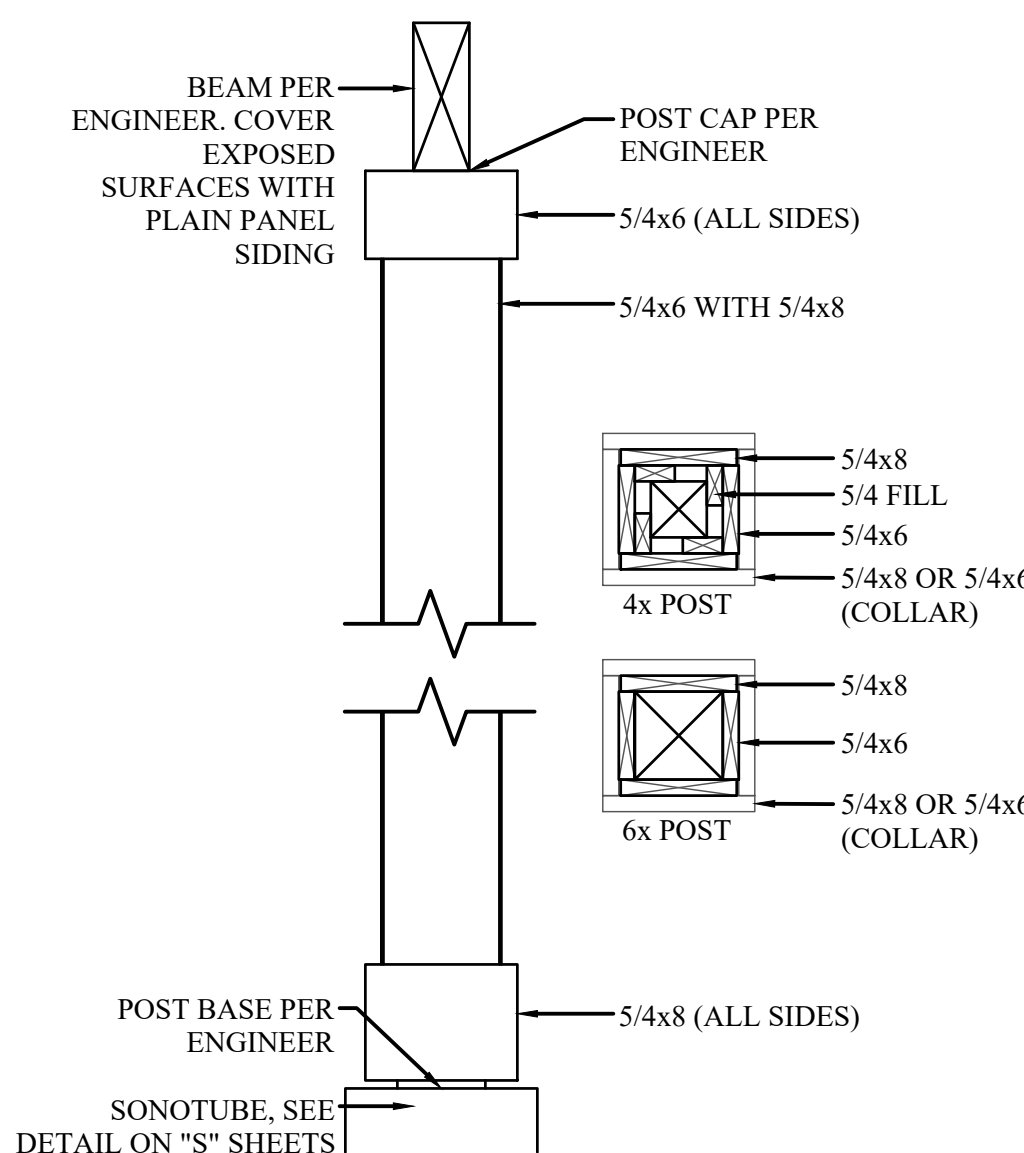


7a EXTERIOR COLUMN
SCALE: 1\"/>

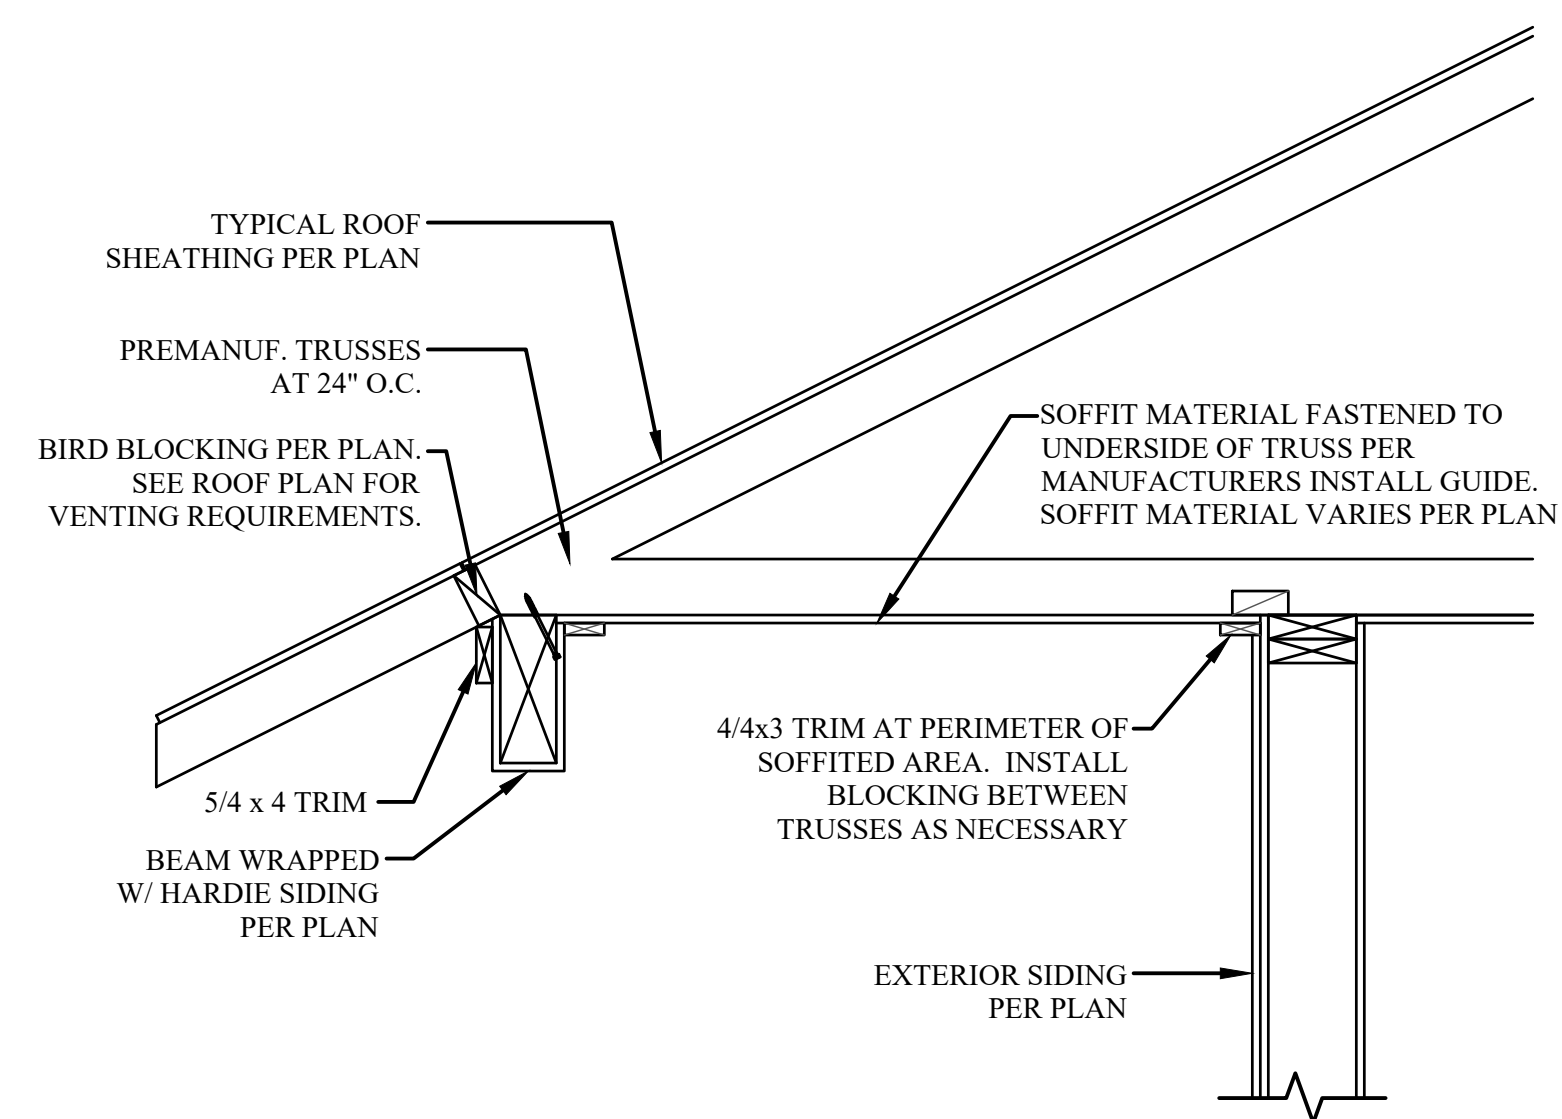

3 EXTERIOR SOFFIT ATTACHMENT
SCALE: 1\"/>

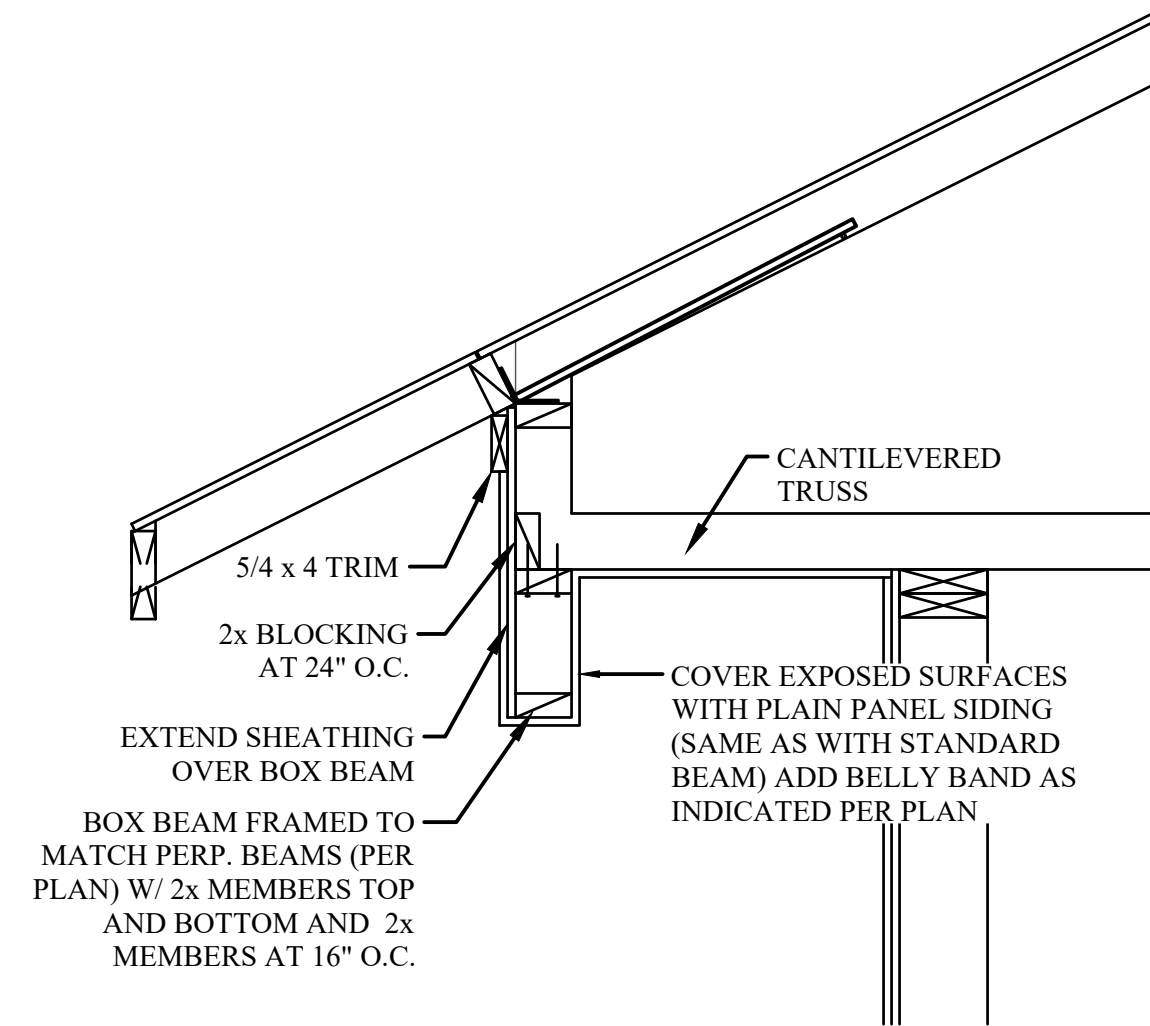

4 BOX BEAM DETAIL - EAVE
SCALE: 1\"/>

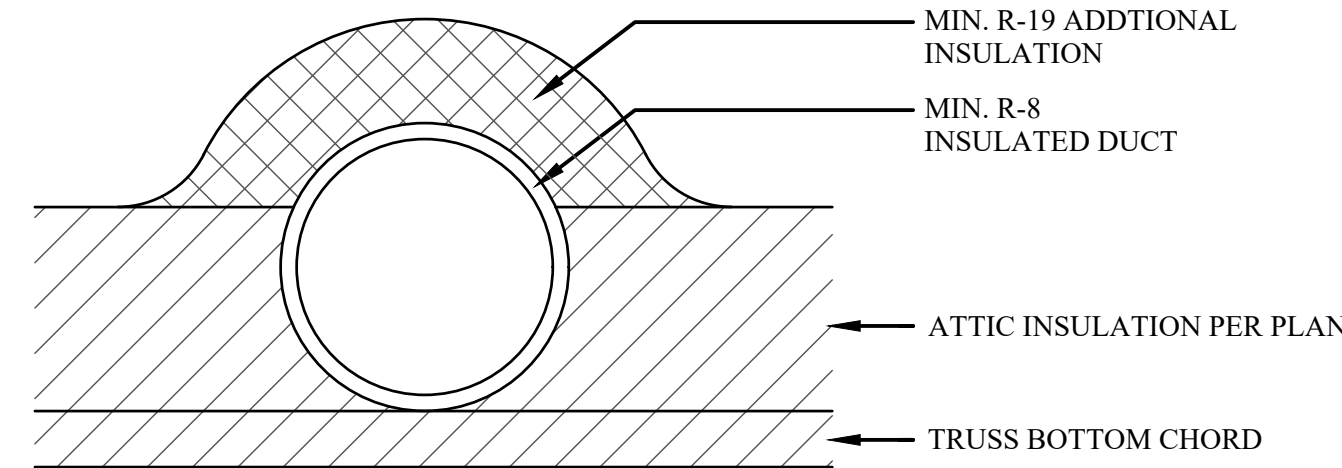

8 DEEPLY BURIED DUCT
SCALE: 1\"/>



ADAIR HOMES, INC
4400 NE 77TH AVE
SUITE 100
VANCOUVER, WA 98662


HODSON #1 - 2386

GARAGE CONFIGURATION: NONE
PLAN ORIENTATION: STANDARD
COMMUNITY CODE / LOT#: MEME-129


2023 ORSC

SCALE: AS SHOWN
DATE: 08/26/2025
DRAFTED BY: ES
REV:


PAGE: AD6

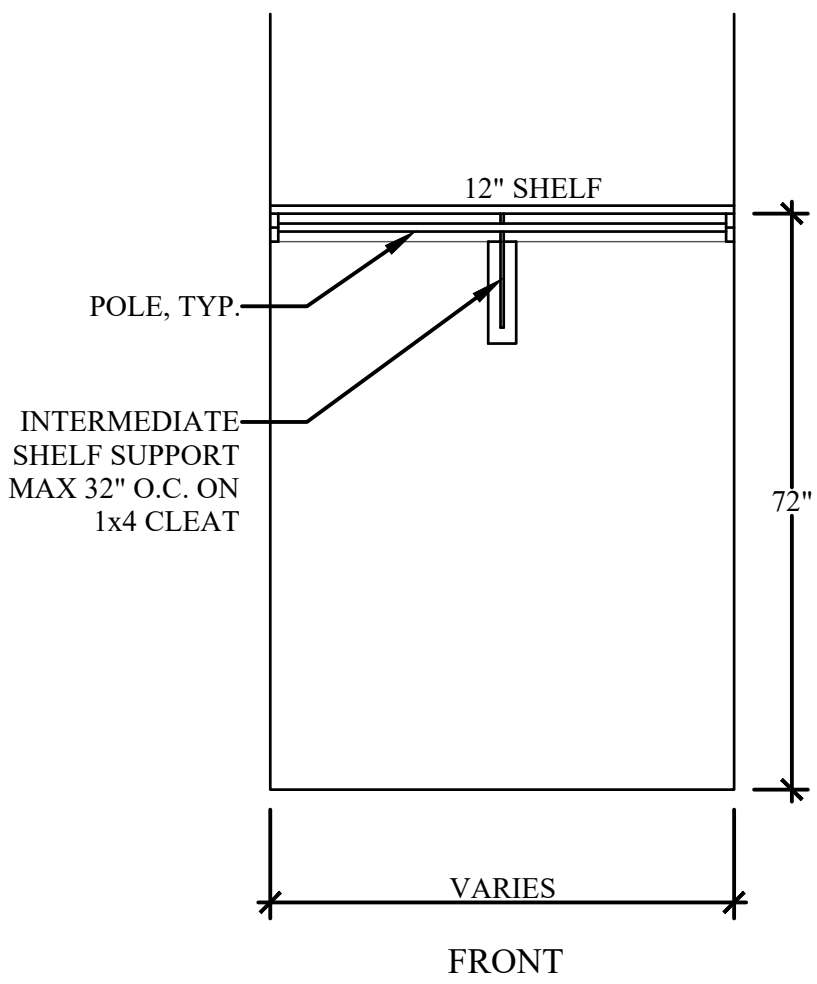


1a TYPICAL CLOSET SHELIVING
SCALE: NTS

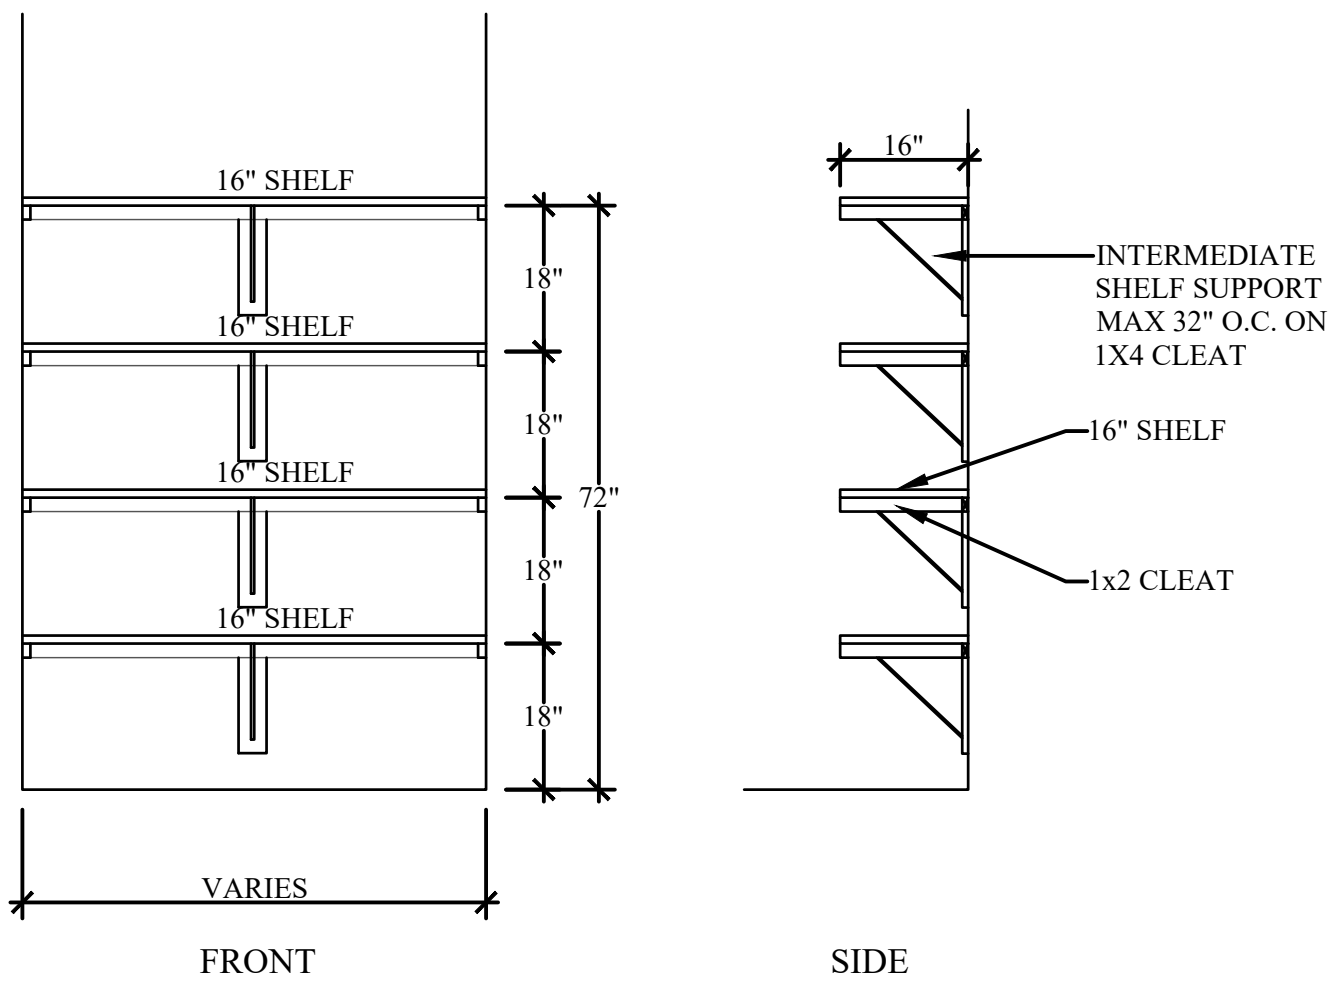


1b TYPICAL PANTRY/LINEN SHELIVING
SCALE: NTS
4 SHELVES

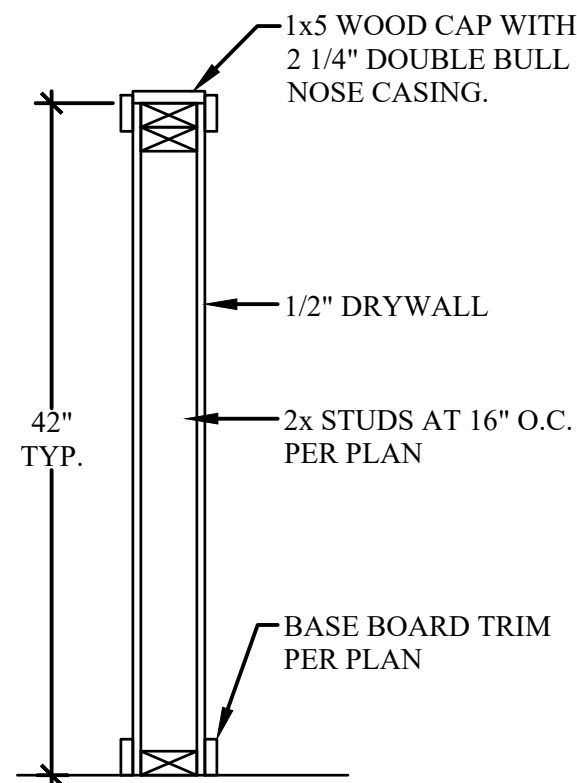

2 1/2 WALL WITH WOOD CAP
SCALE: 1/2 inch = 1'-0 inch
STANDARD MODERN OR CRAFTSMAN

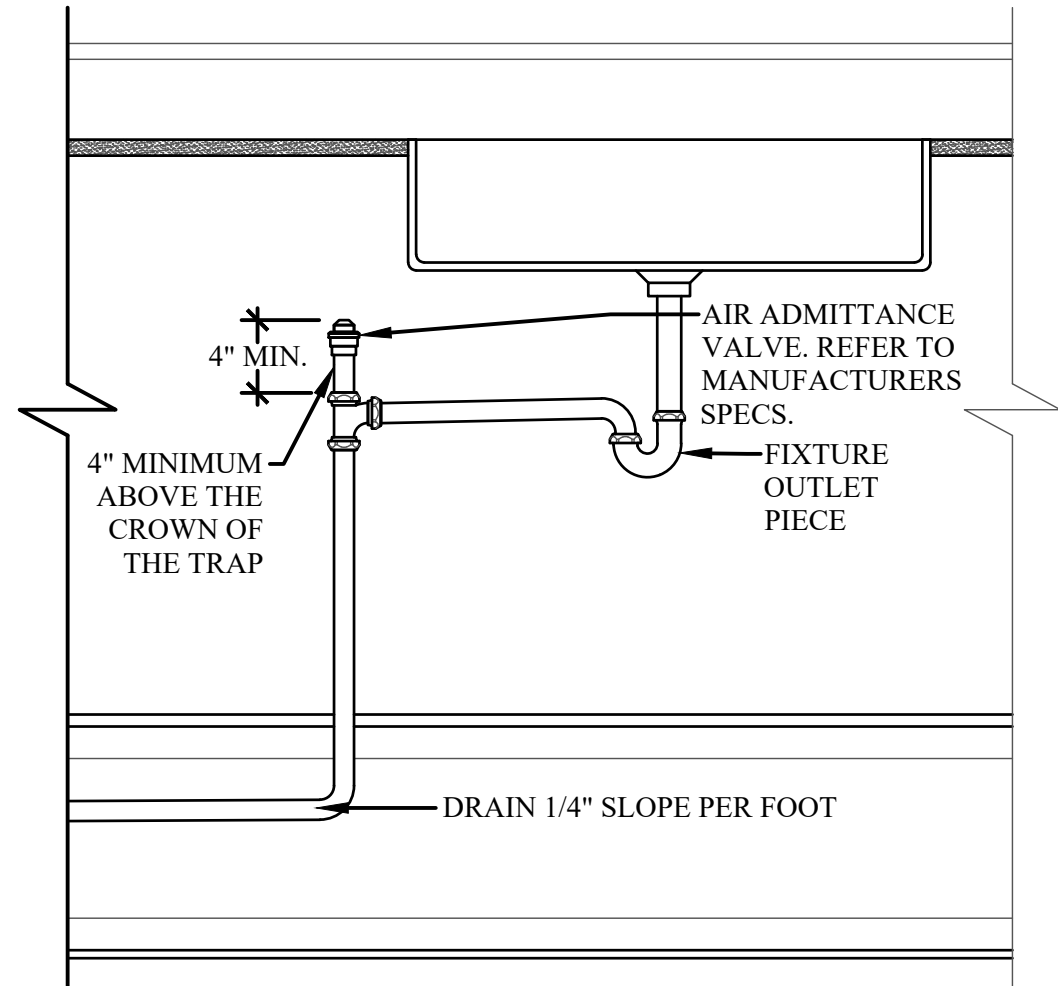


3 AIR ADMITTANCE VALVE DETAIL
SCALE: 2 inch = 1'-0 inch

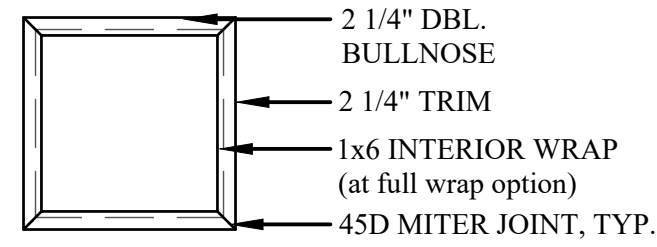


4 WATER HEATER DETAIL (GARAGE)
SCALE: 1 inch = 1'-0 inch

NOTE:
NO SILL AND APRON
WHEN SILL IS > 4'-6" A.F.F.

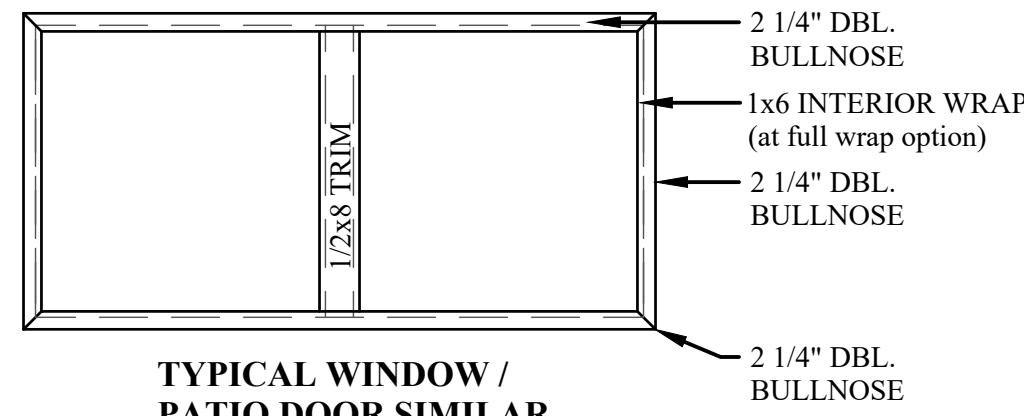

5 TOWEL BAR LOCATION
SCALE: NTS

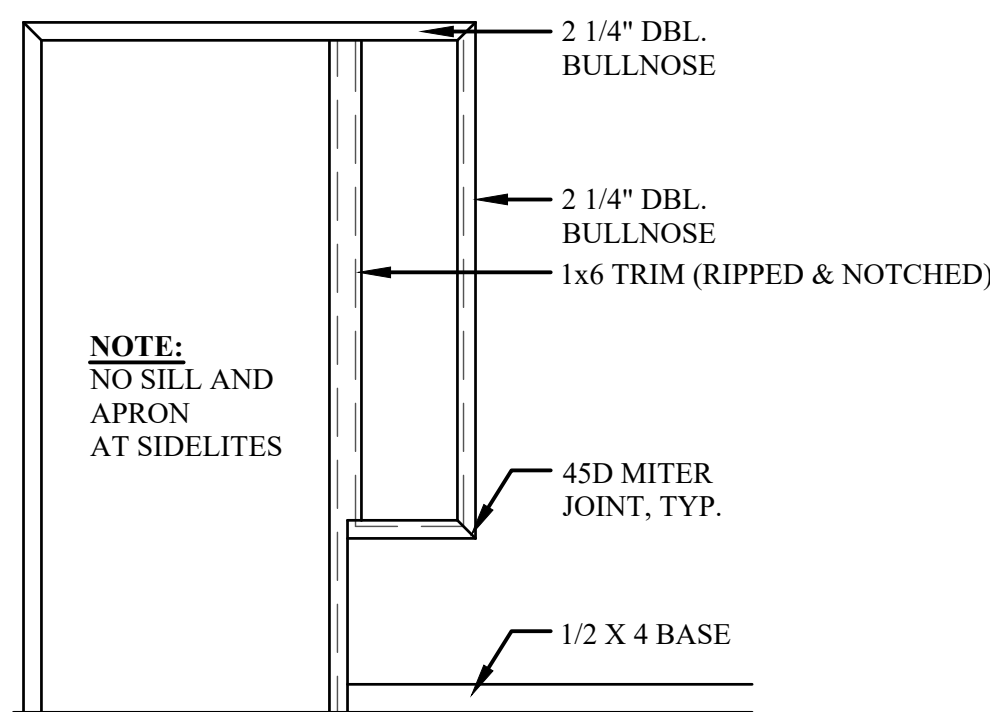

6 FULL-WRAP WINDOW TRIM AND/OR SILL & APRON
SCALE: NTS



ADAIR HOMES INC.
© COPYRIGHT 2025

ADAIR HOMES, INC
4400 NE 77TH AVE
SUITE 100
VANCOUVER, WA 98662

HODSON #1 - 2386

GARAGE CONFIGURATION:
NONE

PLAN ORIENTATION:
STANDARD

COMMUNITY CODE / LOT#:
MEME-129

DETAILS

2023 ORSC

SCALE: AS SHOWN
DATE: 08/26/2025
DRAFTED BY: ES
REV:

PAGE:

AD7

NOTE:
THIS DETAIL IS TYPICAL. SEE PLANS FOR MORE INFORMATION ON SPECIFIC STAIR DIMENSIONS, LOCATION, NUMBER OF RISERS, ETC.

CUT TREADS/RISERS 2" SHORTER THAN WIDTH OF STAIRWELL. LEAVE 1" GAP BETWEEN TREADS/RISERS AND WALL FRAMING

2x12 STAIR STRINGER

DRYWALL TO TOP SIDE OF 2x4 SPACER

FIRE BLOCKING

2x4 SPACER BETWEEN STUDS AND STRINGERS

DRYWALL TO UNDERSIDE OF 2x4 SPACER

STAIR GEOMETRY NOTE:
MAX. RISER HT = 7 3/4" (3/8" MAX. VARIANCE)
MIN. TREAD DEPTH = 10" (3/8" MAX. VARIANCE)
NOSING PROJECTION = 3/4" MIN / 1 1/4" MAX

ATTACH 2x4 SPACER TO STUDS W/ (2) 16d NAILS, EACH STUD, THEN ATTACH STRINGER TO SPACER

2x12 STAIR STRINGERS

2x4 STRONGBACK AT CENTER STRINGER

1a STAIR FRAMING DETAIL - STRINGER TO WALL
SCALE: 1/2" = 1'-0"

NOTE:
THIS DETAIL IS TYPICAL. SEE PLANS FOR MORE INFORMATION ON SPECIFIC STAIR DIMENSIONS, LOCATION, NUMBER OF RISERS, ETC.

BLOCKING FOR HANDRAIL AT BOTTOM CENTER AND TOP OF STAIR RUN

CUT TREADS/RISERS 2" SHORTER THAN WIDTH OF STAIRWELL. LEAVE 1" GAP BETWEEN TREADS/RISERS AND WALL FRAMING

2x12 STAIR STRINGERS

2x4 KICK PLATE

RISERS TO BE CUT FROM SUBFLOOR SCRAPS AND ATTACHED WITH (2) 8d HDG. NAILS TO EACH STRINGER. INSTALL RISERS FIRST, THEN INSTALL TREADS.

STAIR GEOMETRY NOTE:
MAX. RISER HT = 7 3/4" (3/8" MAX. VARIANCE)
MIN. TREAD DEPTH = 10" (3/8" MAX. VARIANCE)
NOSING PROJECTION = 3/4" MIN / 1 1/4" MAX

2 STAIR FRAMING DETAIL - STRAIGHT STAIR
SCALE: 1/2" = 1'-0"

1 1/8" OSB STAIR TREADS. NAIL TREADS TO STRINGERS WITH 16d GALV. NAILS AT (3) PLACES EACH STRINGER

NOSE OF SUBFLOOR IN LINE WITH NOSE OF TREADS

USE 2x LEDGER AS NEEDED FOR PROPER ANCHOR ATTACHMENT

SIMPSON A34 ANCHOR AT TOP OF STRINGERS (4) PLACES

SOLID HEADER PER PLAN. (ONLY IF WALL IS PRESENT)

ATTACH RISERS TO BACK EDGE OF TREADS W/ (4) 8d HDG NAILS

2x4 SPACER BETWEEN STUDS AND STRINGERS. ATTACH SPACER TO STUDS W/ (2) 16d NAILS, EACH STUD, THEN ATTACH STRINGER TO SPACER

FIRE BLOCKING

1 3/16"

4" MIN.

2 1/4"

1/2" SHEETROCK AT INTERIOR (WHERE APPLIES)

2x4 BLOCKING BLOCKING FOR HANDRAIL AT BOTTOM CENTER AND TOP OF STAIR RUN

30"

UNDERSIDE OF BLOCKING TO STAIR TREAD

34" - 38" ABOVE STAIR TREAD AS PER CODE

HAND RAIL PER MANUFACTURER SPECS

HAND RAIL BRACKET PER MANUFACTURER SPECS

STAIR TREAD

3 HAND RAIL DETAIL
SCALE: 2" = 1'-0"

1 1/8" OSB STAIR TREADS. NAIL TREADS TO STRINGERS WITH 16d GALV. NAILS AT (3) PLACES EACH STRINGER

NOSE OF SUBFLOOR IN LINE WITH NOSE OF TREADS

FINISH FLOORING

EQUAL

EQUAL

USE 2x LEDGER AS NEEDED FOR PROPER ANCHOR ATTACHMENT

RISERS TO BE CUT FROM SUBFLOOR SCRAPS AND ATTACHED WITH (2) 8d HDG. NAILS TO EACH STRINGER. INSTALL RISERS FIRST, THEN INSTALL TREADS.

2x12 STAIR STRINGER

SIMPSON A34 ANCHOR AT TOP OF STRINGERS (4) PLACES EACH FLIGHT

SOLID HEADER PER PLAN. (ONLY IF WALL IS PRESENT)

4 STAIR DETAIL - TOP OF STAIR RUN
SCALE: 1" = 1'-0"

1 1/8" OSB STAIR TREADS. NAIL TREADS TO STRINGERS WITH 16d GALV. NAILS AT (3) PLACES EACH STRINGER

RISERS TO BE CUT FROM SUBFLOOR SCRAPS AND ATTACHED WITH (2) 8d HDG. NAILS TO EACH STRINGER. INSTALL RISERS FIRST, THEN INSTALL TREADS.

EQUAL

EQUAL

EQUAL

2x12 STAIR STRINGER

2x8 JOISTS @ LANDING

2x4 KICK PLATE

2x4 CRIPPLE WALL FOR LANDING SUPPORT

5 STAIR DETAIL - AT LANDING
SCALE: 1" = 1'-0"

1 1/8" OSB STAIR TREADS. NAIL TREADS TO STRINGERS WITH 16d GALV. NAILS AT (3) PLACES EACH STRINGER

RISERS TO BE CUT FROM SUBFLOOR SCRAPS AND ATTACHED WITH (2) 8d HDG. NAILS TO EACH STRINGER. INSTALL RISERS FIRST, THEN INSTALL TREADS.

EQUAL

EQUAL

EQUAL

2x12 STAIR STRINGER

SUBFLOOR PER PLAN

2x4 KICK PLATE

6 STAIR DETAIL - AT FLOOR
SCALE: 1" = 1'-0"



ADAIR HOMES INC.
© COPYRIGHT 2025

ADAIR HOMES, INC
4400 NE 77TH AVE
SUITE 100
VANCOUVER, WA 98662

HODSON #1 - 2386

GARAGE CONFIGURATION:
NONE

PLAN ORIENTATION:
STANDARD

COMMUNITY CODE / LOT#:
MEME-129

DETAILS

2023 ORSC

SCALE: AS SHOWN


DATE: 08/26/2025

DRAFTED BY: ES

REV:


PAGE:

AD8

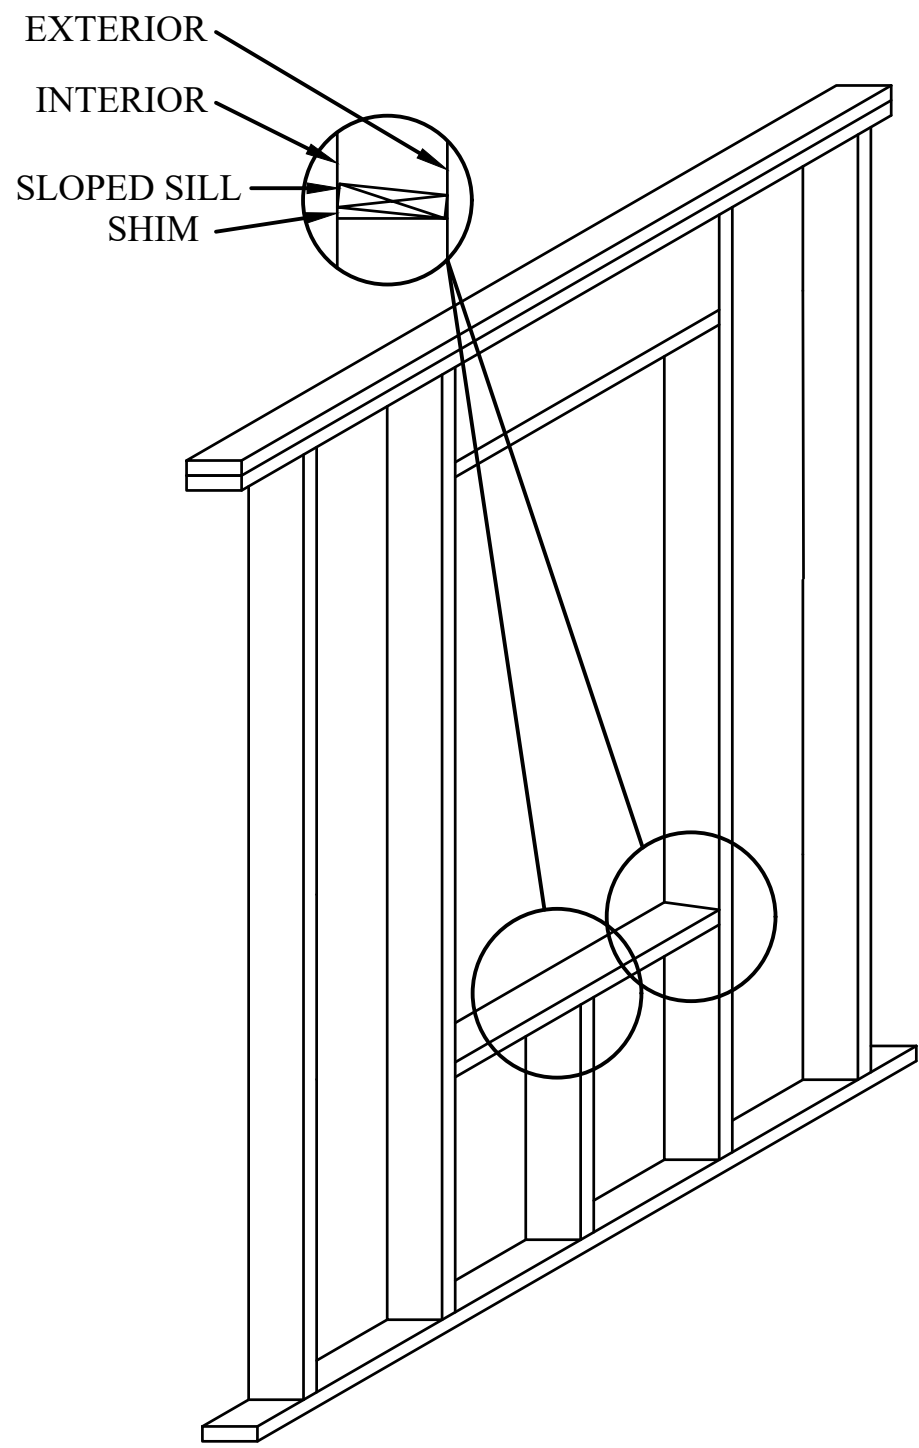


** WALL SHEATHING NOT SHOWN FOR CLARITY **

STEP 1
ENSURE WINDOW FRAMING IS CORRECT SIZE, IS SQUARE AND PLUMB.
ENSURE SILL IS SLOPED A MINIMUM OF 6 TO 8 DEGREES (ADD SHIMS FOR SUPPORT)

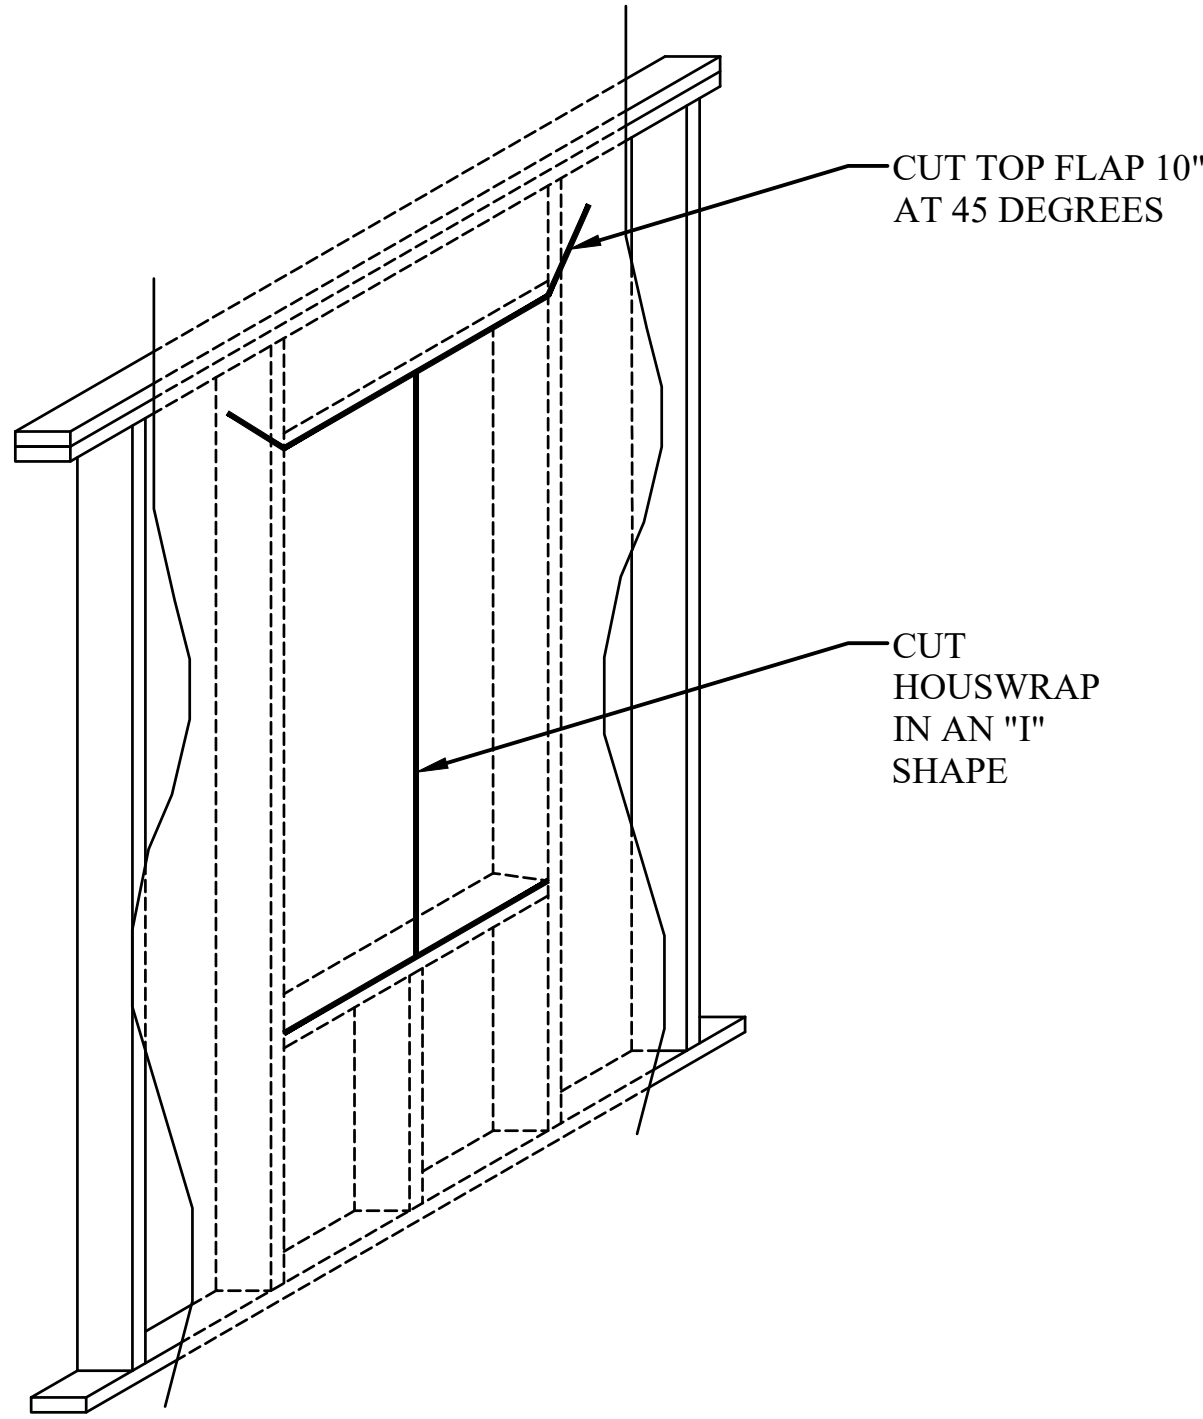


** WALL SHEATHING NOT SHOWN FOR CLARITY **

STEP 2
INSTALL HOUSWRAP OVER WALLS AND OPENING
CUT HOUSEWRAP IN AN "I" SHAPE AT WINDOW OPENING
CUT HOUSE WRAP TOP FLAP 10" AT 45 DEGREE ANGLE

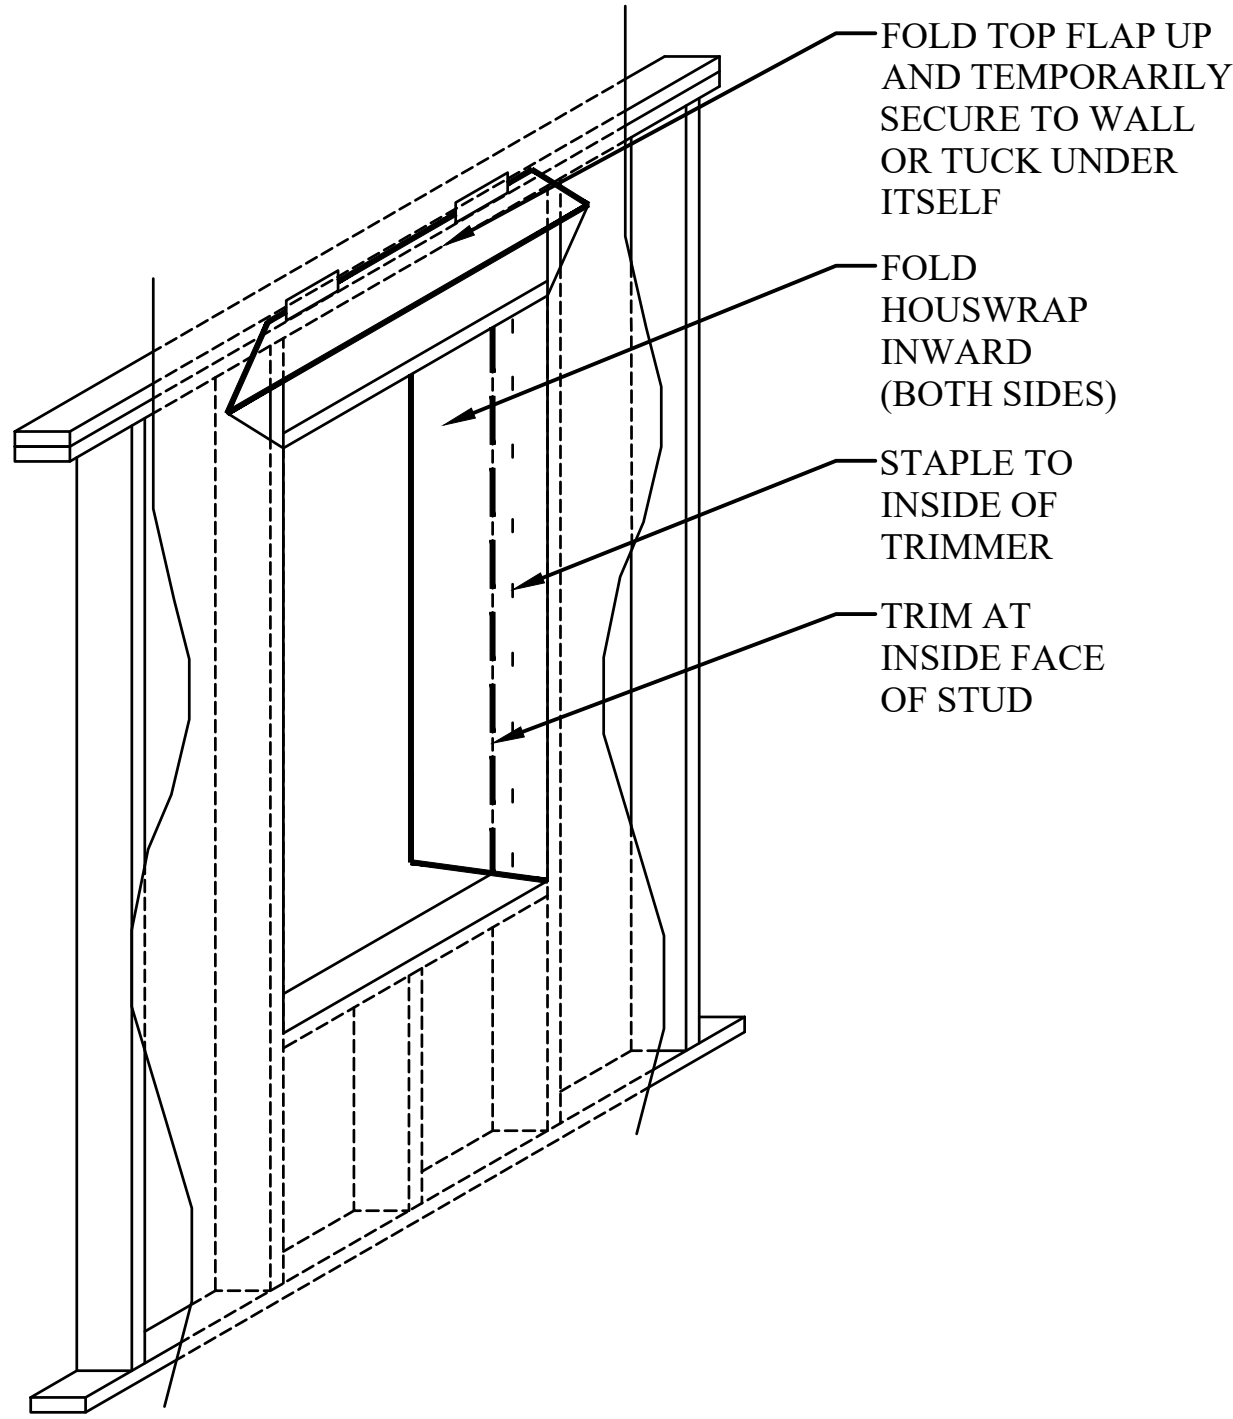


** WALL SHEATHING NOT SHOWN FOR CLARITY **

STEP 3
WRAP HOUSWRAP INTO OPENING AT THE SIDES AND STAPLE TO WINDOW FRAMING (TRIM OFF EXTRA AT FACE OF STUDS
FOLD TOP FLAP UP AND TEMPORARILY SECURE IN PLACE

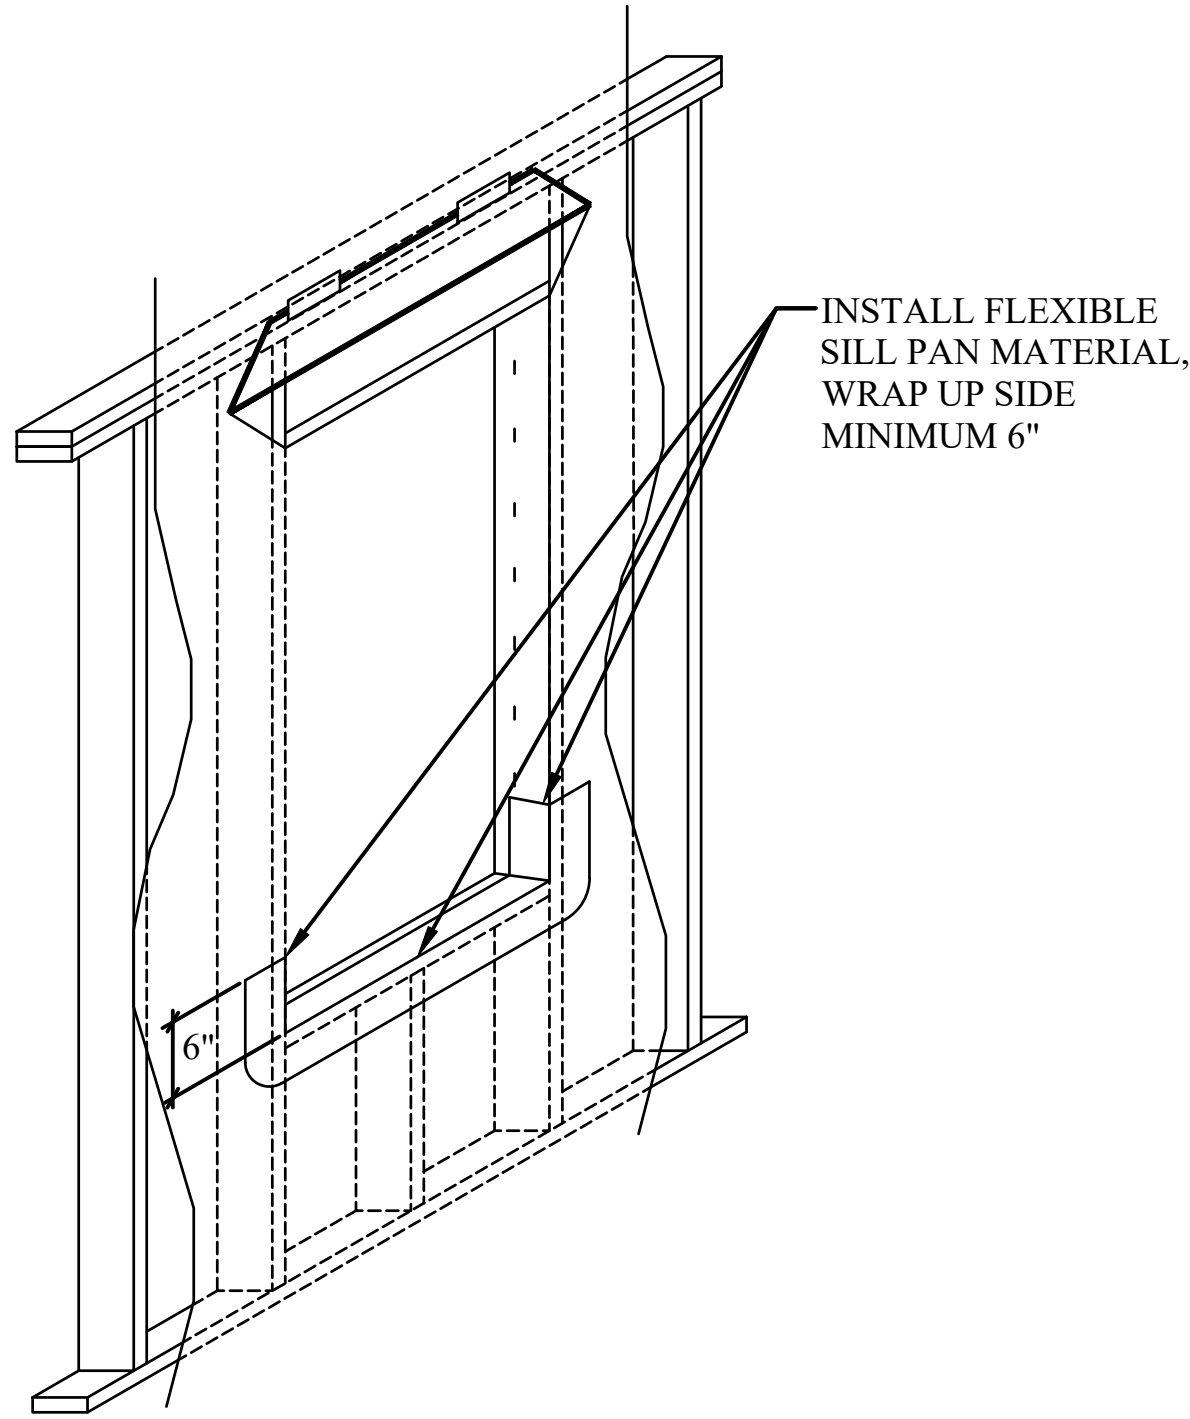


** WALL SHEATHING NOT SHOWN FOR CLARITY **

STEP 4
INSTALL FLEXIBLE SILL PAN

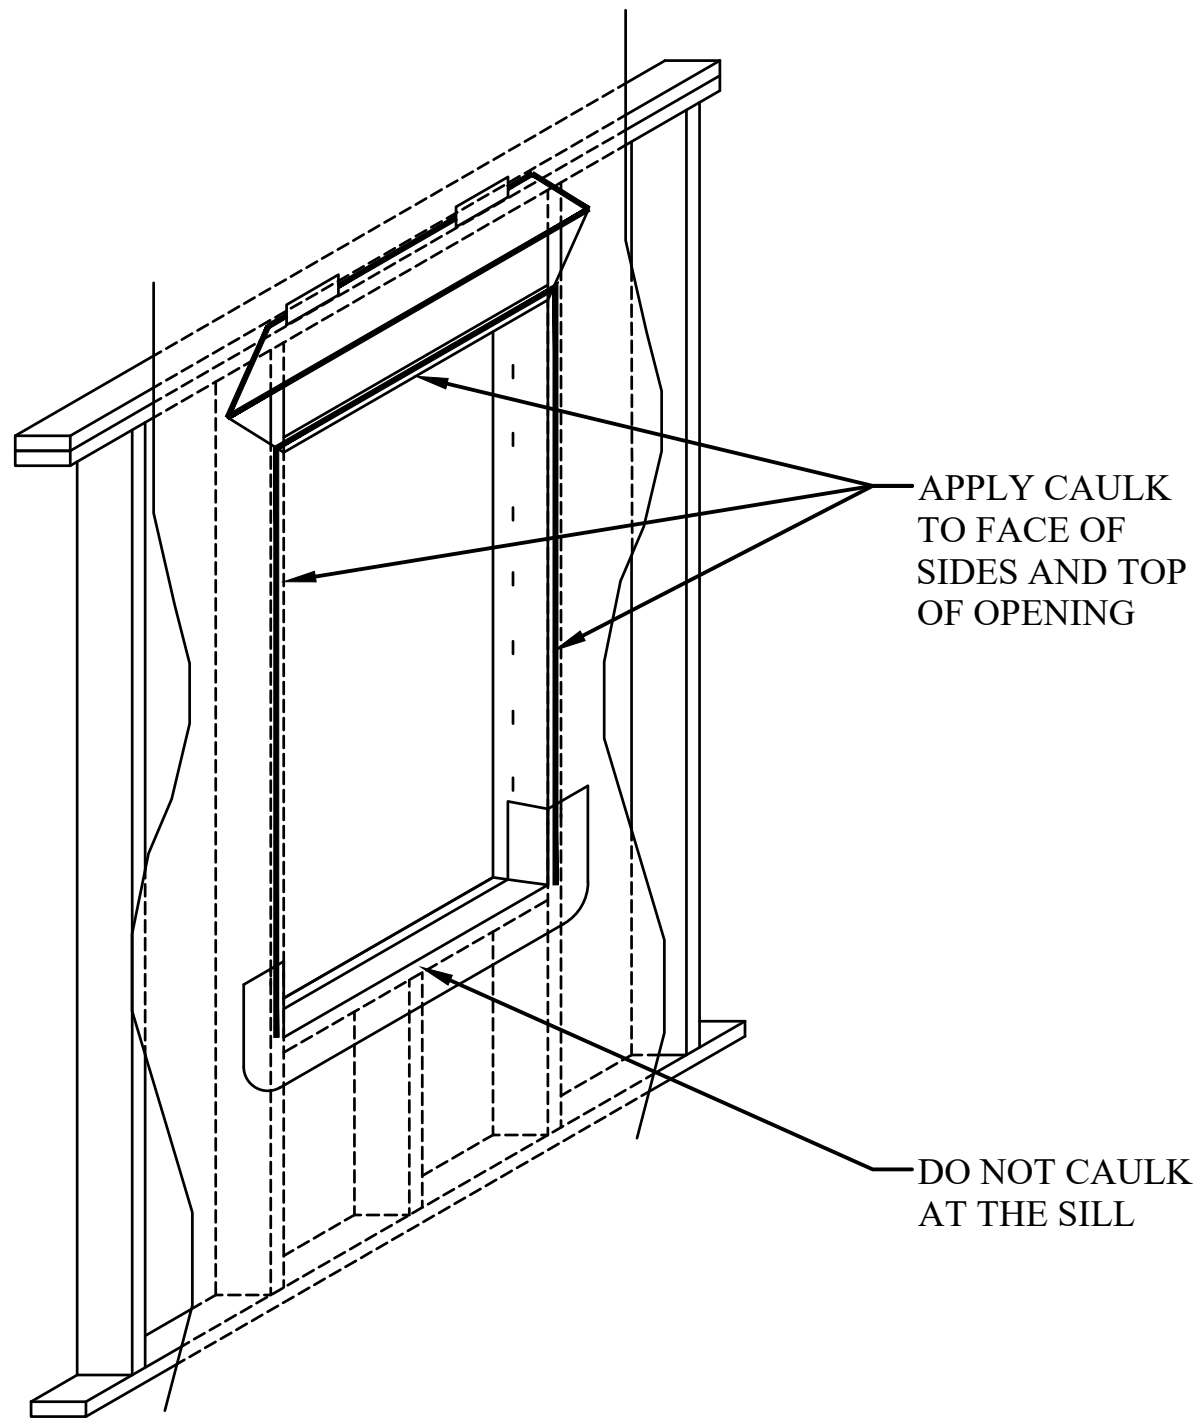


** WALL SHEATHING NOT SHOWN FOR CLARITY **

STEP 5
CAULK SIDES AND TOP OF WINDOW OPENING (DO NOT CAULK THE SILL

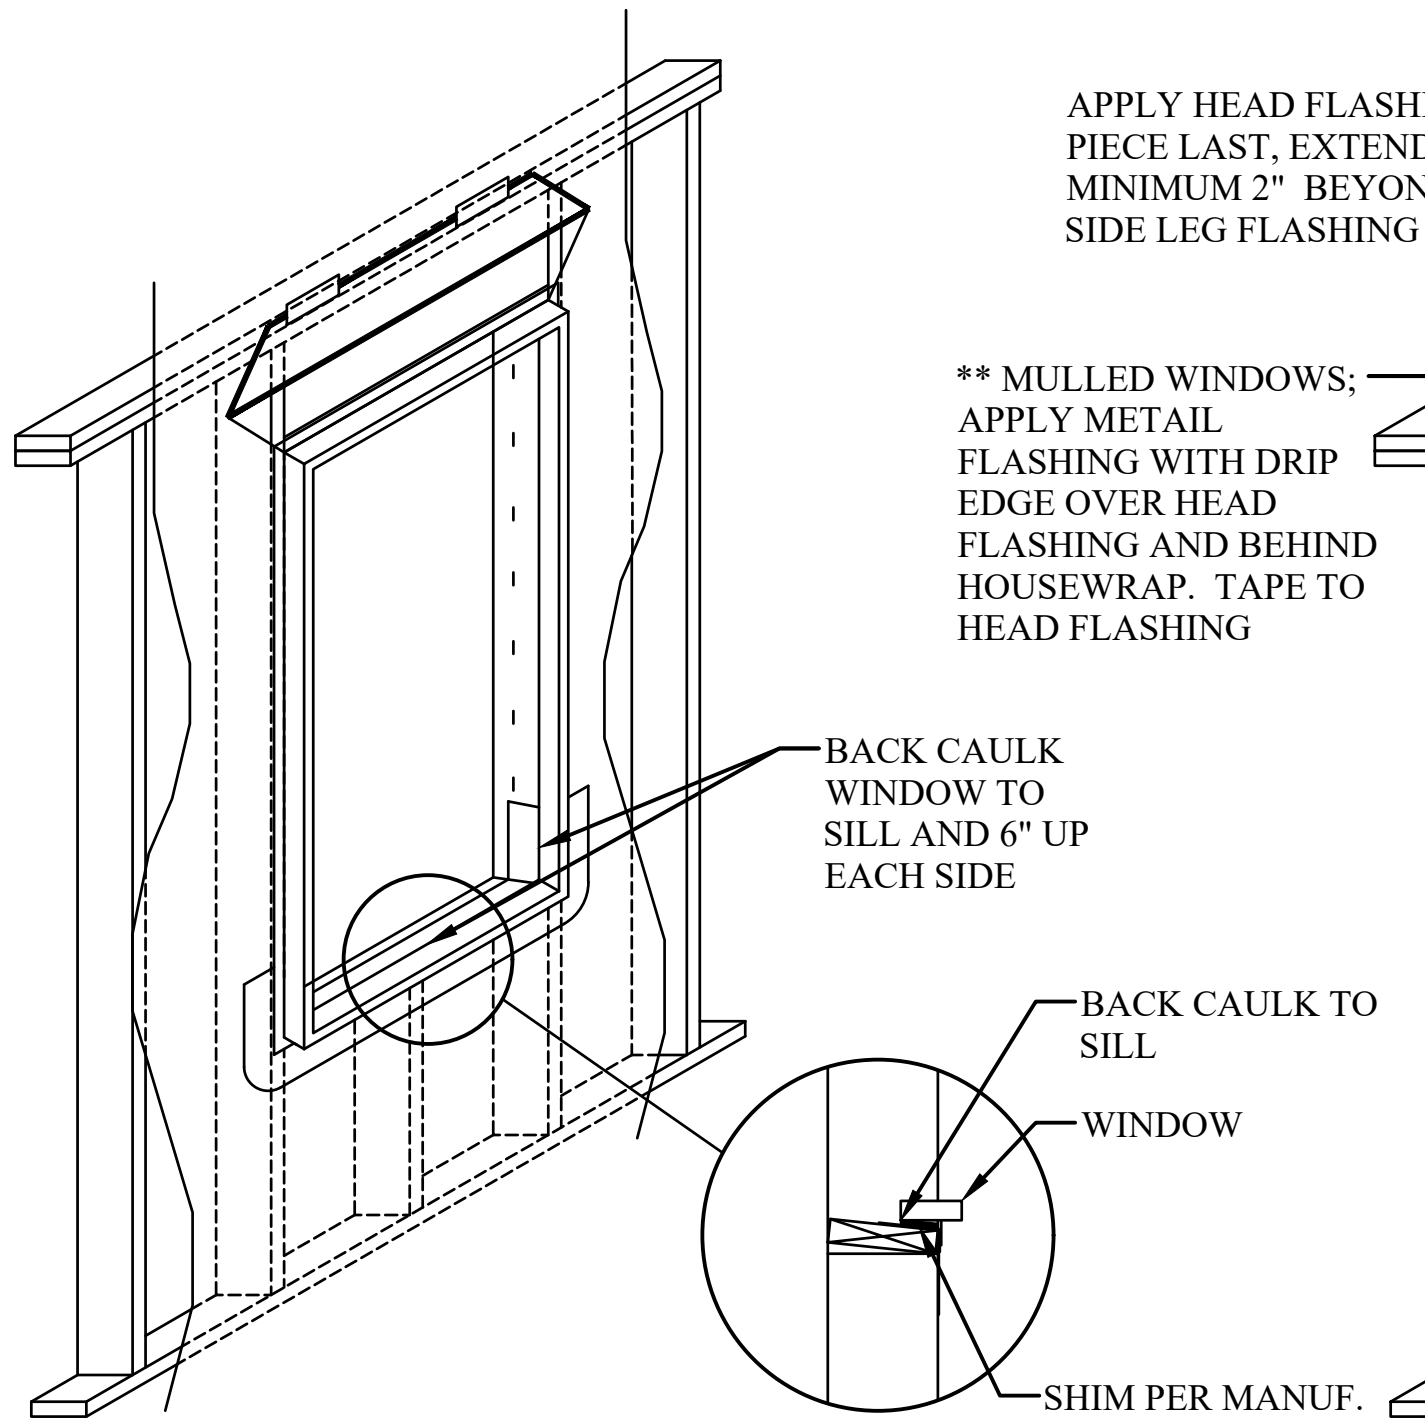


** WALL SHEATHING NOT SHOWN FOR CLARITY **

STEP 6
SET WINDOW, ENSURE WINDOW IS COMPLETELY SUPPORTED AT THE BOTTOM. USE SHIMS AS NEEDED PER MANUFACTURER RECOMMENDATIONS

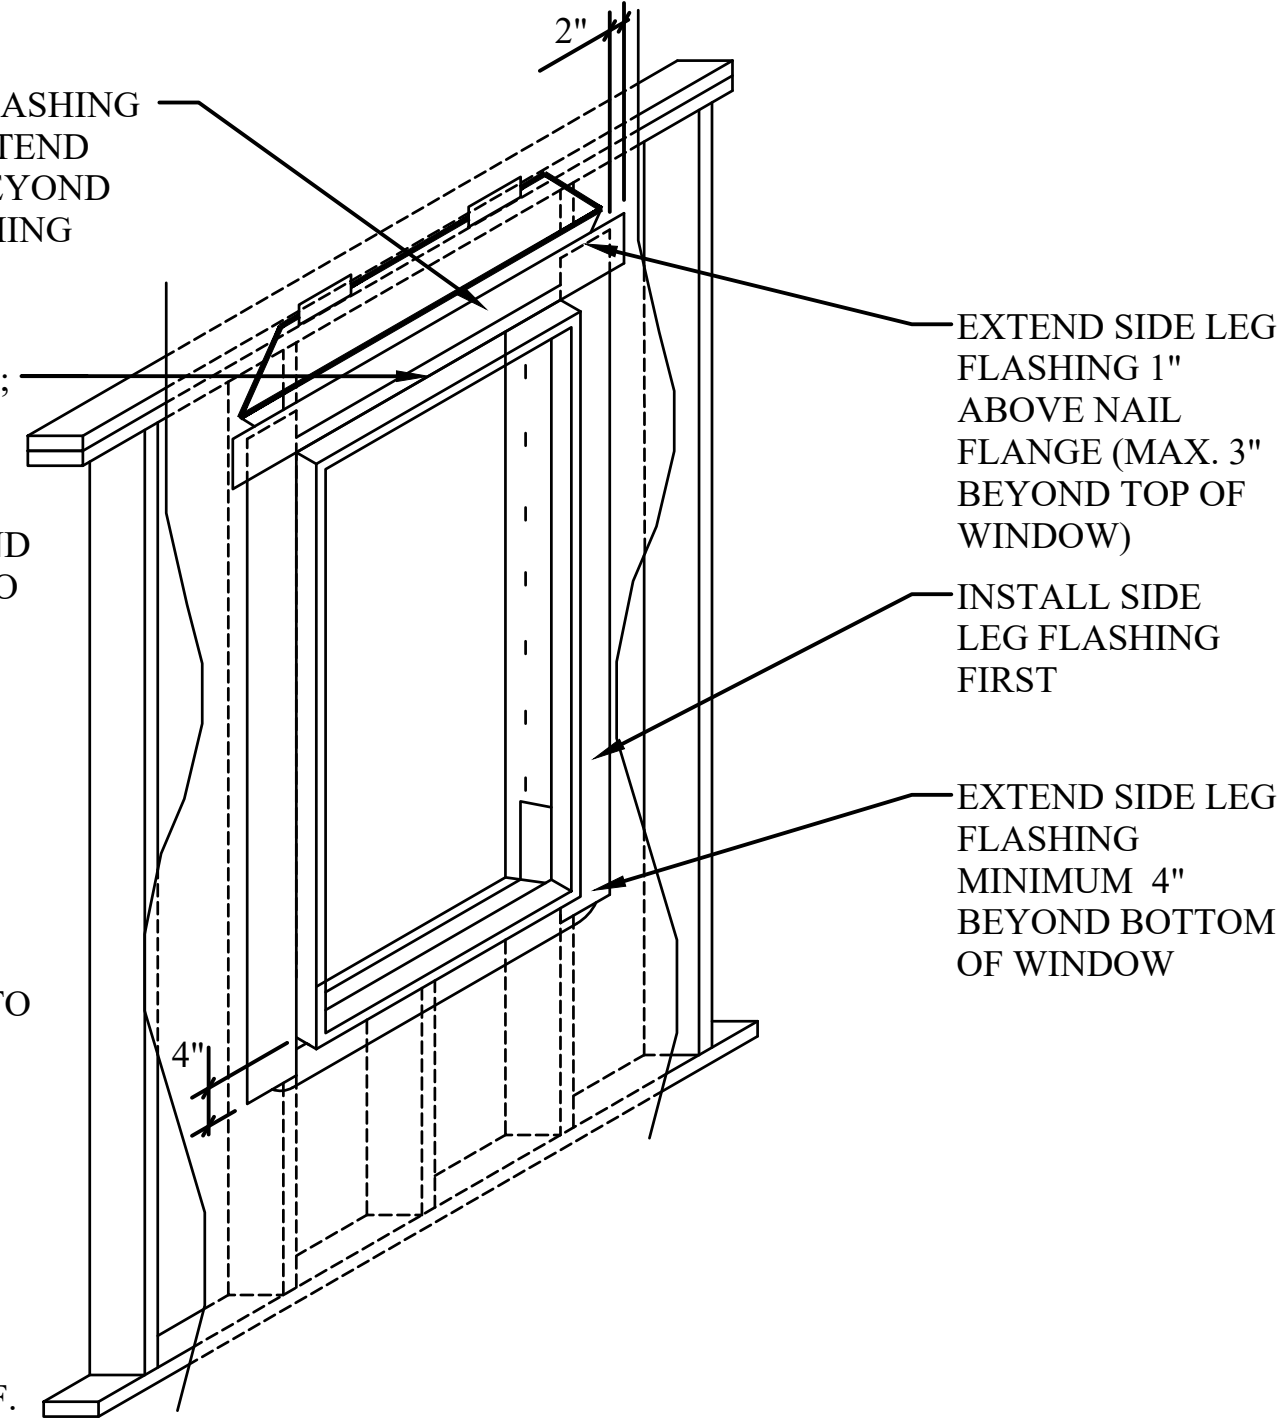

** WALL SHEATHING NOT SHOWN FOR CLARITY **

STEP 7
INSTALL SELF ADHESIVE FLASHING TO SIDES AND TOP OF WINDOW

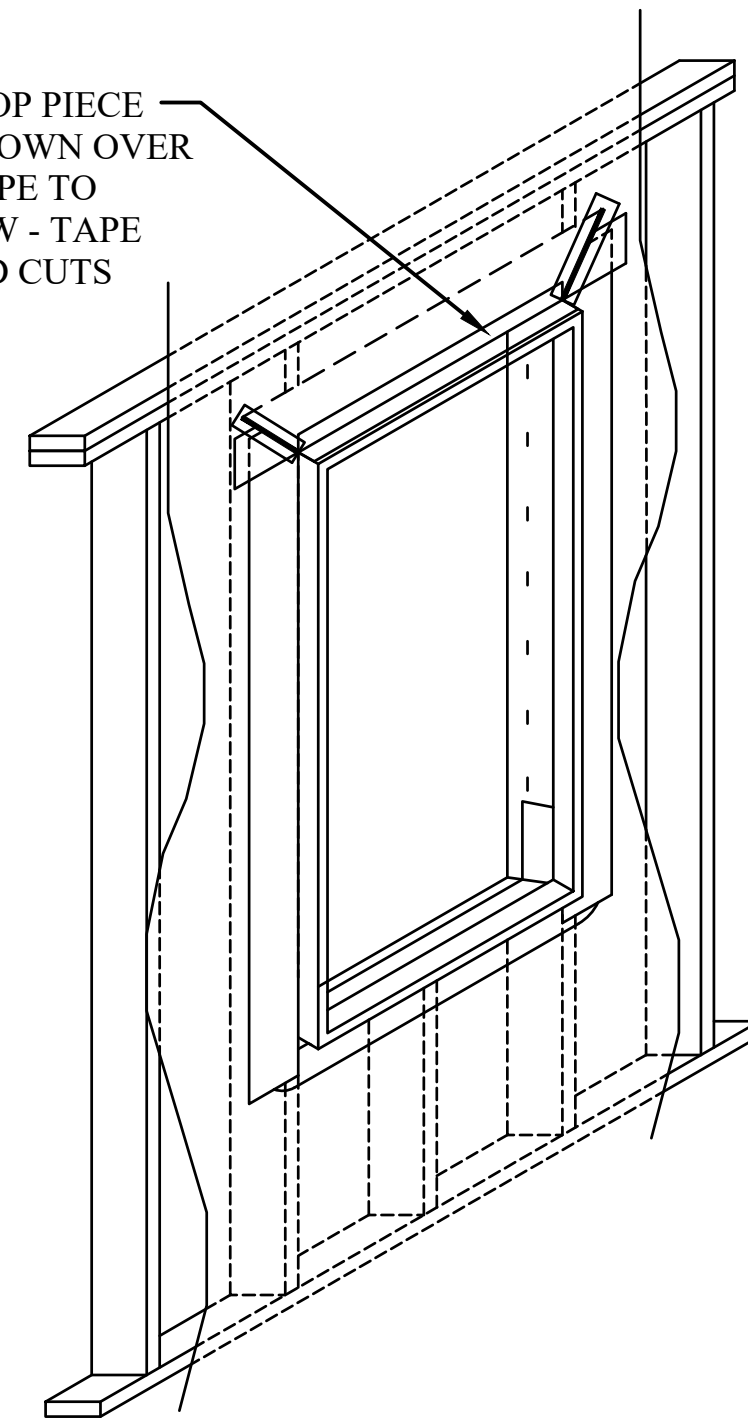

** WALL SHEATHING NOT SHOWN FOR CLARITY **

STEP 8
FOLD TOP PIECE OF HOUSEWRAP DOWN OVER TOP OF WINDOW
TAPE TO TOP OF WINDOW



ADAIR HOMES, INC
4400 NE 77TH AVE
SUITE 100
VANCOUVER, WA 98662

HODSON #1 - 2386

COMMUNITY CODE / LOT#:
MEME-129

PLAN ORIENTATION:
STANDARD


GARAGE CONFIGURATION:
NONE

DETAILS


2023 ORSC

SCALE: AS SHOWN
DATE: 08/26/2025
DRAFTED BY: ES
REV:

PAGE:
AD10

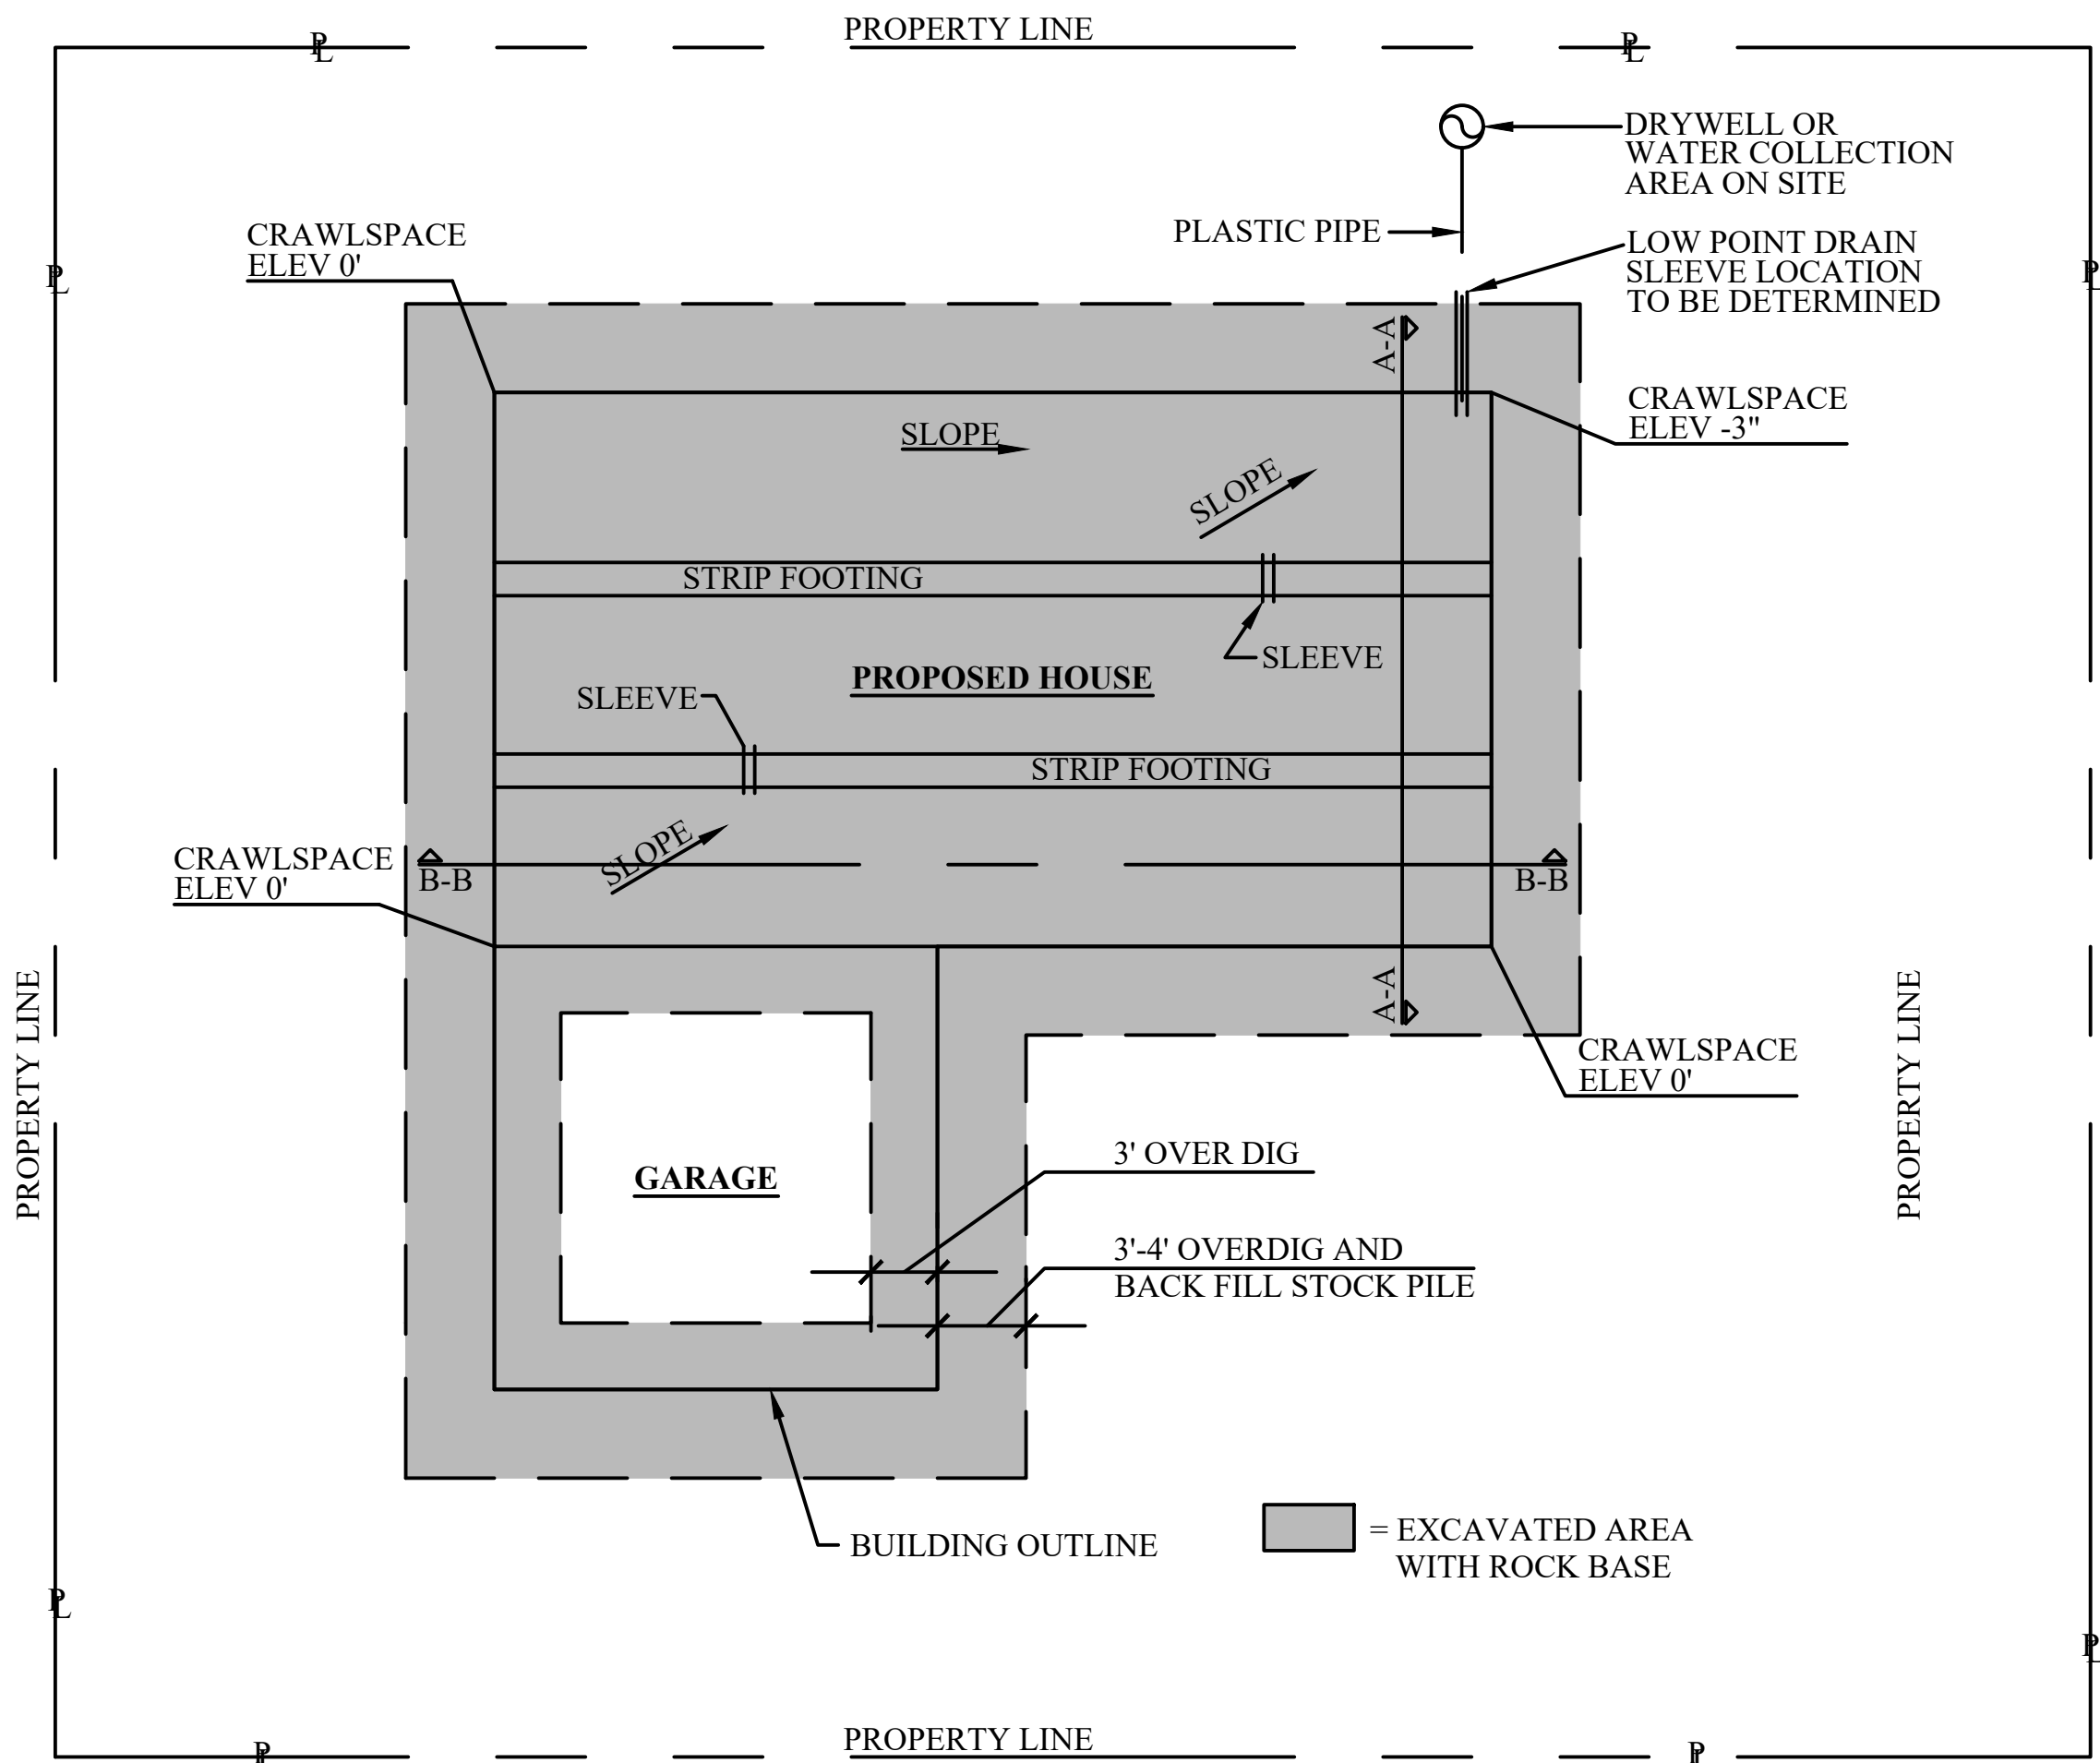


1 LOW POINT DRAIN EXAMPLE
NO SCALE

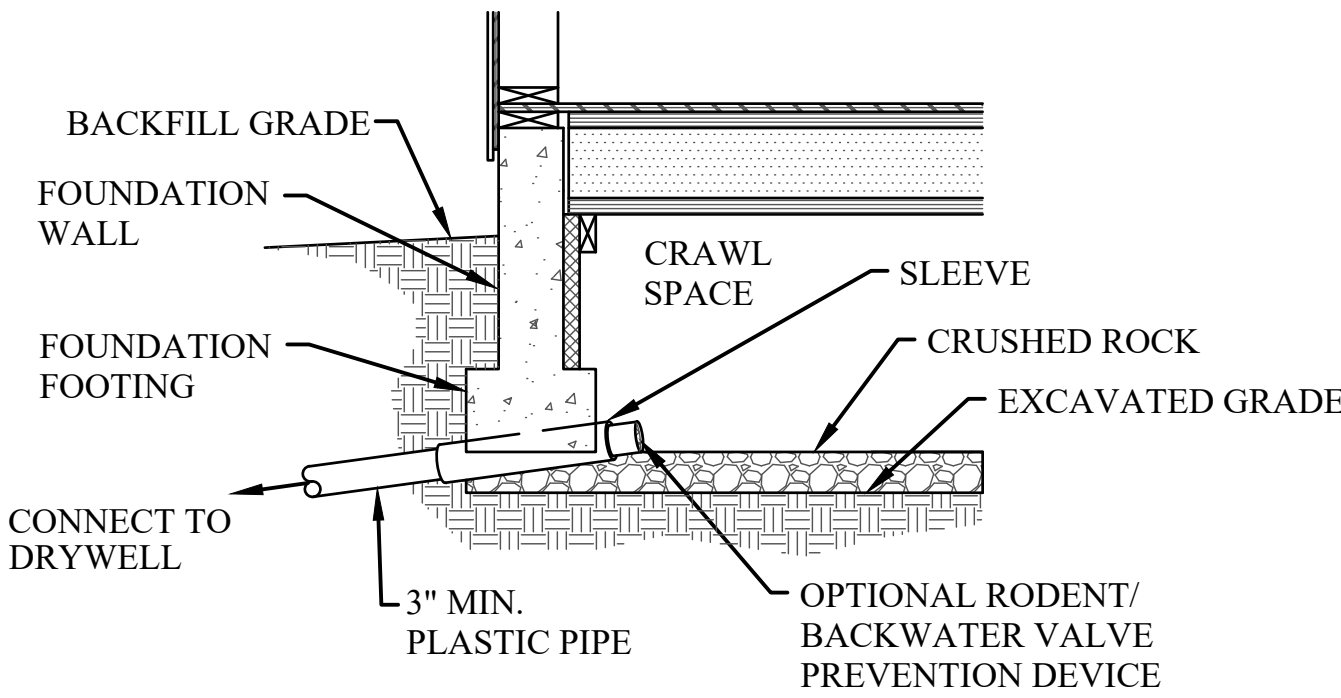


DRAIN UNDER FOOTING DETAIL

- NOTE:
1. DIRECTION OF SLOP MAY CHANGE DEPENDING ON LOT. LOW POINT DRAIN CAN BE LOCATED ANYWHERE ON EXTERIOR FOOTING
 2. LOW POINT DRAIN TO EXTEND MIN. 4' PAST FURTHEST POINT OF EXCAVATED OVER DIG TO DRYWELL.
 3. ENTIRE BUILDING FOOTPRINT SHALL BE CAPPED WITH 1-3" ROCK
 4. INCASE BUILDING IS TO HAVE INTERIOR FOOTINGS. SLEEVES SHALL BE PLACED INTERMEDIATELY TO ALLOW THE UNINTERRUPTED FLOW OF WATER ON THE WATER COLLECTION SITE

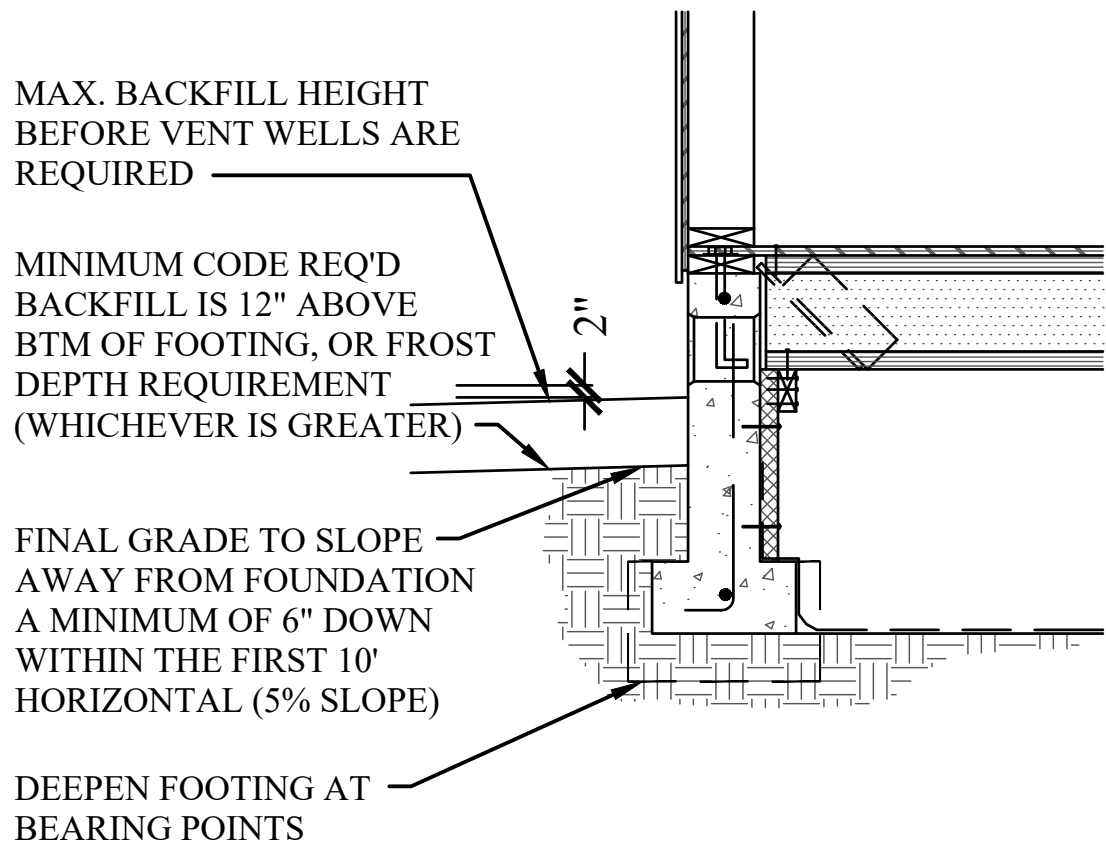



EXT. BACKFILL/GRADING REQUIREMENTS

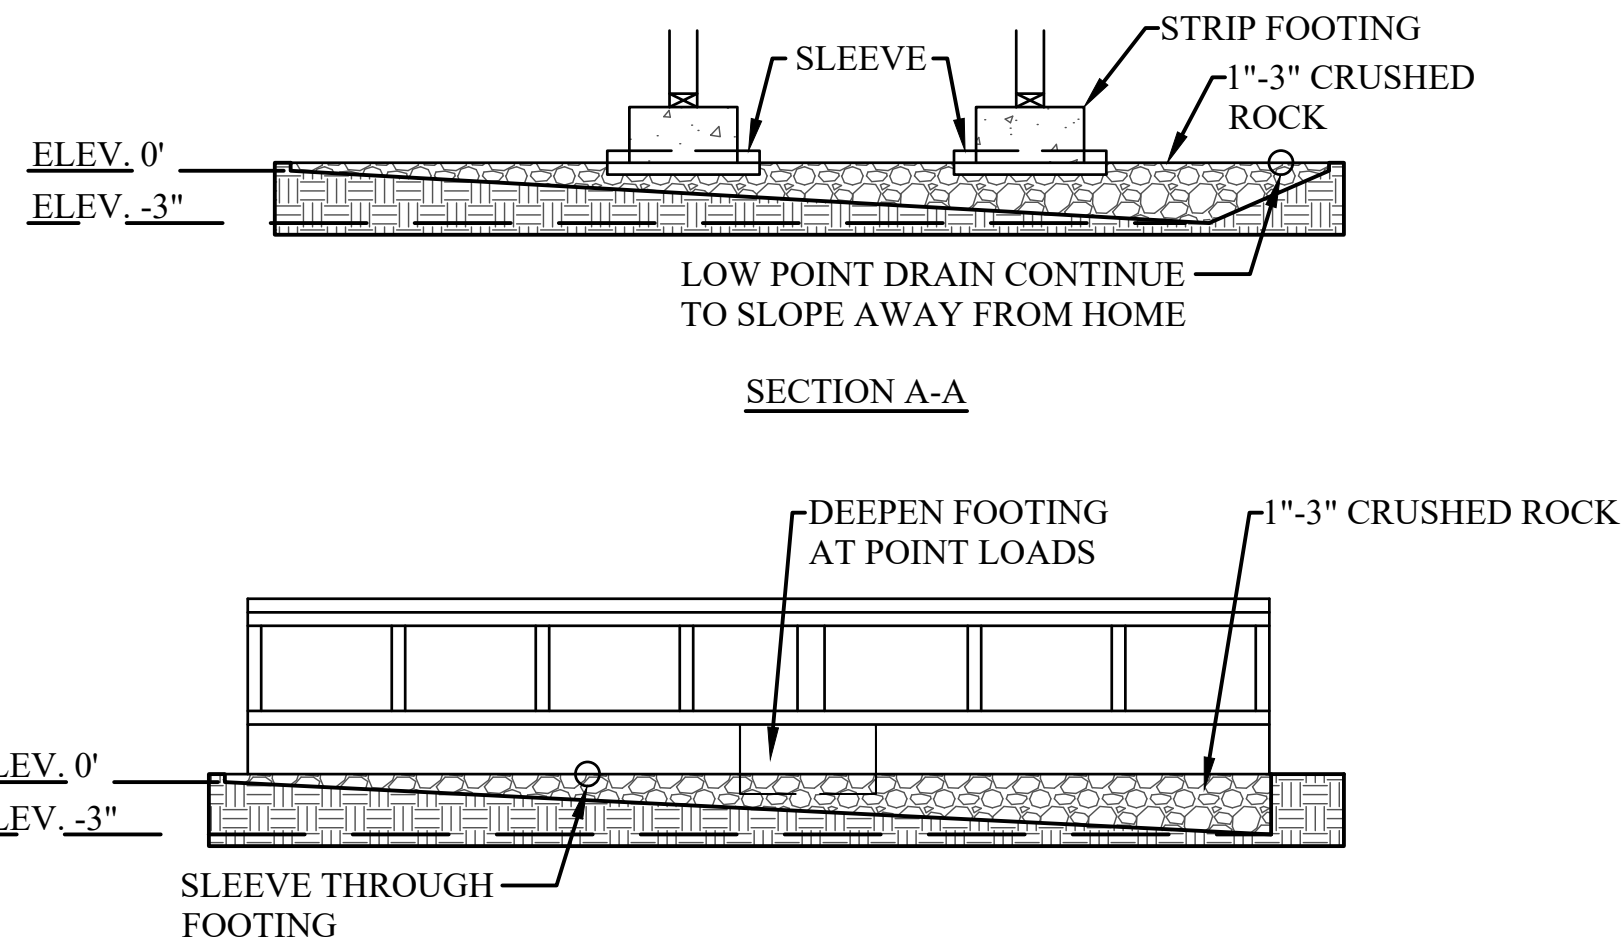

SECTION B-B

IMPORTANT:
OWNER SHOULD CONSULT WITH THEIR EXCAVATOR AND/OR OTHER EXPERTS TO DESIGN A DRAINAGE SYSTEM APPROPRIATE TO THEIR SITE AND PROJECT

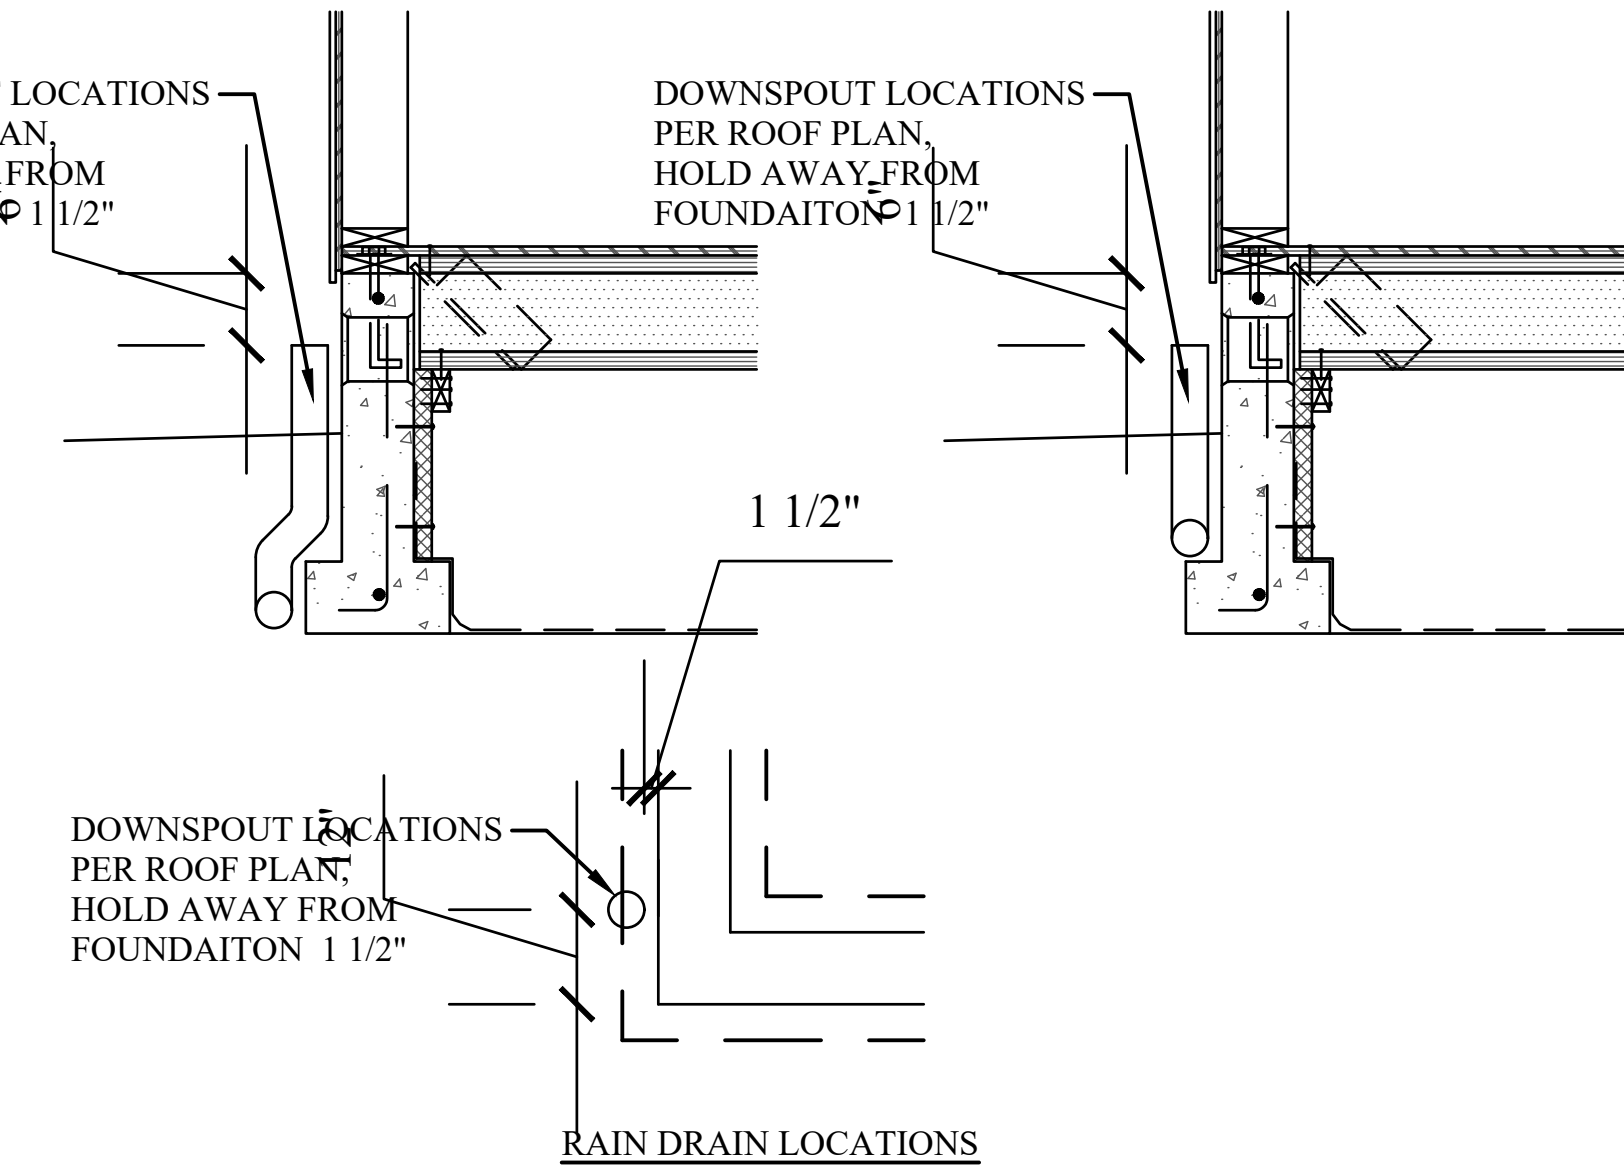

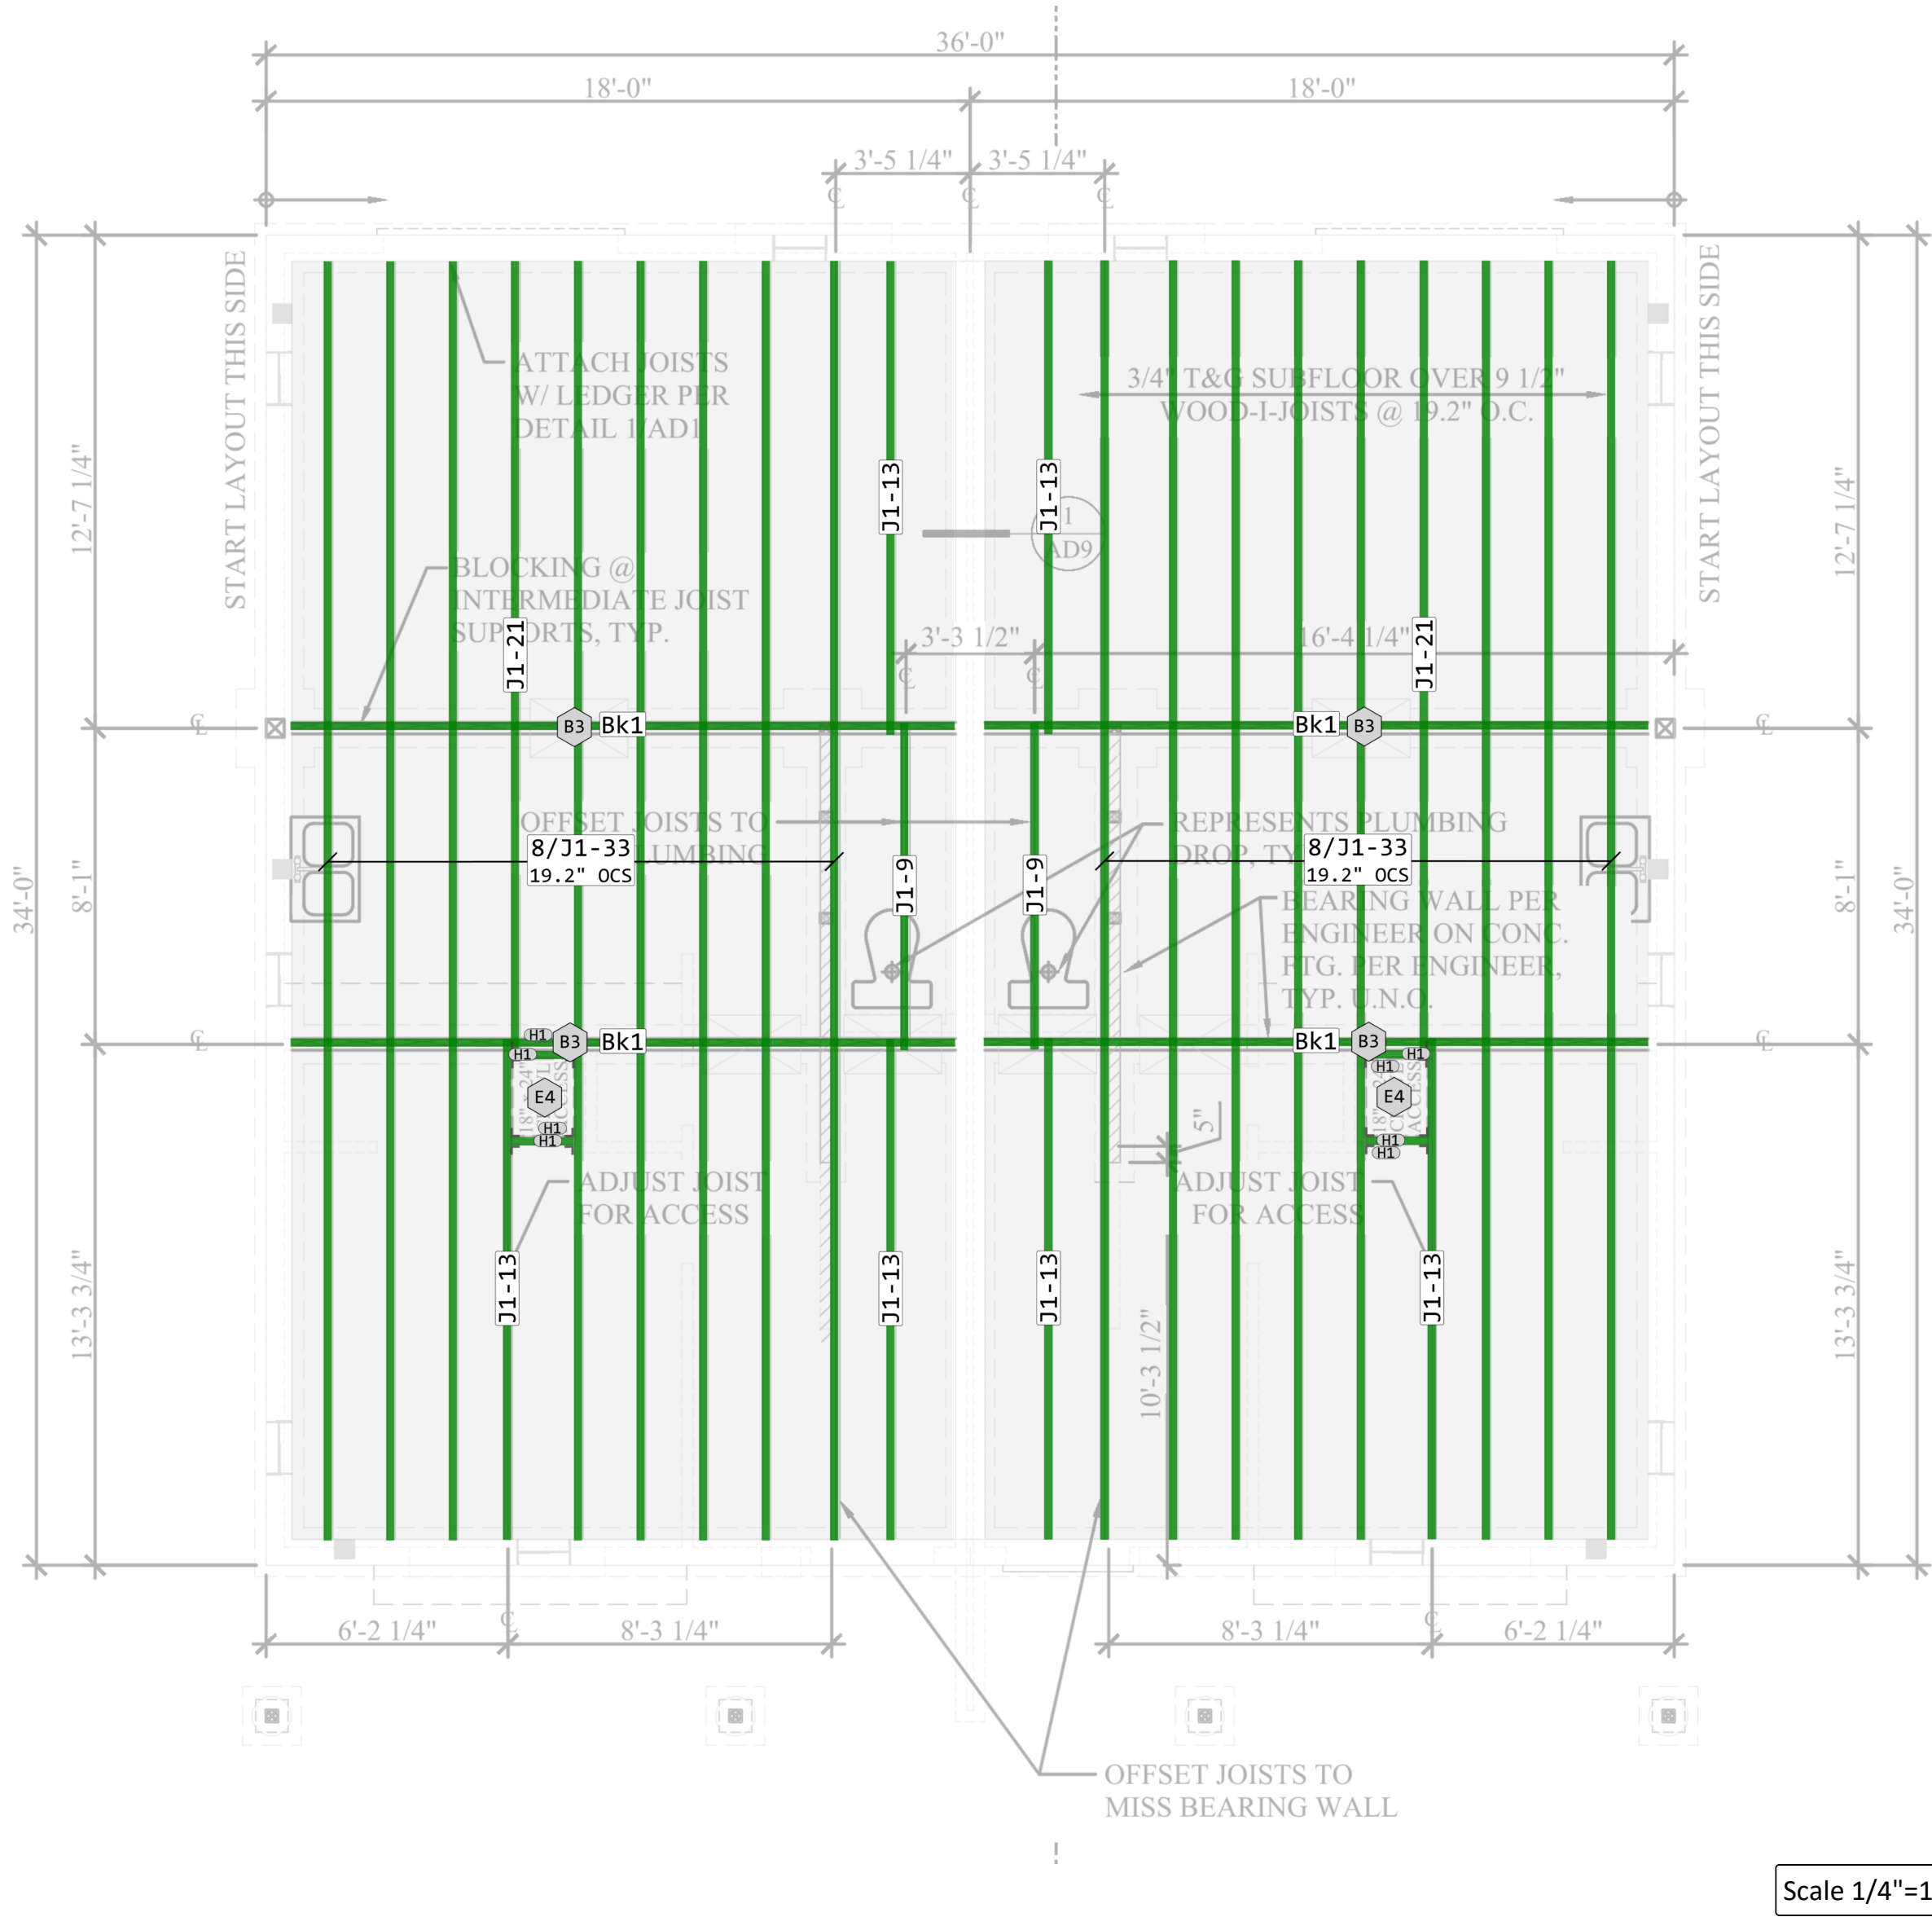

Scale 1/4"=1'0"


Tag	Qty	Product	Len
Floor Joist			
J1	16	2-1/2"x9-1/2" PWI 18S	33'
J1	2	2-1/2"x9-1/2" PWI 18S	21'
J1	6	2-1/2"x9-1/2" PWI 18S	13'
J1	2	2-1/2"x9-1/2" PWI 18S	9'
J1	4	2-1/2"x9-1/2" PWI 18S	2'
Floor Joist Blocking			
Bk1	68	2-1/2"x9-1/2" PWI 18S	R/L
Hanger			
H1	8	ITS2.56/9.5 Simpson Strong Tie	
Floor Decking			
	39	3/4"x4"x8" LP TopNotch 350 Series	

E4 I-JOIST HEADER CROSS-SECTION

NOTES:
Web Filler For Hanger: install fillers tight to bottom flange. Filler behind hanger to be installed tight to top flange for top-mount hangers (as shown) or tight to bottom flange for bottom-mount hangers. Provide web fillers both sides of a single I-joist header.
Filler block: install with 1/8" minimum gap at top. Use 4" long filler blocks at each support, concentrated loads, and at 8' oc maximum.
Attach filler blocks and web fillers with 2 rows of 8d nails at 8" o.c. from each side. Use 10d for I-joists that are wider than 3-1/2". Clinch when possible. See I-Joist Filler Schedule for filler sizes. Verify capacity and fastener requirements of hangers and connectors.

B3 BLOCKING AT INTERIOR SUPPORT

Blocking is not required if no wall above. Blocking may be required at interior supports by project designer or by code for seismic design.

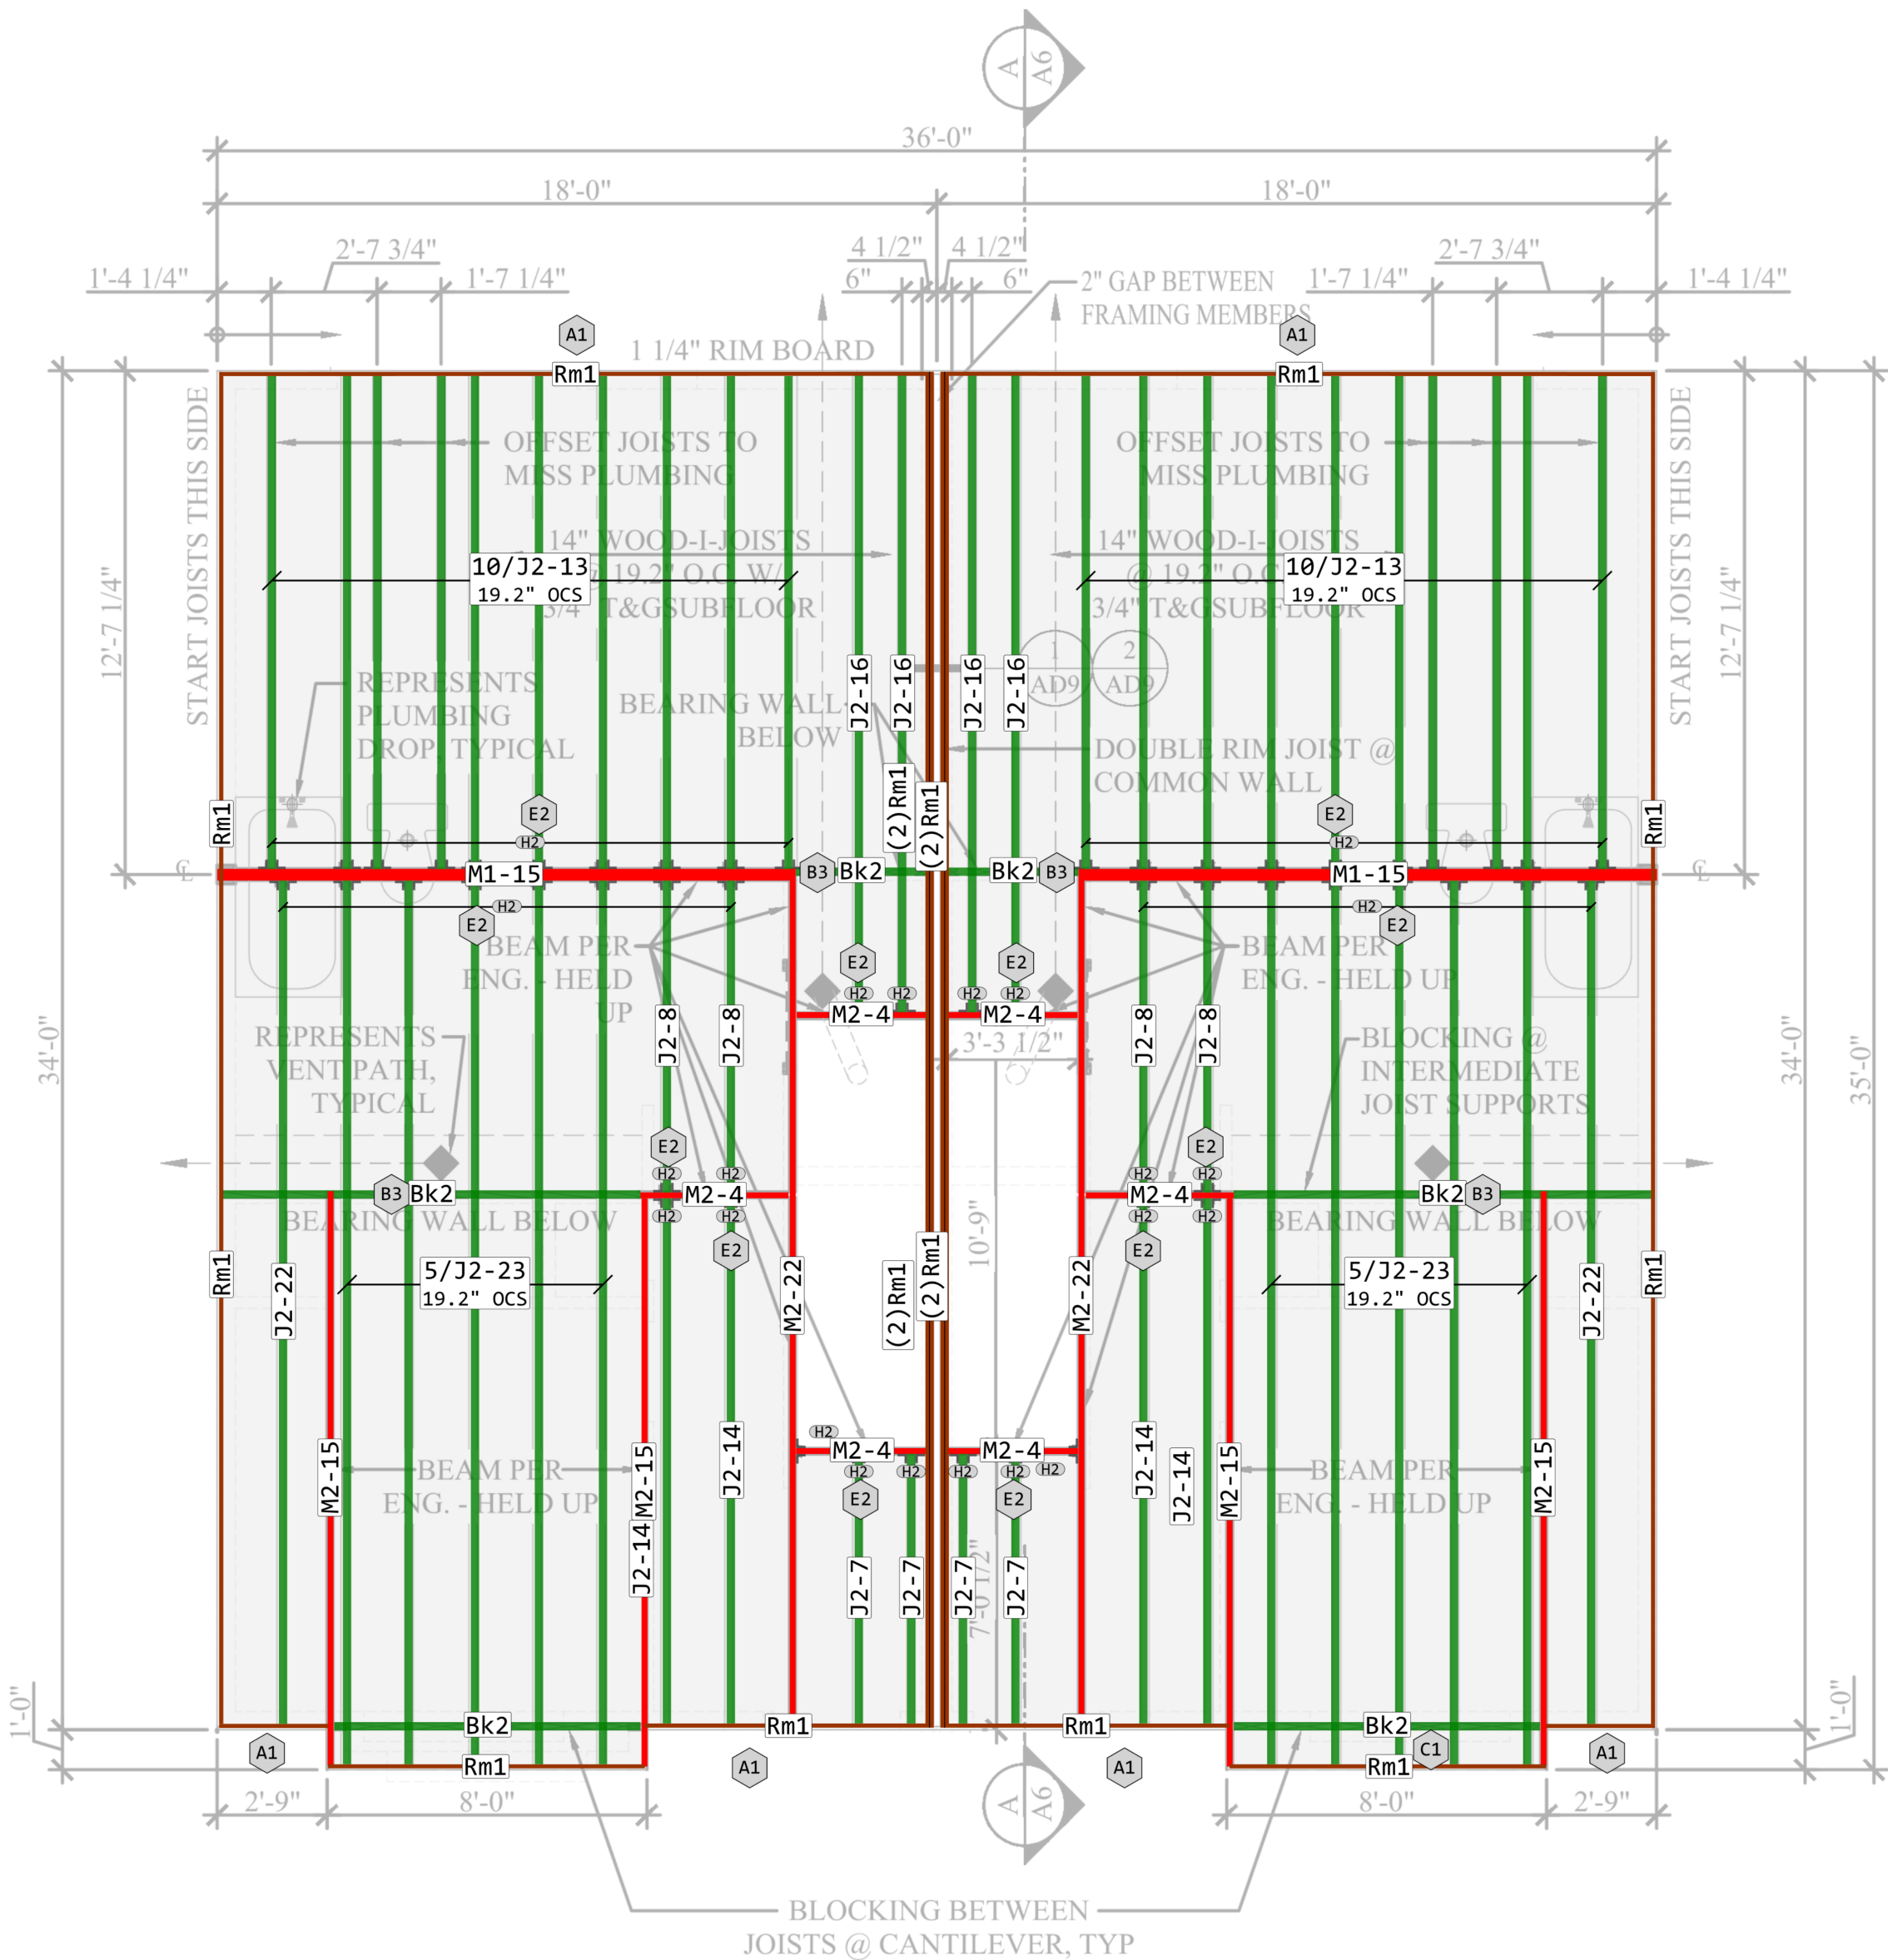

Scale 1/4"=1'-0"

Tag	Qty	Product	Len
Floor Joist			
J2	10	2-1/2"x14" PWI 20S	23'
J2	2	2-1/2"x14" PWI 20S	22'
J2	4	2-1/2"x14" PWI 20S	16'
J2	4	2-1/2"x14" PWI 20S	14'
J2	20	2-1/2"x14" PWI 20S	13'
J2	4	2-1/2"x14" PWI 20S	8'
J2	4	2-1/2"x14" PWI 20S	7'
Floor Joist Blocking			
Bk2	43	2-1/2"x14" PWI 20S	R/L
Beam			
M1	2	3-1/2"x14" PWT™ LVL	15'
M2	2	2-1-3/4"x14" PWT™ LVL	22'
M2	4	1-3/4"x14" PWT™ LVL	15'
M2	6	1-3/4"x14" PWT™ LVL	4'
Rim			
Rm1	283	1-1/4"x14" Tolko T-TEC LSL Rim Board	R/L
Hanger			
H2	54	IUS2.56/14 Simpson Strong Tie	
Floor Decking			
	40	3/4"x4"x8' LP TopNotch 350 Series	

E2

HANGER DETAIL

Verify capacity and fastening requirements of hangers and connectors

Verify web filler requirements for hangers

C1

CANTILEVER REINFORCEMENT

No reinforcement required

APA-rated 23/32" OSB (or equal) closure, or as required by code

LPI Blocking*

* LPI SolidStart Rim Board, LVL or LSL may be substituted for the LPI Blocking

B3

BLOCKING AT INTERIOR SUPPORT

Blocking is not required if no wall above unless I-joists end at support. Blocking may be required at interior supports by project designer or by code for seismic design.

Bearing wall aligned under wall above

A1

RIM BOARD

Fasten rim board to each floor I-joist using one 8d nail or 10d box nail per flange

Same depth as I-joist

10d box nails at 6" o.c. toe-nailed from outside of building.

1. DESIGN CRITERIA:

A. CRITERIA

1. DESIGNED USING 2022 OREGON STRUCTURAL SPECIALTY CODE (OSSC) & 2023 OREGON RESIDENTIAL SPECIALTY CODE (ORSC)
2. OCCUPANCY CATEGORY TYPE (OSSC TABLE 1604.5) = II

B. ROOF LOADS

1. ROOF SNOW/LIVE LOAD = 28 PSF
2. ROOF DEAD LOAD = 17 PSF
3. ROOF DEFLECTIONS TL = L/240
4. ROOF DEFLECTIONS LL = L/360

C. FLOOR LOADS

1. FLOOR LIVE LOAD - (OSSC TABLE 1607.1) = 40 PSF
2. FLOOR DEAD LOAD (UPPER FLOORS) = 10 PSF
3. FLOOR DEFLECTIONS TL = L/240
4. FLOOR DEFLECTION LL = L/480

D. SEISMIC LOADS

1. DESIGN SPECTRAL RESPONSE ACC. COEFF. AT SHORT PERIOD, SDS = 0.532 G
2. DESIGN SPECTRAL RESPONSE ACC. COEFF. AT 1-SEC PERIOD, SD1 = N/A
3. BUILDING SITE CLASS (OSSC TABLE 1613.5.2) = D
4. SEISMIC DESIGN CATEGORY (OSSC TABLE 1613.3.5(1 & 2)) = D1
5. SITE COEFFICIENT, FA (OSSC TABLE 1613.3.3(1)) = 1.00
6. SITE COEFFICIENT, FV (OSSC TABLE 1613.3.3(2)) = 1.00
7. SEISMIC IMPORTANCE FACTOR, IE = 1.00
8. SEISMIC COEFFICIENT FORCE FACTOR,CS = 0.098 (ASCE 07-10 12.8.1.1 GOVERNS)
9. RESPONSE MODIFICATION FACTOR, R = 6.5
10. BASIC SEISMIC-FORCE-RESISTING SYSTEM = BEARING WALL SYSTEM: LIGHT WEIGHT FRAMED WALL SHEARWALL w/ WOOD STRUCTURAL PANELS
11. ANALYSIS PROCEDURE USED = EQUIVALENT LATERAL FORCE PROCEDURE

E. WIND LOADS

1. WIND IMPORTANCE FACTOR, IW = 1.00
2. BASIC WIND SPEED (ULT.) = 120 MPH
3. WIND EXPOSURE = B

F. GEOTECHNICAL/SOILS CRITERIA

1. ALLOWABLE SOIL BEARING PRESSURE = 1,500 PSF
2. MINIMUM FROST DEPTH = 18 INCHES

2. FOUNDATION:

- A. ALL FOOTING AND FOUNDATION DESIGNS ARE BASED ON AN ALLOWABLE SOIL BEARING CAPACITY OF 1,500 PSF. IF THE SITE HAS A LOWER BEARING CAPACITY THAN LISTED, THE FOUNDATION PLAN WILL NEED TO BE REDESIGNED.
- B. A MINIMUM FROST DEPTH OF 18" FROM LOWEST ADJACENT FINISH GRADE TO BOTTOM OF FOOTING SHALL BE MAINTAINED FOR ALL EXTERIOR FOOTINGS, CONTRACTOR SHALL COORDINATE AND VERIFY.
- C. IT IS RECOMMENDED THAT ALL GRADING, EXCAVATION, PLACEMENT OF STRUCTURAL FILL AND INSTALLATION OF FOUNDATIONS BE PERFORMED UNDER THE INSPECTION AND TESTING OF A QUALIFIED GEOTECHNICAL CONSULTANT DURING THE CRITICAL STAGES OF CONSTRUCTION.
- D. ALL CONCRETE SLABS SHALL HAVE REINFORCING PER PLANS & CONTROL JOINTS @ 10'-0" O.C. SPACING MAX. AND SHALL BE FOUNDED ON MATERIALS COMPACTED TO 95% OF MAXIMUM DENSITY AS DETERMINED BY A STANDARD PROCTOR AT OPTIMUM MOISTURE AND PLACED IN 8" LIFTS.
- E. ALL STRUCTURAL FILL BELOW FOOTINGS SHALL EXTEND OUT PAST FOOTINGS AT A SLOPE OF 1 HORIZONTAL TO 2 VERTICAL TO COMPETENT SOILS.
- F. PROVIDE ADEQUATE DRAINAGE BEHIND ALL WALLS TO ALLEVIATE ANY STANDING WATER.
- G. MINIMUM CONCRETE SLAB THICKNESS IS 4"

3. CONCRETE:

- A. ALL CONCRETE CONSTRUCTION SHALL CONFORM TO REQUIREMENTS SET FORTH IN ACI-318, 'BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE', AND ACI-301, 'SPECIFICATIONS FOR STRUCTURAL CONCRETE FOR BUILDINGS'.
- B. THE MINIMUM COMPRESSIVE STRENGTH FOR CONCRETE AT 28 DAYS SHALL BE AS FOLLOWS:
- C. 1. ALL FOOTINGS, FOUNDATIONS AND STEM WALL = F'c - 3,000 PSI (2,500 PSI USED IN DESIGN, NO SPECIAL INSPECTION)
- D. 2. ALL FOOTINGS , FOUNDATIONS AND STEM WALLS = F'c - 4,500 PSI (FREEZE/THAW CONDITIONS).
- E. 3. SLABS ON GRADE = F'c - 3,500 PSI (2,500 PSI USED IN DESIGN, NO SPECIAL INSPECTION)
- F. CONCRETE MIX DESIGN SHALL NOT EXCEED A WATER/CEMENT RATIO OF 0.48. APPROVED ADMIXTURES MAY BE USED TO INCREASE THE WORKABILITY OF THE CONCRETE UPON WRITTEN APPROVAL OF THE OWNER.
- G. ALL CONCRETE MIXING SHALL MEET THE REQUIREMENTS SET FORTH IN ASTM C94. USE TYPE I/II CEMENT, ASTM 150. CONCRETE SHALL BE NORMAL WEIGHT WITH MAX. AGGREGATE OF ¾" AND CONFORMING TO ASTM C33.
- H. ALL EMBEDDED ANCHOR BOLTS SHALL BE A36 OR A307 STEEL W/ 7" MIN. EMBEDMENT. ANCHOR BOLTS TO BE WITHIN 1'-0" OF SILL PLATE ENDS, WITH A MIN. OF TWO PER WALL AND NO CLOSER THAN 6" FROM CONCRETE WALL CORNERS. REFER TO FOUNDATION PLAN FOR SPECIFIC ANCHOR BOLT PLAN.
- I. WET SETTING OF REINFORCING BARS IN FOOTINGS AND WALLS IS NOT ALLOWED.
- J. PROTECT ALL CONCRETE FROM DRYING AND PREMATURE CURING DURING EXTREME WEATHER CONDITIONS. IT IS NOT PERMITTED TO ADD ANY POTABLE WATER TO MIXTURE ON-SITE.
- K. BLOCK-OUT ALL STEM WALLS @ ENTRIES AS REQUIRED.
- L. CONCRETE FORM WORK TO BE OF ADEQUATE STRENGTH AND BRACED TO PREVENT DEFORMATION.
- M. PROTECT ALL CONCRETE FROM FREEZING.
- N. STAIN & TEXTURE OF EXPOSED CONCRETE SURFACES PER OWNER'S DIRECTION, IF APPLICABLE.

- A. ALL ARRANGEMENT AND DETAILING OF REINFORCING STEEL, INCLUDING BAR SUPPORTS AND SPACERS, SHALL BE IN ACCORDANCE WITH THE LATEST ACI 315 DETAILING MANUAL.
- B. ASTM A615, GRADE 40 (#3 REBAR OR SMALLER), ASTM A615, GRADE 60 (#4 REBAR OR LARGER), ASTM A185, GRADE 65 (WELDED WIRE FABRIC SHEETS), BARS TO BE WELDED SHALL BE ASTM A706, GRADE 60.
- C. DIMENSIONS OF REINFORCING ARE TO BAR CENTERLINES U.N.O. IN DRAWINGS.
- D. MINIMUM CLEAR PROTECTION FOR REINFORCEMENT SHALL BE AS FOLLOWS:

1. CONCRETE PLACED DIRECTLY AGAINST EARTH: = 3"

2. FORMED SURFACES AND EXPOSED TO EXTERIOR (#5 BARS OR SMALLER): = 2"

3. INTERIOR FACE OF WALLS: = 1 ½"
- E. MINIMUM REINFORCING LAP SPLICES/DEVELOPMENT LENGTHS (F'C = 2,500 PSI) IS 48 BAR DIAMTERS:
- F. STAGGER SPLICES IN WALLS SO THAT NO TWO ADJACENT BARS ARE SPLICED IN THE SAME LOCATION. REINFORCING SHALL BE CONTINUOUS THROUGH ALL COLD JOINTS.
- G. PROVIDE CORNER BARS w/ 18" LEGS AT CORNERS AND INTERSECTING WALLS AND FOOTINGS, SIZE AND PLACEMENT TO MATCH HORIZONTAL REINFORCEMENT.
- H. PROVIDE #4 HORIZONTALS AT TOP OF WALL, CONT. IN FOOTINGS, AND ABOVE ALL OPENINGS. PROVIDE #5 HORIZONTALS AT ALL INTERSECTING FLOORS AND ROOF LEVELS, BOTTOM OF ALL WINDOWS AND AT 2'-0" O.C. MAX.
- I. PROVIDE #4 VERTICALS AT 48" O.C. w/ STANDARD HOOK EXTENDING INTO FOOTING AT EACH SIDE OF WALL OPENING AND AT EACH END OF WALLS, U.N.O.
- J. ALL REINFORCEMENT SHALL BE COLD BENT, UNLESS OTHERWISE PERMITTED BY THE BUILDING OFFICIAL AND ENGINEER OF RECORD. REINFORCEMENT PARTIALLY EMBEDDED IN CONCRETE OR MASONRY SHALL NOT BE FIELD BENT, UNLESS PERMITTED BY THE BUILDING OFFICIAL AND ENGINEER OF RECORD.

5. WOOD FRAMING:

- A. ALL WOOD CONSTRUCTION SHALL CONFORM TO REQUIREMENTS SET FORTH IN NDS-08, "NATIONAL DESIGN SPECIFICATIONS FOR WOOD CONSTRUCTION", AND THE LATEST AF&PA, 'AMERICAN FOREST & PAPER ASSOCIATION REFERENCE STANDARDS.
- B. ALL STRUCTURAL LUMBER SHALL BE DOUGLAS FIR LARCH (DF/L) #2 OR BETTER, U.N.O. ALL INTERIOR NON-LOAD BEARING WALLS CAN BE DF/L STUD GRADE. ALL STRUCTURAL LUMBER SHALL BE MARKED AND GRADED BY AN APPROVED GRADING INSPECTION AGENCY.
- C. GLUE-LAMINATED BEAMS SHALL BE DOUGLAS FIR COMBINATION 24F-V4 FOR SIMPLE SUPPORTED AND 24F-V8 FOR CANTILEVERED BEAMS AND MULTI-SPAN CONDITIONS, U.N.O. MEMBERS SHALL BE MANUFACTURED USING WATERPROOF ADHESIVES AND SHALL BE MANUFACTURED IN ACCORDANCE WITH ANSI/AITC A190, 1-2002 OR APPROVED EQUIVALENT. ANY HOLES AND/OR NOTCHES IN THE BEAMS SHALL BE IN ACCORDANCE WITH THE STANDARDS OF THE AMERICAN INSTITUTE OF TIMBER CONSTRUCTION (AITC). BEAMS SHALL BE ARCHITECTURAL APPEARANCE GRADE U.N.O. AND SHALL HAVE THE FOLLOWING MIN. SECTION PROPERTIES: FB = 2400 PSI, FV = 165 PSI, E = 1,800,000 PSI. PROVIDE WET USE GLUE ON ALL EXTERIOR LOCATIONS.
- D. ALL STRUCTURAL WOOD FRAMING AND CONNECTIONS SHALL MEET THE REQUIREMENTS PROVIDED IN THE INTERNATIONAL BUILDING CODE, CHAPTER 23, TABLE 2304.9.1, TYPICAL.
- E. PNEUMATIC NAILING SHALL BE PLAIN SHANK, COATED OR GALVANIZED:

1. 8D = 0.131" DIA. x 2 ½" MIN. LENGTH

2. 10D = 0.148" DIA. x 3" MIN. LENGTH

3. 16D = 0.135" DIA. x 3 ½" MIN. LENGTH
- F. HAND NAILING SHALL BE SINKERS, COATED:

1. 8D = 11 ½ GA. x 2 3/8"

2. 10D = 11 GA. x 2 7/8"

3. 16D = 9 GA. x 3 ¼"
- G. ALL METAL HANGERS AND CONNECTIONS ARE NOTED AS 'SIMPSON STRONG-TIE' AND SHALL BE INSTALLED PER MANUFACTURER'S RECOMMENDATIONS, U.N.O. AN APPROVED EQUIVALENT MAY BE USED INSTEAD WITH PRIOR APPROVAL FROM THE STRUCTURAL EOR.
- H. ALL LAMINATED STRAND LUMBER SHALL BE LOUISIANA PACIFIC LSL AND SHALL HAVE THE FOLLOWING MINIMUM SECTION PROPERTIES: FB = 2,500 PSI, FV = 410 PSI, E = 1, 750,000 PSI.
- I. PACIFIC LVL AND SHALL HAVE THE FOLLOWING MINIMUM
- J. ALL PLATES AND WOOD INSTALLED WITHIN 1" OF CONCRETE OR MASONRY SHALL BE PRESSURE TREATED HEM FIR (HF) OR HAVE SUFFICIENT WEATHER RESISTANT PROPERTIES.
- K. PROVIDE WET USE ADHESIVES.
- L. MAXIMUM SAWN LUMBER MOISTURE CONTENTS SHALL BE 19%.
- M. ALL FRAMING DETAILS SHALL BE IN ACCORDANCE WITH THE ADOPTED CODE.
- N. PROVIDE SOLID BLOCKING BELOW ALL BEARING WALLS AND POSTS. PROVIDE BLOCKING @ 24" O.C. @ JOISTS PARALLEL WITH BEARING WALLS ABOVE.
- O. MINIMUM HEADER AT BEARING WALL TO BE 2x10 DF#2 w/ 1-2x TRIMMER AND 1-2x KING STUD, U.N.O. HEADERS WITH LARGER LOADING WILL BE CALLED OUT IN PLANS.
- P. BLOCK AND NAIL ALL HORIZONTAL PANEL EDGES AT SHEAR WALLS.
- Q. ALL EXTERIOR WALLS TO BE 2x6 DF#2@ 16" O.C. AND AT INTERIOR NON-LOAD BEARING PARTITIONS TO BE 2x4 @ 16" O.C. STUD WALLS (U.N.O.)
- R. PROVIDE STEEL STRAPS AT PIPES IN STUD WALLS AS REQUIRED BY THE ADOPTED CODE.
- S. OVER-FRAMING SHALL BE DONE SUCH THAT VERTICAL LOADS ARE TRANSFERRED TO MAIN STRUCTURE BELOW BY DIRECT BEARING AT SPACING NOT TO EXCEED 24" O.C.
- T. ENGINEERED "I" JOISTS TO BE DESIGNED, CERTIFIED, ERECTED, INSTALLED, AND BRACED PER MANUFACTURER'S SPECS. USE THESE PRODUCTS OR AN EQUIVALENT APPROVED MANUFACTURER.
- U. ALL WINDOW SIZES IN EXTERIOR WOOD WALLS ARE NOMINAL; VERIFY ACTUAL OPENINGS WITH WINDOW MANUFACTURERS, RE. ARCH.
- V. ALL ROOF OPENINGS GREATER THAN 24"x24" SHALL BE FRAMED IN OPENINGS.
- W. ALL FASTENERS IN PRESSURE TREATED WOOD MUST MEET THE REQUIREMENTS OF IBC 2304.9.5.



HODSON 2 DUPLEX

411 TALENT AVE, TALENT, OR 97540

2386
AH25-044

GENERAL
STRUCTURAL NOTES

S0

SHEET INDEX	
SHEET NUMBER	SHEET NAME
S0	GENERAL STRUCTURAL NOTES
S0.1	GENERAL STRUCTURAL NOTES
S1	FOUNDATION PLAN
S1.1	2nd FLOOR/LOW ROOF FRAMING PLAN
S1.2	ROOF FRAMING PLAN
S2	STRUCTURAL DETAILS
S2.1	STRUCTURAL DETAILS

6. PLYWOOD SHEATHING:

- A. ALL PLYWOOD SHEATHING AT BUILDING SHALL BE APA RATED EXPOSURE 1 AND THICKNESS SHOWN ON DRAWINGS w/ SPAN INDEX 48/24 AND SHALL BE APA CD EXPOSURE 1 GRADE AT FLOORS. ALL PLYWOOD ROOF PANELS SHALL BE BONDED w/ INTERMEDIATE OR EXTERIOR GLUE w/ MIN SPAN RATING INDICATED. ORIENTED STRAND BOARD (OSB) CAN BE SUBSTITUTED FOR PLYWOOD.
- B. ROOF SHEATHING SHALL HAVE THE FOLLOWING MINIMUM FASTENING:
8d NAILS AT 6" O.C. AT PANEL EDGES AND AT 12" O.C. AT INTERMEDIATE SUPPORTS.
- C. TONGUE AND GROOVE FLOOR SHEATHING SHALL BE GLUED AND HAVE THE FOLLOWING MINIMUM FASTENING:
10d NAILS AT 6" O.C. AT PANEL EDGES AND AT 10" O.C. AT INTERMEDIATE SUPPORTS.
- D. ROOF AND FLOOR SHEATHING SHALL BE PLACED PERPENDICULAR TO FRAMING WITH STAGGERED END JOINTS
PROVIDE 1/4" SPACE AT ALL PANEL EDGES FOR EXPANSION, AT ALL ROOF AND WALLS.
- E. EXT. WALL SHEATHING: 7/16" CDX MIN. (24/0) SPAN RATING w/ 8d NAILS @ 6" O.C. EDGE, 12" O.C. FIELD U.N.O. ALL SPAN RATINGS TO MEET LOCAL CODES ORIENTED STRAND BOARD (OSB) WITH THE SAME SPAN RATING MAY BE SUBSTITUTED. SHEATHING MAY BE PERPENDICULAR OR PARALLEL TO FRAMING.
- F. SHEAR WALL SHEATHING SHALL CONSIST OF 7/16" MINIMUM APA RATED SHEATHING WITH A SPAN RATING OF 24/0, WITH FASTENER SIZE AND SPACING AS SHOWN ON PLANS. SEE SHEAR WALL SCHEDULE FOR ALL ADDITIONAL REQUIREMENTS. SHEATHING MAY BE PERPENDICULAR OR PARALLEL TO FRAMING.

7. GENERAL NOTES:

- A. ALL ELEVATIONS AND HEIGHTS GIVEN ARE FROM THE FINISHED FLOOR DATUM ELEVATION, WHICH IS SET AT 0'-0".
- B. DO NOT SCALE DRAWINGS, CONTACT DESIGNER OR EOR FOR DIMENSION CLARIFICATIONS PRIOR TO CONSTRUCTION.
- C. VERIFY ALL OPENINGS, BUILDING DIMENSIONS, COLUMN GRID LOCATIONS AND DIMENSIONS WITH OWNER PRIOR TO POURING OF ANY CONCRETE FOUNDATIONS OR CONSTRUCTION.
- D. THE ENGINEER OF RECORD IS NOT RESPONSIBLE FOR ANY DEVIATIONS FROM THESE PLANS UNLESS SUCH CHANGES ARE AUTHORIZED IN WRITING TO THE STRUCTURAL ENGINEER OF RECORD.
- E. THE CONTRACTOR IS RESPONSIBLE FOR PROVIDING SAFE AND ADEQUATE SHORING AND/OR TEMPORARY STRUCTURAL STABILITY FOR ALL PARTS OF THE STRUCTURE DURING CONSTRUCTION. THE STRUCTURE SHOWN ON THE DRAWINGS HAS BEEN DESIGNED FOR FINAL CONFIGURATION.
- F. NOTCHING AND/OR CUTTING OF ANY STRUCTURAL MEMBER IN THE FIELD IS PROHIBITED, UNLESS PRIOR CONSENT IS GIVEN BY THE STRUCTURAL ENGINEER OF RECORD.
- G. IT IS NECESSARY THAT THE STRUCTURAL DRAWINGS BE USED IN CONJUNCTION WITH THE ARCHITECTURAL DRAWINGS TO HAVE A COMPLETE SCOPE OF WORK INVOLVED IN THIS PROJECT.

8. DEFERRED SUBMITTALS:

- A. DEFERRED SUBMITTALS ITEMS PER OSSC 106.3.4.2 SHALL BE SUBMITTED TO THE ENGINEER OF RECORD FOR REVIEW AND APPROVAL. ALL DEFERRED SUBMITTALS SHALL BE STAMPED AND SIGNED BY A PROFESSIONAL ENGINEER REGISTERED IN THE STATE OF OREGON (SPECIALTY ENGINEER) AND SHALL BE THE SOLE RESPONSIBILITY OF THE SPECIALTY ENGINEER INCLUDING, BUT NOT LIMITED TO, DESIGN, COORDINATION, CONNECTIONS, DIMENSIONS, AND INTENDED PURPOSE. DEFERRED SUBMITTAL ITEMS SHALL INCLUDE A QUALITY ASSURANCE PLAN AS REQUIRED BY CHAPTER 17 OF THE OSSC. REVIEW BY THE ENGINEER OF RECORD SHALL BE FOR GENERAL CONFORMANCE TO THE DESIGN LOADING CRITERIA SET FORTH ON THE CONTRACT DRAWINGS AND SPECIFICATIONS. THE DEFERRED SUBMITTALS ITEMS SHALL NOT BE FABRICATED OR INSTALLED UNTIL THE DESIGN AND SUBMITTAL DOCUMENTS HAVE BEEN REVIEWED BY THE ENGINEER OF RECORD AND APPROVED BY THE BUILDING OFFICIAL.
- B. FOR REVIEW BY THE ENGINEER OF RECORD
1. DEFERRED SUBMITTAL/SHOP DRAWINGS LIST:
- a. PRE-MANUFACTURED ROOF TRUSS LAYOUTS AND ENGINEERING.

GENERAL PLAN NOTES

GENERAL NOTES:

A.

THE DIMENSIONS SHOWN HERE APPLY TO STRUCTURAL ELEMENTS ONLY, SEE ARCHITECTURAL PLANS FOR ANY DIMENSIONS NOT SHOWN. DUE TO ROUNDED DIMENSIONS PRECISION THERE MAY BE CONFLICTS WITH SOME DIMENSION STRINGS ON PLANS. COORDINATE ALL DIMENSIONS WITH ARCH AND CIVIL DRAWINGS AS NEEDED.

B.

CONTRACTOR SHALL FIELD VERIFY EXISTING STRUCTURAL CONDITIONS. IF ANY DISCREPANCY OCCURS BETWEEN EXISTING CONDITIONS AND PROPOSED ALTERATIONS, CONTRACTOR SHALL CONTACT ARCHITECT AND STRUCTURAL ENGINEER BEFORE PERFORMING ALTERATION WORK.

SYMBOL LEGEND:

1

S0.0

SECTION REFERENCE

CONCRETE

1

S0.0

ELEVATION REFERENCE

EARTH

1

S0.0

GENERAL VIEW REFERENCE

FOOTING

1

S0.0

REVISION CLOUD AND NUMBER

SHEARWALLS

1

S0.0

KEY NOTE

AREA OF OVERBUILD FRAMING

1

S0.0

SHEARWALL TAG

AREA OF MECHANICAL WELL

ABBREVIATIONS			
(E)	EXISTING	HVAC	HEATING VENTILATING AND AIR CONDITIONING
(F)	FUTURE	I.D.	INSIDE DIAMETER
(N)	NEW	IN.	INCH
(R)	RENOVATE	INSUL.	INSULATION
Ø	CENTERLINE	INT.	INTERIOR
∅	DIAMETER OR ROUND	IT.	JOINT
⊥	PERPENDICULAR	K.O.	KNOCKOUT
□	SQUARE	L.F.	LINEAL FEET OR FOOT
#	NUMBER OR POUND	L.L.V.	LONG LEG VERTICAL
@	AT	L.L.H.	LONG LEG HORIZONTAL
A.B.	ANCHOR BOLT	LSL	LAMINATED STRAND LUMBER
A.F.F.	ABOVE FINISH FLOOR	LAM.	LAMINATE
ABV.	ABOVE	LVL	LAMINATED VENEER LUMBER
ADJ.	ADJUSTABLE	LBS.	POUNDS
AGG.	AGGREGATE	M.B.	MACHINE BOLT
ALT.	ALTERNATIVE	M.O.	MASONRY OPENING
ALUM.	ALUMINUM	MAX.	MAXIMUM
APPROX.	APPROXIMATE	MECH.	MECHANICAL
ARCH.	ARCHITECTURAL	MET.	METAL
B.O.	BOTTOM OF	MFR.	MANUFACTURER
B.O.C.	BOTTOM OF CONCRETE	MIN.	MINIMUM
B/T	BETWEEN	MISC.	MISCELLANEOUS
B.N.	BOUNDARY NAIL(ING)	MT'D	MOUNTED
B.U.	BUILT-UP	MTRL	MATERIAL
BD.	BOARD	N	NORTH
BLDG.	BUILDING	N.T.S.	NOT TO SCALE
BLK.	BLOCK	NO.	NUMBER
BM.	BEAM	NOM.	NOMINAL
BOT.	BOTTOM	O/H	OVERHEAD
C.C.	CENTER TO CENTER	O/	OVER
C.I.	CAST IRON	O.A.	OVER ALL
C.I.P.	CAST IN PLACE	O.C.	ON CENTER
CMU	CONCRETE MASONRY UNIT	O.D.	OUTSIDE DIAMETER
C.O.	CONCRETE OPENING OR CLEAN-OUT	OPNG.	OPENING
CLG.	CEILING	OPP.	OPPOSITE
CLR.	CLEAR	OZ.	OUNCE
CNTRSK.	COUNTERSUNK	PART.	PARTICLE
COL.	COLUMN	P/L	PROPERTY LINE
CONC.	CONCRETE	PL	PLATE
CONT.	CONTINUOUS	PLYWD.	PLYWOOD
CORR.	CORRIDOR	PRE-ENG.	PRE-ENGINEERED
CW/	COORDINATE WITH	PT.	POINT
D.B.A.	DEFORMED BAR ANCHOR	P.S.L.	PARALLEL STRAND LUMBER
D.F.	DOUGLAS FIR	R.	RADIUS OR RISER
DET.	DETAIL	R.D.	ROOF DRAIN
DIA.	DIAMETER	R.O.	ROUGH OPENING
DIAG.	DIAGONAL	RE:	REFERENCE (CW/)
DIM.	DIMENSION	REINF.	REINFORCE(D)
DN.	DOWN	REQ'D.	REQUIRED
DWG.	DRAWING	RM.	ROOM
E.B	EXPANSION BOLT	S.F.	SQUARE FEET OR FOOT
E.B.E.	ECCENTRICALLY BRACED FRAME	S.S.	STAINLESS STEEL
E.J.	EXPANSION JOINT	SCHED.	SCHEDULE
E.N.	EDGE NAIL(ING)	SECT.	SECTION
EA.	EACH	SHT.	SHEET
EL.	ELEVATION	SIM.	SIMILAR OR SIMILAR TO
ELEC.	ELECTRICAL	SPECS.	SPECIFICATIONS
ELEV.	ELEVATOR	SQ.	SQUARE
EOR	ENGINEER OF RECORD	STD.	STANDARD
EQ.	EQUAL	STRUC.	STRUCTURAL
EQUIP.	EQUIPMENT	SUSP.	SUSPENDED
EXP.	EXPANSION	SYM.	SYMMETRICAL
EXT.	EXTERIOR	T&G	TONGUE & GROOVE
F.B.	FLAT BAR	T.O.B.	TOP OF BEAM
F.D.	FLOOR DRAIN	T.O.C.	TOP OF CURB/CONCRETE
F.O.	FACE OF	T.O.D.	TOP OF DECK
F.O.C.	FACE OF CURB/CONCRETE	T.O.M.	TOP OF MASONRY
F.O.F.	FACE OF FINISH	T.O.S.	TOP OF SLAB
F.O.M.	FACE OF MASONRY	T.O.W.	TOP OF WALL
F.O.S.	FACE OF STUDS	THK.	THICKNESS
F.O.T.	FACE OF TREAD	TJI	TRUSS JOIST I-JOIST
FDN.	FOUNDATION	TYP.	TYPICAL
FIN.	FINISH	U.B.C.	UNIFORM BUILDING CODE
FL.	FLOOR(ING)	U.N.O.	UNLESS NOTED OTHERWISE
FLASH.	FLASHING	V.I.F.	VERIFY IN FIELD
FT.	FOOT OR FEET	VERT.	VERTICAL
FTG.	FOOTING	W/	WITH
FTW.	FIRE TREATED WOOD	W/O	WITHOUT
FURR.	FURRING	WD.	WOOD
GA.	GAUGE OR GAGE	W.	WIDE
GALV.	GALVANIZED	W.W.F.	WELDED WIRE FABRIC
GSN	GENERAL STRUCTURAL NOTES		
GYP.	GYPSUM		
H.C.A.	HEADED CONCRETE ANCHOR		
H.S.S.	HOLLOW STRUCTURAL STEEL		
HORIZ.	HORIZONTAL		
HT.	HEIGHT		

MICHAEL K. BROWN, S.E.

REGISTERED PROFESSIONAL STRUCTURAL ENGINEER

5346 E.BRANCHWOOD DR., BOISE, ID 83716

(208)850-7542 mike.brown@core-engineering.net



HODSON 2 DUPLEX

411 TALENT AVE, TALENT, OR 97540

2386
AH25-044

GENERAL
STRUCTURAL NOTES

S0.1


MARK NUMBER	HOLDOWN	Boundary Studs	Tension of DF Allowable Lbs	Tension of HF Allowable Lbs	Anchor Mono Pour	Anchor Two Pour
1	HDU2-SDS2.5 OR PHD2-SDS3	(2)2x	3075	2215	SB ⅝ X 24	SSTB24
2	HDU4-SDS2.5 OR PHD5-SDS3	(2)2x	4545	3270	SB ⅝ X 24	SSTB24
3	HDU8-SDS2.5	(3)2x	7870	5665	SSTB28L	7/8" DIA. 324" MIN EMBED INTO CONC. A36 THREADED ROD w/ HEAVY SQ. NUT AND BP7/8-2 BEARING PLATE WASHER @ BOT.
4	HDU11-SDS2.5	(1)6x	9535	6865	1" DIA. 442" A36 THREADED ROD w/ HEAVY SQ. NUT AND WASHER @ BOT.	1" DIA. 442" A36 THREADED ROD w/ HEAVY SQ. NUT AND WASHER @ BOT.
8	HHOQ14-SDS2.5	(1)6x	13710	10745	PROVIDE 24" EMBED INTO CON. FTG.	PROVIDE 24" EMBED INTO CON. FTG.
5	MSTC28	(2)2x	3000	2590	N/A	N/A
6	MSTC40	(2)2x	4335	3745	N/A	N/A
7	MSTC66	(2)2x	5660	5660	N/A	N/A

LEGEND

Diagram illustrating the assembly of a vertical post and bracket system. The components shown include:

- END POST PER SCHEDULE
- HOLDOWN PER PLAN & SCHEDULE
- I-JOIST OR 2x FLOOR JOISTS
- COUPLER AS REQD
- SCHEDULE REF.
- TO BE HUNG WALL
- TO BE HUNG WALL
- TO BE HUNG WALL

SCALE: N.T.S.

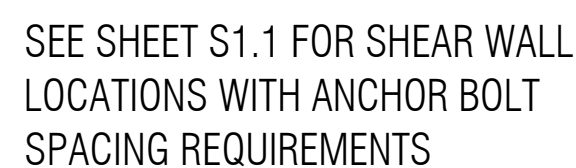

09/09/25

EXPIRATION DATE: 12-31-2025

2386
AH24-044

FOUNDATION PLAN

S1

FOUNDATION PLAN

$$1/4'' = 1'-0''$$

HOLDOWN SCHEDULE

MARK NUMBER	HOLDOWN	Boundary Studs	Tension of DF Allowable Lbs	Tension of HF Allowable Lbs	Anchor Mono Pour	Anchor Two Pour
1	HDU2-SDS2.5 OR PHD2-SDS3	(2)2x	3075	2215	SB 5/8" X 24	SSTB24
2	HDU4-SDS2.5 OR PHD5-SDS3	(2)2x	4545	3270	SB 5/8" X 24	SSTB24
3	HDU8-SDS2.5	(3)2x	7870	5665	SSTB28L	
						7/8" DIA. X 24" MIN. EMBED INTO CONC. A36 THREADED ROD w/ HEAVY SQ. NUT AND B7/8-Z BEARING PLATE WASHER @ BOT.
4	HDU11-SDS2.5	(1)6x	9535	6865	1" DIA. X 42" A36 THREADED ROD w/ HEAVY SQ. NUT AND WASHER @ BOT. PROVIDE 24" EMBED INTO CONT. FTG.	1" DIA. X 42" A36 THREADED ROD w/ HEAVY SQ. NUT AND WASHER @ BOT. PROVIDE 24" EMBED INTO CONT. FTG.
8	HHQ14-SDS2.5	(1)6x	13710	10745		
5	MSTC28	(2)2x	3000	2590	N/A	N/A
6	MSTC40	(2)2x	4335	3745	N/A	N/A
7	MSTC66	(2)2x	5660	5660	N/A	N/A

Notes:


1. Install all holdowns per manufacturee specificaiton per latest Simpson Strong Tie catalog.

2. Match studs on schedule for walls below on all wall to wall holdowns.

3. (Multiple)2x studs nailed together with (2) rows of 16d @ 3" o.c. staggered.

4. Refer to shearwall schedule and typical shearwall details for wall locations and configurations.

5. Refer to Simpson catalog for minimum embed of anchors into concrete.

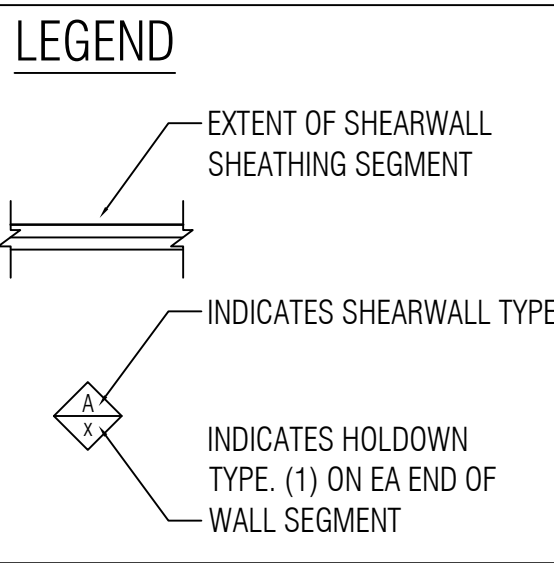

SHEARWALL SCHEDULE

(a-m)

MARK NUMBER	REF NOTES: (a.i)	Note: (b)	EDGE NAILING	FIELD NAILING	SILL TO CONCRETE	SILL TO WOOD	SHEAR TRNSFER	Lbs
	SHEATHING	NAIL SIZE	SPACING	SPACING	CONNECTION. Note: (c)	CONNECTION. Note (g)	CLIPS (h)	CAPACITY
A	1/16" OSB (1) SIDE	8d	6"	12"	5/8" Dia. A.B. @ 48" o/c	16d @ 6" o/c	LS50 @ 18" o/c	280
B	1/16" OSB (1) SIDE (f)	8d	4"	12"	5/8" Dia. A.B. @ 24" o/c	16d @ 4" o/c	LS50 @ 10" o/c	520
C	1/16" OSB (1) SIDE (e,f)	8d	3"	12"	5/8" Dia. A.B. @ 18" o/c(m)	16d @ 3" o/c	LS50 @ 7" o/c	720
D	1/16" OSB (1) SIDE (e,f)	8d	2"	12"	5/8" Dia. A.B. @ 16" o/c(m)	16d @ 2" o/c	A35 @ 8" o/c	936
E	1/16" OSB (2) SIDE (d,e,f)	8d	6"	12"	5/8" Dia. A.B. @ 18" o/c(m)	16d @ 3" o/c	A35 @ 10" o/c	768
F	1/16" OSB (2) SIDE (d,e,f)	8d	4" Staggered	12"	5/8" Dia. A.B. @ 12" o/c(m)	16d @ 2" o/c	A35 @ 7" o/c	1120
G	1/16" OSB (2) SIDE (d,e,f)	8d	3" Staggered	12"	5/8" Dia. A.B. @ 10" o/c(m)	16d @ 3" o/c(2)rows staggered	A35 @ 5" o/c	1440
H	1/16" OSB (2) SIDE (d,e,f)	8d	2" Staggered	12"	5/8" Dia. A.B. @ 8" o/c (m)	16d @ 2" o/c(2)rows staggered	HGA10KT @ 7" o/c	1872

Notes:

a) Wood structural panels shall conform to the requireents for its type in DOC PS 1 or PS 2. All wall construction to conform to AF&PA SDPWS per IBC 2306.3.

b) Use Common Wire Nails for all wood sheathing and cooler nails for gypboard sheathing.

c) A.B. minimum 7" embed into concrete. 3"x3"x1/4" plate washers req'd at all shear wall A.B. Locate edge of Washer no greater than 3/8" from sheathed edge of sill plate.

d) Panel joints shall be offset to fall on different framing members or framing shall be 3x or thicker and nails on each side shall be staggered.

e) 3x or Db1 2x framing at all panel edges and nails shall be staggered.

f) All edges blocked.

g) Common Wire Nails.


h) Clip to be attached from continuous blocking to top of continuous top plates. Clips are not required at Gyp Bd walls but blocking is attached per the toenailing schedule.

i) See attached typical shearwall details.

j) Sheathing to be Structural I Sheathing.

k) Values are for framing of H-F.

m) See plan for walls where seismic design shear is greater than 560 plf. 3x or 2x flat blk/g at panel edges, Stagger nails. Where indicated on the plans 3x sills are required with A.B. spacing as per plan and schedule. See note C for plate washers req'd at A.B. For walls with the larger sills, Anchor Bolt spacing may be increased by a factor of 1.25 from the table above due to thicker sills.

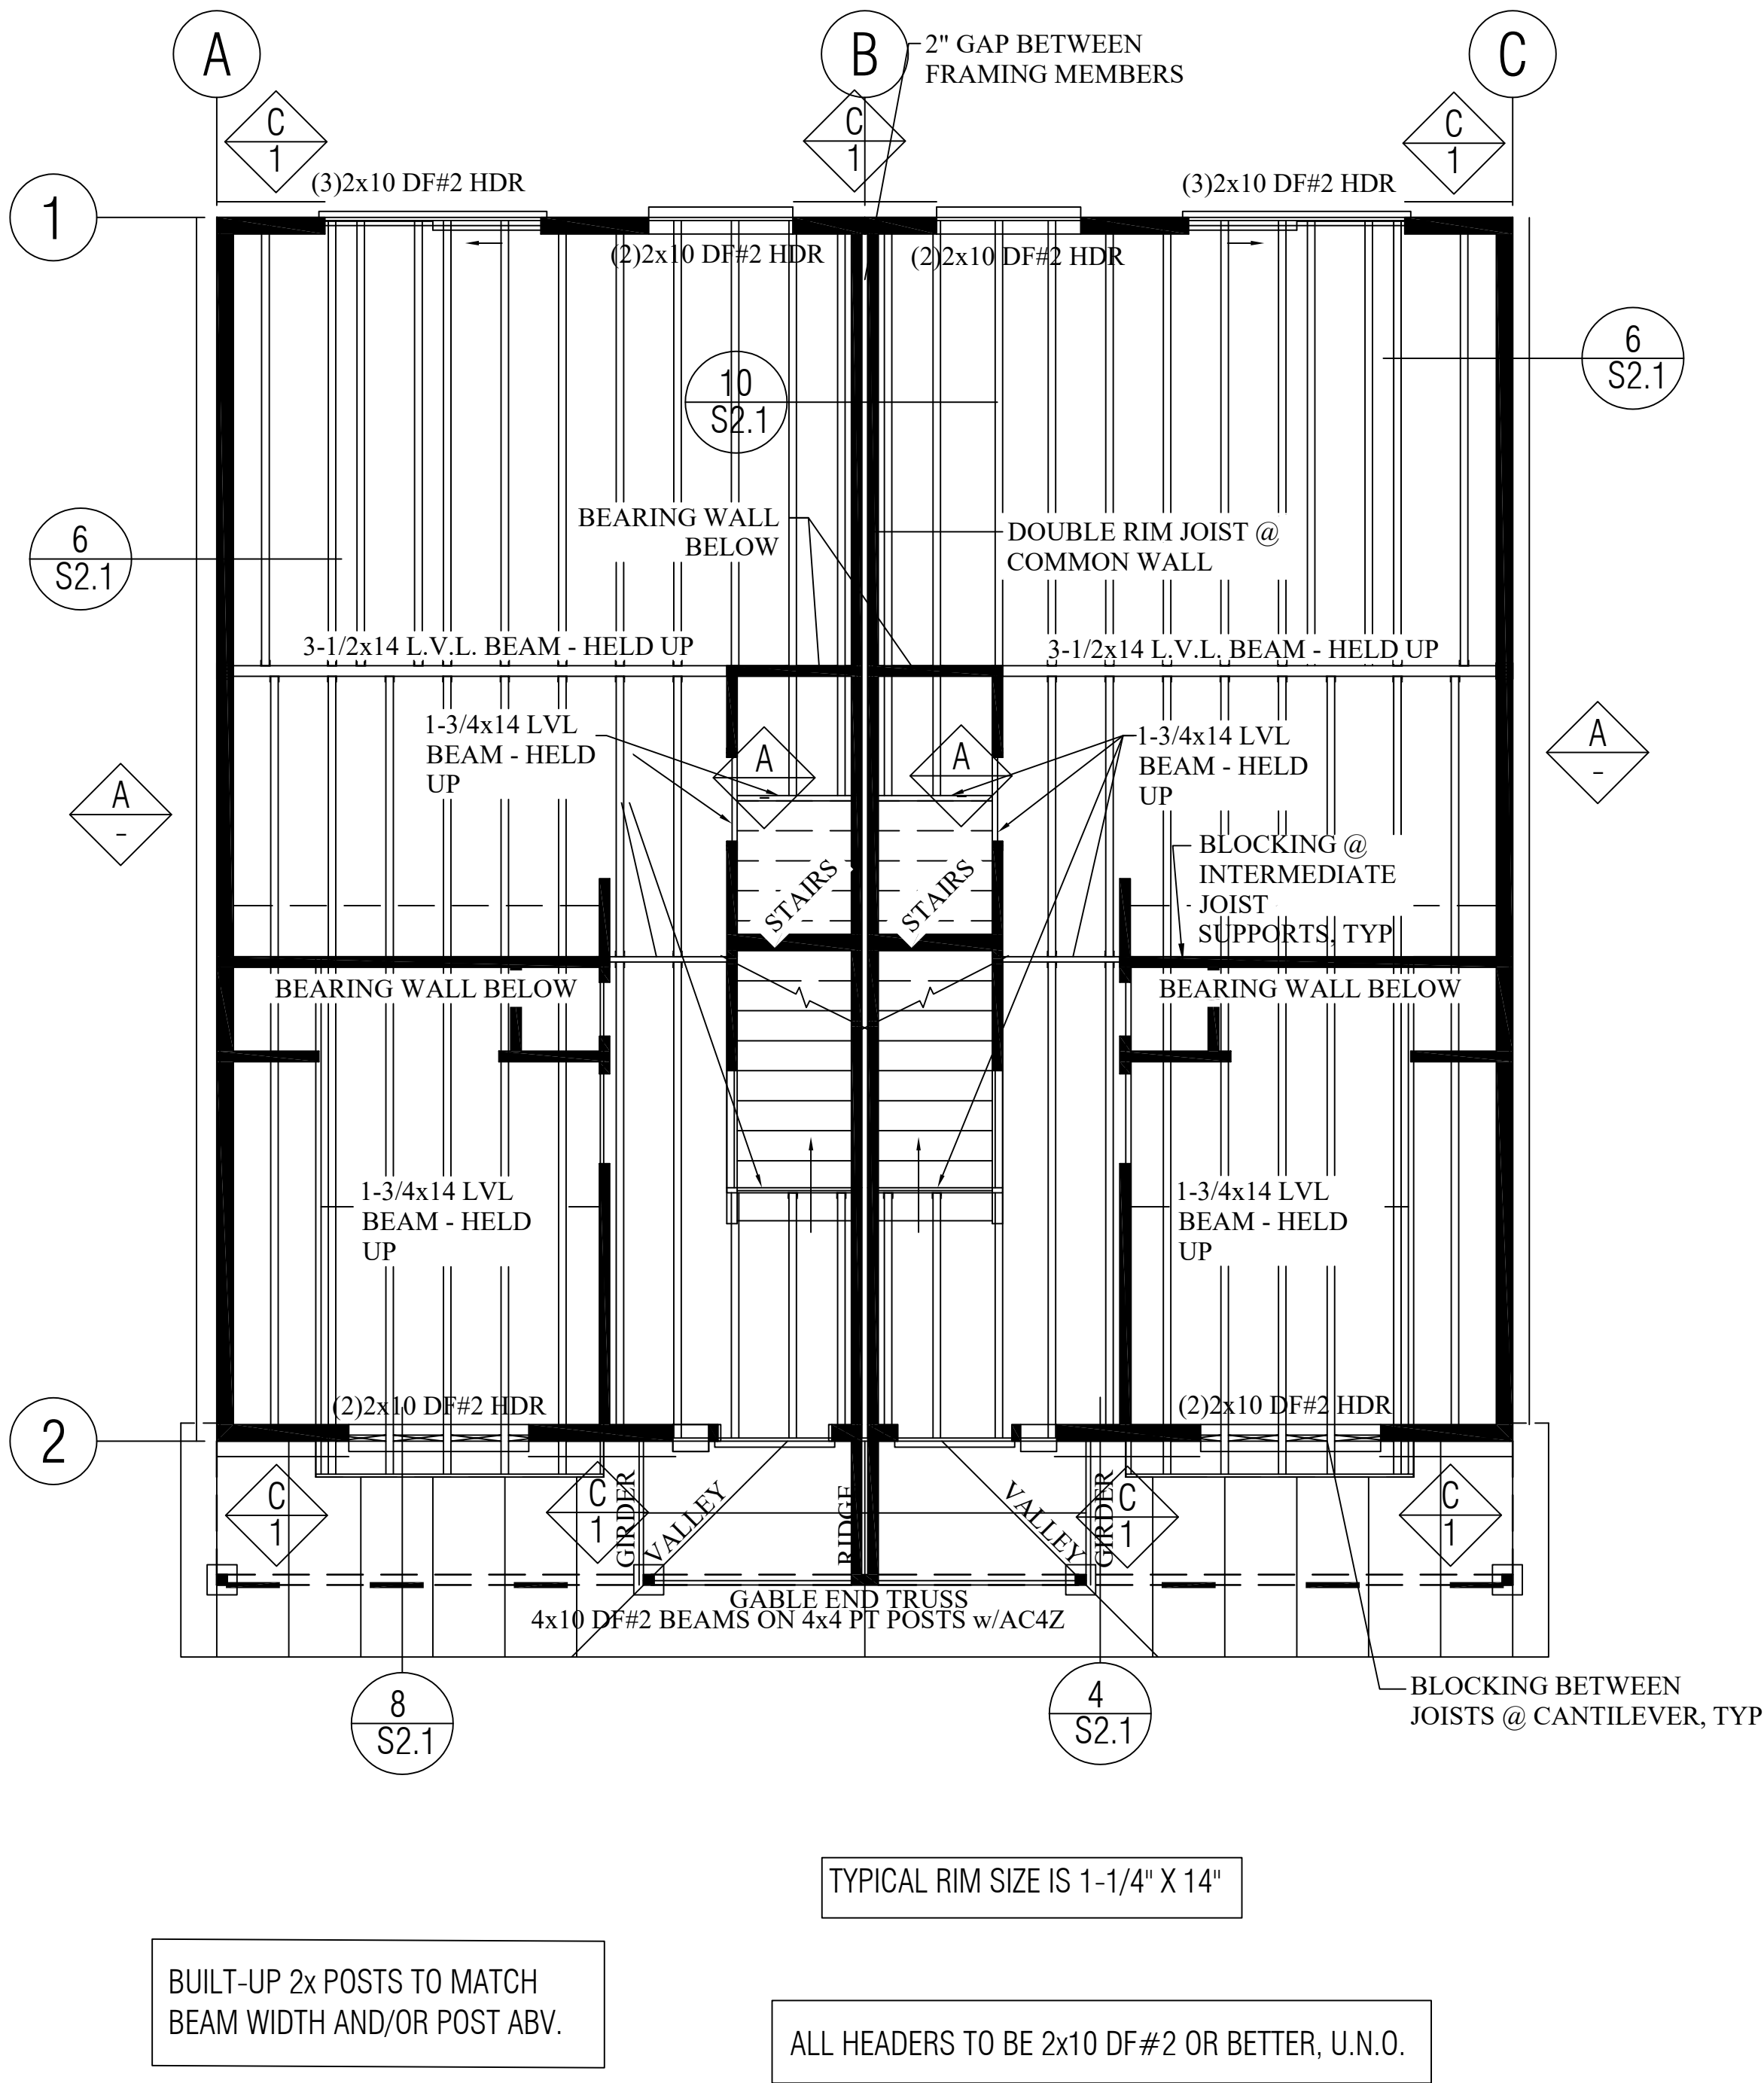

A

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1

6

S2.1

4

S2.1

C

1

10

S2.1

6

S2.1

1


6

S2.1


4

S2.1

HOLDOWN SCHEDULE						
MARK		Boundary	Tension of DF	Tension of HF	Anchor	Anchor
NUMBER	HOLDOWN	Studs	Allowable Lbs	Allowable Lbs	Mono Pour	Two Pour
1	HDU2-SDS2.5 OR PHD2-SDS3	(2)2x	3075	2215	SB ¾" X 24	SSTB24
2	HDU4-SDS2.5 OR PHD5-SDS3	(2)2x	4545	3270	SB ¾" X 24	SSTB24
3	HDU8-SDS2.5	(3)2x	7870	5665	SSTB28L	7/8" DIA. X 24" MIN. EMBED INTO CONC. A36 THREADED ROD w/ HEAVY SQ. NUT AND B97/8-2 BEARING PLATE WASHER @ BOT.
4	HDU11-SDS2.5	(1)6x	9535	6865	1" DIA. X 42" A36 THREADED ROD w/ HEAVY SQ. NUT AND WASHER @ BOT. PROVIDE 24" EMBED INTO CONT FTG.	
8	HHQ14-SDS2.5	(1)6x	13710	10745	1" DIA. X 42" A36 THREADED ROD w/ HEAVY SQ. NUT AND WASHER @ BOT. PROVIDE 24" EMBED INTO CONT FTG.	
5	MSTC28	(2)2x	3000	2590	N/A	N/A
6	MSTC40	(2)2x	4335	3745	N/A	N/A
7	MSTC66	(2)2x	5660	5660	N/A	N/A
Notes:						
1. Install all holdowns per manufactureer specificaiton per latest Simpson Strong Tie catalog.						
2. Match studs on schedule for walls below on all wall to wall holdowns.						
3. (Multiple)2x studs nailed together with (2) rows of 16d @ 3" o.c. staggered.						
4. Refer to shearwall schedule and typical shearwall details for wall locations and configurations.						
5. Refer to Simpson catalog for minimum embed of anchors into concrete.						

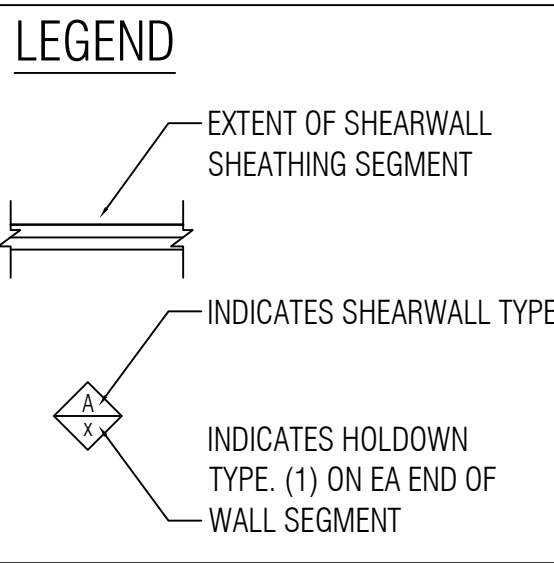

SHEARWALL SCHEDULE (a-m)									
MARK	REF NOTES: (a,i)	Note: (b)	EDGE NAILING	FEILD NAILING	SILL TO CONCRETE	SILL TO WOOD	SHEAR TRNASFER	Lbs	
NUMBER	SHEATHING	NAIL SIZE	SPACING	SPACING	CONNECTION. Note: (c)	CONNECTION. Note: (g)	CLIPS (h)	CAPACITY	
A	$\frac{L}{16}$ OSB (1) SIDE	8d	6"	12"	5/8" Dia. A.B. @ 48" o/c	16d @ 6" o/c	LS50 @ 18" o/c	280	
B	$\frac{L}{16}$ OSB (1) SIDE (f)	8d	4"	12"	5/8" Dia. A.B. @ 24" o/c	16d @ 4" o/c	LS50 @ 10" o/c	520	
C	$\frac{L}{16}$ OSB (1) SIDE (e,f)	8d	3"	12"	5/8" Dia. A.B. @ 18" o/c(m)	16d @ 3" o/c	LS50 @ 7" o/c	720	
D	$\frac{L}{16}$ OSB (1) SIDE (e,f)	8d	2"	12"	5/8" Dia. A.B. @ 16" o/c(m)	16d @ 2" o/c	A35 @ 8" o/c	936	
E	$\frac{L}{16}$ OSB (2) SIDE (d,e,f)	8d	6"	12"	5/8" Dia. A.B. @ 18" o/c(m)	16d @ 3" o/c	A35 @ 10" o/c	768	
F	$\frac{L}{16}$ OSB (2) SIDE (d,e,f)	8d	4" Staggered	12"	5/8" Dia. A.B. @ 12" o/c(m)	16d @ 2" o/c	A35 @ 7" o/c	1120	
G	$\frac{L}{16}$ OSB (2) SIDE (d,e,f)	8d	3" Staggered	12"	5/8" Dia. A.B. @ 10" o/c(m)	16d @ 3" o/c(2)rows staggered	A35 @ 5" o/c	1440	
H	$\frac{L}{16}$ OSB (2) SIDE (d,e,f)	8d	2" Staggered	12"	5/8" Dia. A.B. @ 8" o/c (m)	16d @ 2" o/c(2)rows staggered	HGA10KT @ 7" o/c	1872	
Notes:									
a) Wood structural panels shall conform to the requirents for its type in DOC PS 1 or PS 2. All wall construction to conform to AF&PA SDPWS per IBC 2306.3.									
b) Use Common Wire Nails for all wood sheathing and cooler nails for gypboard sheathing.									
c) A.B. minimum 7" embed into concrete. 3"x3"x $\frac{1}{4}$ " plate washers req'd at all shear wall A.B. Locate edge of Washer no greater than $\frac{3}{8}$ " from sheathed edge of sill plate.									
d) Panel joints shall be offset to fall on different framing members or framing shall be 3x or thicker and nails on each side shall be staggered.									
e) 3x or Db1 2x framing at all panel edges and nails shall be staggered.									
f) All edges blocked.									
g) Common Wire Nails.									
h) Clip to be attached from continuous blocking to top of continuous top plates. Clips are not required at Gyp Bd walls but blocking is attached per the toenailing schedule.									
i) See attached typical shearwall details.									
j) Sheathing to be Structrual I Sheathing.									
k) Values are for framing of H-F.									
m) See plan for walls where seismic design shear is greater than 560 plf. 3x or 2x flat blk/g at panel edges, Stagger nails. Where indicated on the plans 3x sills are required with A.B. spacing as per plan and schedule. See note C for plate washers req'd at A.B. For walls with the larger sills, Anchor Bolt spacing may be increased by a factor of 1.25 from the table above due to thicker sills.									

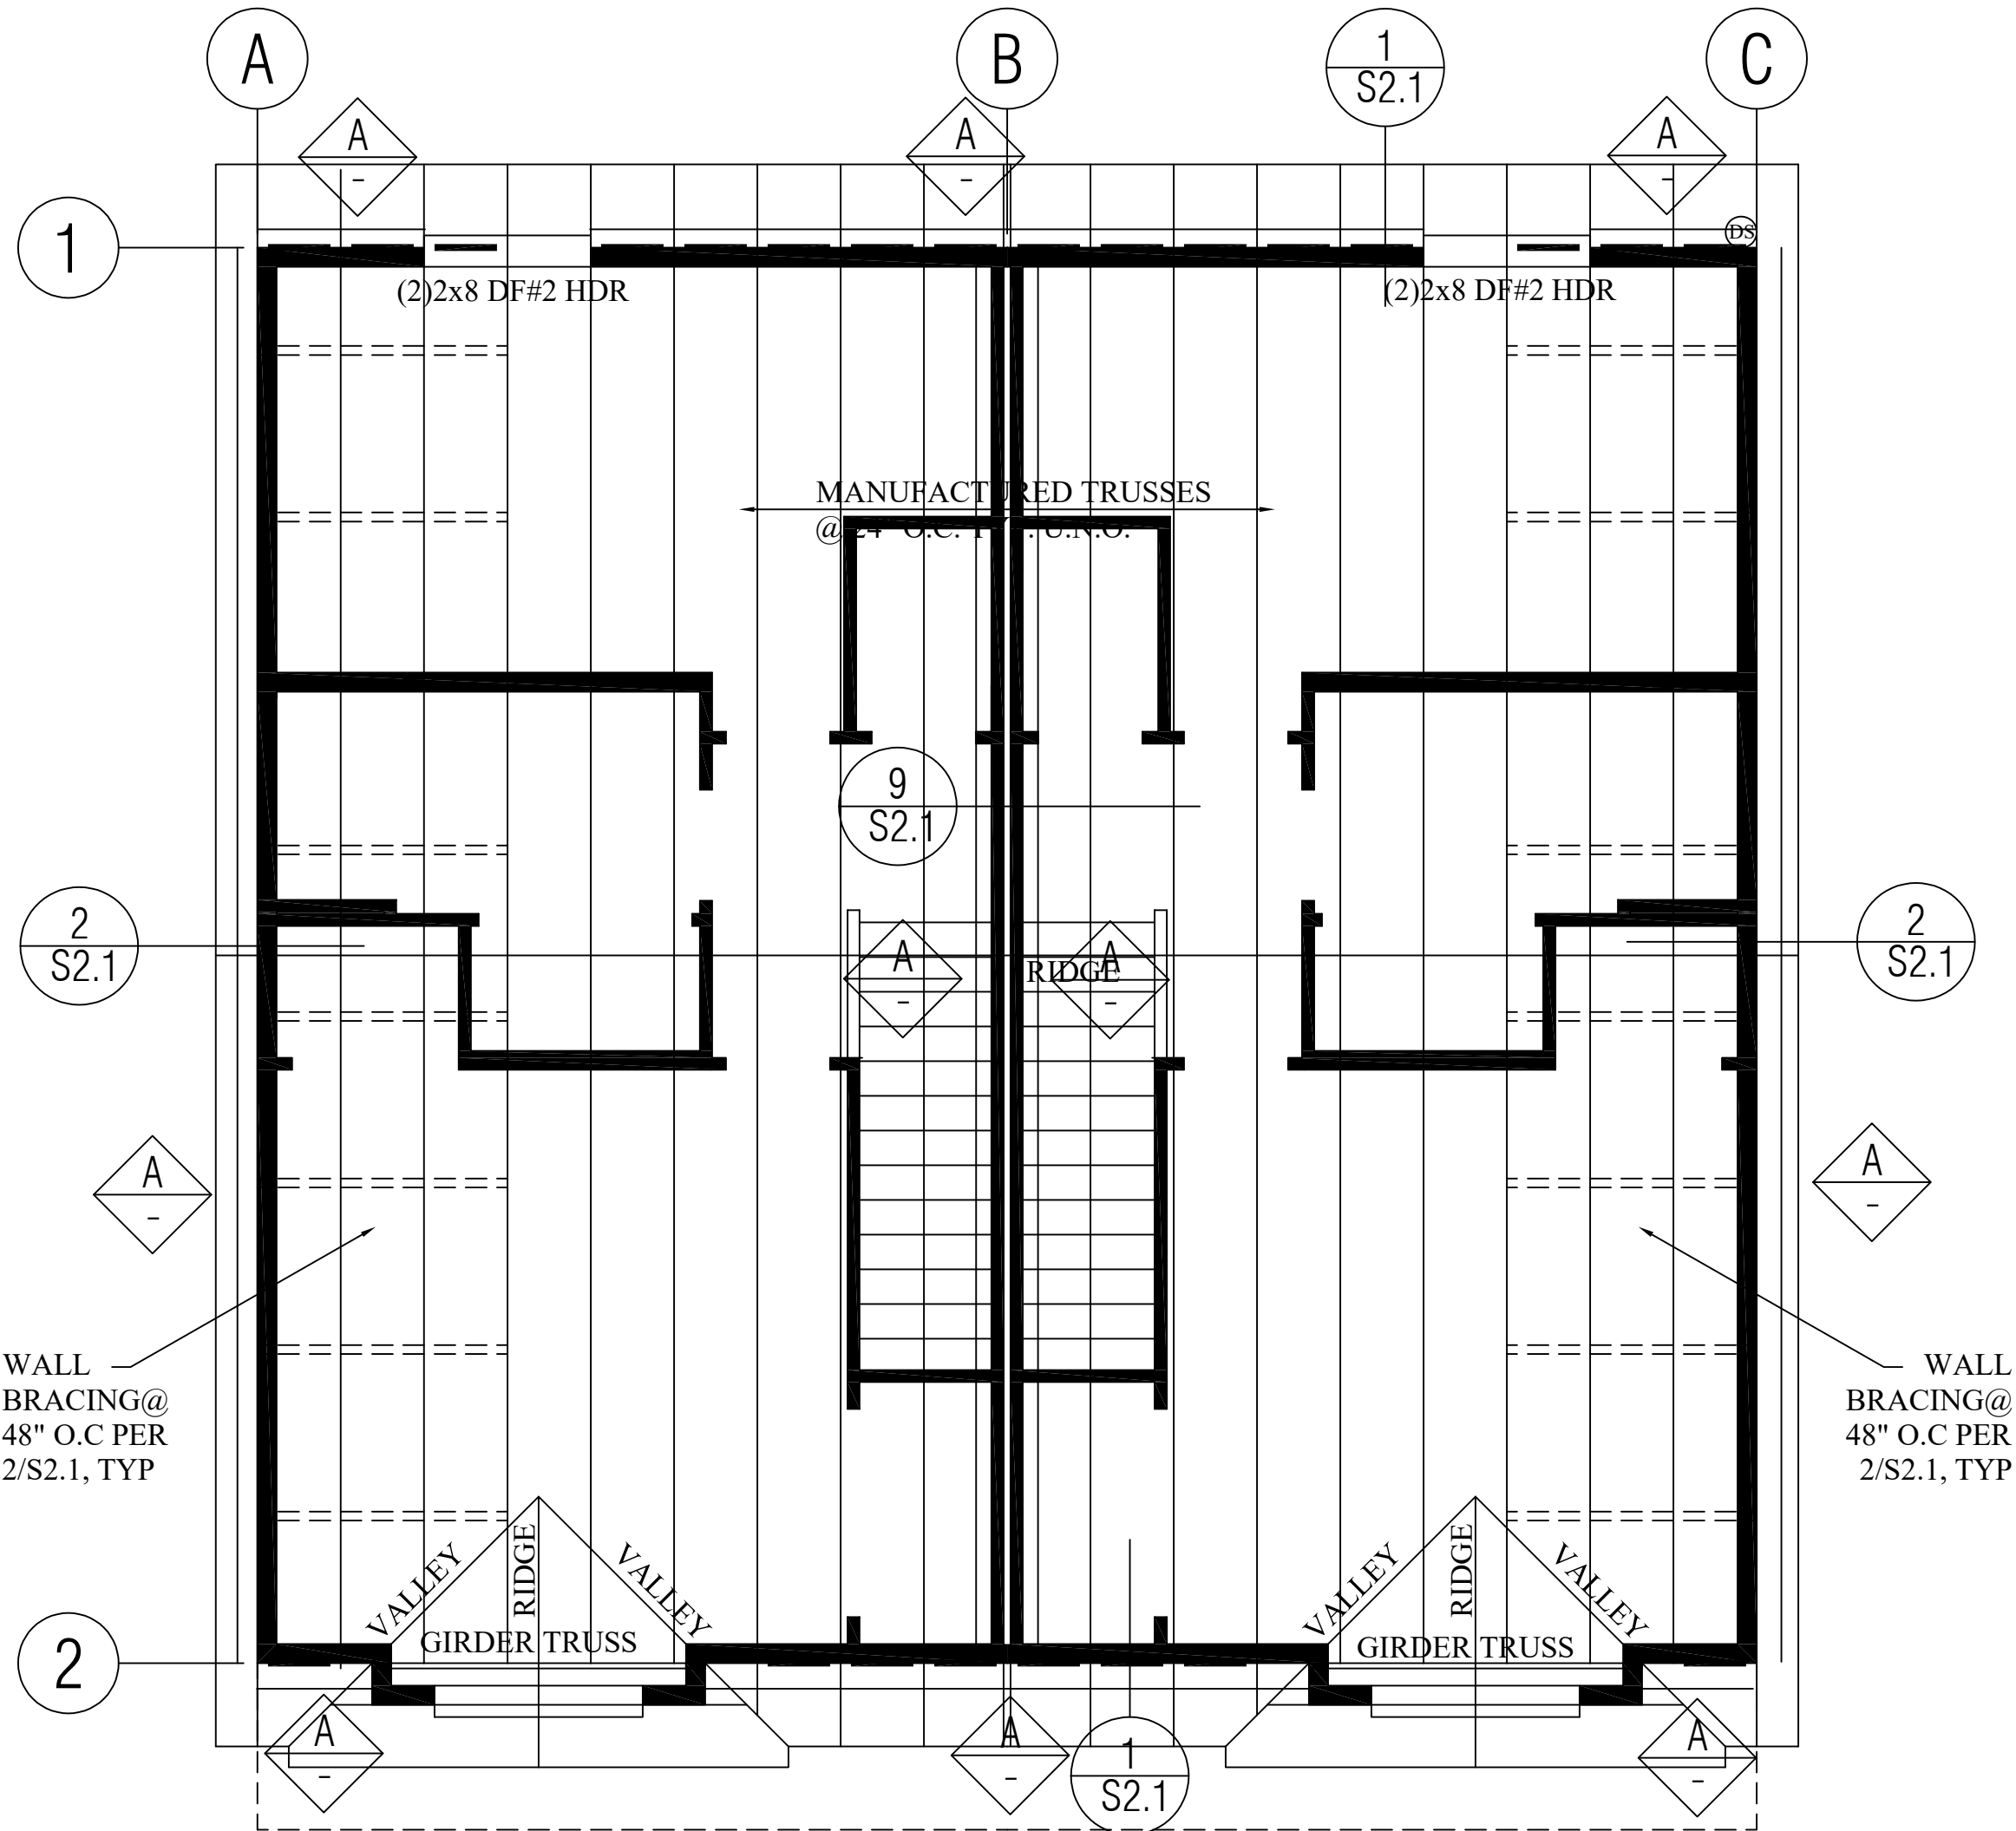

ROOF SHEATHING TO BE 7/16" (MIN)
24/16 MIN SPAN RATING SHEATHING
CONTINUOUS OVER 2 OR MORE SPANS.
STAGGER PANEL ENDS & FASTEN W/
10D AT 6" O.C. ALL SUPPORTED EDGES
AND 12" O.C. FIELD.

BUILT-UP 2x POSTS TO MATCH
NUMBER OF GIRDER TRUSS
PLYS

ALL HEADERS TO BE 2x8 DF#2 OR BETTER U.N.O.

ROOF FRAMING PLAN

SCALE: 1/4"=1'

MICHAEL K. BROWN, S.E.
REGISTERED PROFESSIONAL STRUCTURAL ENGINEER

5346 E.BRANCHWOOD DR., BOISE, ID 83716
(208)850-7542 mike.brown@core-engineering.net




HODSON 2 DUPLEX

411 TALENT AVE, TALENT, OR 97540


2386
AH25-044

ROOF FRAMING PLAN


S1.2

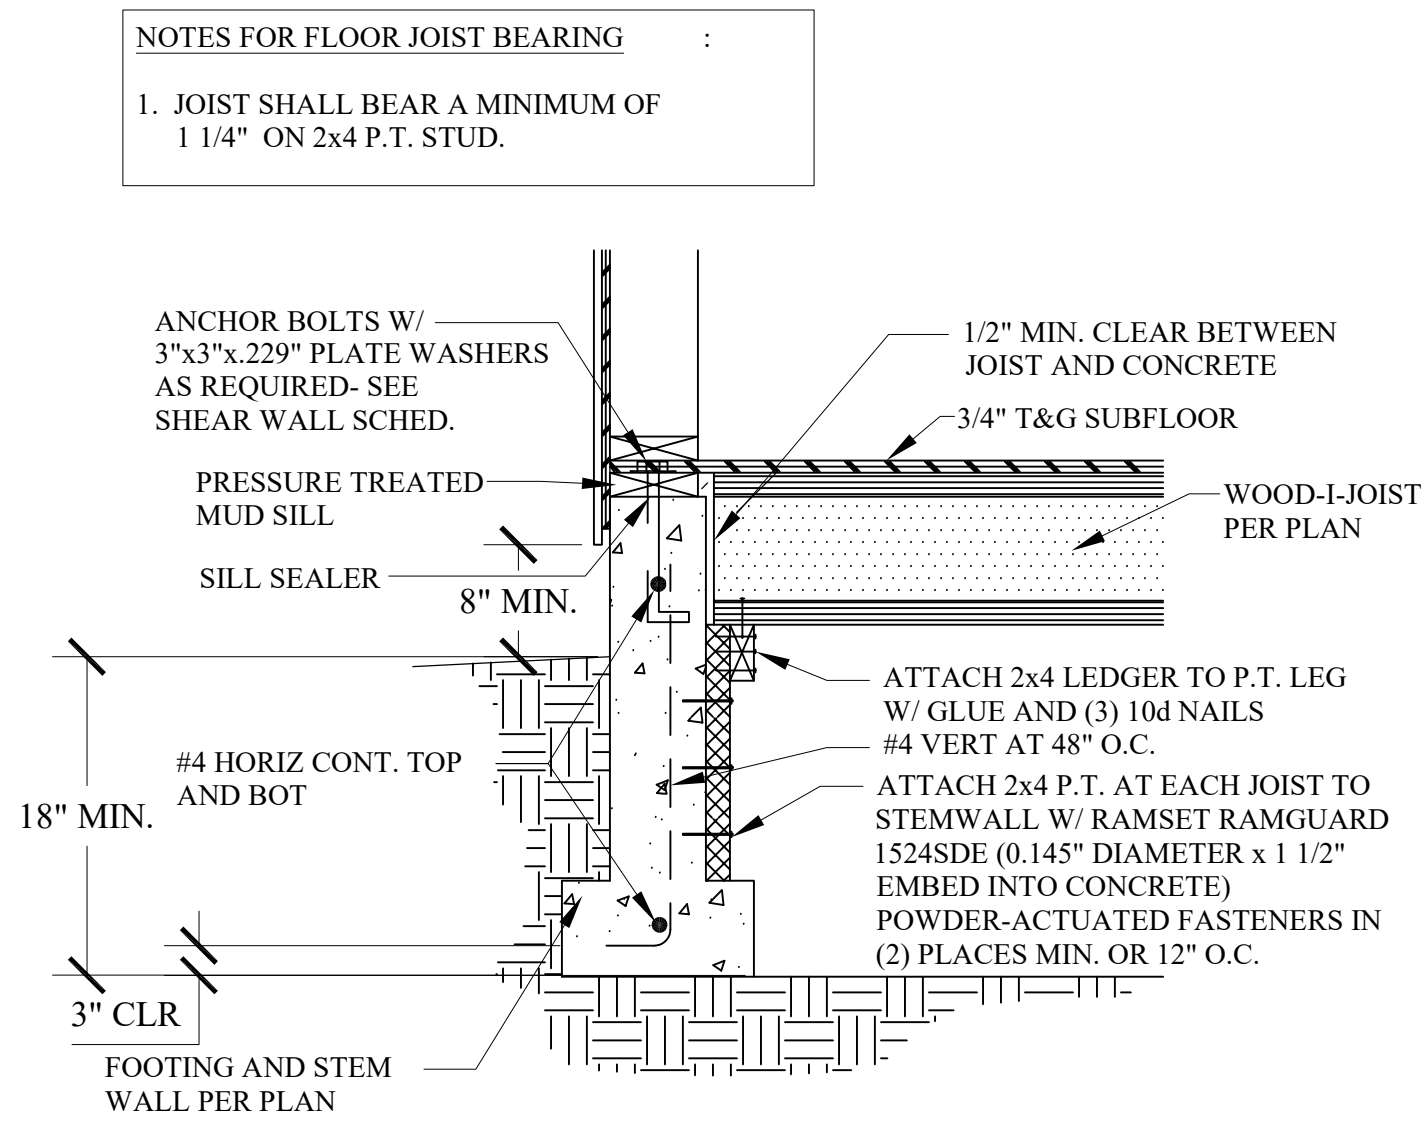


1 FOUNDATION & FLOOR SECTION
SCALE = 3/4" = 1'-0"

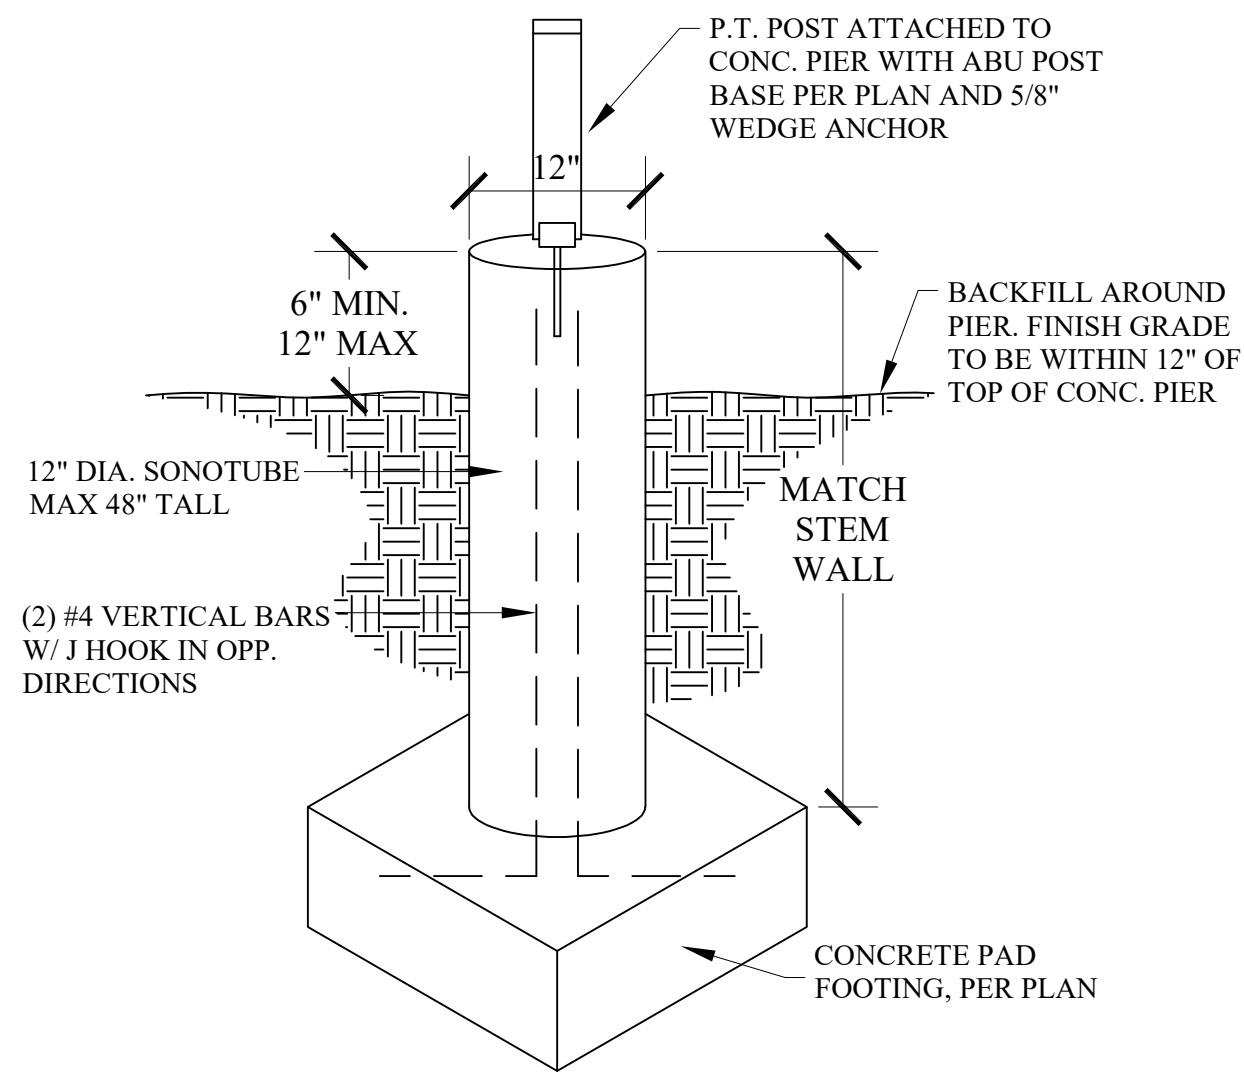

2 SONOTUBE PIER TO PAD FOOTING CONNECTION
SCALE = N.T.S.

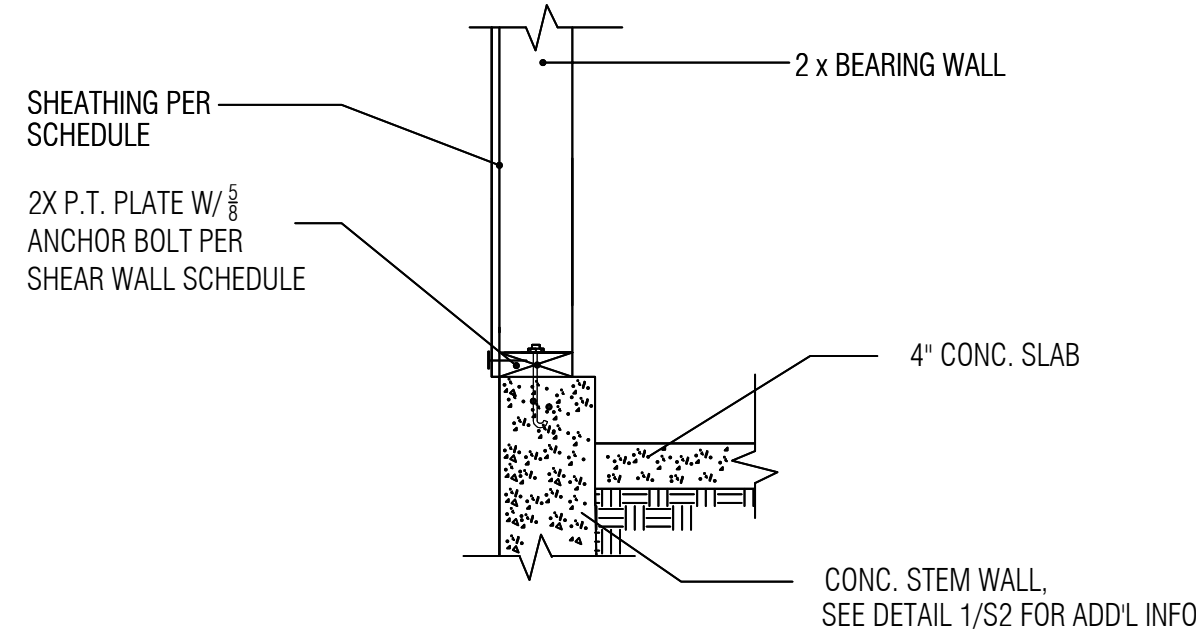

5 CONCRETE CURB
SCALE: N.T.S.

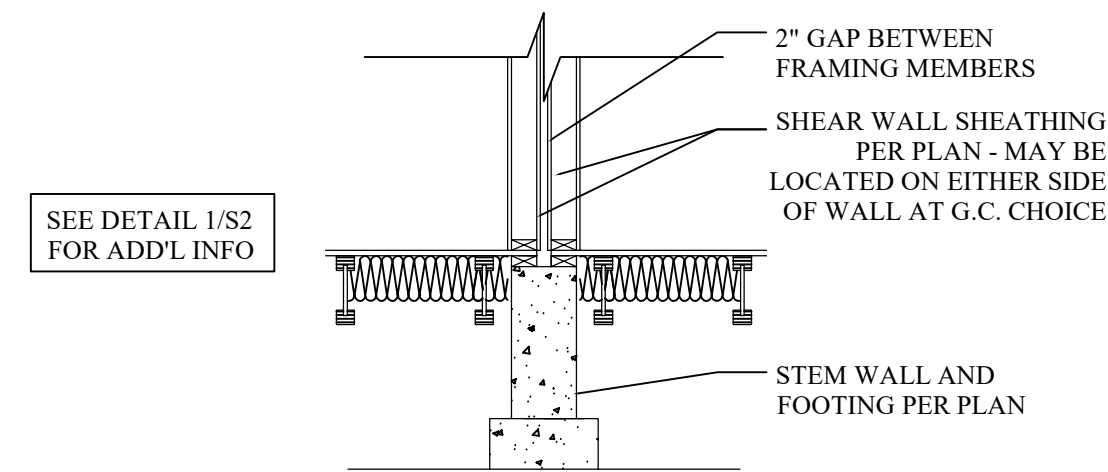

8 FOUNDATION AT PARTY WALL
SCALE: N.T.S.

MICHAEL K. BROWN, S.E.
REGISTERED PROFESSIONAL STRUCTURAL ENGINEER


5346 E.BRANCHWOOD DR., BOISE, ID 83716
(208)850-7542 mike.brown@core-engineering.net




HODSON 2 DUPLEX
411 TALENT AVE, TALENT, OR 97540

2386
AH25-044


STRUCTURAL DETAILS

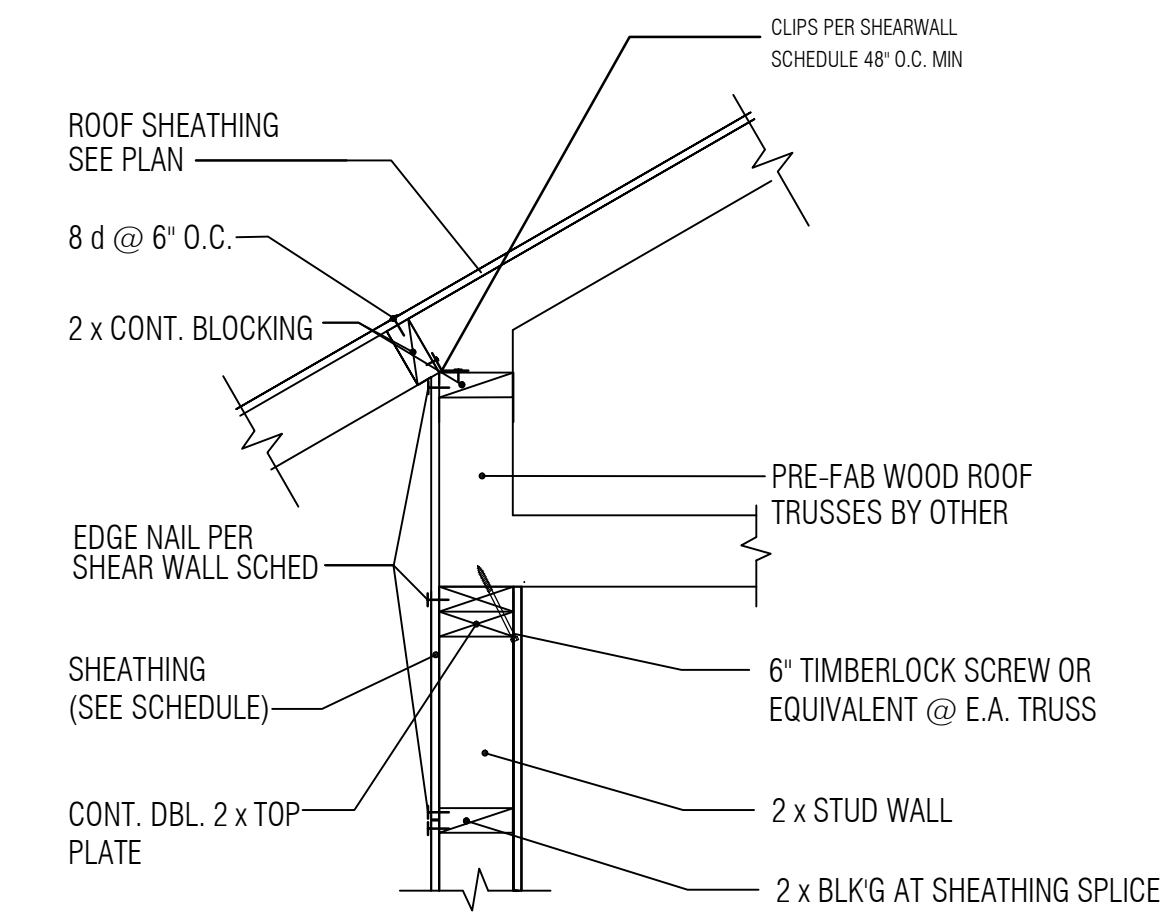


1 ROOF BLKG. @ TRUSSES
SCALE: N.T.S.

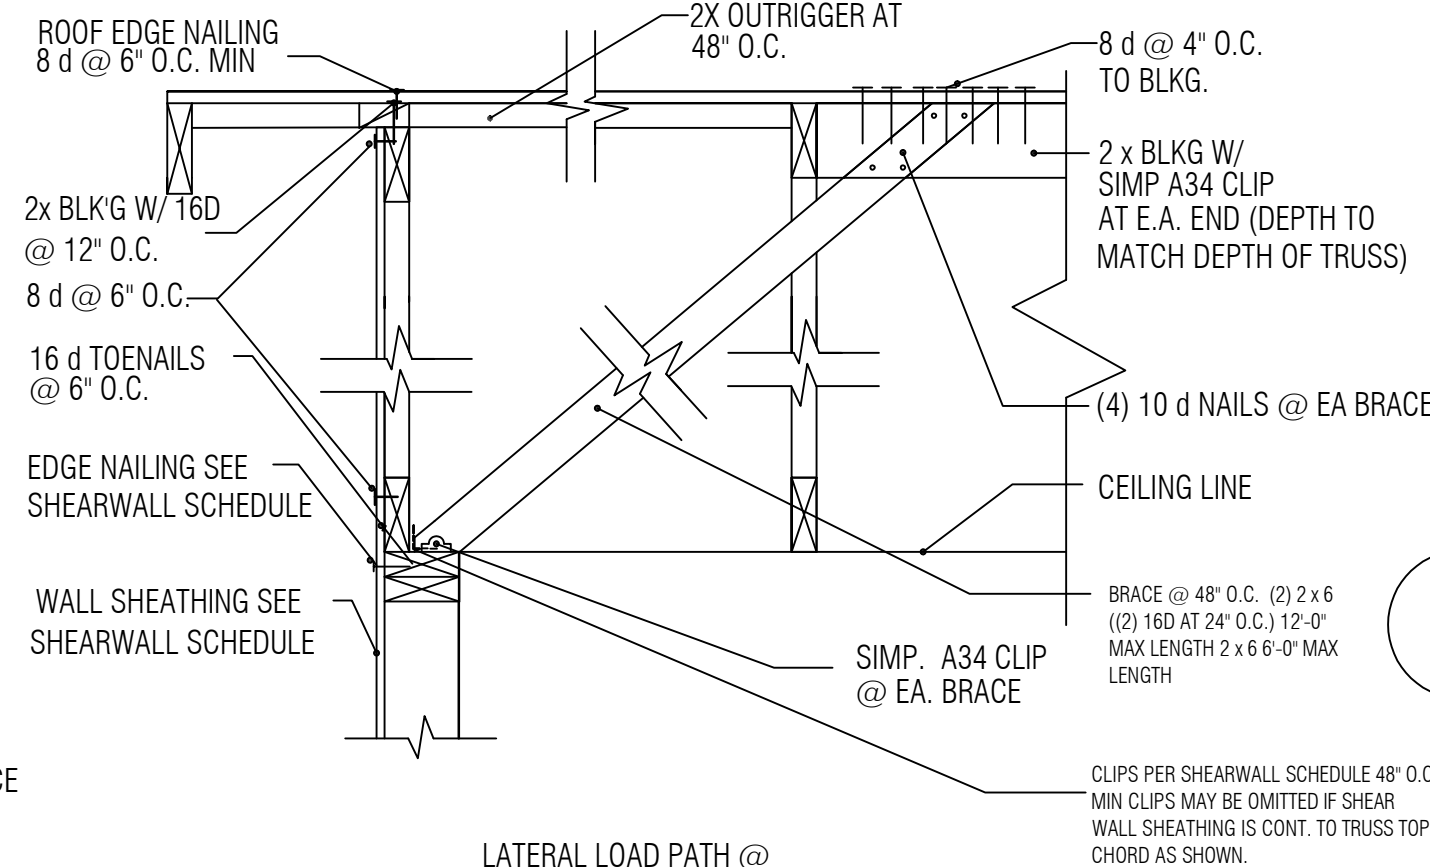


2 PARALLEL TRUSSES TO WALL
SCALE: N.T.S.

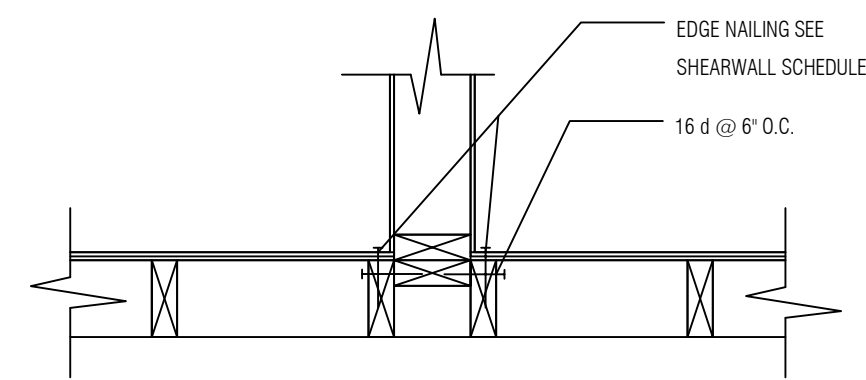


3 THRU WALL INTERRUPTION
SCALE: N.T.S.

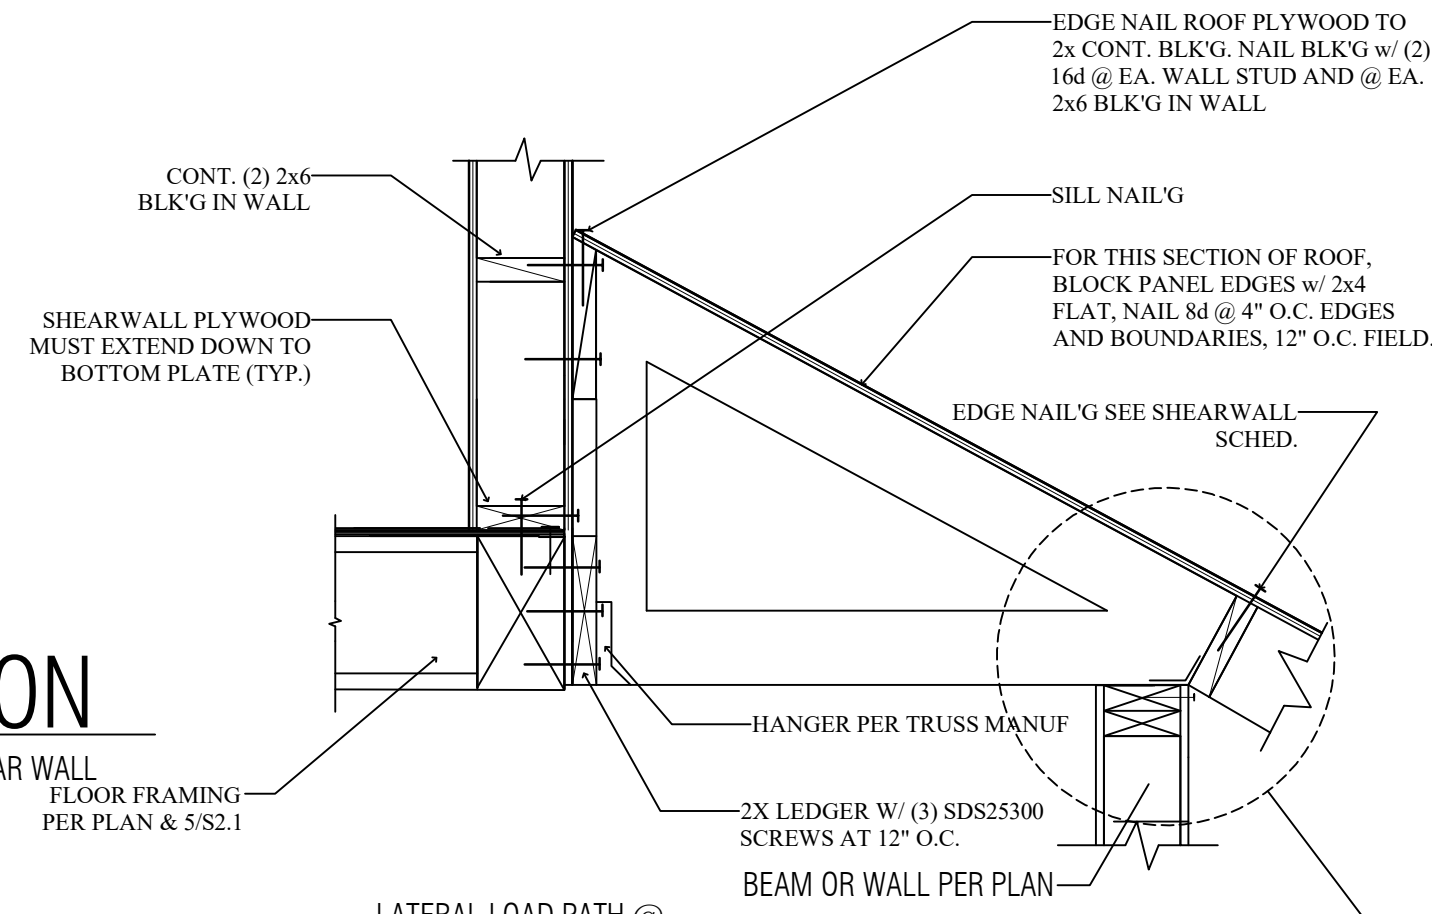


4 ROOF LEDGER
SCALE: N.T.S.

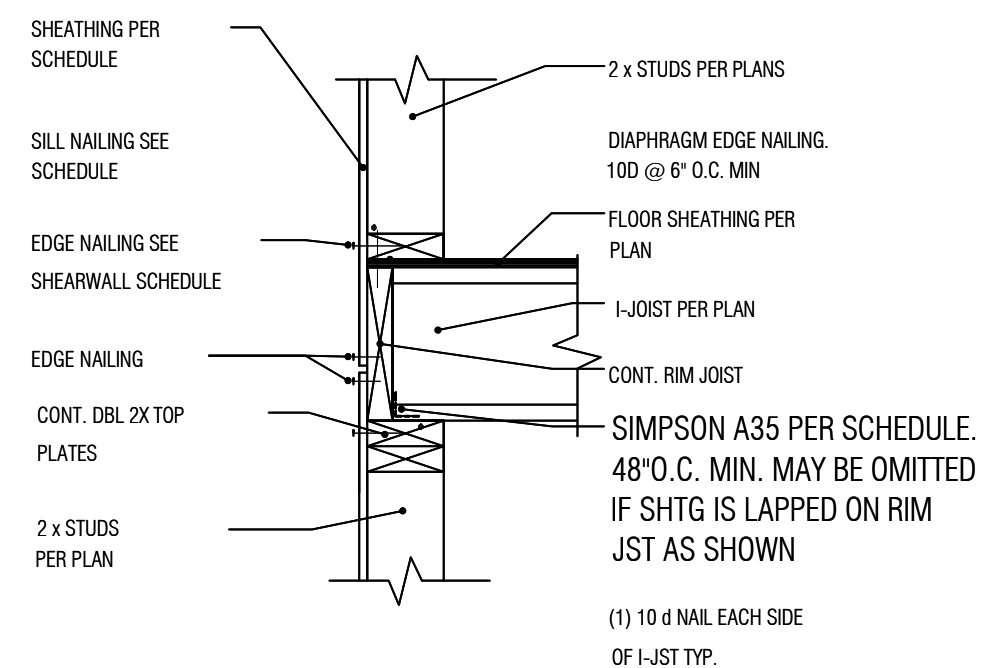


5 PERP. FLR. FRAMING ALT. @ EXT. WALL
SCALE: N.T.S.

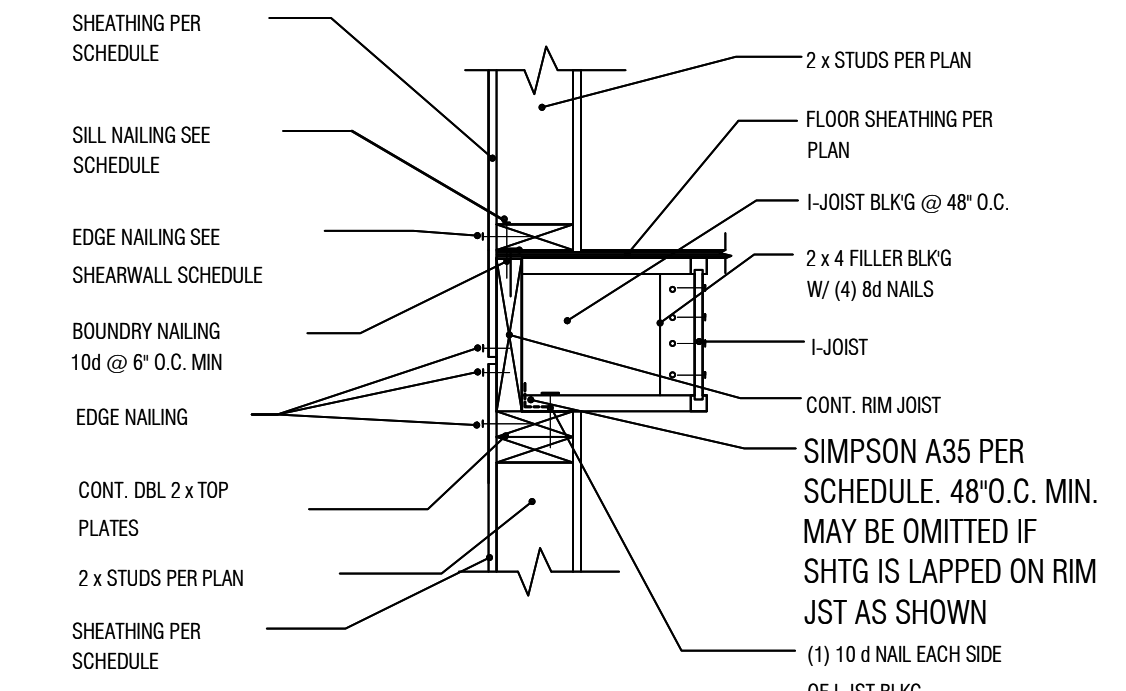


6 PARALLEL FLR. FRAMING ALT. @ EXT. WALL
SCALE: N.T.S.

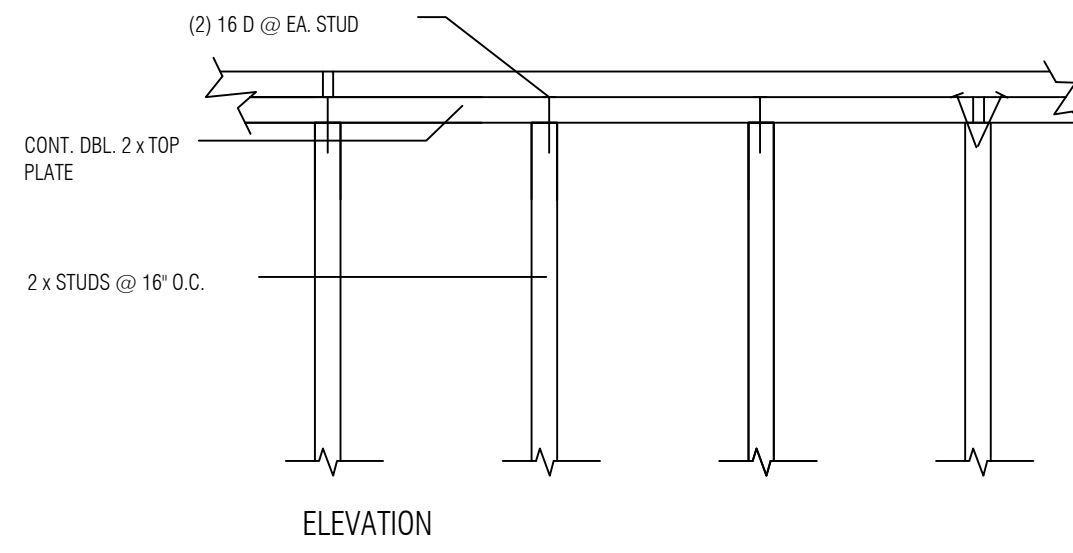


7 TOP PLATE SPLICE
SCALE: N.T.S.

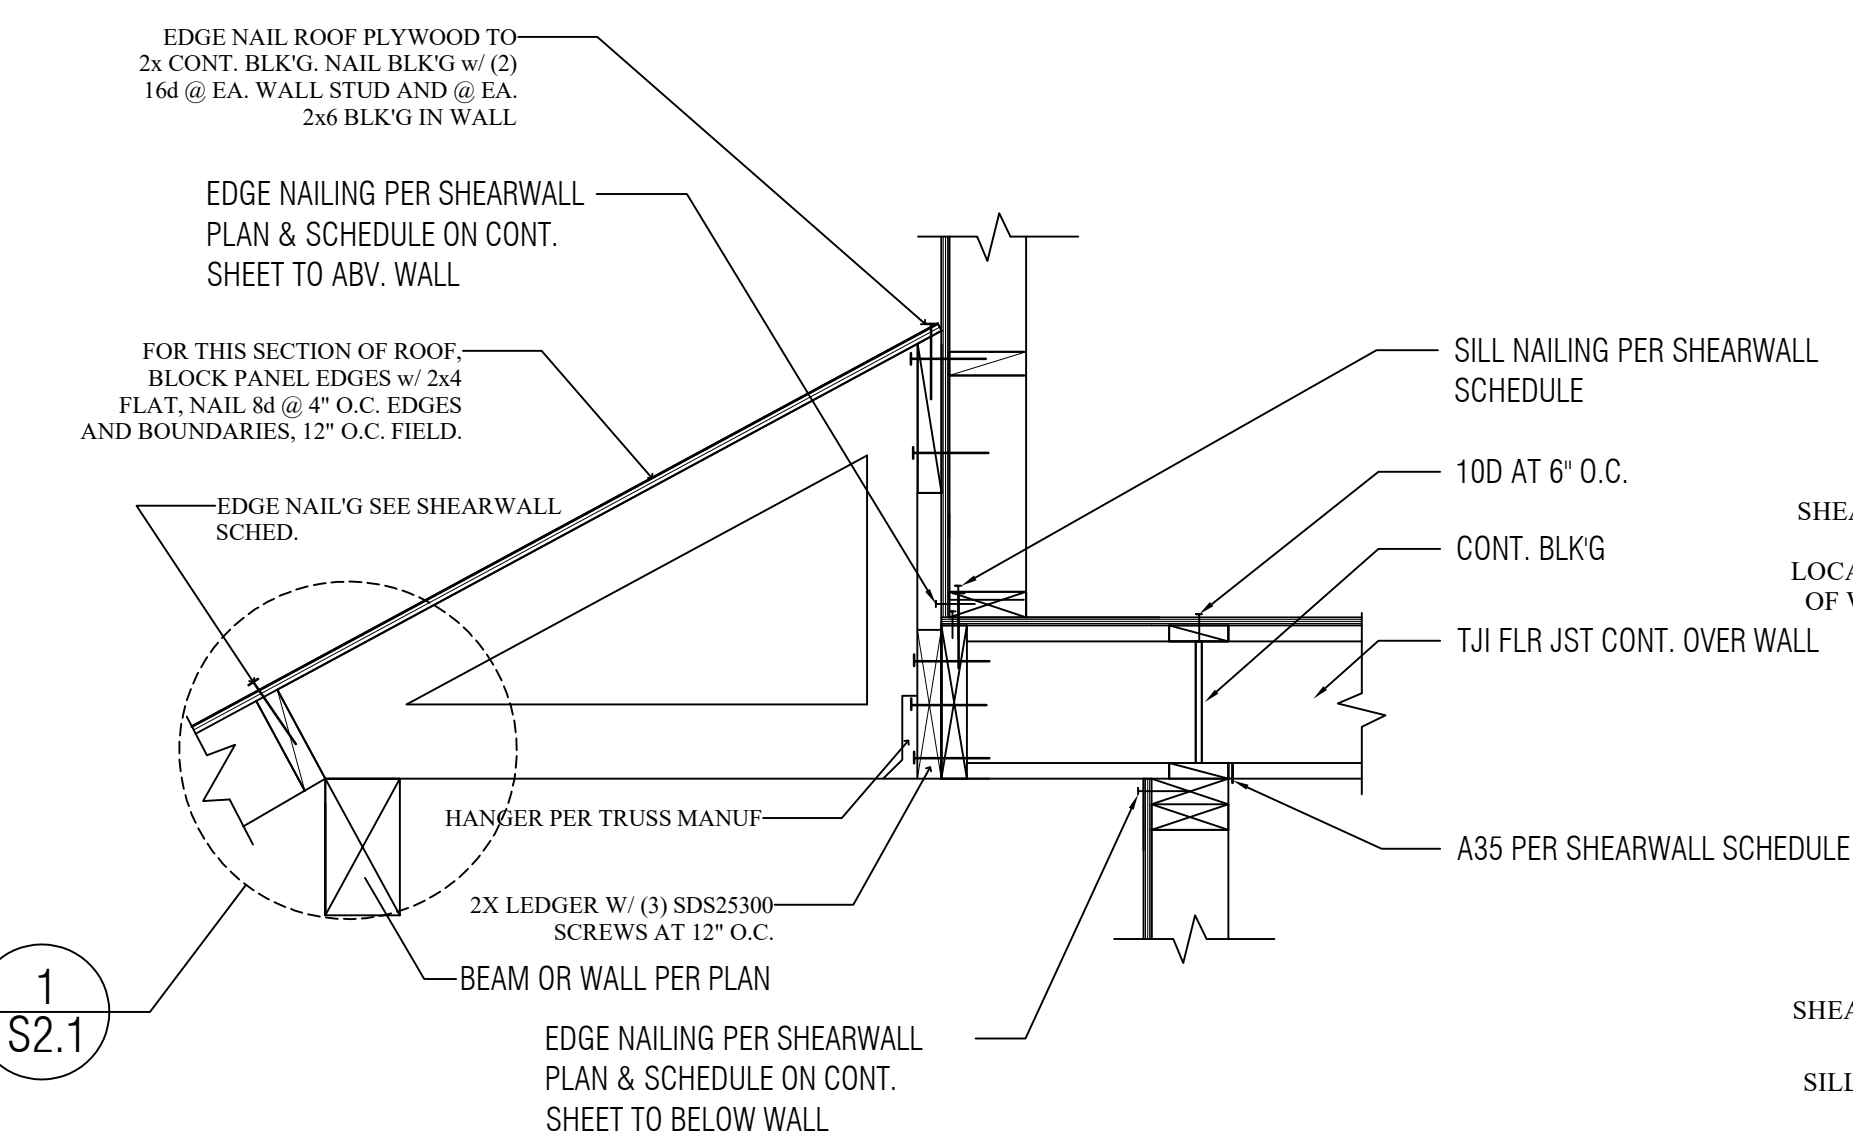

8 CANTILEVER FLOOR FRAMING
SCALE: N.T.S.

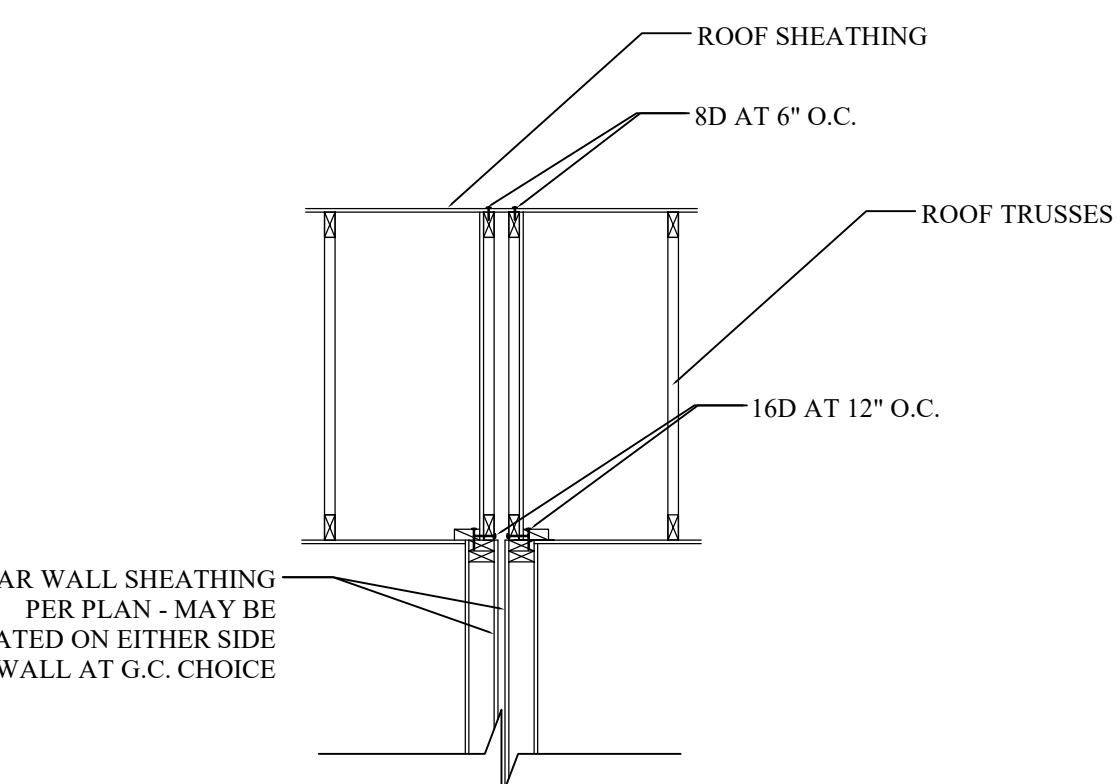

9 SHEAR TRANSFER AT TRUSSES
SCALE: N.T.S.

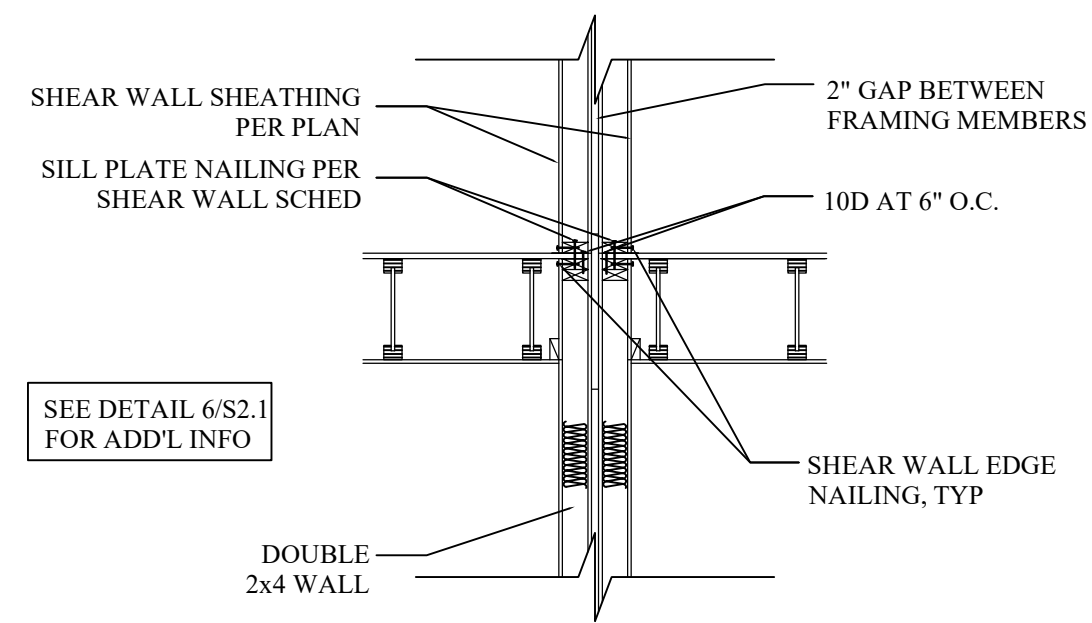

10 SHEAR TRANSFER AT FLOOR
SCALE: N.T.S.




MICHAEL K. BROWN, S.E.
REGISTERED PROFESSIONAL STRUCTURAL ENGINEER
5346 E.BRANCHWOOD DR., BOISE, ID 83716
(208)850-7542 mike.brown@core-engineering.net

HODSON 2 DUPLEX
411 TALENT AVE, TALENT, OR 97540

2386
AH25-044

STRUCTURAL DETAILS

S2.1

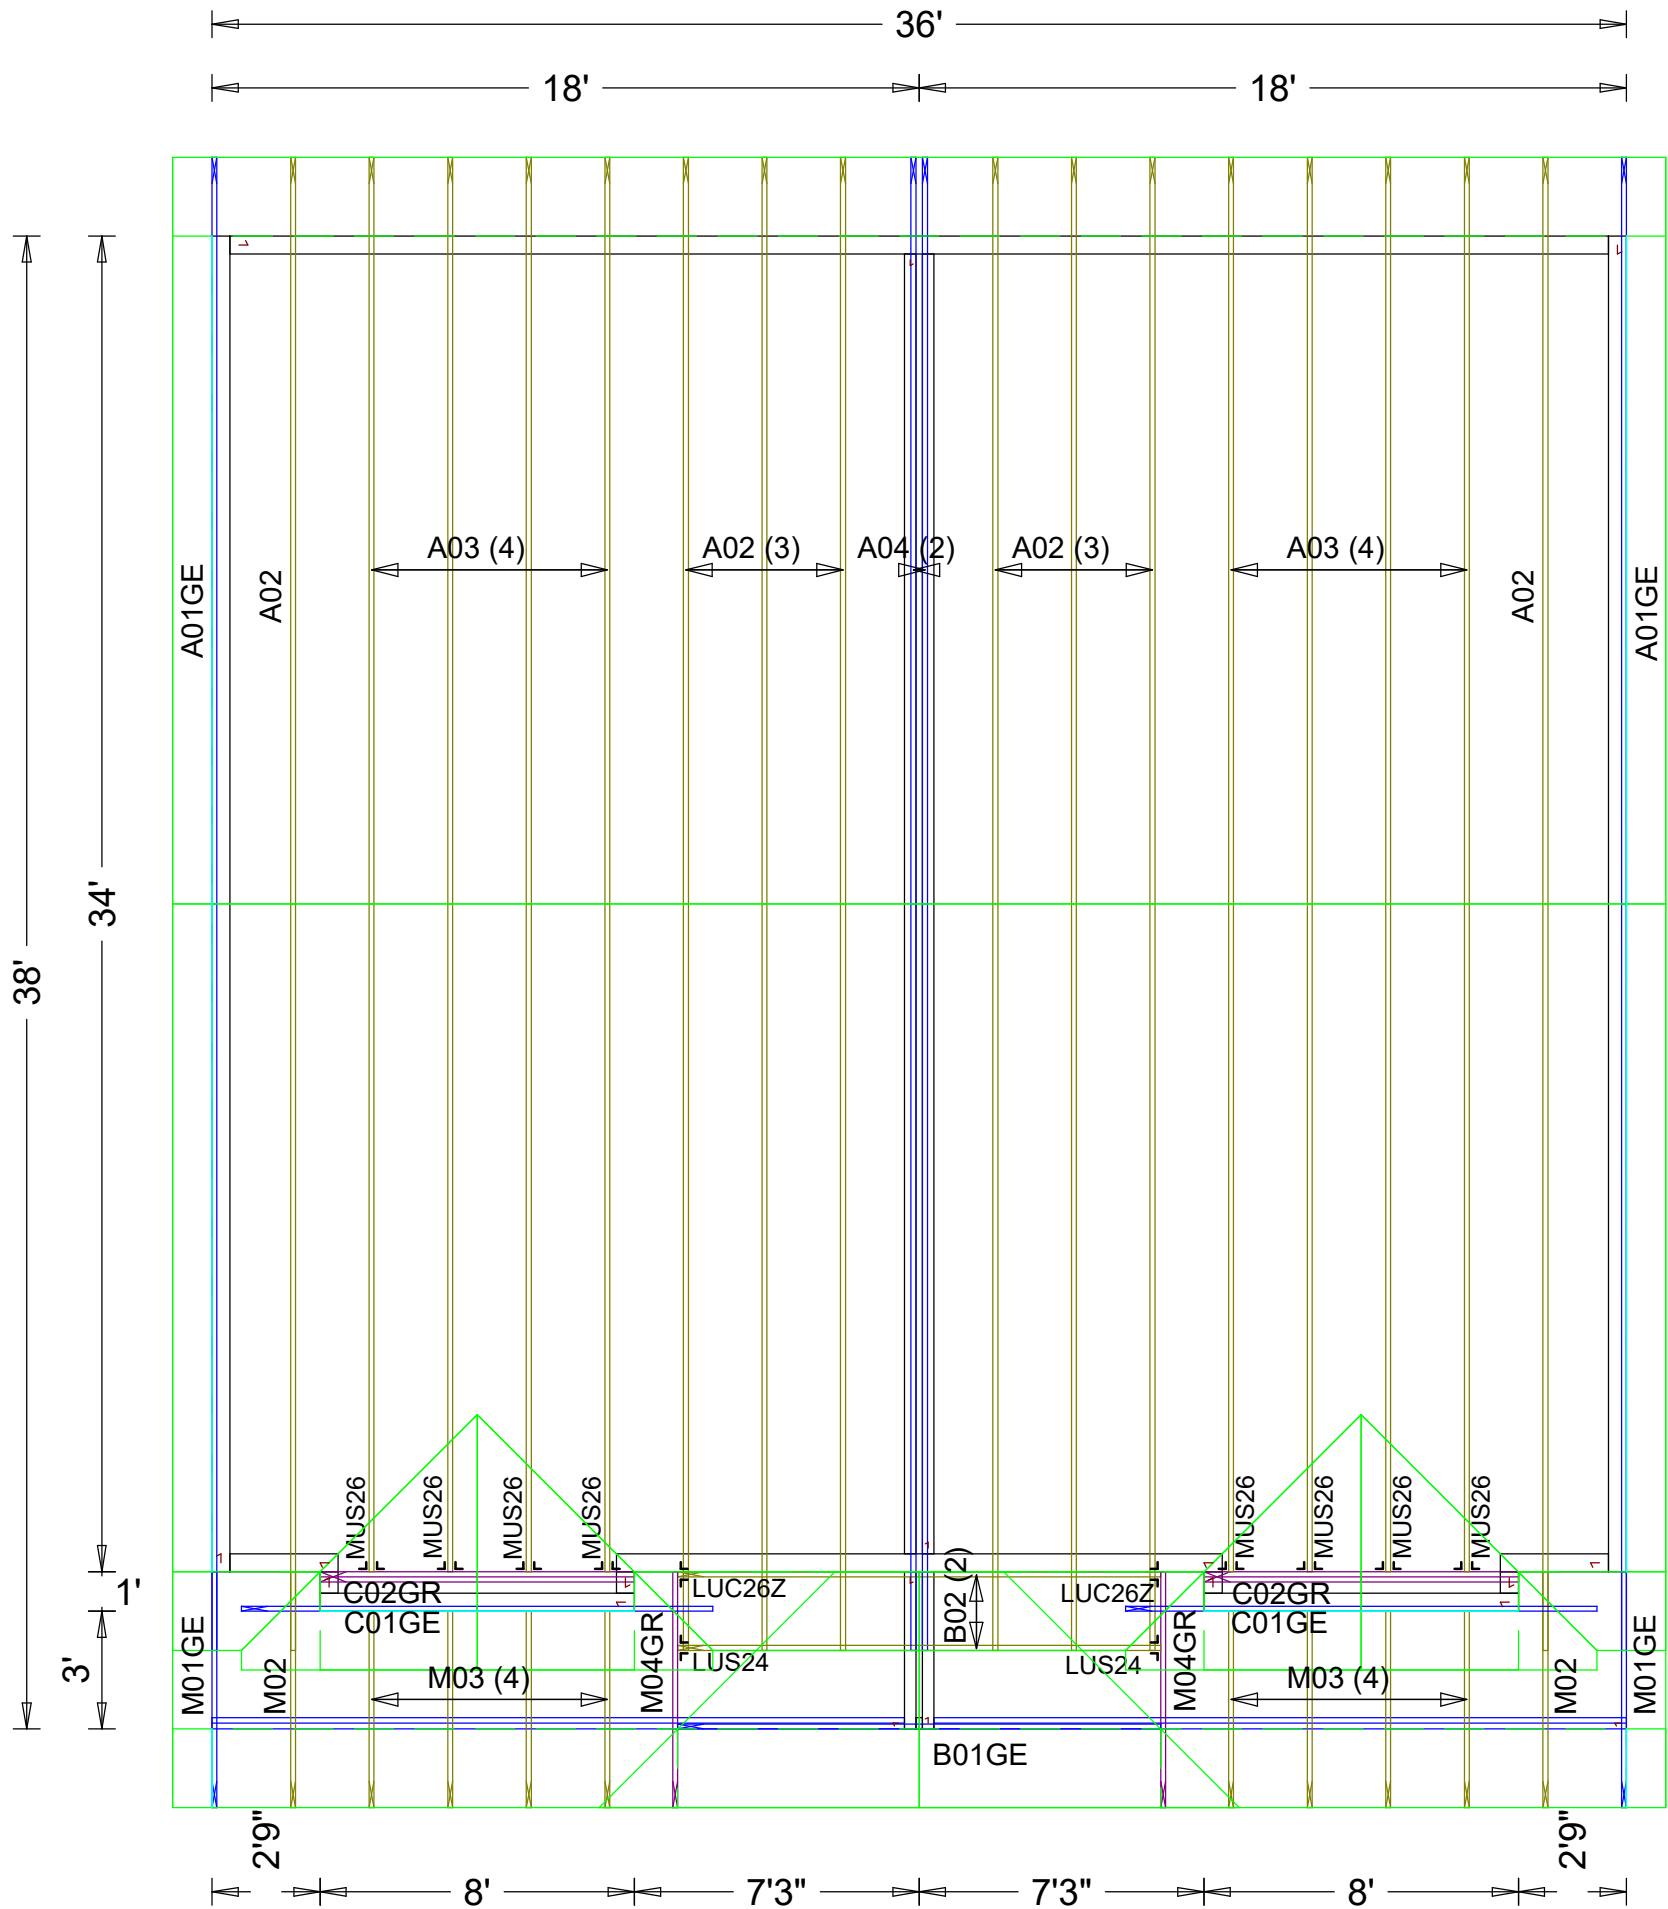

Customer: Adair Homes - Medford
Home Owner:
Contractor:
Designer: MICHAH
Sales Rep: RICPRE
ISR: LUZFLE

Date: 09-11-2025
Name: Adair -MEME-129- Hodson #
Model:
Street: 411 Talent Ave
City: Talent
State: OR

JOB NO:
Q5017428

PAGE NO:
1 OF 1

