

DIMENSIONING NOTES

1. ALL DIMENSIONS ARE TO FACE OF STRUCTURE (F.O.S.) UNLESS OTHERWISE NOTED. SHEATHING IS NOT INCLUDED AS STRUCTURE IN DIMENSIONING. DIMENSIONS ARE TO FRAMING.

2. DO NOT SCALE FROM DRAWINGS.

3. ANY INCONSISTENCIES OR UNFORESEEN CONDITIONS TO BE REVIEWED BY HOME EC PRIOR TO PROCEEDINGS WITH CONSTRUCTION.

4. ALL NON-DIMENSIONED EXTERIOR DOORS AND WINDOWS SHALL BE OFFSET FROM WALLS TO ALLOW FOR (3) 2X4 STUDS AT THE JAMBS UNLESS OTHERWISE NOTED.

5. ALL NON-DIMENSIONED INTERIOR DOORS SHALL BE OFFSET FROM THE HINGE-SIDE WALL TO ALLOW FOR (2) 2X4 STUDS AT THE JAMB. (U.O.N.)

6. ALL CASEWORK DIMENSIONS TO FACE OF FINISH.

MISCELLANEOUS NOTES

7. SOUND INSULATION REQUIRED IN ALL INTERIOR WALLS.

8. PROVIDE 1.28 GALLONS OF WATER PER FLUSH TOILETS.

9. WATER HEATERS SHALL BE STRAPPED OR HAVE A RIGID CONNECTION TO AN ADJACENT WALL.

10. ALL INSULATION MATERIALS SHALL BE CERTIFIED BY THE MANUFACTURER AS COMPLYING WITH THE REQUIRED QUALITY STANDARDS FOR INSULATION MATERIAL.

11. CRC-R311.3-EXCEPTION: A DOOR MAY OPEN AT A LANDING THAT IS NOT MORE THAN 7'-3/4" LOWER THAN THE FLOOR LEVEL IF THE DOOR DOES NOT SWING OVER THE LANDING. CRC R311.3.1 AND R311.3.2

12. AS REQUIRED BY AGENCY, AN APPROVED SEISMIC SHUTOFF VALVE SHALL BE INSTALLED ON THE FUEL GAS LINE ON THE DOWNSTREAM SIDE OF THE UTILITY METER AND BE RIGIDLY CONNECTED TO THE EXTERIOR OF THE BUILDING OR STRUCTURE CONTAINING THE FUEL GAS PIPING.

13. FOR TYPICAL MOUNTING HEIGHTS OF DOOR HARDWARE, ELECTRICAL DEVICES AND MECHANICAL CONTROLS SEE DETAIL 9M-7.5 REFER TO DETAIL WHEN DIMENSIONS OF STATED ITEMS ARE NOT SHOWN IN ELEVATION.

14. PROVIDE R-12 EXTERIOR BLANKET INSULATION FOR HOT WATER HEATER, R-3 INSULATION SHALL BE PROVIDED FOR THE FIRST FIVE FEET IF THE WATER HEATER OUTLET PIPE. ALL WATER HEATING AND SPACE CONDITIONING EQUIPMENT, SHOWER HEADS, AND FAUCETS SHALL BE C.E.C. CERTIFIED. ALL STEAM AND STEAM CONDENSATE RETURN PIPING AND ALL CONTINUOUSLY RE-CIRCULATING DOMESTIC HEATING OR HOT WATER PIPING SHALL BE INSULATED PER PLUMBING DIVISION.

15. INSULATION VALUES SHALL BE AS FOLLOWS:
ALL EXTERIOR WALLS = R-21
ROOF INSULATION = MINIMUM R-38
HIGH DENSITY BATT INSULATION IN FLOORS = R-30
INTERIOR BATH AND BEDROOM WALLS BATT INSULATION = R-13

16. HANDRAILS AT STAIRS SHALL BE REQUIRED WHERE THERE ARE 4 OR MORE RISERS, AND NOT BE LESS THAN 34" NOR MORE THAN 38" ABOVE LANDINGS AND NOSINGS OF TREADS.

17. GRIPS ON RAILS SHALL HAVE A 1 1/2" MINIMUM AND 2" MAXIMUM I/METER OR OFFER EQUIVALENT GRIPPING SURFACE.

18. GUARDRAILS & HANDRAILS SHALL BE STRONG ENOUGH TO RESIST A 200 POUND POINT LOAD IN ANY DIRECTION.

19. A COMPREHENSIVE REVIEW OF THE ENERGY COMPLIANCE CALCULATION AND DETAILS BASED ON CLIMATE ZONE AND BUILDING ORIENTATION WILL BE CONDUCTED BY THE LOCAL ENFORCEMENT AGENCY.

20. AN OPERATION AND MAINTENANCE MANUAL SHALL BE PROVIDED TO THE BUILDING OCCUPANT OR OWNER.

21. MOISTURE CONTENT OF BUILDING MATERIALS USED IN WALL AND FLOOR FRAMING DO NOT EXCEED 19% PRIOR TO ENCLOSURE AND IS CHECKED BEFORE ENCLOSURE. INSULATION PRODUCTS ARE DRY PRIOR TO ENCLOSURE.

22. DUCT OPENINGS AND OTHER RELATED AIR DISTRIBUTION COMPONENT OPENINGS ARE COVERED DURING CONSTRUCTION UNTIL FINAL STARTUP OF THE HVAC EQUIPMENT.

23. DISPLACED TOPSOIL IS STOCKPIKED FOR REUSE IN A DESIGNATED AREA AND COVERED OR PROTECTED FROM EROSION

ON-SITE WORK FOR LOCAL GC OR OWNER

THIS SCOPE OF WORK IS A GENERAL OUTLINE FOR THE WORK REQUIRED TO BE PERFORMED BY THE LOCAL GC FOR A CONNECT HOME. IT IS NOT INTENDED TO BE USED AS A COMPREHENSIVE LIST. IT IS THE RESPONSIBILITY OF THE LOCAL GC AND OWNER TO REVIEW THE LOCAL ARCHITECTURAL DRAWINGS AND THE LOCAL BID SET AND CONSTRUCTION SET AS WELL AS THE GEOTECHNICAL REPORT AND CIVIL RECOMMENDATIONS (IF APPLICABLE)

- LOCAL GC OR OWNER PRE-DELIVERY SCOPE OF WORK:**
1. **EROSION AND SEDIMENTATION CONTROL NOTES**
- A) FOLLOW ALL DIRECTIONS OF EROSION CONTROL PLAN PER BMPs AND ALL RELATED COUNTY REQUIRED MEASURES
2. **GRADING**
- A) REVIEW SOILS REPORT AND GRADING RECOMMENDATIONS (IF APPLICABLE)
- B) GRADING/ EXCAVATION FOR FOOTINGS, CRAWLSPACE, TRENCHING, DRIVEWAY
- C) BACKFILL AND COMPACT ALL SOIL REMOVED FOR UTILITY TRENCHING AND FOOTINGS
3. **FOUNDATIONS AND BASEMENT**
- A) CONCRETE FOUNDATION FOOTINGS FOR HOUSE AND GARAGE
- B) STEM WALLS AND PIERS PER PLAN
- C) FOUNDATION VENTS
- D) CRAWLSPACE ACCESS DOOR
- E) INSTALL CLASS I VAPOR RETARDER AT CRAWLSPACE AND DRAINS AS REQUIRED
- F) CONCRETE PAD FOR CONDENSER(S)
- G) CONCRETE BASEMENT WALLS
4. **STEEL**
- A) SUPPLY AND INSTALL WELD PLATES AT TOP OF STEM WALLS AND PIERS
5. **UTILITY INFRASTRUCTURE**
- A) **SEWER:** - RUN SANITARY SEWER LINE FROM PROPERTY LINE TO STUB UP/POINT OF CONNECTION(S) IN CRAWLSPACE
- COORDINATE WITH LOCAL RESPONSIBLE AGENCY IF NEW SEWER LATERAL WILL BE REQUIRED
- INSTALL SEPTIC SYSTEM (IF APPLICABLE)
- B) **WATER:** - RUN WATER MAIN SERVICE LINE FROM WATER METER TO MANIFOLD/ SHUT OFF VALVE OUTSIDE CRAWLSPACE AND SUPPLY STUB UPS/ POINTS OF CONNECTION FOR DOMESTIC SERVICES AND FIRE SPRINKLER SERVICE
- COORDINATE METER SIZE AND MAIN LINE SIZE REQUIREMENTS WITH LOCAL UTILITY COMPANY AND FIRE SPRINKLER REQUIREMENTS
- COORDINATE LOCATION OF EXTERIOR HOSE BIBS
- IF PROPERTY IS ON WATER WELL, INSTALL WATER WELL, TANKS, PUMPS, (IF APPLICABLE)
- C) **GAS:** - COORDINATE GAS SERVICE LINE FROM PROPERTY LINE TO NEW METER LOCATION
- IF PROPERTY IS ON PROPANE, INSTALL PROPANE TANK
- D) **ELECTRICAL:** - INSTALL PIPE SLEEVE AND STUB UP POINT OF CONNECTION IN CRAWLSPACE TO PULL FUTURE ELECTRIC SERVICE INTO CRAWLSPACE
- COORDINATE SERVICE REQUIREMENTS AND SERVICES SIZE WITH LOCAL POWER COMPANY
- IF ADDITIONAL STRUCTURES ON SITE (GARAGE, CARPORT), RUN UNDERGROUND CONDUIT FROM CRAWLSPACE OR MAIN SERVICE PANEL TO THOSE LOCATIONS
- INSTALL TEMPORARY POWER, COORDINATE WITH LOCAL POWER COMPANY
- E) **FIRE:** - COORDINATE FIRE SAFETY REQUIREMENTS (DRIVEWAYS, TURNOUTS, HYDRANTS, WATER SUPPLY WITH LOCAL FIRE DEPARTMENT

BEFORE CONNECT HOMES CAN SCHEDULE THE DELIVERY OF THE HOME THE FOLLOWING REQUIREMENTS MUST BE MET:

- FOUNDATIONS COMPLETE
- STAGING AREA FOR CRANE AND TRUCKS CLEAR OF ALL DEBRIS
- NO OPEN TRENCHES
- TEMPORARY POWER
- TEMPORARY TOILET
- ANY DISTURBED OR EXCAVATED AREAS ON SITE WITHIN THE CONNECT HOMES WORK ZONE (FOR CRANE, TRUCKS AND ALL AROUND THE FOUNDATION) TO BE BACKFILLED AND COMPACTED BEFORE DELIVERY.

NOTE:
CONNECT HOMES STRONGLY ADVISES NOT COMPLETING DRIVEWAYS WITH FINISH MATERIALS PRIOR TO MODULE DELIVERY TO

RESUME OF WORK FACTORY SCOPE OF WORK

1. **STRUCTURAL STEEL FRAMES**

A) WELD AND ASSEMBLE STEEL FRAME

B) PREP, PRIME AND PAINT

C) INSTALL BLOCKING AND BLOCKING FASTENER AT STEEL BEAMS

D) NOTES: SUPPLY MATING PLATES, BOLTS, AND ACCESSORIES TO BE INSTALLED IN FIELD

2. **FLOOR ASSEMBLY**

A) INSTALL FLOOR JOISTS

B) INSTALL INSULATION

C) INSTALL PLYWOOD SUBFLOOR

D) INSTALL TILE FLOORING AT BATHROOM LOCATIONS

E) INSTALL STAIR AND LANDING FRAMING (FOR 2 STORY ONLY)

3. **CEILING ASSEMBLY**

A) INSTALL GYPSUM BOARD CEILING, FINISH AND PAINT

B) INSTALL CEILING JOISTS AT DROPPED CEILING LOCATIONS

D) INSTALL EXTERIOR WOOD SIDING SOFFIT AT COVERED DECK LOCATIONS

4. **ROOFING ASSEMBLY**

A) INSTALL ROOF RAFTER AND CRIPPLE WALL FRAMING

B) INSTALL ROOF INSULATION

C) INSTALL PLYWOOD SHEATHING

D) INSTALL ROOFING MEMBRANE

5. **WALL ASSEMBLY**

A) INSTALL WALL FRAMING

B) INSTALL INSULATION

C) INSTALL INTERIOR GYPSUM BOARD, FINISH AND PAINT

D) INSTALL INTERIOR BASEBOARD

E) INSTALL INTERIOR TILE AT BATHROOM LOCATIONS

F) INSTALL INTERIOR DOORS

G) INSTALL EXTERIOR PLYWOOD SHEATHING

H) INSTALL EXTERIOR BUILDING WRAP, FLEXIBLE FLASHING AND METAL FLASHING, SILL PANS

I) INSTALL EXTERIOR SIDING

J) INSTALL EXTERIOR WINDOW AND DOOR ASSEMBLIES

6. **ELECTRICAL**

A) INSTALL ROUGH ELECTRICAL

B) INSTALL ELECTRICAL FIXTURES

C) INSTALL ELECTRICAL PANEL AND SUB PANEL (FOR 2 STORY ONLY)

D) INSTALL LOW VOLTAGE DEVICES AND ROUGH INS -WIRES WILL BE PULLED IN FIELD

E) INSTALL CONDUIT FOR SOLAR TO ROOF (WIRING AND INSTALL OF SYSTEM IN OWNER SCOPE)

F) INSTALL CONDUIT FOR EV CHARGER (WIRING AND INSTALL BY OWNER) (IF APPLICABLE)

7. **PLUMBING**

A) INSTALL ROUGH PLUMBING -WATER, SANITARY DRAIN, GAS

B) INSTALL WATER HEATER AND OUTTAKE AND INTAKE VENT CAPS

C) INSTALL PLUMBING FIXTURES

D) INSTALL ROUGH PLUMBING STUB DOWNS AT FLOOR AND VENT STUB UPS AT ROOF

8. **MECHANICAL**

A) INSTALL MINI SPLITS

B) SUPPLY MECHANICAL CONDENSER -TO BE INSTALLED ON SITE

C) INSTALL THERMOSTATS

D) INSTALL LAUNDRY ROOM VENT GRILL (IF APPLICABLE)

E) INSTALL ERV AND ERV GRILLS/DUCTING

F) INSTALL DUCTING FOR BATHROOMS FANS AND HOOD VENT

F) INSTALL HEAT MATS AND THERMOSTATS (IF APPLICABLE)

9. **FIRE SPRINKLERS**

A) INSTALL FIRE SPRINKLER MANIFOLD

B) INSTALL FIRE SPRINKLER HEADS, SUPPLY LINES AND STUB DOWNS

C) INSTALL FIRE SPRINKLER ALARM BELL

D) INSTALL FIRE SPRINKLER INTERIOR HORN(S)

10. **APPLIANCES**

A) INSTALL FACTORY-INSTALLED APPLIANCES

B) INSTALL HOOD VENT STUB OUT

11. **CASEWORK**

A) INSTALL CASEWORK

B) INSTALL COUNTERTOPS

12. **DELIVERY PREP**

A) INSTALL CLOSE-UP PLASTIC AT ALL EXTERIOR WALLS FOR SHIPPING

B) SECURE SHIP LOOSE ITEMS

C) CRIB MODULES FOR TRUCK PICK UP

D) PROVIDE FORKLIFTS AS NEEDED FOR LOADING MODULES ONTO TRUCKS

Permit DEV21-3089

REVIEWED BY: AJG 2K20 DATE: 01/27/2023

SUBJECT TO:
*STATE LAWS AND REGULATIONS
*COUNTY ORDINANCES
*NOTATIONS HEREON
*FIELD INSPECTIONS & TESTS
*FINAL INSPECTION

THE STAMPING OF THESE PLANS BY THIS OFFICE SHALL NOT BE CONSTRUED AS APPROVAL OR PERMISSION TO VIOLATE ANY COUNTY OR STATE LAW OR REGULATION.

A COPY OF THE APPROVED PERMIT AND PLANS SHALL BE KEPT ON THE JOB SITE DURING CONSTRUCTION.

CALL 72 HOURS PRIOR TO DESIRED INSPECTION OR TEST FOR APPOINTMENT.

SEE APPROVED GRADING PLAN DEV 21-1336

COUNTY OF SANTA CLARA
BUILDING INSPECTION OFFICE
PLANS APPROVED FOR PERMIT

RECORD NO.: DEV21-3089

BY: Mhenen Date: 01/26/2023

HARD COPY OF THESE STAMPED PLANS MUST BE ON THE SITE FOR INSPECTIONS

SPECIAL INSPECTION
REQUIRED FOR THE FOLLOWING

See special inspection form

ARCHITECTURAL SET - LOCAL	
Sheet Number	Sheet Name
L-0.1	TITLE SHEET
L-0.2	MATERIALS AND FINISHES - LOCAL SET
L-1.0	OVERALL SITE PLAN (CIVIL)
L-1.2	OVERALL ARCHITECTURAL SITE PLAN
L-1.6	LANDSCAPING PLAN
L-2.0	ARCHITECTURAL FOUNDATION PLAN
L-2.1	FLOOR PLAN - BASEMENT
L-2.2	FLOOR PLAN - LEVEL 1
L-2.3	FLOOR PLAN - GARAGE
L-2.4	ROOF PLAN
L-3.0	SITE EXTERIOR ELEVATIONS
L-3.1	SITE EXTERIOR ELEVATIONS
L-3.2	BUILDING SECTIONS
L-3.3	UTILITY PLAN - LEVEL 1
L-3.3B	UTILITY PLAN - BASEMENT
L-3.4	SITE-BUILT ARCHITECTURAL DETAILS
L-3.5	SITE-BUILT ARCHITECTURAL DETAILS
L-4.0	TITLE 24 DOCUMENTATION
L-4.1	TITLE 24 DOCUMENTATION
L-4.2	TITLE 24 DOCUMENTATION
L-5.0	FIRE PLAN
L1	LANDSCAPE PLAN
CG-1	CALGREEN MANDATORY & TIER 1 REQUIREMENTS
CG-2	CALGREEN MANDATORY & TIER 1 REQUIREMENTS
CG-3	CALGREEN MANDATORY & TIER 1 REQUIREMENTS
CG-4	CALGREEN MANDATORY & TIER 1 REQUIREMENTS

STRUCTURAL SET - LOCAL	
Sheet Number	Sheet Name
S-1.0	STRUCTURAL NOTES
S-5.0	SYSTEM FOUNDATION DETAILS (GENERAL SITE)
S-6.0	STRUCTURAL FOUNDATION AND DECK PLANS
S-6.1	STEEL FLOOR BEAMS CHECK PLAN AND FOUNDATION TIE DETAILS
S-7.0 (GV)	SYSTEM FOUNDATION DETAILS (GENERAL SITE)
S-7.1	FOUNDATION WALL DETAILS
S-7.2	MAT SLAB W/ SLAB EDGE FOOTING AT HILLSIDE
S-8.0	CEILING AND ROOF FRAMING PLAN
S-8.1	DECK FRAMING PLAN AND DETAILS
S-8.2	GARAGE&ENTRY HALLWAY STRUCTURAL DETAILS

CIVIL PLANS	
C0	OVERALL SITE PLAN
C1	OVERALL SITE PLAN
C2	GRADING AND DRAINAGE PLAN
C2.1	GRADING AND DRAINAGE PLAN
C3	DRIVEWAY PROFILE SECTIONS AND DETAILS
C5	EROSION CONTROL PLAN
C6	EROSION CONTROL DETAIL (BMP-1)
C6	EROSION CONTROL DETAIL (BMP-2)

HCD APPROVED - FACTORY BUILT HOUSING SET	
Sheet Number	Sheet Name
M-0.1	TITLE SHEET
M-0.2	MATERIALS AND FINISHES - MANUFACTURE SET
M-0.3	SCHEDULES - DOOR AND WINDOW
M-2.0	FLOOR AND ROOF PLANS
M-3.0	EXTERIOR ELEVATIONS
M-3.1	BUILDING SECTIONS
M-4.0	INTERIOR ELEVATIONS
M-4.1	INTERIOR ELEVATIONS
M-4.2	INTERIOR ELEVATIONS
M-4.3	DECK FRAMING - PLAN AND DETAILS
M-5.1 (GV)	MANUFACTURE DETAILS - SECTIONS AND PLANS
M-7.0	PLUMBING SCHEDULES AND NOTES
M-7.1	MECHANICAL PLANS AND SCHEDULES
M-7.3	ARCHITECTURAL LIGHTING, POWER, AND RCPS
M-7.4	ARCHITECTURAL FIRSESPRINKLER PLAN

HCD APPROVED - F - SHEETS	
Sheet Number	Sheet Name
F-5.1 (GV)	FINISH DETAILS - SECTIONS AND PLANS

HCD APPROVED - STRUCTURAL SET	
Sheet Number	Sheet Name
S-1.0	STRUCTURAL NOTES
S-2.0	STRUCTURAL PLANS OVERALL
S-2.1	STRUCTURAL PLANS - MODULES 01 - 03
S-2.2	STRUCTURAL PLANS 04 - 06
S-2.3	STRUCTURAL PLANS - OVERALL ROOF
S-3.0	STRUCTURAL STEEL DETAILS
S-4.0	STRUCTURAL FRAMING DETAILS
S-5.0	SYSTEM FOUNDATION DETAILS (GENERAL SITE)

ATTACHED DOCUMENTATION WITH ORIGINAL SUBMITTAL:

- STRUCTURAL CALCULATIONS FOR SITE WORK
- GEOTECHNICAL EXPLORATION/ SOILS REPORT
- STRUCTURAL CALCULATIONS FOR FACTORY BUILT DWELLING (HCD APPROVED)
- CALGREEN MANDATORY FORMS AND CUTSHEETS (HCD APPROVED)
- TITLE 24 FORMS (HCD APPROVED)

PROPOSED MINIMUM SOLAR Kwdc PER TITLE 24: 5 Kwdc (DEFERRED SUBMITTAL)

WORK SHOWN IN RIGHT-OF-WAY FOR REFERENCE ONLY.
SEE ROADS AND AIRPORTS ENCROACHMENT PERMIT ENC22-0444
FOR APPROVED WORK IN THE RIGHT-OF-WAY.

NOTES NO SCALE 11

ADVISORY:

The proposed residence is a Factory Built Home and is regulated under the California Health and Safety Codes, Division 1, Part 6. Please note that the following stamp is affixed to all sheets except the "Local" requirements sheets.

FIRE MARSHAL INSPECTIONS
DEV Record No. DEV21-3089, Date 01/27/2023
BY: AJG 2K20

COMBUSTIBLE MATERIALS SHALL NOT BE BROUGHT ON-SITE UNTIL THE FOLLOWING HAVE BEEN INSTALLED, INSPECTED, AND DEEMED FUNCTIONAL BY THE FIRE MARSHAL'S OFFICE.

- ☒ FIRE PROTECTION WATER SUPPLY
- ☒ FIRE HYDRANTS
- ☒ ACCESS ROADS
- ☒ DRIVEWAYS

INSPECTION AND APPROVAL OF THE WHOLE HYDRANT BY THE FIRE MARSHAL IS REQUIRED PRIOR TO THE FOUNDATION INSPECTION (REFERENCE FMO STANDARD CPMO-W4 WS)

☒ YES ☐ NO

CALL 408-341-4030 TO SCHEDULE INSPECTIONS

Notes:

RADCO APPROVED FACTORY-BUILT HOUSING

These plans have been approved pursuant to the provisions of the State of California Health and Safety Code, Division 13, Part 6 and the regulations adopted pursuant thereto.

Approvals herein does not authorize or approve any omission of deviation from State laws or valid local ordinances nor is it applicable to movement of units over highways, county roads or city streets.

Foundation Design is not approved.

Occupancy Roof LL Wind Exp Seismic Cat
R3 20psf 91 mph C D

Plan Approval No. RAD-33-1105

Christopher Sesma

By Approved Date: 4/6/2021
Expiration Date: 4/6/2024

RADCO APPROVAL NO SCALE 10

PRIOR TO BUILDING PERMIT FINAL APPROVAL, THE PROPERTY SHALL BE IN COMPLIANCE WITH THE VEGETATION MANAGEMENT REQUIREMENTS PRESCRIBED IN THE CALIFORNIA FIRE CODE SECTION 4006, INCLUDING CALIFORNIA PUBLIC RESOURCES CODE 4291 OR CALIFORNIA GOVERNMENT CODE 51162. (CRC R337.1.5)


REGULATING CODES:

- 2019 CALIFORNIA BUILDING CODE (2018 IBC)
- 2019 CALIFORNIA RESIDENTIAL CODE (2018 IRC)
- 2019 CALIFORNIA ELECTRICAL CODE (2017 NEC)
- 2019 CALIFORNIA MECHANICAL CODE (2018 IMC)
- 2019 CALIFORNIA PLUMBING CODE (2018 IPC)
- 2019 CALIFORNIA FIRE CODE
- 2019 CALIFORNIA GREEN BUILDING STANDARDS CODE (CALGREEN)
- 2019 CALIFORNIA ENERGY CODE
- COUNTY OF SANTA CLARA CODE OF ORDINANCES

RESUME OF WORK : ON SITE (PRE-DELIVERY) NO SCALE 8

- LOCAL GC OR OWNER POST-DELIVERY SCOPE OF WORK:**
1. **FOUNDATIONS**
- A) CONCRETE PADS FOR SITE-BUILT STAIRS, DECKS.
- B) FINISH SLAB FOR CARPORT/ GARAGE (IF APPLICABLE)
- C) CRAWLSPACE ACCESS COVER (IF APPLICABLE)
2. **UTILITY INFRASTRUCTURE**
- A) **SEWER:** -INSTALL SANITARY DRAINAGE BRANCH IN CRAWLSPACE CONNECTING SANITARY DRAIN/WASTE/VENT STUB DOWNS UNDER HOUSE AND CONNECT TO SANITARY DRAINAGE STUB UP IN CRAWLSPACE.
-PROVIDE ACCESSIBLE END OF LINE CLEAN OUTS PER CODE REQUIREMENTS.
- B) **WATER:** -CONNECT WATER SERVICE LINE TO STUB DOWN IN CRAWLSPACE AND CONNECT FIRE SPRINKLER RISER STUB DOWNS UNDER HOUSE TO STUB UP IN CRAWLSPACE, INSTALL HOSE BIBS
- C) **GAS:** -INSTALL SEISMIC SHUTOFF VALVE, CONNECT GAS SERVICE FROM METER TO GAS LINE STUB DOWNS UNDER HOUSE TO STUB UP IN CRAWLSPACE
- D) **ELECTRICAL:** -COORDINATE ELECTRIC METER LOCATION AND SIZE OF SERVICE WITH LOCAL UTILITY COMPANY
-SUPPLY AND INSTALL MAIN ELECTRICAL PANEL AND RUN OVERHEAD OR UNDERGROUND SERVICE TO METER
-CONNECT ELECTRIC SERVICE FROM MAIN SERVICE PANEL TO SUB PANELS
-RUN SERVICE TO CONDENSER (IF APPLICABLE)
-IF ADDITIONAL STRUCTURES ON SITE (GARAGE/ CARPORT), RUN ELECTRIC SERVICE TO THEM
- E) COORDINATE DIRECTLY WITH THE LOCAL TELEPHONE AND CABLE PROVIDERS SERVICING THE AREA TO PROVIDE SERVICE FOR THE HOME, INCLUDING THE INSTALLATION OF TELEPHONE AND CABLE PANELS AND THE PULLING OF LOW VOLTAGE WIRES CONNECTING THE DEVICES INSIDE THE HOUSE TO THE PANELS (IF APPLICABLE)
- F) COORDINATE INSTALL OF SOLAR PANELS WITH SOLAR PANEL SUB CONTRACTOR, COORDINATE WITH LOCAL UTILITY COMPANY (IF APPLICABLE)
3. **GRADING**
- A) COMPLETE BACKFILL AND FINISH GRADING
4. **SITE FEATURES (CHECK PLANS TO SEE IF APPLICABLE)**
- A) GARAGE
- B) SITE DECKS AND STAIRS
- C) LIJ/ WATER CATCHMENT SYSTEMS
- D) HARDSCAPES
- E) GATES, FENCING
- F) DRIVEWAY
- G) BASEMENT EXTERIOR DOORS AND WINDOWS
5. **SITE DRAINAGE**
- A) CONNECT DOWNSPOUTS TO SUBSURFACE DRAINS, RAIN BARRELS, OR SUPPLY AND INSTALL SPLASH BLOCKS (IF APPLICABLE)
- ADDITIONAL NOTES:**
- LOCAL GC OR OWNER WILL MAINTAIN A TEMPORARY TOILET, TEMPORARY POWER, JOBSITE FENCING AND SECURITY AND WILL BE RESPONSIBLE FOR HAULING ANY TRASH AND CONSTRUCTION DEBRIS DURING THE COURSE OF ON-SITE WORK AS WELL AS DURING CONNECT HOMES' INSTALLATION SERVICES ON SITE.
 - LOCAL GC OR OWNER WILL BE RESPONSIBLE FOR THE COORDINATION AND SCHEDULING OF ALL LOCAL JURISDICTION INSPECTIONS, PUBLIC INSPECTIONS, DEPUTY INSPECTIONS AND STRUCTURAL OBSERVATIONS AT THE SITE THAT ARE REQUIRED BY THE LOCAL JURISDICTION BUILDING DEPARTMENT OR AGENCY FOR THE WORK THEY PERFORM.

RESUME OF WORK: ON SITE (POST-DELIVERY) NO SCALE 7

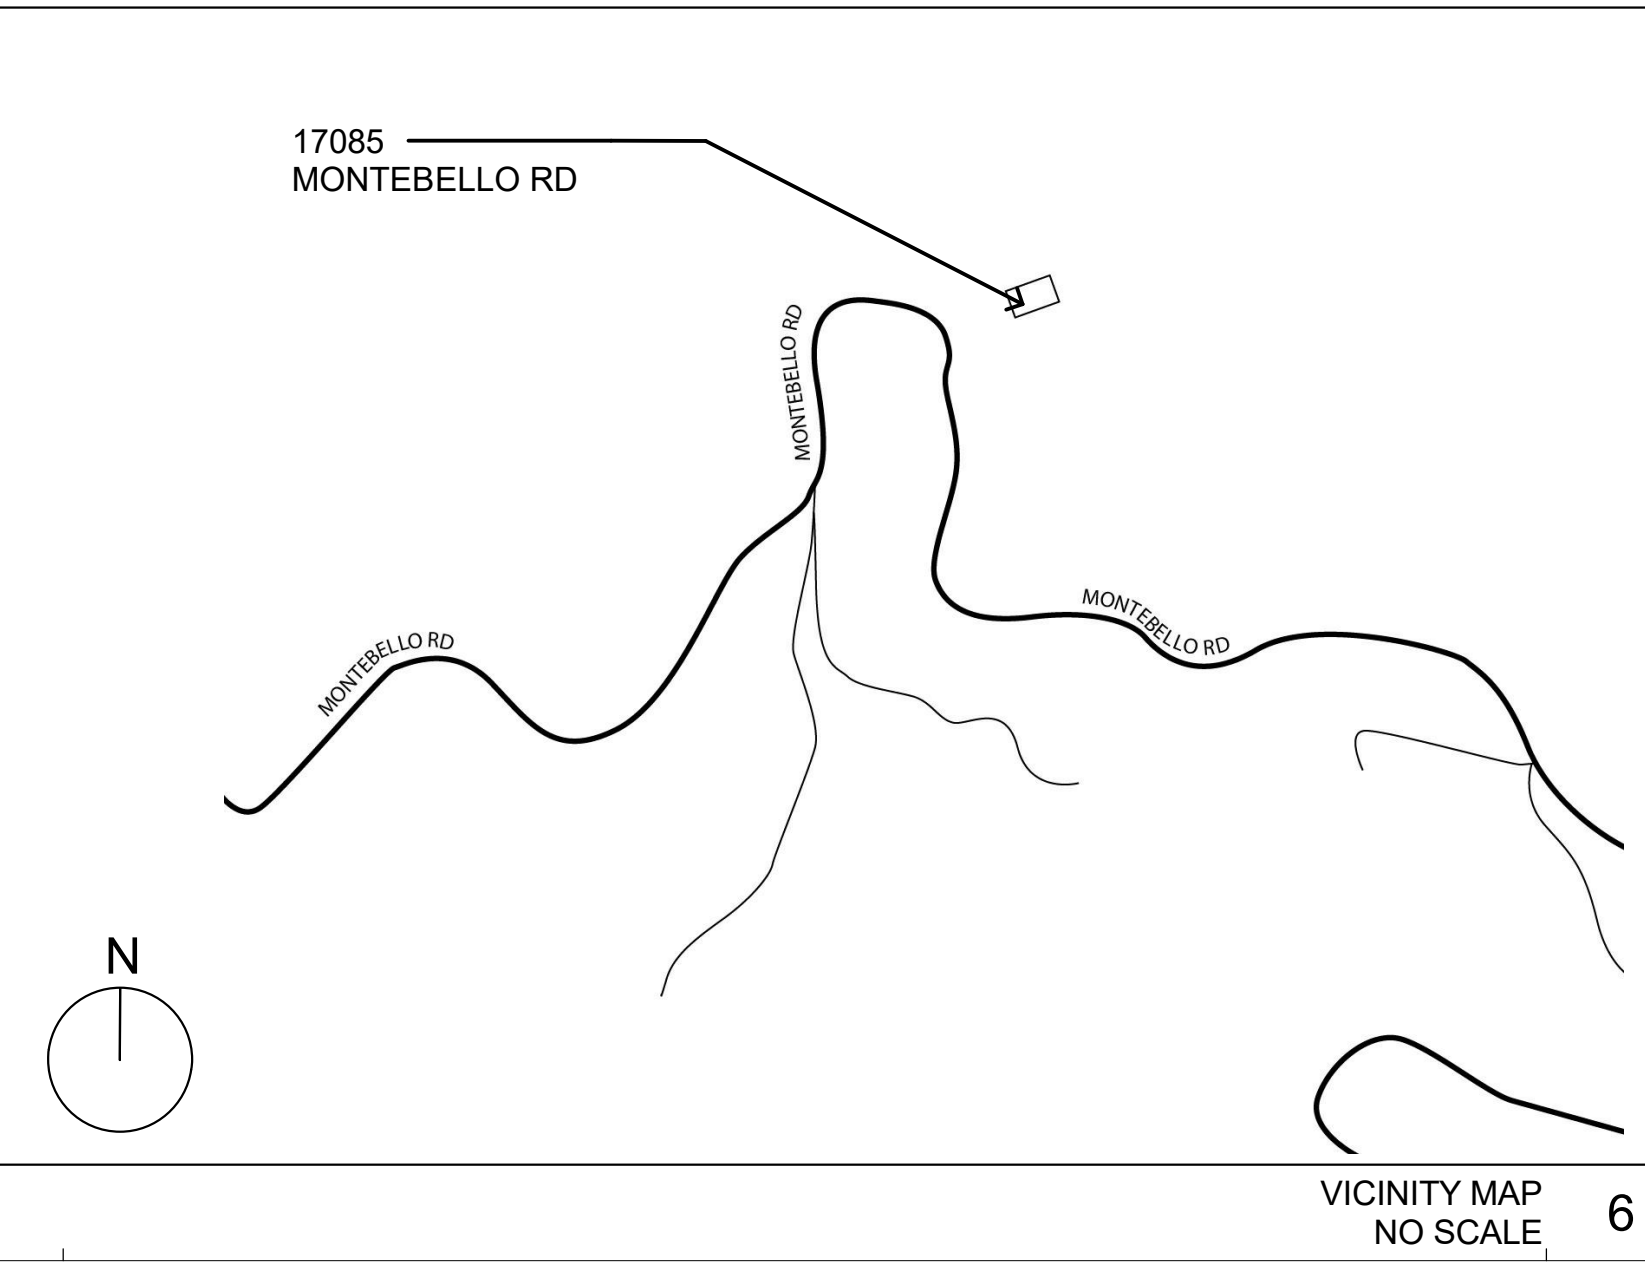

RESUME OF WORK: IN FACTORY NO SCALE 5

PROJECT DESCRIPTION

1,936 SF SINGLE FAMILY FACTORY BUILT RESIDENCE WITH SITE-BUILT 2,010 SF (UNFINISHED) BASEMENT, 284 SF HALLWAY, 357 SF UNCOVERED SITE-BUILT DECKS, 510 SF GARAGE & 88'-0" RETAINING WALL

PARCEL INFORMATION

SITE ADDRESS: 17085 MONTEBELLO RD, CUPERTINO, CA, 95014

APN: 351-40-001
ZONING: HS-d1-sr
LOT SIZE: 79.5 acres 3,463,020 SF
CONSTRUCTION TYPE: TYPE V-B
SRAWUI ZONE: YES
FLOOD PRONE URBAN AREA: NO
CLIMATE ZONE: 4
OCCUPANCY: R3
AUTOMATIC FIRE SPRINKLERS: YES (UNDER SEPARATE PERMIT)
SPECIAL INSPECTION & STRUCTURAL OBSERVATION: YES

PRESENT LAND USE : VACANT

PROPOSED: 1856 SF FACTORY BUILT 1-STORY SINGLE FAMILY DWELLING + 80 SF INSET DECK
1950 SF SITE BUILT BASEMENT + 60 SF INSET DECK
510 SF SITE BUILT GARAGE
264 SF SITE BUILT ENTRY HALLWAY
357 SF UNCOVERED SITE-BUILT DECKS
4720 SF TOTAL COVERED FLOOR AREA
357 SF TOTAL UNCOVERED FLOOR AREA

HEIGHT:
HEIGHT LIMIT: 35'
PROPOSED HEIGHT: 21' 2"

WUI
THIS PROJECT IS LOCATED WITHIN THE WILDLAND-URBAN INTERFACE
HIGH-MODERATE FIRE HAZARD SEVERITY ZONE

REQUIRED SETBACKS:
FRONT YARD SETBACK: 30'
SIDE YARD SETBACK: 30'
REAR YARD SETBACK: 30'

PROPOSED SETBACKS:
FRONT YARD: 30'
SIDE YARD: 30'
REAR YARD: 30'

PARKING REQUIREMENTS: 2 OFF-STREET PARKING (1 MUST BE COVERED)
PROPOSED PARKING: 2 OFF-STREET COVERED PARKING

NOTE:

- FOR DESIGN LOADS, WIND CRITERIA AND SEISMIC CRITERIA SEE SHEET S-1.0
- GRADING PERMIT IS A SEPARATE SUBMITTAL
- FIRE SPRINKLER AND SOLAR PERMITS ARE SEPERATE AND DEFERRED
- "CERTIFICATE OF INSIGNIA FOR THE WUI COMPLIANT MANUFACTURED HOME" TO BE PROVIDED TO THE COUNTY INSPECTOR BEFORE FOUNDATION INSPECTION

Landscape Area is less than 500 square feet and no Landscape Permit is necessary

PROJECT INFORMATION NO SCALE 4

RESUME OF WORK FINISH INSTALLATION - IN FIELD SCOPE OF WORK

1. **STRUCTURAL STEEL FRAMES**

A) WELD BOTTOM STEEL CORNER PLATES AND STEEL SHM PLATES LOCATED AT FLOOR BEAMS TO STEEL WELD PLATES ON CONCRETE STEM WALL AND PIERS

B) WELD MATING SIDE PLATES AT MODULES' CONNECTION

C) INSTALL MATE LINE BOLTS THROUGH ROOF BEAMS AT ROOF

D) INSTALL MATE LINE CONNECTION PLATES THROUGH ROOF BEAMS AT ROOF

E) INSTALL BOLTS AT STORYLINE CONNECTIONS. (FOR 2 STORY ONLY)

2. **FLOOR ASSEMBLY**

A) INSTALL PLYWOOD SUBFLOOR ALONG FLOOR MATING SEAMS

B) INSTALL INSULATION AT FLOOR MATING SEAMS

C) INSTALL WOOD FLOORING

D) COMPLETE STAIR LANDING ASSEMBLY (FOR 2 STORY ONLY)

3. **CEILING ASSEMBLY**

A) INSTALL GYPSUM BOARD CEILING, FINISH AND PAINT AT ACCESS BLOCKOUTS (WHERE APPLICABLE)

B) INSTALL MATELINE CEILING BOARD BETWEEN BEAMS

4. **ROOFING ASSEMBLY**

A) INSTALL MATELINE BLOCKING AS NEEDED

B) INSTALL PLYWOOD SHEATHING ALONG MATING SEAMS

C) COMPLETE ROOFING MEMBRANE MATELINE OVERLAPS

D) INSTALL METAL GUTTER AND FASCIA TRIM METALS

E) INSTALL METAL DOWNSPOUTS

F) INSTALL METAL TRIM PIECE AT UNDERSIDE OF BLOCKING ALONG ROOF BEAM MATING SEAMS

G) INSTALL ROOF VENTILATION

5. **WALL ASSEMBLY**

A) INSTALL GYPSUM BOARD ALONG WALL MATING SEAMS AND REMAINING AREAS, FINISH AND PAINT

B) PRIME AND PAINT ALONG WALL MATING SEAMS

C) INSTALL WALL BASE ALONG WALL MATING SEAMS

D) INSTALL INSULATION ALONG WALL MATING SEAMS

E) INSTALL EXTERIOR PLYWOOD SHEATHING, FLEXIBLE FLASHING LAP AND EXTERIOR FURRING STRIPS ALONG WALL MATING SEAMS

F) INSTALL EXTERIOR SIDING ALONG WALL MATING SEAMS AND REMAINING AREAS

G) INSTALL EXTERIOR METAL CORNER CAPS/ EXTERIOR SIDING AT CORNERS (IF APPLICABLE)

H) INSTALL EXTERIOR METAL BASE FASCIA

6. **ELECTRICAL**

A) COMPLETE ELECTRIC CIRCUIT AND SWITCH CONNECTIONS CROSSOVERS BETWEEN MODULES

B) CONNECT SECOND FLOOR SUBPANEL TO FIRST FLOOR SUBPANEL (2 STORY ONLY)

C) INSTALL REMAINING ELECTRICAL FIXTURES

D) INSTALL EXTERIOR LIGHTS

E) TEST ELECTRICAL SYSTEMS IN HOUSE

7. **PLUMBING**

A) INSTALL ROOF VENT SLEEVES AND PROTECTION COLLARS AT VENT STUB UPS

B) INSTALL REMAINING PLUMBING FIXTURES

C) TEST PLUMBING SYSTEMS IN HOUSE

8. **MECHANICAL**

A) INSTALL FAN UNITS

B) INSTALL SUPPLY AND RETURN AIR REGISTERS

C) COMPLETE THERMOSTAT WIRING

D) INSTALL CONDENSER

F) CONNECT REMAINING DUCTING, INCLUDING RANGE HOOD AND CROSSOVERS

G) TEST MECHANICAL SYSTEM

9. **APPLIANCES**

A) INSTALL REMAINING APPLIANCES (WITHIN CH SCOPE)

B) TEST APPLIANCES

10. **CASEWORK**

GENERAL CONTRACTOR:
TBD

OWNER:
JEREMY VAN GRINSVEN & TINA CHEN
17085 MONTEBELLO RD
CUPERTINO, CA, 95014
919 412 6568 TEL
jeremy@vangrinsven.us

ARCHITECT:
Jared Levy
Connect Homes
706 S. Hill Street
Los Angeles, CA 90014
323 697 2386 TEL
310 622 9271 FAX
info@connect-homes.com

MODULAR BUILDER:
Connect Homes Factory
1811 Riverview Dr.
San Bernardino, CA 92408

STRUCTURAL ENGINEER:
Sza Shahani, MEng., M.Sc., P.E.
8th St. Construction & Consulting
619 906 0202 TEL
reza@8thstreets.com

SURVEYOR:
PEOPLE ASSOCIATES
1996 Tarot Court
Milpitas, CA 95035
408 957 9221 FAX
408 957 9220 TEL

GEOTECH:
C2EARTH, INC.
750 Camden Ave # A
Campbell, CA 95008
408 866 5436 TEL

CIVIL ENGINEER:
Ninh M. Le, PE
LC Engineering
598 E Santa Clara St Ste 270
San Jose, CA 95112
nle@lceengineering.net
408 806 7187 TEL

COMPLETE PRIOR TO FINAL INSPECTION
SUBMIT CONSTRUCTION OBSERVATION LETTER BY PROJECT GEOLOGIST OR SOILS ENGINEER TO COUNTY GEOLOGIST FOR GEOLOGY CLEARANCE

SEE APPROVED GRADING PLAN DEV 21-1336

PROJECT DIRECTORY NO SCALE 2B

THE FOLLOWING IS A SUMMARY OF THE FEATURES THAT MUST BE FIELD-VERIFIED BY A CERTIFIED HERS RATER AS A CONDITION FOR MEETING THE MODEL ENERGY PERFORMANCE FOR THIS COMPUTER ANALYSIS. ADDITIONAL DETAIL IS PROVIDED IN THE BUILDING TABLES BELOW. REGISTERED CF2RS AND CF3RS ARE REQUIRED TO BE COMPLETED IN THE HERS REGISTRY

BUILDING-LEVEL VERIFICATIONS:

- QUALITY INSULATION INSTALLATION (QII)
- INDOOR AIR QUALITY VENTILATION

COOLING SYSTEM VERIFICATIONS:

- VERIFIED SEER
- VERIFIED REFRIGERANT CHARGE
- AIRFLOW IN HABITABLE ROOMS (SC3.1.4.1.7)
- MINIMUM AIRFLOW ACCORDING TO RA3.3 AND SC3.3.4.1

HEATING SYSTEM VERIFICATIONS:

- VERIFIED HSPF
- VERIFIED HEAT PUMP RATED HEATING CAPACITY
- CEC CERTIFIED LOW-STATIC VCHP SYSTEM
- WALL-MOUNTED THERMOSTAT IN ZONES GREATER THAN 150 FT² (SC3.4.5)
- VERIFIED AIR FILTER SIZING (SC3.1.4.7)
- VERIFIED AIR FILTER PRESSURE DROP RATING

HVAC DISTRIBUTION SYSTEM VERIFICATIONS:

- DUCTS LOCATED ENTIRELY IN CONDITIONED SPACE CONFIRMED BY DUCT LEAKAGE TESTING
- VERIFIED LOW-LEAKAGE DUCTS IN CONDITIONED SPACE MUST MEET MAXIMUM 25 CFM LEAKAGE TO