
NOTE: A REVISION AFTER THE TRUSSES SUBMITALL IS REQUIRED

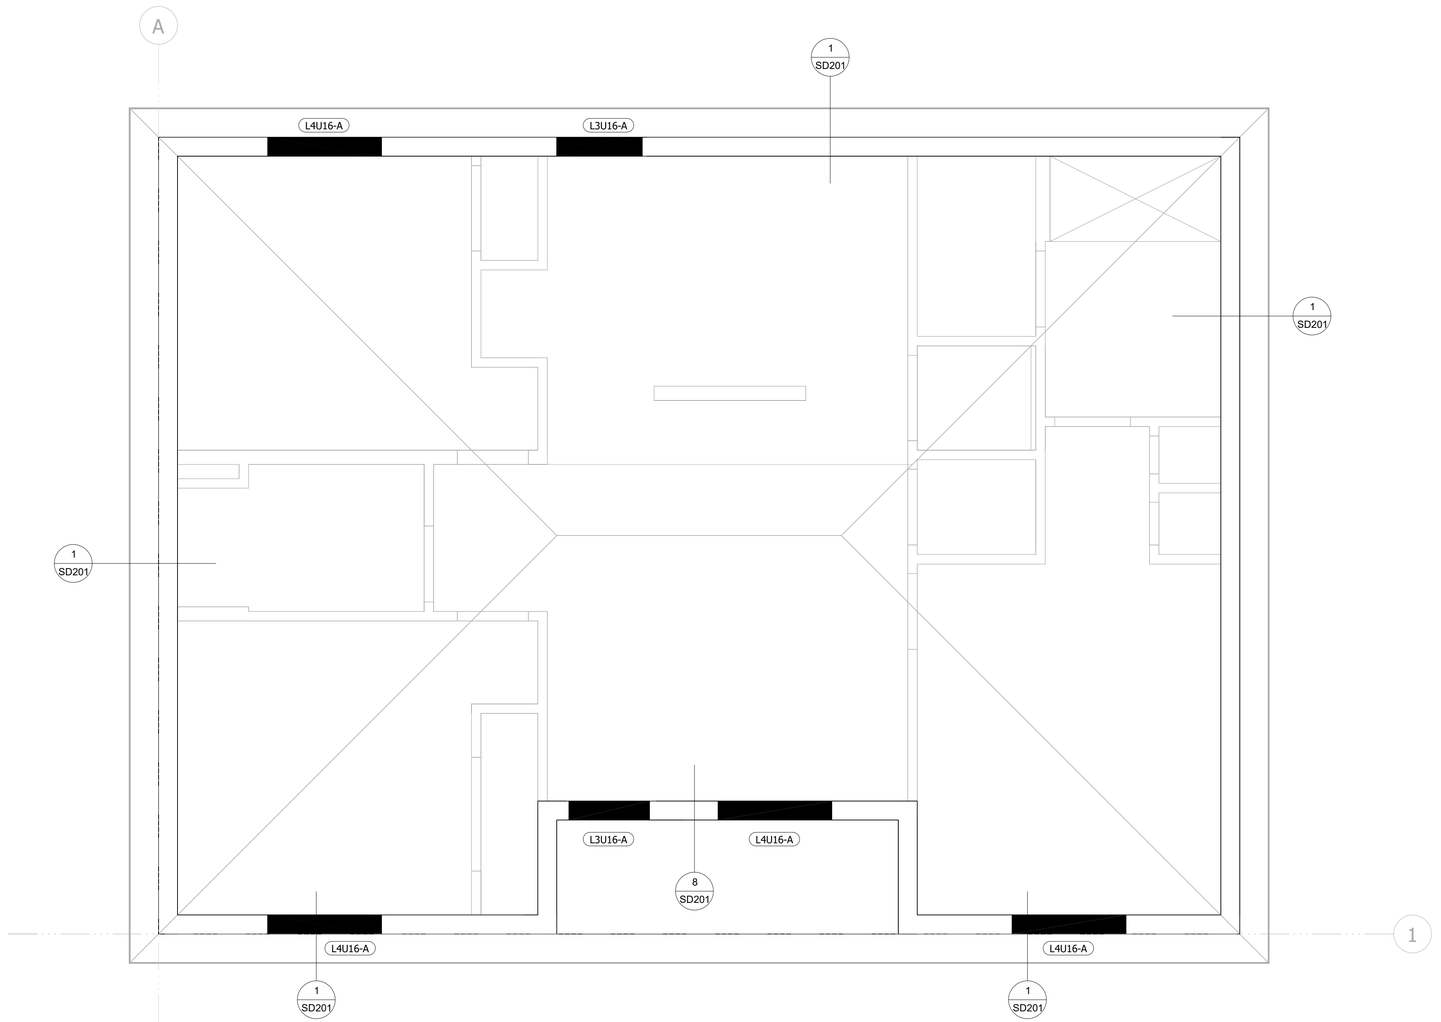

1 ROOF FRAMING PLAN
3/8" = 1'-0"

HEADER SCHEDULE LEGEND	
A	HEADER IDENTIFICATION MARK (HXX)
B	NUMBER OF PLYS RQUIRED
C	**HEADER SIZE
D	NUMBER OF JACK/TRIMMER STUDS AT EACH END
E	NUMBER OF KING/FULL LENGTH STUDS AT EACH END
F	TYPE HEADER STRAP REQUIRED
G	NUMBER OF JACK STUDS STRAPPED AT EACH END
H	NUMBER OF FULL LENGTH STUDS STRAPPED AT EA. END
I	*TYPE STRAP REQUIRED AT BASE OF JACKS AND BOTH TOP AND BOTTOM OF FULL LENGTH STUDS

* ONLY JACKS THAT ARE REQUIRED TO BE STRAPPED AT TOP NEED TO BE STRAPPED AT BOTTOM

** HEADER MUST BE DOUGLAS FIR-LARCH #2 OR BETTER

NAIL JACK STUDS AND FULL STRENGTH STUDS TOGETHER WITH 10d's STAGGERED AT 12" O.C. EACH PLY.

ALL HEADER SHALL BE NAILED TO JACK STUDS W/2 12d TOE NAILS AND (3) 16d TOE NAILS TO KING STUDS

HEADER SCHEDULE LEGEND

MARK	# PLYS	HDR. SIZE	# JACK STUDS EA. END	# FULL LENGTH STUDS EA. END.	# HDR STRAP EA. END	HDR STRAP EA. END	# FULL LENGTH STUDS STRAP AT EA. END	STUD STRAP
H00	2	(2) 2X TOP PLATE	0	2	-	-	-	
H01	2	2X6	1	1	-	-	-	
H02	2	2X6	1	2	-	-	-	-
H03	2	2X6	1	3	-	-	-	
H04	2	2X6	1	1	1	W7	-	S1
H05	2	2X6	1	2	1	W7	-	S1
H06	2	2X6	1	3	1	W7	-	S1
H07	2	2X8	1	1	-	-	-	
H08	2	2X8	1	2	-	-	-	
H09	2	2X8	1	3	-	-	-	
H10	2	2X8	1	1	1	W7	-	S1
H11	2	2X8	1	2	1	W7	-	S1
H12	2	2X8	1	3	1	W7	-	S1
H13	2	2X8	2	1	2	W7	-	S1
H14	2	2X8	2	2	2	W7	-	S1
H15	2	2X8	2	3	2	W7	-	S1
H16	2	2X10	1	1	-	-	-	
H17	2	2X10	2	1	-	-	-	
H18	2	2X10	1	1	1	W7	-	S1
H19	2	2X10	1	2	1	W7	-	S1
H20	2	2X10	1	3	1	W7	-	S1

OPENING PRESSURES 100 EXP. C

OPENING SQ. FT.	MID ZONE +W	MID ZONE -W	END ZONE +W	END ZONE -W
0-19.9999	+16.0	-16.0	+16.0	-18.5
20-49.9999	+16.0	-16.0	+16.0	-17.3
50-99.9999	+16.0	-16.0	+16.0	-16.0
100 & >	+16.0	-16.0	+16.0	-16.0

* DENOTES PRESSURES CALCULATED FOR DOOR PARTIALLY IN END ZONE

FRAMING NOTES 100 EXP. C ULTIMATE DESIGN WIND SPEED

1. REFER TO GENERAL NOTES FOR GENERAL FRAMING REQUIREMENTS U.N.O. ON DRAWINGS
2. 2X6 OF #2 OR BETTER EXTERIOR WALL FRAMING @16" O.C. U.N.O.
3. PROVIDE (2) 2X BUILD UP COLUMN AT ALL BEAM SUPPORTS U.N.O. ON PLAN
4. ALL NAILS ARE COMMON WIRE NAIL U.N.O.
5. FLOOR/ROOF SHEATHING SHALL HAVE (2) ROWS OF EDGE NAILING AT BEAMS/COLLECTORS

HEADER SUBSTITUTION CHART

MATERIAL: ANTHONY 1.6E SHORT SPAN HEADER 3-1/2" WIDE; 1500 Fb; 160FV

SAWN LUMBER	EQUIVALENT SUBSTITUTION
2-2x6	3 1/2" x 5 1/2"
2-2x8	3 1/2" x 7 1/4"
2-2x10	3 1/2" x 9 1/4"
2-2x12	3 1/2" x 11 1/2"

*NOTE: HEADER CHART STRAPPING & DETAILS STILL APPLY

LEGEND

L3F16-B	DENOTES LINTEL TYPE SEE SHEET SD110 FOR SCHEDULE
XX	DENOTES CONNECTOR TYPE SEE SHEET SD110 FOR SCHEDULE
H04	DENOTES HEADER TYPE SEE THIS SHEET FOR SCHEDULE


LEGEND

- CMU BEARING WALL AT 8'-0"
- INTERIOR BEARING WALL
- SHEAR WALL PER 7/SD400
- 2x6 WOOD FRAMING WALL
- 2x4 WOOD FRAMING WALL

BUILDER NOTE

THE ENGINEERING FOR THIS CONSTRUCTION DOCUMENT HAS BEEN PREPARED W/ THE ROOFING MATERIAL AS: SHINGLE

ATTIC MOUNTED AIR HANDLER HANGER DETAIL

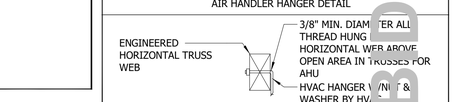

BID PROGRESS SET NOT FOR CONSTRUCTION

FOREFRONT
ARCHITECTURE + ENGINEERING
ARCHITECTURE + ENGINEERING
1230 Oakley Seaver Drive, Suite 100
Clermont, Florida 34711
888.850.FFAE (3323)
www.forefront.com
AR102538-CA30900

ISSUE - REVISION LOG

MARK.	DATE	DESCRIPTION

SEAL

JOB NAME: HOUSING ASSISTANCE PROGRAM - WOODBURRY RESIDENCE
826 N WEST 6TH AVE., OCALA, FL 34475

SHEET NAME: ROOF FRAMING PLAN

ANY DISCREPANCY OR ERROR IN DIMENSIONS OR NOTES SHALL BE BROUGHT TO THE ATTENTION OF THE DESIGN PROFESSIONAL FOR CLARIFICATION PRIOR TO COMMENCEMENT OF CONSTRUCTION.

JOB #: 25-14622

DATE: Issue Date

SHEET NUMBER: S102

C:\Users\mshelley\Documents\2025-05-10_HOUSING ASSISTANCE PROGRAM-WOODBURY RESIDENCE_STR_RVT24_0_mshelley#5JLB.rvt