

STAGHILL COTTAGE

NEW ADDITION

28738 JENNINGS RD IN EASTON, MD 21601

GENERAL NOTES		PROJECT SCOPE		DRAWING INDEX	
1. WHEN INTERPRETING THE DRAWINGS, PREFERENCE SHALL BE GIVEN IN ALL CASES TO NUMERICAL DIMENSION OVER MEASUREMENTS BY SCALE, AND TO DETAIL DRAWINGS OVER THOSE DRAWINGS OF A SMALLER SCALE. 2. DETAIL DRAWINGS AND SCHEDULES DESCRIBE CONSTRUCTION AT GIVEN AREAS. THE GENERAL CONTRACTOR AND ALL SUBCONTRACTORS SHALL UTILIZE EQUIVALENT CONSTRUCTION METHODS IN ALL AREAS NOT DETAILED. 3. ALL NOTES ON THE DRAWINGS SHALL BE ASSUMED AS TYPICAL UNLESS OTHERWISE SHOWN OR NOTED ON THE DRAWINGS. 4. ALL FINISHED DIMENSIONS, UNLESS NOTED OTHERWISE, ARE TO FACE OF FINISHED DRYWALL, FACE OF MASONRY, FACE OF CONCRETE OR CENTERLINE OF STRUCTURAL STEEL (COLUMNS, BEAMS, ETC.). 5. IT SHALL BE THE DUTY OF THE CONTRACTOR TO VERIFY ALL DIMENSIONS AND CONDITIONS GIVEN ON THE DRAWINGS AND TO REPORT TO THE ARCHITECT ANY ERROR OR INCONSISTENCY WITH THE ACTUAL CIRCUMSTANCES IN THE FIELD BEFORE COMMENCING WORK. 6. THE CONTRACTOR SHALL BEAR ALL RESPONSIBILITY FOR CORRECTIVE ACTION DUE TO THE CONTRACTOR'S FAILURE TO COORDINATE THE WORK. 7. THE CONTRACTOR SHALL COMPLY WITH THE CURRENT APPLICABLE CODES, ORDINANCES, LAWS AND OTHER LEGAL REQUIREMENTS OF THE PUBLIC AUTHORITIES HAVING JURISDICTION. 8. IN THE CASE OF INCONSISTENCY BETWEEN DRAWINGS NOT CLARIFIED BY ADDENDUM, THE BETTER QUALITY OR GREATER QUANTITY OF WORK SHALL BE PROVIDED IN ACCORDANCE WITH THE ARCHITECT'S INTERPRETATION. 9. DRAWINGS, AS INSTRUMENTS OF SERVICE, ARE AND SHALL REMAIN THE PROPERTY OF THE ARCHITECT WHETHER THE PROJECT FOR WHICH THEY ARE MADE IS EXECUTED OR NOT. THEY ARE NOT TO BE USED ON ANY OTHER PROJECTS OR EXTENSIONS TO THIS PROJECT EXCEPT BY WRITTEN AGREEMENT WITH THE ARCHITECT. 10. THESE DRAWINGS DO NOT INCLUDE INDICATIONS OF NECESSARY COMPONENTS FOR CONSTRUCTION SAFETY. ALL CONSTRUCTION MUST BE COMPLETED IN COMPLIANCE WITH THE OCCUPATIONAL SAFETY AND HEALTH ACT AND ALL RULES AND REGULATIONS THERETO APPURTENANT. IT SHALL BE THE CONTRACTORS RESPONSIBILITY FOR COMPLIANCE THERETO.		THIS PROJECT CONSISTS OF A NEW ADDITION TO BE CONSTRUCTED ONTO AN EXISTING RESIDENCE LOCATED IN EASTON, MARYLAND. THE CLIENT HAS REQUESTED THAT THE EXISTING RESIDENCE SHALL BE EXPANDED WITH A NEW ADDITION CONTAINING A GREAT ROOM, BEDROOM, EXPANDING THE EXISTING OWNER'S SUITE AND A NEW HALLWAY CONNECTED TO THE ENTRY FOYER. THE NEW ADDITION SHALL BE CONSTRUCTED IN RELATION TO THE EXISTING RESIDENCE TO REMAIN. THE WORK SHALL BE COMPLETED IN A SINGLE PHASE. IN ADDITION TO THE CONSTRUCTION OF THE NEW ADDITION, PROPER FLASHING STANDARDS WILL BE CONDUCTED TO ACCEPT INSTALLATION OF THE NEW FINISHES. CONSTRUCTION SHALL COMPLY WITH THE CURRENT APPLICABLE CODES, ORDINANCES, LAWS AND OTHER REQUIREMENTS OF TALBOT COUNTY.		SHEET NO. SHEET TITLE PERMIT SET 02.28.2025 00 GENERAL DRAWINGS G1 COVER SHEET G2 GENERAL SPECIFICATIONS G3 MARYLAND ALTERNATIVE MINIMUM R-VALUE TABLES 01 ARCHITECTURAL DRAWINGS A1 FOUNDATION PLAN, NOTES & DETAILS A2 FIRST FLOOR PLAN, NOTES & DETAILS A3 ROOF PLAN, NOTES & DETAILS A4 EXTERIOR ELEVATIONS, NOTES & DETAILS A5 BUILDING SECTIONS, NOTES & DETAILS A6 FIRST FLOOR & ROOF FRAMING PLAN, NOTES & DETAILS A7 TYPICAL CONSTRUCTION DETAILS A8 TYPICAL WALL SECTION DETAILS	
PROJECT TEAM		ABBREVIATIONS		CODE INFORMATION	
OWNER RICHARD & MARY-ANNE SCHOEB 28738 JENNINGS RD EASTON, MARYLAND 21601 CONTRACTOR NUTTLE BUILDERS, INC. 1139 INDUSTRIAL PARK WAY DENTON, MD 21629 PHONE - (410) 479-2890 ARCHITECT KEZLO GROUP, LLC P.O. BOX 1086 BROOKHAVEN, PA 19015 PHONE - (844) 495-3956		AB ANCHOR BOLT ACC ACCESS ACC AIR CONDITIONING ACT ACOUSTICAL CEILING TILE AD AREA DRAIN ADHES ADHESIVE ADJ ADJUSTABLE AFF ABOVE FINISHED FLOOR AGGR AGGREGATE AHU AIR HANDLING UNIT ALT ALTERNATE ALUM ALUMINUM ANOD ANODIZED ARCH ARCHITECTURAL ASB ASBESTOS ASPH ASPHALT AUTO AUTOMATIC BD BOARD BITUM BITUMINOUS BLDG BUILDING BLK BLOCK BLKG BLOCKING BM BENCHMARK BOT BOTTOM BR BUMPER RAIL BRG BEARING BRK BRICK BRZ BRONZE BSMT BASEMENT BTU BRITISH THERMAL UNIT BUR BUILT UP ROOFING BV BEVELED CAB CABINET CB CATCH BASIN CCT CUBICLE CURTAIN TRACK CEM CEMENT CFCI CONTRACTOR FURNISHED, CONTRACTOR INSTALLED FOI CONTRACTOR FURNISHED, OWNER INSTALLED CG CORNER GUARD CI CAST IRON CIR CIRCLE CJ CONSTRUCTION JOINT CL CENTER LINE CLG CEILING CLKG CAULKING CLO CLOSET CLOS CLOSURE CLR CLEAR CMU CONCRETE MASONRY UNIT CO CLEAN OUT COL COLUMN CONC CONCRETE CONF CONFERENCE CONN CONNECT (ION) CONT CONTINUOUS CONTR CONTRACTOR CORR CORRIDOR CPT CARPET CR CHAIR RAIL CSI CONSTRUCTION SPECIFICATION INSTITUTE CSMT CASEMENT CT CERAMIC TILE CW COLD WATER D/A DOUBLE ACTING DBL DOUBLE DEG DEGREE DEMO DEMOLITION DEMOU DEMOUNTABLE NT DEPRESSED DET DETAIL DF DRINKING FOUNTAIN DH DOUBLE HUNG DIA DIAMETER DIAG DIAGONAL DIM DIMENSION DIV DIVISION DN DOWN DR DOOR DW DISH WASHER DWG DRAWING DWR DRAWER E EAST EA EACH EF EXHAUST FAN EIFS EXTERIOR INSULATING FINISH SYSTEM EJ EXPANSION JOINT EL ELEVATION ELEC ELECTRIC ELEV ELEVATOR ENCL ENCLOSURE EPS EPOXY PAINT SYSTEM EQ EQUAL EQUIP EQUIPMENT ETR EXISTING TO REMAIN EWG ELECTRIC WATER COOLER EXIST EXISTING EXCAV EXCAVATE EXH EXHAUST EXP EXPANSION EXPS EXTERIOR PAINT SYSTEM EXT EXTERIOR FA FIRE ALARM FAB FABRICATED FD FLOOR DRAIN FE FIRE EXTINGUISHER FEC FIRE EXTINGUISHER CABINET FF EL FINISHED FLOOR ELEVATION FHC FIRE HOSE CABINET FHEC FIRE HOSE AND EXTINGUISHER CABINET FIN FINISH (ED) FLR FLOOR FLUOR FLUORESCENT FM FACTORY MUTUAL FOC FACE OF CONCRETE FOF FACE OF FINISH FOS FACE OF STUD FPRF FIREPROOF FRPL FIREPLACE FRT FIRE RETARDANT TREATED FT (') FOOT, FEET FTG FOOTING FURN FURNISH, FURNITURE FURR FURRED, FURRING FUT FUTURE GA GAUGE GALV GALVANIZED GC GENERAL CONTRACTOR GL GLASS, GLAZING GRD GRADE GWB GYPSUM WALLBOARD GYP GYPSUM BOARD, GYPSUM H/C HANDICAPPED HB HOSE BIB HCWD HOLLOW CORE WOOD HD HEAVY DUTY HONR HARDENER HDR HEADER HDWR HARDWOOD HM HARDWARE HORIZ HOLLOW METAL HP HORIZONTAL HP HIGH POINT HR HAND RAIL HT HEIGHT HTG HEATING HYVAC HEATING, VENTILATING AND AIR CONDITIONING HW HOT WATER ID INSIDE DIAMETER IN INCHES INCL INCLUDING INFO INFORMATION INSUL INSULATION INT INTERIOR INV INVERT IPS INTERIOR PAINT SYSTEM JAN JANITOR JST JOIST JT JOINT KIT KITCHEN KO KNOCKOUT KPL KICKPLATE KR KICK RAIL L LENGTH LAB LABORATORY LAM LAMINATE (D) LAV LAVORATORY LBL LABEL LF LINEAR FOOT (FEET) LH LEFT HAND (ED) LHR LEFT HAND REVERSE LL LIVE LOAD LP LOW POINT MATL MATERIAL MAX MAXIMUM MBR MEMBER MECH MECHANICAL MEMB MEMBRANE MFR MANUFACTURER MH MAN HOLE MIN MINIMUM MISC MISCELLANEOUS MO MASONRY OPENING MOD MODULAR MON MONITOR MR MOISTURE RESISTANT MTD MOUNTED MTL METAL MULL MULLION N NORTH N/A NOT APPLICABLE NIC NOT IN CONTRACT NO NUMBER NOM NOMINAL NRC NOISE REDUCTION COEFFICIENT NTS NOT TO SCALE OA OVERALL OC ON CENTER OD OUTSIDE DIAMETER OFCI OWNER FURNISHED CONTRACTOR INSTALLED OFF OFFICE OFOI OWNER FURNISHED OWNER INSTALLED OH OVERHEAD OPNG OPENING OPP OPPOSITE OPQ OPAQUE PAR PARALLEL PART PARTITION PBD PARTICLE BOARD PC PERSONAL COMPUTER PERF PERFORATED PERIM PERIMETER PLAM PLASTIC LAMINATE PLYWD PLYWOOD PNL PANEL POLY POLYETHYLENE PREFA PREFABRICATED PRT PRESSURE TREATED PSF POUNDS PER SQUARE FOOT PSI POUNDS PER SQUARE INCH PT PAINT PTS PNEUMATIC TUBE STATION PVC POLYVINYL CHLORIDE PWC PROTECTIVE WALL COVERING QT QUARRY TILE QTY QUANTITY R RISER RA RETURN AIR RAD RADIUS RB RUBBER RD ROOF DRAIN REF REFRIGERATOR REINF REINFORCED REQD REQUIRED RESIL RESILIENT REV REVISION RH RIGHT HAND (ED) RHR RIGHT HAND REVERSE RM ROOM RO ROUGH OPENING ROW RIGHT OF WAY S SOUTH SCHED SCHEDULE SCWD SOLID CORE WOOD SECT SECTION SEG SEGMENT SF SQUARE FOOT SHR SHOWER SHT SHEET SHTG SHEATHING SIM SIMILAR SPEC SPECIFICATION SPKR SPEAKER SQ SQUARE SRV SLIP RESISTANT VINYL SST STAINLESS STEEL STA STATION STC SOUND TRANSMISSION CLASS STD STANDARD STL STEEL STOR STORAGE STRUC STRUCTURE, STRUCTURAL SUSP SUSPENDED SV SHEET VINYL SYM SYMMETRICAL T TREAD TEL TELEPHONE TEMP TEMPORARY TERR TERRAZZO THK THICK (NESS) THRES THRESHOLD TOT TOP OF CONCRETE TOF TOP OF FOOTING TOIL TOILET TOS TOP OF STEEL TOW TOP OF WALL TRANS TRANSFORMER F TV TELEVISION TYP TYPICAL UL UNDERWRITERS LABORATORY UNEXC UNEXCAVATED AV UNFINISHED UNFIN UNFINISHED UON UNLESS OTHERWISE NOTED UR URINAL VARN VARNISH VAT VINYL ASBESTOS TILES VB VINYL BASE VCB VINYL COVE BASE VCT VINYL COMPOSITION TILE VERT VERTICAL VEST VESTIBULE VIF VERIFY IN FIELD VWC VINYL WALL COVERING W WEST WITH WITHOUT W/O WATER CLOSET WC WOOD WDF WIDE FLANGE WIN WINDOW WT WEIGHT WWF WELDED WIRE FABRIC WWM WELDED WIRE MESH YD YARD			
SYMBOLS KEY		AERIAL MAP		BUILDING INFORMATION	
XXXXX DOOR NUMBER W X WINDOW NUMBER 1 A101 SIM DETAIL NUMBER DRAWING SHOWN ON 1 A101 SIM SECTION NUMBER DRAWING SHOWN ON 1 A101 WORK POINT, CONTROL POINT, OR DATUM POINT 1 REVISION NUMBER 1 REVISION CLOUD PXXXX PARTITION TYPE DESIGNATION CX CONSTRUCTION NOTE - SEE DWG. AXXX FX FINISH PLAN NOTE X DETAIL NOTE 1 NORTH ARROW XX A7XX XX EXTERIOR ELEVATION TAG A7XX INTERIOR ELEVATION TAG 1 A101 SIM SECTION DETAIL 1 CENTERLINE 1 COLUMN LINE REFERENCE		SEE DWG X/AXXX MATCHLINE NEW SWING DOOR PER SCHEDULE NEW PARTITION AS SCHEDULED EXISTING DOOR TO REMAIN EXISTING WALL TO REMAIN EXISTING DOOR TO BE REMOVED EXISTING WALL TO BE REMOVED EARTH DRAINAGE FILL SAND, MORTAR, PLASTER, GWB CONCRETE BRICK CONCRETE MASONRY UNIT(S) STRUCTURAL STEEL, METAL FINISHED WOOD CONTINUOUS WOOD BLOCKING INTERRUPTED WOOD BLOCKING PLYWOOD BATT INSULATION RIGID INSULATION		GROUND SNOW LOAD 30 PSF WIND DESIGN SPEED (MPH) 115 TOPO EFFECTS NO SPECIAL WIND REGION NO SEISMIC DESIGN CATEGORY A SUBJECT TO DAMAGE FROM WEATHERING SEVERE FROST LINE DEPTH 30" TERMITE MODERATE - HEAVY WINTER DESIGN TEMP 20° F CLIMATE ZONE 4A ROOF / CEILING ASSEMBLIES R-49 (R-38 UN-COMPRESSED) EXTERIOR WALLS R-20 OR R-13 + R-5 CONTINUOUS FOR FULL HEIGHT FLOORS OVER UNHEATED SPACES R-19 PERIMETER "SLAB ON GRADE" R-10 @ 4FT VERTICALLY AND / OR HORIZONTALLY FENESTRATION U-FACTOR 0.30 GLAZED FENESTRATION SHGC 0.40 FLOOD HAZARDS SEE FLOOD MAPS AIR FREEZING INDEX 1500 MEAN ANNUAL TEMP 55° F SPRINKLER REQUIREMENTS YES ICE BARRIER UNDERLAYMENT REQ. YES EXPPOSED INSULATION FLAME SPREAD INDEX NOT TO EXCEED 75 SMOKE DEVELOPMENT FACTOR NOT TO EXCEED 450 (USE FOIL FACED OR SIMILAR WHEN EXPOSED)	

NUTTLE BUILDERS, INC.

kezlo group

PO Box 1086
Brookhaven, PA 19015

844.495.3956
www.kezlo.com

THE INFORMATION CONTAINED HEREIN MAY NOT BE USED OR REPRODUCED WITHOUT THE WRITTEN PERMISSION OF KEZLO GROUP, LLC.

SEAL

CONSULTANTS:

CLIENT:

MARY-ANNE SCHOEB
RICHARD SCHOEB

DATE: 02.28.2025
KEZLO GROUP PROJECT NUMBER: 24-083
PROJECT TITLE:

STAGHILL COTTAGE - ADDITION

SHEET TITLE: COVER SHEET

SHEET NUMBER: G1

A. GENERAL CONDITIONS

1. THESE DRAWINGS ARE NOT TO BE INTERPRETED AS COMPLETE CONSTRUCTION DRAWINGS DEPICTING ALL ASPECTS OF THE WORK. THEY ARE PREPARED FOR THE PURPOSES OF OBTAINING A BUILDING PERMIT AND GENERALLY CONVEYING THE OWNER'S WISHES.
2. THE CONTRACTOR MUST INVESTIGATE THE EXISTING CONDITIONS AND PROVIDE THE NECESSARY CONSTRUCTION METHODS AND MEANS TO COMPLETE ALL ITEMS DESIRED BY THE OWNER.
3. WHEN INTERPRETING THE DRAWINGS, PREFERENCE SHALL BE GIVEN IN ALL CASES TO NUMERICAL DIMENSION OVER MEASUREMENTS BY SCALE AND TO DETAIL DRAWINGS OVER THOSE DRAWINGS OF A SMALLER SCALE.
4. ALL NOTES ON THE DRAWINGS SHALL BE ASSUMED AS TYPICAL UNLESS OTHERWISE SHOWN OR NOTED ON THE DRAWINGS OR SPECIFICATIONS.
5. ALL NOTES SUPPLEMENT THE PLANS AND SPECIFICATIONS AND ARE IN NO WAY TO BE CONSIDERED AS EXCLUDING ANY ITEM IN THEM.
6. ALL FINISHED DIMENSIONS, UNLESS NOTED OTHERWISE, ARE TO FACE OF FINISH FRAMING OR FACE OF MASONRY.
7. IT SHALL BE THE DUTY OF THE CONTRACTOR TO VERIFY ALL DIMENSIONS AND CONDITIONS GIVEN ON THE DRAWINGS AND TO REPORT TO THE ARCHITECT ANY ERROR OR INCONSISTENCY WITH THE ACTUAL CIRCUMSTANCES IN THE FIELD BEFORE COMMENCING WORK.
8. THE PROJECT SHALL BE MAINTAINED AT ALL TIMES IN A NEAT, ORDERLY MANNER.
9. DRAWINGS AND SPECIFICATIONS AS INSTRUMENTS OF SERVICE ARE AND SHALL REMAIN THE PROPERTY OF THE ARCHITECT WHETHER THE PROJECT FOR WHICH THEY ARE MADE IS EXECUTED OR NOT. THEY ARE NOT TO BE USED ON ANY OTHER PROJECTS OR EXTENSIONS TO THIS PROJECT EXCEPT BY WRITTEN AGREEMENT WITH THE ARCHITECT.
10. THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING BUILDING PERMIT.
11. ALL WORK SHALL BE COMPLETED UTILIZING MATERIALS, STANDARD AND CRAFTSMANSHIP CONSISTENT WITH FIRST CLASS CUSTOM RESIDENTIAL CONSTRUCTION.

B. SITEWORK

1. ALL SITEWORK IS TO BE THE RESPONSIBILITY OF THE CONTRACTOR AS INDICATED ON THE DRAWINGS, AND AS FOLLOWS:
 - A. EXCAVATION FOR FOOTINGS AND FOUNDATIONS. EXCAVATION SHALL BE TO DEPTHS REQUIRED BY CONSTRUCTION DOCUMENTS OR DEEPER IF NECESSARY TO MAKE CERTAIN FOOTINGS BEAR ON UNDISTURBED SOIL. CONTRACTOR SHALL BACKFILL EXCAVATIONS FOLLOWING COMPLETION OF WORK WITH PROPERLY COMPACTED SOIL, FREE OF DEBRIS, TO THE ELEVATION OF ADJACENT GRADES.
 - B. ANY MISCELLANEOUS SITEWORK NECESSARY TO COMPLETE WORK REQUIRED BY CONSTRUCTION DOCUMENTS.
 - C. MAINTENANCE OF SITE IN NEAT, ORDERLY, DEBRIS FREE CONDITION DURING CONSTRUCTION. CONTRACTOR SHALL STORE DEBRIS IN A DUMPSTER DURING CONSTRUCTION. IF NECESSARY, DUMPSTER SHALL BE COVERED TO PREVENT DEBRIS FROM BEING SCATTERED DUE TO WIND.
 - D. EXCAVATION AND FOUNDATION CONTRACTORS SHALL REFER TO GEOTECHNICAL REPORT IF REQUIRED FOR SOIL CONDITION AND SCOPE OF WORK.

C. CONCRETE WORK

1. CONTRACTOR IS ALSO RESPONSIBLE FOR THE FOLLOWING:
 - A. INSTALLATION OF CONCRETE FOOTINGS AND PIERS AS REQUIRED BY CONSTRUCTION DOCUMENTS AS WELL AS LANDING/STEPS AT EAST, WEST AND SOUTH SIDES OF BUILDING AND CRAWLSPACE.
 - B. INTERIOR CONCRETE FLOOR SLABS SHALL BE STEEL TROWEL FINISHED AND EXTERIOR CONCRETE SLABS SHALL BE BROOM FINISHED. ALL SURFACES SHALL BE FREE FROM BLEMISHES, VOIDS, FINIS AND OTHER DEFECTS. EXTERIOR SLABS SHALL RECEIVE STONE TOPPING - CONTRACTOR SHALL CONFIRM DEPTH AND ELEVATION OF SLAB.
2. PRODUCTS
 - A. REINFORCING BARS: ASTM A 615, GRADE 40, PLAIN FINISH
 - B. PORTLAND CEMENT: ASTM C 150, TYPE 1 AGGREGATES: ASTM C 33
 - C. CONCRETE MIX: BATCH MACHINED INGREDIENTS THOROUGHLY DISTRIBUTED, 3000 PSI, 5% AIR ENTRAINED CONCRETE, 4" MAXIMUM SLUMP.
 - D. ALL CONCRETE SHALL HAVE A MINIMUM 28-DAY COMPRESSIVE STRENGTH OF 3,000 PSI UNLESS OTHERWISE NOTED, WITH CEMENT CONFORMING TO ASTM C150 AND AGGREGATE CONFORMING TO ASTM C33 COURSE AGGREGATE.
 - E. GRAVEL FILL SHALL BE 3/4" CLEAN WASHED GRAVEL.
 - F. VAPOR BARRIER SHALL BE 6-MIL POLYETHYLENE FILM.
 - G. EXPANSION JOINT FILLER SHALL CONFORM TO ASTM D1752, TYPE 11.
3. EXECUTION
 - A. CONSTRUCT FRAMEWORK, SHORING AND BRACING TO CODE REQUIREMENTS AND TO DIMENSIONS SHOWN ON DRAWINGS.
 - B. PLACE CONCRETE CONTINUOUSLY BETWEEN PREDETERMINED LOCATIONS.
 - C. PLACE EXPANSION MATERIALS WHERE SHOWN OR REQUIRED BY DESIGN.
 - D. PROTECT CONCRETE FROM PREMATURE DRYING AND EXCESSIVE COLD OR HEAT. KEEP CONTINUOUSLY MOIST FOR NOT LESS THAN 72 HOURS.

D. SEALANTS

1. PRODUCTS/EXECUTION
 - A. INTERIOR CAULKING SHALL BE ACRYLIC LATEX CAULK AS MANUFACTURED BY DAP, PECORA OR TREMCO. (OR APPROVED SIMILAR)
 - B. EXTERIOR SEALANT SHALL BE SIKOFLEX IAS SINGLE COMPONENT, GUN GRADE POLYURETHANE AS MANUFACTURED BY SIKA CHEMICAL OR EQUAL BY TREMCO, SONNEBORN OR PECORA. (OR APPROVED SIMILAR)
 - C. SINGLE COMPONENT CLEAR SILICONE SEALANT SCS 1000 AS MANUFACTURED BY GENERAL ELECTRIC OR EQUAL BY DOW CORNING SHALL BE USED AT MILLWORK.
 - D. SEALANT UNDER EXTERIOR THRESHOLD SHALL BE BUTYL RUBBER AS MANUFACTURED BY TREMCO, PECORA OR DAP.
 - E. BACKER RODS SHALL BE EXTRUDED CLOSED CELL POLYETHYLENE FOAM.
 - F. INSULATE ALL PIPES, STACKS, SUPPLY AND RETURN DUCTS LOCATED IN EXTERIOR WALLS.

E. SIDING

1. CONTRACTOR TO COMPLETE ALL WORK IN CONNECTION WITH SIDING AND ACCESSORIES AS REQUIRED BY THE CONSTRUCTION DOCUMENTS, ALL APPLICABLE CODES AND CONSISTENT WITH FIRST CLASS RESIDENTIAL CONSTRUCTION STANDARDS AND PRACTICES.
2. EXECUTION
 - A. COMPLY WITH MANUFACTURER'S CURRENT PUBLISHED INSTRUCTIONS, FOR INSTALLATION OF SYSTEM.

F. UNIT MASONRY

1. CONTRACTOR SHALL BE RESPONSIBLE FOR ALL CMU REQUIRED BY THE CONSTRUCTION DOCUMENTS INCLUDING MORTAR, GROUT AND ACCESSORIES.
2. PRODUCTS
 - A. CONCRETE MASONRY UNITS (CONCRETE BLOCK): ASTM C90, GRADE N, LIGHTWEIGHT OR NORMAL WEIGHT.
 - B. MORTAR: ASTM C270, TYPE S WITH SAND AGGREGATE. NO CALCIUM CHLORIDE OR OTHER ADD MIXTURES.
 - C. PROVIDE CODE COMPLIANT ACCESS PANEL AND FOUNDATION VENTS.
 - D. PROVIDE FIRE BRICK, DAMPERS AND FLUE PER CODE.
1. EXECUTION
 - A. PLACE MASONRY VENEER TIES AT NOT OVER 24" O.C. IN HORIZONTAL AND VERTICAL DIRECTIONS.
 - B. LAY UP MASONRY IN RUNNING BOND, PLUMB AND LEVEL. MAINTAIN 3/8" JOINTS.
 - C. LAY UP SPECIAL PATTERNS AND OTHER WORK SHOWN ON DRAWINGS.
 - D. DO NOT USE CHIPPED OR BROKEN UNITS.
 - E. PLACE CONCRETE BLOCK IN FULL MORTAR ON HORIZONTAL AND VERTICAL FACE SHELLS. PLACE FOOTING OR FOUNDATION-STARTING COURSES IN FULL MORTAR ON WEBS AND FACE SHELLS. PLACE SOLID BLOCK AT TOP OF WALLS.
 - F. TOOL EXPOSED JOINTS TO DENSE, SMOOTH, CONCAVE SURFACE. STRIKE VERTICAL JOINTS FIRST; TOOLING HORIZONTAL JOINTS IMMEDIATELY THEREAFTER.
 - G. CLEAN MASONRY SURFACES FREE OF MORTAR STAINS AND FOREIGN MATTER.
 - H. KEEP TOP OF ALL WALLS COVERED WITH NON-STAINING WATERPROOF COVERINGS WHEN WORK IS NOT IN PROGRESS.

G. INSULATION

1. CONTRACTOR TO COMPLETE ALL WORK IN CONNECTION WITH INSULATION AS REQUIRED BY THE CONSTRUCTION DOCUMENTS, ALL APPLICABLE CODES AND CONSISTENT WITH FIRST CLASS CUSTOM RESIDENTIAL CONSTRUCTION STANDARDS AND PRACTICES.
2. PRODUCTS
 - A. BLANKET INSULATION: MINERAL WOOL OR GLASS FIBER, CONFORMING TO FEDERAL SPECIFICATION HH-1521, WITH KRAFT PAPER FACING.
 - B. NAILS AND STAPLES: ELECTROPLATED OR GALVANIZED STEEL WIRE.
 - C. TAPE: SELF ADHERING POLYETHYLENE FACED.
 - D. EXTERIOR BUILDING WRAP: AMOCOR P14 OR TYVEK (OR APPROVED SIMILAR)
3. EXECUTION
 - A. ENSURE THAT SURFACES TO RECEIVE INSULATION ARE CLEAN, FREE OF DELETERIOUS MATTER AND SUFFICIENTLY TRUE AND LEVEL TO ALLOW CONTINUOUS AND COMPLETE THERMAL PROTECTION.
 - B. INSTALL BLANKET INSULATION WITH FACING TOWARD INSIDE OF BUILDING, LAPPING ENDS AND FLANGES AND SECURELY NAILING OR STAPLING AT 6" O.C.
 - C. FIT TIGHTLY WITHIN SPACES AND BEHIND MECHANICAL AND ELECTRICAL SERVICES LEAVING NO GAPS OR VOIDS.
 - D. TAPE ENDS AND LAPPED SIDE FLANGES.
 - E. INSTALL INSULATION AS REQUIRED PER LOCAL BUILDING CODE. SEE COVER SHEET FOR ADDITIONAL INFORMATION.
 - F. INSTALL AMOROCOR P14, TYVEK, TYPAR BUILDING WRAP OVER NEW EXTERIOR WALL CONSTRUCTION (OR APPROVED SIMILAR)
 - G. INSTALL INSULATION FOAM IN ALL GAPS AT EXTERIOR WALL TOO SMALL TO BE PROPERLY INSULATED WITH BATT INSULATION.
 - H. SEAL WITH PLASTIC CEMENT AROUND ALL PIPES, ANCHORS AND OTHER ITEMS THAT PENETRATE THE WATERPROOFING AND DAMPROOFING.

H. DRYWALL

1. CONTRACTOR TO COMPLETE ALL WORK IN CONNECTION WITH DRYWALL AS REQUIRED BY THE CONSTRUCTION DOCUMENTS, ALL APPLICABLE CODES AND FIRST CLASS CUSTOM RESIDENTIAL CONSTRUCTION STANDARD AND PRACTICES.
2. PRODUCTS
- A. DRYWALL (REGULAR): ASTM C36, 1/2" THICK UNLESS SHOWN OTHERWISE.
- B. FIRECODE DRYWALL: ASTM C36, TYPE X, 5/8" THICK UNLESS SHOWN OTHERWISE.
- C. WATER RESISTANT DRYWALL: ASTM C630, 1/2" THICK UNLESS OTHERWISE SHOWN. PROVIDE IN ALL BATHROOMS.
- D. DRYWALL SHALL HAVE TAPERED EDGES, SQUARE ENDS AND SHALL BE 4'-0" WIDE IN LENGTHS TO FIT JOB NEEDS AND MINIMIZE END JOINTS.
- E. DRYWALL SCREWS - RUST RESISTANT.
- F. METAL TRIM AND CASING BEADS: GALVANIZED, PERFORATED FLANGES.
- G. JOINT COMPOUND AND TAPE: ASTM C475; 2" WIDE TAPE; CASEIN, VINYL OR LATEX BASE COMPOUND.
- H. PANEL ADHESIVE: AS RECOMMENDED FOR DRYWALL APPLICATION.
3. EXECUTION
- A. INSTALLATION
1. INSTALL DRYWALL ON CEILINGS WITH LONG EDGES PARALLEL, ENDS OCCURRING ON FRAMING MEMBERS.
2. INSTALL DRYWALL ON WALLS WITH SHEETS HORIZONTAL ACROSS FRAMING, ENDS OCCURRING ON STUDS.
3. NAIL AND GLUE TO FRAMING MEMBERS.
4. PLACE METAL TRIM AT EXTERNAL CORNERS. PLACE CASING BEADS WHERE DRYWALL ABUTS DISSIMILAR MATERIAL. PROVIDE RADIUS CORNERS AT LOCATIONS DETERMINED BY OWNER.
5. TAPE AND FILL EXPOSED JOINTS, EDGES, CORNERS AND OPENINGS. FILL NAIL DIMPLES.
6. SAND FILLED AREAS SMOOTH, READY FOR FINISHING.

I. ROOFING

- CONTRACTOR TO INSTALL ALL ROOFING AND RELATED ACCESSORIES IN ACCORDANCE WITH CONSTRUCTION DOCUMENTS, ALL APPLICABLE CODES AND CONSISTENT WITH FIRST CLASS CUSTOM RESIDENTIAL CONSTRUCTION STANDARDS AND PRACTICES.
2. PRODUCTS
- A. SHINGLES: TO BE SELECTED BY OWNER
- B. ROOFING FELT: 30 POUND, ASPHALT SATURATED (OR APPROVED SIMILAR)
- C. GUTTERS AND DOWNSPOUTS: PAINTED ALUMINUM OGEE - WHITE (SEE DRAWINGS FOR LOCATION)
- D. WATERPROOF MEMBRANE UNDER DECKING: GAF-RUBBEROID TORCH (SMOOTH)- TWO PLYS WITH BASE SHEET AND SLIP SHEET TOP.
- E. METAL FLASHING: ALUMINUM (CONCEALED)
- F. RIDGE VENT: PER ROOFING MANUFACTURER SPECIFICATIONS.
- G. ROOF EDGE: PRE-FINISHED ALUMINUM
- H. NAILS: GALVANIZED, LARGE HEADS ROOFING NAILS
3. EXECUTION
- A. COORDINATE ROOFING AND SHEET METAL TO ENSURE WEATHER TIGHT INSTALLATION.
- B. PROVIDE FOR EXPANSION AND CONTRACTION IN SHEET METAL WORK.
- C. SECURE FLASHING'S USING CONCEALED HOOK STRIP OR CLIP TYPE FASTENERS, OF SOME MATERIAL AS FLASHING'S.
- D. APPLY SEALING COMPOUND AT JOINTS OF ALUMINUM FLASHING'S.
- E. PLACE ON LAYER OF BUILDING PAPER OVER AREA TO RECEIVE SHINGLES LAPPED 4" MINIMUM. NAIL SUFFICIENTLY TO HOLD IN PLACE. INSTALL PERPENDICULAR TO SLOPE. STAGGER END JOINTS.
- F. PLACE ONE LAYER OF ICE SHIELDING 24" WIDE CENTER OVER OPEN VALLEYS, ROOF EDGES AND WITH WEATHER LAPPED JOINTS.
- G. PLACE SHINGLES IN STRAIGHT COURSING PATTERN IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS.
- H. FLASH ITEMS PROJECTING THROUGH OR MOUNTED ON ROOF; SEAL WITH PLASTIC CEMENT.
- I. GUTTERS AND DOWNSPOUTS:
1. PREFABRICATE AND INSTALL GUTTERS AND DOWNSPOUTS WITH AS FEW JOINTS AS POSSIBLE.
2. SECURE GUTTERS EVERY 32" WITH COMPATIBLE HANGERS.
3. SECURE DOWNSPOUTS TO WALLS WITH BANDS OF SAME MATERIAL. RIVET DOWNSPOUTS TO GUTTERS.
4. PROVIDE SCUPPERS AND DOWNSPOUTS. EPDM ROOF.
5. INSTALL RIDGE VENTS IN LOCATIONS SHOWN ON DRAWINGS IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS.
- A. INSTALL PREFINISHED ALUMINUM ROOF EASE AT PERIMETER OF ROOF.

J. PAINTING

1. CONTRACTOR TO COMPLETE ALL WORK IN CONNECTION WITH INTERIOR & EXTERIOR STAINING AND PAINTING AS REQUIRED BY THE CONSTRUCTION DOCUMENTS, APPLICABLE CODES AND FIRST CLASS CUSTOM RESIDENTIAL CONSTRUCTION STANDARDS AND PRACTICES.
2. PRODUCTS
 - A. EXTERIOR PAINTING: ALL EXTERIOR SIDING AND TRIM - SEMI GLOSS LATEX.
 1. INTERIOR PAINTING: ALL INTERIOR TRIM - SEMI GLOSS LATEX.
 2. INTERIOR PAINTING: ALL INTERIOR GYP. BOARD WALLS - FLAT LATEX.
 3. INTERIOR PAINTING: KITCHEN AND BATHROOM WALLS AND CEILINGS - SATIN LATEX.
 - A. CAULKING: SIKAFLEX, DAP (OR APPROVED SIMILAR)
 - B. PAINT ACCESSORIES: LINSEED OIL, SHELLAC, TURPENTINE AND OTHER PRODUCTS SHALL BE OF HIGH QUALITY AND ACCEPTABLE MANUFACTURER.
 - C. BRUSH, ROLLERS, SPRAYERS: AS RECOMMENDED BY PAINT MANUFACTURER.
3. EXECUTION
 - A. EXAMINE SURFACES TO BE PAINTED TO ENSURE PROPER APPLICATION.
 - B. PROPERLY AND ADEQUATELY PROTECT ADJACENT SURFACES.
 - C. REMOVE MILDEW, DIRT, OIL AND GREASE, USING ACCEPTABLE MEANS.
 - D. SAND SURFACES IF NECESSARY TO PROVIDE PROPER ADHESION. FILL HAIRLINE CRACKS AND SMALL IMPERFECTIONS.
 - E. CAULK ALL JOINTS AT WINDOWS, DOORS, TRIM, ETC., IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS.
 - F. PAINT IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDED COVERAGE RATES. APPLY EACH COAT AT PROPER CONSISTENCY, THINNING ONLY IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.
 - G. ALLOW COATS TO DRY BEFORE APPLYING SUCCEEDING COATS.
 - H. COORD. W/OWNER PAINT COLORE G.C. SHALL PROVIDE TWO COATS ON ALL WOOD & GYP. BD.

K. FINISH CARPENTRY

1. CONTRACTOR TO COMPLETE ALL WORK IN CONNECTION WITH FINISH CARPENTRY AS REQUIRED BY THE CONSTRUCTION DOCUMENTS, ALL APPLICABLE CODES AND CONSISTENT WITH FIRST CLASS RESIDENTIAL CONSTRUCTION STANDARDS AND PRACTICES.
2. EXECUTION
 - A. INSTALL ALL INTERIOR PAINTED SOFTWOOD TRIM AND MOLDINGS REQUIRED BY DRAWINGS INCLUDING BASE, WINDOW AND DOOR CASINGS, JAMB EXTENSIONS, ETC. MITRE ALL OUTSIDE EDGES AND CORNERS.
 - B. AT LOCATIONS WHERE STANDARD FACTORY MILLED TRIMS CANNOT BE UTILIZED DUE TO DIMENSION REQUIREMENTS OR OTHER CONDITIONS, MILL NECESSARY TRIM UTILIZING SHAPES AND PROFILES CONSISTENT WITH FACTORY MILLED TRIM. PROVIDE ALL NECESSARY WOOD BLOCKING.

L. ROUGH CARPENTRY

- CONTRACTOR TO COMPLETE ALL WORK IN CONNECTION WITH ROUGH CARPENTRY AS REQUIRED BY THE CONSTRUCTION DOCUMENTS. ALL APPLICABLE CODES AND CONSISTENT WITH FIRST CLASS, CUSTOM RESIDENTIAL CONSTRUCTION STANDARDS AND PRACTICES.

2. WHERE CERTAIN GRADES AND FINISH OF LUMBER AND TIMBER ARE CALLED FOR THROUGHOUT THESE SPECIFICATIONS THEY SHALL BE AS REQUIRED BY THE LATEST GRADING RULES OF THE ASSOCIATION GOVERNING THE SPECIES OF WOOD.

3. MOISTURE CONTENT OF LUMBER SHALL NOT EXCEED 19%.

4. PRODUCTS

A. FRAMING LUMBER: HEM FIR, BENDING STRESS 1150 PSI.

B. TJI AND MICRO LAM BEAMS AND CEDAR (A AND BETTER).

C. EXPOSED EXTERIOR LUMBER: PRESERVATIVE TREATED LUMBER WHERE CONCEALED

D. LAG BOLTS: FEDERAL SPEC. FF-B-561 GALVANIZED AT EXTERIOR.

E. NAILS: COMMON, FEDERAL SPEC., FF-N-105, GALVANIZED AT EXTERIOR AND STAINLESS STEEL FOR SIDING AND TRIM.

F. SHEATHING: DOUGLAS FIR PLYWOOD, PLYWOOD ROOF AND WALL SHEATHING SHALL BE C-C OR C-D EXTERIOR GRADE (OR APPROVED SIMILAR)

G. PLYWOOD SUB-FLOORS: DOUGLAS FIR (OR APPROVED SIMILAR)

H. HOMASOTE: SUPER EXTERIOR 440.

5. EXECUTION

A. PROVIDE SIZES AND THICKNESS AS SHOWN ON DRAWINGS.

B. CUT AND FIT ROUGH CARPENTRY AS SHOWN ON DRAWINGS BY OTHER TRADES.

C. PROVIDE TIGHT, WELL NAILED JOINTS, WITH MEMBERS ASSEMBLED IN ACCORDANCE WITH APPLICABLE CODES AND REGULATIONS.

D. JOIST AND RAFTER FRAMING:

1. SELECT PIECES SO THAT KNOTS AND OBVIOUS DEFECTS WILL NOT INTERFERE WITH PLACING BOLTS OR NAILS OR MAKING PROPER CONNECTIONS. CUT OUT AND DISCARD DEFECTS WHICH RENDER A PIECE UNABLE TO SERVE ITS INTENDED FUNCTION.

2. CUTTING OF FLOOR JOISTS TO A DEPTH OF 1/6 JOINT DEPTH WILL BE PERMITTED EXCEPT IN THE MIDDLE THIRD OF THE SPAN.

3. PROVIDE DOUBLE JOIST HEADERS AND TRIMMERS AROUND OPENINGS.

4. PROVIDE DOUBLE JOISTS OR LADDER JOIST CONSTRUCTION UNDER PARTITIONS PARALLEL TO JOISTS.

5. PROVIDE 1 X 3 WHITE PINE BRIDGING OR BETTER, OR MANUFACTURED METAL BRIDGING, AS FOLLOWS:

a. ONE ROW AT JOISTS 12 FEET OR LESS.

b. TWO ROWS AT JOISTS OVER 12 FEET.

c. DOUBLE NAIL AT EACH END OF BRIDGING.

A. STUD FRAMING

1. FRAME EXTERIOR WALL OPENINGS AND INTERIOR LOAD BEARING PARTITION OPENINGS WITH HEADERS TO CARRY IMPOSED LOADING CONDITION.

2. CUTTING OF STUDS TO 1/22 STUD DEPTH WILL BE PERMITTED TO RECEIVE PIPING AND DUCT WORK.

3. USE DOUBLE STUDS AT SIDES OF LOAD BEARING WALL OPENINGS, SINGLE STUDS AT SIDES OF NON-LOAD BEARING PARTITION OPENINGS.

4. FORM OUTSIDE AND INSIDE CORNERS WITH THREE STUDS SPIKED TOGETHER.

5. PROVIDE PLATES CONSISTING OF 2X4, 2X6 OR 2X8 DOUBLED AT TOP OF LOAD BEARING PARTITIONS, TIED INTO INTERSECTING PARTITIONS.

A. SUB-FLOORS

1. BREAK SUB-FLOOR JOINTS OVER JOISTS.

2. GIVE SUB-FLOORING UTILIZING AN APPROPRIATE CONSTRUCTION ADHESIVE.

3. NAILS WITH 8D SCREW OR RING SHANK 8" O.C.

4. COVER EXTERIOR FRAME WITH SHEATHING, PROVIDE ROOF CLIPS AT ALL JOINTS BETWEEN RAFTERS.

5. ROOF SHEATHING TO BE LAID TIGHT AND NAILED 6" O.C. AT EACH RAFTER. BREAK PANEL JOINTS OVER RAFTERS.

6. COVER ROOF SHEATHING WITH ONE LAYER 30 POUND SATURATED ROOFING FELT, WEATHER LAPPED 6" MINIMUM AND STAPLED IN PLACE (OR APPROVED SIMILAR)

A. SHEATHING

1. ALL ITEMS OF WOOD BLOCKING, FURRING, ETC., COMING IN CONTACT WITH MASONRY OR WHERE INDICATED ON DRAWINGS, SHALL RECEIVE GROUND CONTACT GRADE PRESERVATIVE TREATMENT, "WOLMANIZED" BY KOPPERS COMPANY, INC., OR "K-33" BY OSMOSE WOOD PRESERVING COMPANY OF AMERICA, INC.

A. MISCELLANEOUS

1. PROVIDE ALL NECESSARY METAL CONNECTORS, HANGERS, ETC., AS REQUIRED AND NECESSARY.

2. PROVIDE AND INSTALL ALL MISCELLANEOUS GROUNDS, BLOCKING, ETC.

M. WINDOWS AND DOORS

1. CONTRACTOR TO COMPLETE ALL WORK IN CONNECTION WITH DOORS AND WINDOWS AS REQUIRED BY THE CONSTRUCTION DOCUMENTS. ALL APPLICABLE CODES AND CONSISTENT WITH FIRST CLASS, CUSTOM RESIDENTIAL CONSTRUCTION STANDARDS AND PRACTICES.

2. SEE DRAWINGS FOR WINDOWS AND DOORS.

3. EXECUTION

A. INSTALL ALL DOORS PLUMB AND SQUARE. PROPERLY SHIM ALL FRAMES.

B. WEATHERSTRIP AND CAULK ALL EXTERIOR DOORS.

C. INSTALL ALL HARDWARE.

D. INSTALL ALL WINDOWS AND GLASS DOORS IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS. PROVIDE ALL MISCELLANEOUS FLASHING AND TRIM COMPONENTS AS NECESSARY.

E. APPROVED CORROSION RESISTIVE FLASHING SHALL BE PROVIDED AT THE TOP AND SIDES OF ALL EXTERIOR WINDOW AND DOOR OPENINGS. SIMILAR FLASHING SHALL BE INSTALLED AT THE INTERSECTION OF CHIMNEYS OR OTHER MASONRY CONSTRUCTION WITH FRAME WALLS, UNDER AND AT THE ENDS OF MASONRY, WOOD OR METAL COPINGS AND SILLS, CONTINUOUSLY ABOVE ALL PROJECTING WOOD TRIM: AT WALL AND ROOF INTERSECTIONS; IN ALL ROOF VALLEYS AND AROUND ALL ROOF OPENINGS.

F. WINDOWS TO HAVE MINIMUM U-FACTOR AS REQUIRED PER LOCAL BUILDING CODE. SEE COVER SHEET FOR ADDITIONAL INFORMATION.

TABLE N1108.3 (R408.3) MARYLAND ALTERNATIVE ADDITIONAL ENERGY EFFICIENCY PACKAGE OPTIONS			
THE PROVISIONS OF THIS SECTION SHALL BE APPLIED AS PART OF THE PRESCRIPTIVE COMPLIANCE PATH OF SECTION N1102.1.3.1. ADDITIONAL ENERGY EFFICIENCIES FROM TABLE N1108.3 MUST BE SELECTED TO MEET OR EXCEED A MINIMUM PERCENTAGE INCREASE OF 6% FOR CLIMATE ZONE 4 AND 6% FOR CLIMATE ZONE 5.			
	Energy Feature	Percentage Increase for Climate Zone 4	Percentage Increase for Climate Zone 5
1	≥ 2.5% reduction in total UA ⁵	1%	1%
2	≥ 5% reduction in total UA ⁵	2%	3%
3	> 7.5% reduction in total UA ⁵	2%	3%
4	0.22 U-factor windows ⁵	3%	4%
5	High performance cooling system (Greater than or equal to 18 SEER and 14 EER air conditioner) ²	3%	2%
6	High performance cooling system (Greater than or equal to 16 SEER and 12 EER air conditioner) ²	3%	3%
7	High performance gas furnace (Greater than or equal to 96 AFUE natural gas furnace) ²	5%	7%
8	High performance gas furnace (Greater than or equal to 92 AFUE natural gas furnace) ²	4%	5%
9	High performance heat pump system (Greater than or equal to 10 HSPF/18 SEER air source heat pump.) ²	6%	6%
10	High performance heat pump system (Greater than or equal to 9 HSPF/16 SEER air source heat pump.) ²	5%	5%
11	Ground source heat pump (Greater than or equal to 3.5 COP ground source heat pump.) ²	6%	8%
12	Fossil fuel service water heating system (Greater than or equal to 82 EF fossil fuel service water-heating system.)	3%	2%
13	High performance heat pump water heating system option (Greater than or equal to 2.9 UEF electric service water-heating system.)	8%	6%
14	High performance heat pump water heating system. (Greater than or equal to 3.2 UEF electric service water-heating system.)	8%	6%
15	Solar hot water heating system (Greater than or equal to 0.4 solar fraction solar water-heating system.)	6%	6%
16	More efficient HVAC distribution system. (100 percent of ductless thermal distribution system or hydronic thermal distribution system located completely inside the building thermal envelope.)	10%	12%
17	100% of ducts in conditioned space. (100 percent of duct thermal distribution system located in conditioned space as defined by Section R403.3.2.)	12%	15%
18	Reduced total duct leakage. (When ducts are located outside conditioned space, the total leakage of the ducts, measured in accordance with R403.3.5, shall be in accordance with one of the following: a. Where air handler is installed at the time of testing, 2.0 cubic feet per minute per 100 square feet of conditioned floor area. b. Where air handler is not installed at the time of testing, 1.75 cubic feet per minute per 100 square feet of conditioned floor area.)	1%	1%
19	2 ACH50 air leakage rate with ERV or HRV installed. (Less than or equal to 2.0 ACH50, with either an Energy Recovery Ventilator (ERV) or Heat Recovery Ventilator (HRV) installed.) ³	10%	13%
20	2 ACH50 air leakage rate with balanced ventilation. (Less than or equal to 2.0 ACH50, with balanced ventilation as defined in Section 202 of the 2021 International Mechanical Code.) ⁴	4%	5%
21	1.5 ACH50 air leakage rate with ERV or HRV installed. (Less than or equal to 1.5 ACH50, with either an ERV or HRV installed.) ⁴	12%	15%
22	1 ACH50 air leakage rate with ERV or HRV installed. (Less than equal to 1.0 ACH50, with either an ERV or HRV installed.) ⁴	14%	17%
23	Energy Efficient Appliances (Minimum 3 appliances not to exceed 1 form each type with follow efficiencies. Refrigerator - Energy Star Program Requirements, Product Specification for Consumer Refrigeration Products, Version 5.1 (08/05/2021), Dishwasher - Energy Star Program Requirements for Residential Dishwashers, Version 6.0 (01/29/2016), Clothes Dryer - Energy Star Program Requirements, Product Specification for Clothes Dryers, Version 1.1 (05/05/2017) and Clothes Washer - Energy Star Program Requirements, Product Specification for Clothes Washers, Version 8.1 (02/05/2018)	7%	5%
24	Renewable Energy Measure. ⁴	11%	9%
1. 2. 3. 4. 5. 6. 7. Energy efficiency percentage increases as established by PNNL. For multiple cooling systems, all systems shall meet or exceed the minimum efficiency requirements in this section and shall be sized to serve 100 percent of the cooling design load. For multiple heating systems, all systems shall meet or exceed the minimum efficiency requirements in this section and shall be sized to serve 100 percent of the heating design load. Increases to minimum efficiency requirements are limited to one selection. Minimum HRV and ERV requirements, measured at the lowest tested net supply airflow, shall be greater than or equal to 75 percent Sensible Recovery Efficiency (SRE), less than or equal to 1.1 cubic feet per minute per watt (0.03 m3/min/watt) and shall not use recirculation as a defrost strategy. In addition, the ERV shall be greater than or equal to 50 percent Latent Recovery/ Moisture Transfer (LRMT). Renewable energy resources shall be permanently installed that have the capacity to produce a minimum of 1.0 watt of on-site renewable energy per square foot of conditioned floor area. The installed capacity shall be in addition to any onsite renewable energy required by Section R404.4. To qualify for this option, one of the following forms of documentation shall be provided to the code official: Substantiation that the RECs associated with the on-site renewable energy are owned by, or retired on behalf of, the homeowner. A contract that conveys to the homeowner the RECs associated with the on-site renewable energy or conveys to the homeowner an equivalent quantity of RECs associated with other renewable energy. Reduction in total UA from lines 1, 2 or 3 and higher performance windows from line 4 are limited to a single selection..			

TABLE N1102.1.3.1 (R402.1.3.1) MD ALTERNATIVE INSULATION MINIMUM R-VALUES AND FENESTRATION REQUIREMENTS BY COMPONENT ^a										
N1102.1.3.1 MARYLAND ALTERNATIVE R-VALUE. ASSEMBLIES WITH R-VALUE OF INSULATION MATERIALS EQUAL TO OR GREATER THAN THAT SPECIFIED IN TABLE N1102.1.3.1 SHALL BE AN ALTERNATIVE TO THE U-FACTOR IN TABLE N1102.1.2 WHEN COMBINED WITH SECTION N1108.3. THE PROVISIONS OF SECTION N1108.2.1 SHALL BE APPLIED TO THE BASE MODEL HOUSE TO ESTABLISH THE REFERENCE BASE DESIGN ESTABLISHING ENERGY EFFICIENCY.										
CLIMATE ZONE	FENESTRATION U-FACTOR ^(a)	SKYLIGHT ^b U-FACTOR	GLAZED FENESTRATION SHGC ^{b,c}	CEILING R-VALUE	WOOD FRAME WALL R-VALUE ^d	MASS WALL R-VALUE ^b	FLOOR R-VALUE	BASEMENT ^{c,d} WALL R-VALUE	SLAB ^e R-VALUE AND DEPTH	CRAWL SPACE ^{c,d} WALL R-VALUE
4a	0.30	0.55	0.40	49	20 or 13+5 ^h	8/13	19	10ci or 13	10ci, 4ft	10ci or 13
For SI: 1 foot = 304.8 mm. ci = continuous insulation. a. R-values are minimums. U-factors and SHGC are maximums. Where insulation is installed in a cavity that is less than the label or design thickness of the insulation, the installed R-value of the insulation shall be not less than the R-value specified in the table. b. The fenestration U-factor column excludes skylights. The SHGC column applies to all glazed fenestrations. Exception: In Climate Zones 0 through 3, skylights shall be permitted to be excluded from glazed fenestration SHGC requirements provided that the SHGC for such skylights does not exceed 0.30. c. "10ci or 13" means R-10 continuous insulation (ci) on the interior or exterior surface of the wall or R-13 cavity insulation on the interior side of the wall. "15ci or 19 or 13 & 5ci" means R-15 continuous insulation (ci) on the interior or exterior surface of the wall; or R-19 cavity insulation on the interior side of the wall; or R-13 cavity insulation on the interior of the wall in addition to R-5 continuous insulation on the interior or exterior surface of the wall. d. R-5 insulation shall be provided under the full slab area of a heated slab in addition to the required slab edge insulation R-value for slabs, as indicated in the table. The slab-edge insulation for heated slabs shall not be required to extend below the slab. e. There are no SHGC requirements in the Marine Zone. f. Basement wall insulation is not required in Warm Humid locations as defined by Figure R301.1 and Table R301.1. g. The first value is cavity insulation; the second value is continuous insulation. Therefore, as an example, "13 & 5" means R-13 cavity insulation plus R-5 continuous insulation. h. Mass walls shall be in accordance with Section R402.2.5. The second R-value applies where more than half of the insulation is on the interior of the mass wall. i. A maximum U-factor of 0.32 shall apply in Climate Zones 3 through 8 to vertical fenestration products installed in buildings located either: 1. Above 4,000 feet in elevation, or 2. In windborne debris regions where protection of openings is required by Section R301.2.1.2 of the International Residential Code.										

NUTTLE

BUILDERS, INC.

kezlo group

PO Box 1086
Brookhaven, PA 19015

844.495.3956
www.kezlo.com

THE INFORMATION CONTAINED HEREIN MAY NOT BE USED OR REPRODUCED WITHOUT THE WRITTEN PERMISSION OF KEZLO GROUP, LLC.

SEAL

CONSULTANTS:

ISSUE	DATE	NUMBER

CLIENT:

MARY-ANNE SCHOEB
RICHARD SCHOEB

DATE:	02.28.2025
KEZLO GROUP PROJECT NUMBER:	24-083

PROJECT TITLE:


STAGHILL
COTTAGE -
ADDITION

SHEET TITLE:

MARYLAND
ALTERNATIVE
MINIMUM
R-VALUE TABLES

SHEET NUMBER:

G3

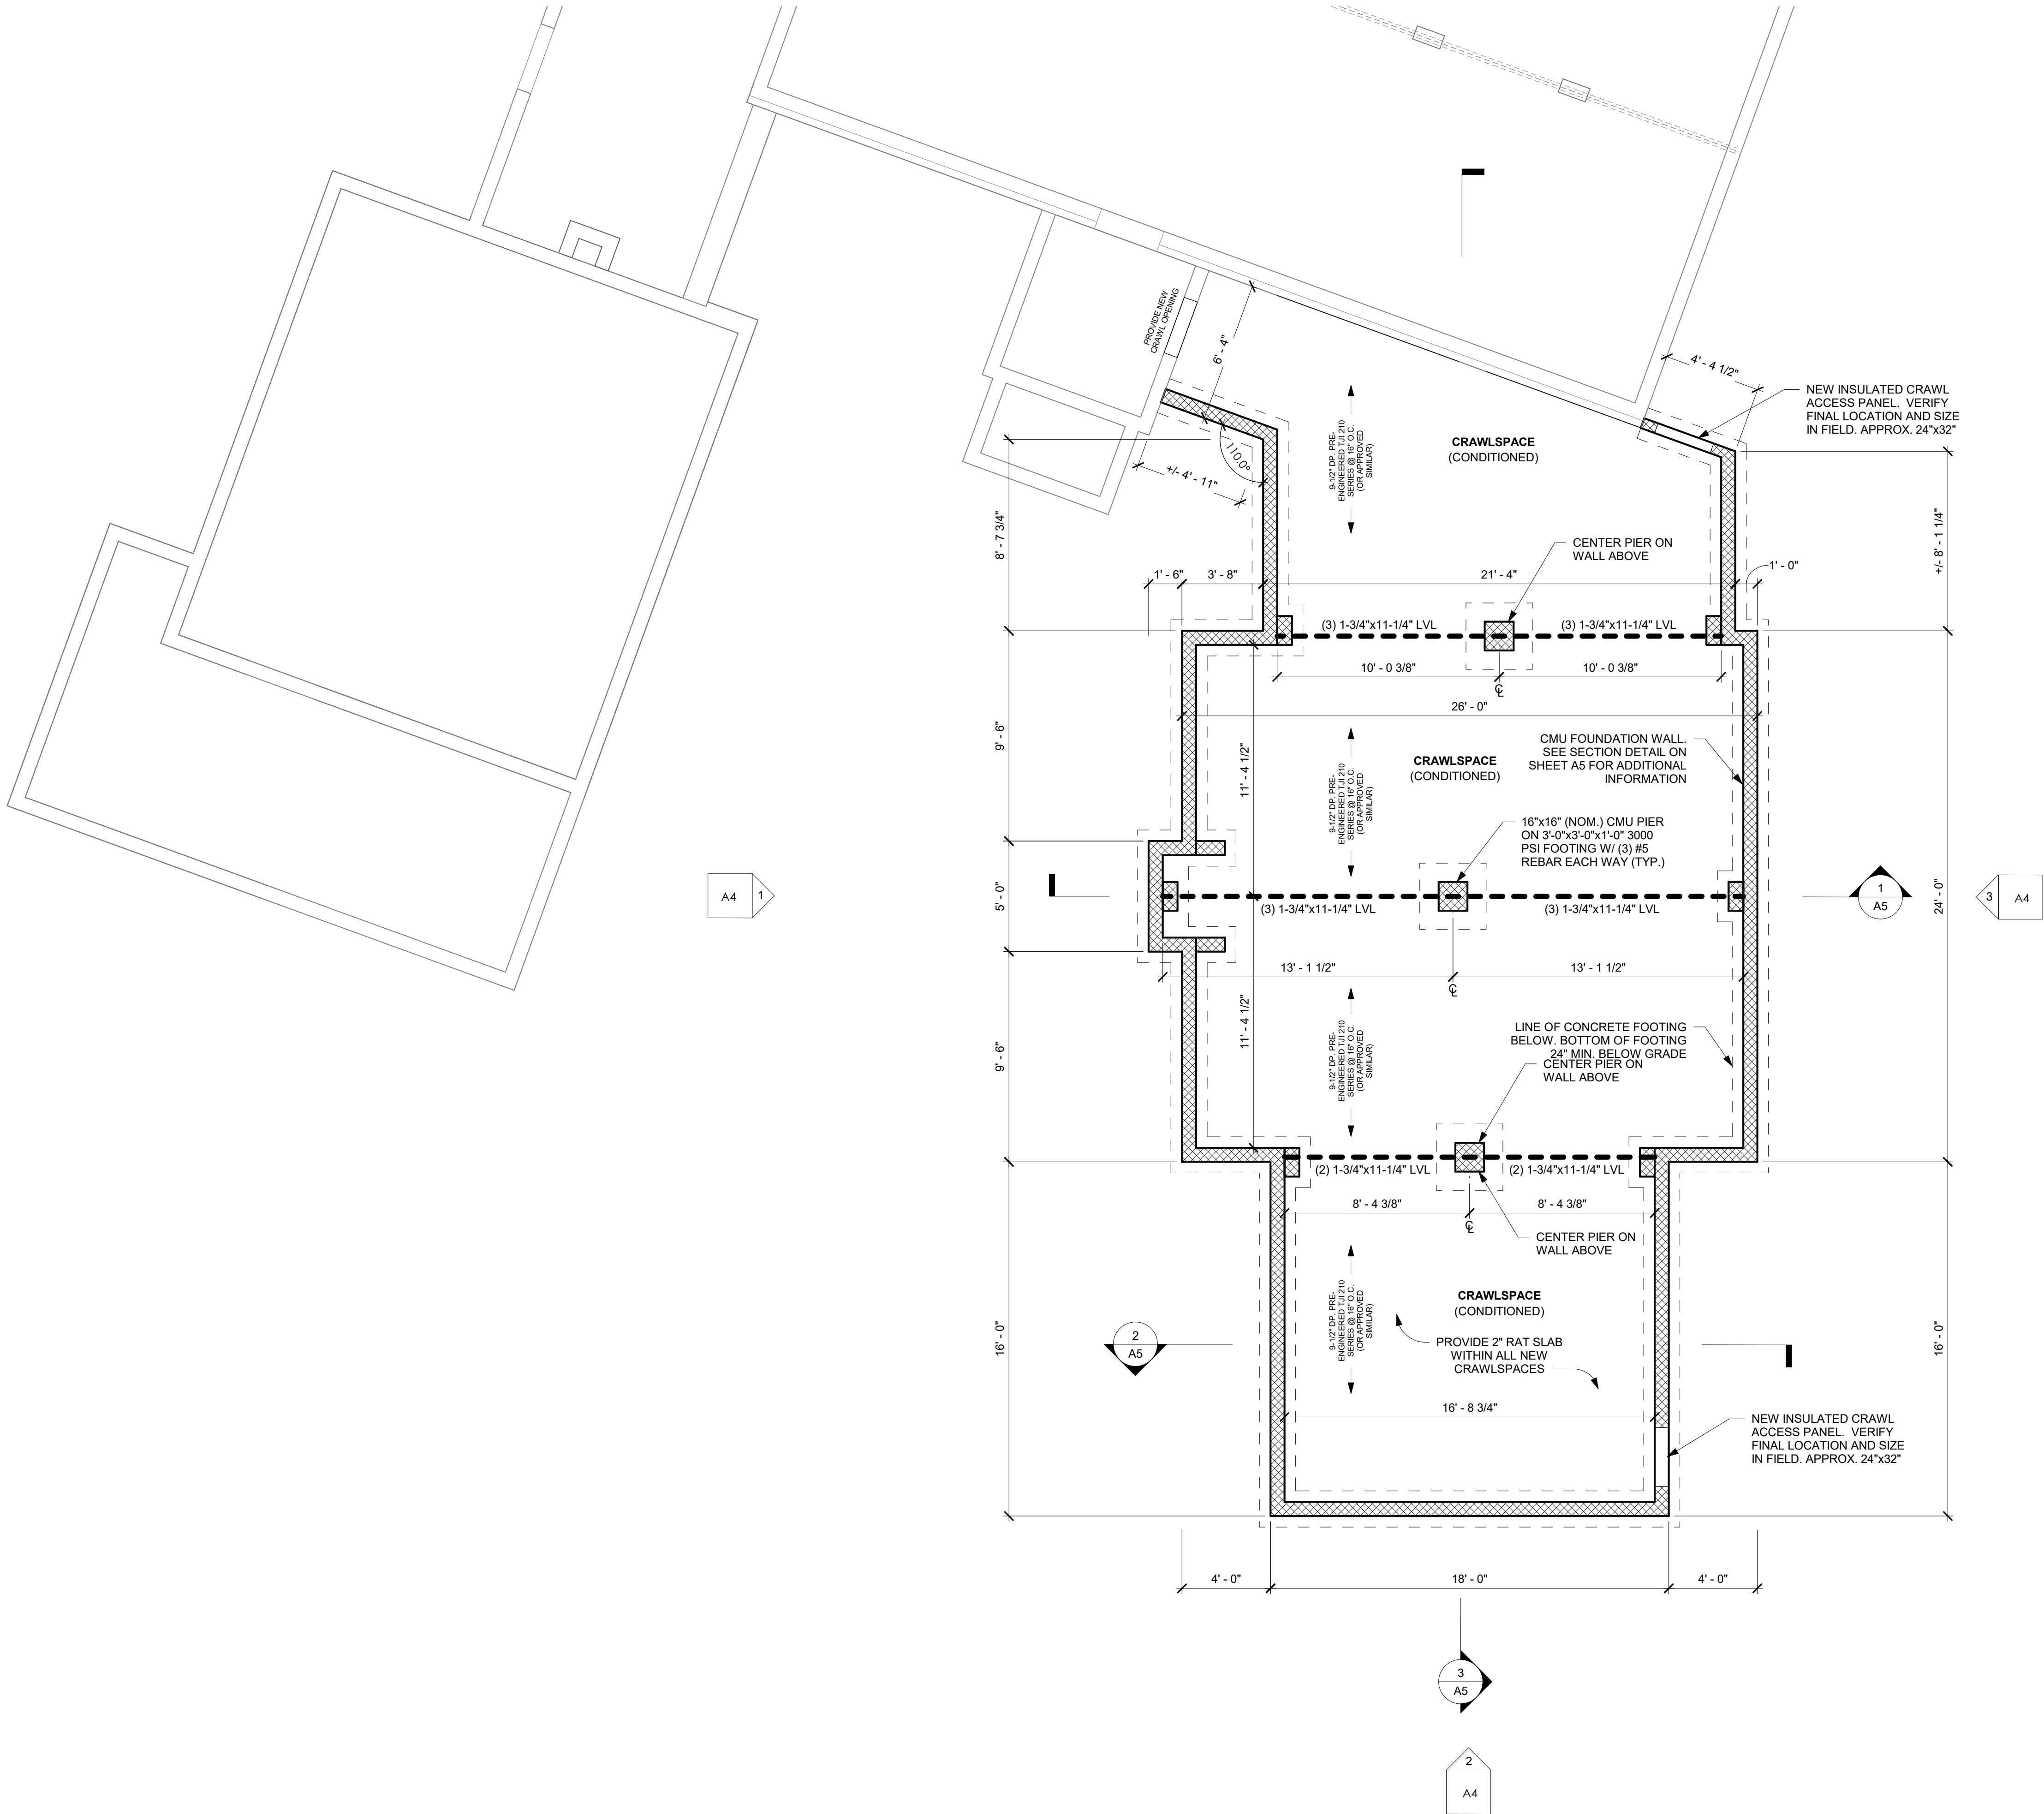

GENERAL NEW FOUNDATION NOTES

- GENERAL NOTES:
- ALL NOTES ARE FOR SUPPLEMENTING PLANS AND SPECIFICATIONS AND ARE IN NO WAY TO BE CONSIDERED AS EXCLUDING ANY PORTION THERE OF.
 - COORDINATION: IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO COORDINATE THE STRUCTURAL DRAWINGS AND THEIR DIMENSIONS WITH OTHER DRAWINGS AND IF A CONFLICT EXISTS HE SHALL NOT CARRY OUT THE AFFECTED WORK UNTIL THE ARCHITECT HAS RESPONDED IN WRITING.
 - CODE: DESIGN AND CONSTRUCTION TO BE IN ACCORD WITH THE IBC CODE AND THE PARTICULAR CODES AS REFERENCED IN IBC AND IRC.
 - CONSTRUCTION SAFETY: LOADS GREATER THAN THE APPLICABLE DESIGN LOADS SHALL NOT BE PLACED ON THE STRUCTURE. PROVISION SHALL BE MADE FOR ADEQUATE BRACING AND SUPPORT OF ADJACENT CONSTRUCTION, UTILITIES AND EXCAVATIONS. JOB SITE SAFETY AND CONSTRUCTION PROCEDURES ARE THE RESPONSIBILITY OF THE CONTRACTOR.
 - FOUNDATION: FOUNDATION DRAWINGS SHALL BE REVIEWED AND SHALL BE APPROVED BY A ENGINEER, REGISTERED IN THE STATE OF MARYLAND. THE AREAS WITHIN THE BUILDING LIMITS AND THOSE EXTENDING ON ALL THE SIDES, TO A MINIMUM OF SIX (6) FEET OR THE DEPTH OF CONTROLLED FILL, WHICHEVER IS MORE, SHALL BE PREPARED (BY EXCAVATION OR BY PLACING CONTROLLED FILL) TO AN ELEVATION (8) INCHES BELOW THE FINISHED FLOOR LEVELS OF SLABS ON GRADE. THE FOOTINGS SHALL BE EXCAVATED AFTER THE BUILDING AREAS HAVE BEEN PROPERLY PREPARED. MATERIAL SATISFACTORY FOR CONTROLLED FILL AND BACKFILL MATERIAL AROUND AND ABOVE FOOTINGS SHALL INCLUDE CLEAN SOIL OR BANKRUN SAND AND GRAVEL (GW, GC, SC, SM, ML & CL), BUT EXCLUDE HIGHLY PLASTIC CLAYS (MH & CH) OR HIGH SHRINK-SWELL SOILS. THE FILL MATERIALS SHALL BE FREE FROM TOPSOIL, ORGANIC CONTAMINATED SOIL AND ROCK FRAGMENTS HAVING A MAJOR DIMENSION GREATER THAN FOUR (4) INCHES, AND SHALL CONTAIN NO ICE OR SNOW. ALL FOOTINGS SHALL BE CARRIED DOWN A MINIMUM OF ONE FOOT INTO VIRGIN SOIL OR COMPACTED FILL AND, IF EXTERIOR, SHALL BE A MINIMUM OF 2'-6" BELOW FINISHED EXTERIOR GRADE. FOOTINGS ARE DESIGNED FOR A SOIL BEARING PRESSURE OF 3000 PSF. FOOTING ELEVATIONS HAVE BEEN ESTABLISHED FROM AVAILABLE INFORMATION AND SHALL NOT BE TAKEN AS A WAIVER OF THESE REQUIREMENTS. WATER, LOOSE SOIL AND SOIL SOFTENED BY WATER SHALL BE REMOVED FROM THE BOTTOM OF THE FOOTING EXCAVATIONS BEFORE PLACING CONCRETE. FOOTING EXCAVATIONS SHALL NOT BE LEFT OPEN FOR LONG PERIODS. DEPTH OF EXCAVATIONS BELOW ANY FOOTINGS SHALL NOT EXCEED 1/2 THE DISTANCE FROM THE NEAREST EDGE OF THAT FOOTING. PROVISIONS MUST BE TAKEN TO PROTECT ALL CONCRETE WORK FROM FROST DAMAGE WITH SPECIAL ATTENTION PAID TO FOOTINGS AND OTHER CONCRETE ON GRADE PRIOR TO BACKFILLING AND ENCLOSING THE BUILDING. CARE SHOULD BE TAKEN TO ASSURE THAT DURING PLACING OF CONCRETE FOOTINGS AND SLABS ON GRADE NO ORGANIC MATTER, SALTS, OR CLAYS ARE MIXED WITH THE CONCRETE.
 - COMPACTION: EACH LAYER OF FILL (IF REQUIRED) SHALL BE COMPACTED AT OPTIMUM MOISTURE CONTENT (PLUS OR MINUS 2%) TO NOT LESS THAN 95% OF MAXIMUM DRY DENSITY. LOWER DEGREES OF COMPACTION MAY BE PERMITTED BY THE BUILDING OFFICIAL IF UPON CERTIFYING THAT HE HAS INVESTIGATED THE SUBSOIL OF THE SITE, HAS TESTED REPRESENTATIVE FILL MATERIALS AND THAT IN HIS OPINION SUCH LOWER DEGREE OF COMPACTION WILL BE ADEQUATE FOR THE INTENDED USE OF THE FILL. IN-PLACE FIELD DENSITY SHALL BE DETERMINED IN ACCORDANCE WITH AASHTO T-180. ALL FILLS SHALL BE PLACED IN APPROXIMATELY HORIZONTAL LAYERS, EACH LAYER HAVING A LOOSE THICKNESS OF NOT MORE THAN 8 INCHES. NO FILL SHALL BE PLACED ON FROZEN GROUND.
 - TEMPORARY LATERAL BRACING: PROVIDE ADEQUATE BRACING AND SHORING FOR FOOTING, FOUNDATION, RETAINING AND PIT WALLS. BRACE AND PIT WALLS UNTIL SUPPORTING FLOORS ABOVE ARE IN PLACE AND HAVE ATTAINED DESIGN STRENGTH. DO NOT BACKFILL WALLS UNTIL AFTER FLOORS AT THE TOP AND BASE OF THE WALLS ARE IN PLACE. WHERE BACKFILL IS REQUIRED ON BOTH SIDES OF A WALL, BACKFILL BOTH SIDES SIMULTANEOUSLY WITH THE GRADE DIFFERENCE NOT TO EXCEED 2'-0" AT ANY TIME. Laterally brace building walls in an approved manner as required. BRACING SHALL REMAIN IN PLACE UNTIL ROOF OR FLOOR MEMBERS HAVE BEEN SECURELY ANCHORED TO THE WALL.
 - CONCRETE: TO BE MIXED AND PLACED IN ACCORDANCE WITH THE CURRENT "AMERICAN CONCRETE INSTITUTE (ACI) BUILDING CODE REQUIREMENTS FOR REINFORCED CONCRETE". ALL REINFORCED CONCRETE, INCLUDING FLOOR TOPPING, TO HAVE A COMPRESSIVE STRENGTH (f_c) OF 3500 PSI, UNLESS OTHERWISE NOTED. 3500 PSI SLAB ON GRADE 3500 PSI WALLS AND FOOTINGS 3500 PSI (CMU FILL) PEA-GRAVEL GROUT. ALL EXTERIOR CONCRETE AND CONCRETE EXPOSED TO WEATHER SHALL BE AIR-ENTRAINED. ALL CONTINUOUS REINFORCING SHALL BE CONTINUOUS OR LAPPED AT ALL SPLICES. CORNERS AND INTERSECTIONS A MINIMUM OF 30 BAR DIAMETERS (U.N.O.), PROVIDE SPACERS, CHAIRS, TIES AS REQUIRED AND NECESSARY FOR ASSEMBLING, PLACING AND SUPPORTING ALL REINFORCEMENT IN PROPER POSITION. CONCRETE PROTECTION FOR REINFORCEMENT SHALL BE AS GIVEN IN ACI-318. ALL CONCRETE WORK, REINFORCING PLACEMENT, FORMWORK AND SHORING SHALL BE IN ACCORDANCE WITH LOCAL BUILDING CODE. CONCRETE QUALITY CONTROL, AND INSPECTION SHALL BE IN STRICT ACCORDANCE WITH THE PROJECT SPECIFICATIONS, AS WELL AS LOCAL BUILDING CODE REQUIREMENTS. USE OF ADDITIVES SHALL NOT BE PERMITTED UNLESS SPECIFICALLY APPROVED BY A STRUCTURAL ENGINEER. USE OF ADDITIVES CONTAINING CALCIUM CHLORIDE SHALL NOT BE PERMITTED. USE OF CEMENT SUBSTITUTES SUCH AS "NEWCEM" SHALL NOT BE PERMITTED WITHOUT PRIOR APPROVAL FROM A STRUCTURAL ENGINEER. THE USE OF NEWCEM WILL ONLY BE PERMITTED DURING SPECIFIC SEASONS. THE AMOUNT OF NEWCEM PERMITTED IN THE MIX DESIGN WILL BE LIMITED TO 25% BY WEIGHT OF THE TOTAL AMOUNT OF CEMENT IN THE MIX.
 - REINFORCING STEEL: SHALL CONFORM TO ASTM SPECIFICATION A615, GRADE 60 FOR BARS. FABRICATION, INCLUDING ACCESSORIES, ALLOWANCE FOR CONCRETE PROTECTION AND MINIMUM AREA OF STEEL REQUIRED, TO BE IN ACCORDANCE WITH THE ACI BUILDING CODE AND MANUAL OF STANDARD PRACTICE.



kezlo group

PO Box 1086
Brookhaven, PA 19015
844.495.3956
www.kezlo.com

THE INFORMATION CONTAINED HEREIN MAY NOT
BE USED OR REPRODUCED WITHOUT THE
WRITTEN PERMISSION OF KEZLO GROUP, LLC.

SEAL

CONSULTANTS:

ISSUE	DATE	NUMBER
-------	------	--------

CLIENT:

MARY-ANNE SCHOEB
RICHARD SCHOEB

DATE: 02.28.2025

KEZLO GROUP PROJECT NUMBER: 24-083

PROJECT TITLE:


**STAGHILL
COTTAGE -
ADDITION**


SHEET TITLE:

**FOUNDATION
PLAN, NOTES &
DETAILS**

SHEET NUMBER:

A1



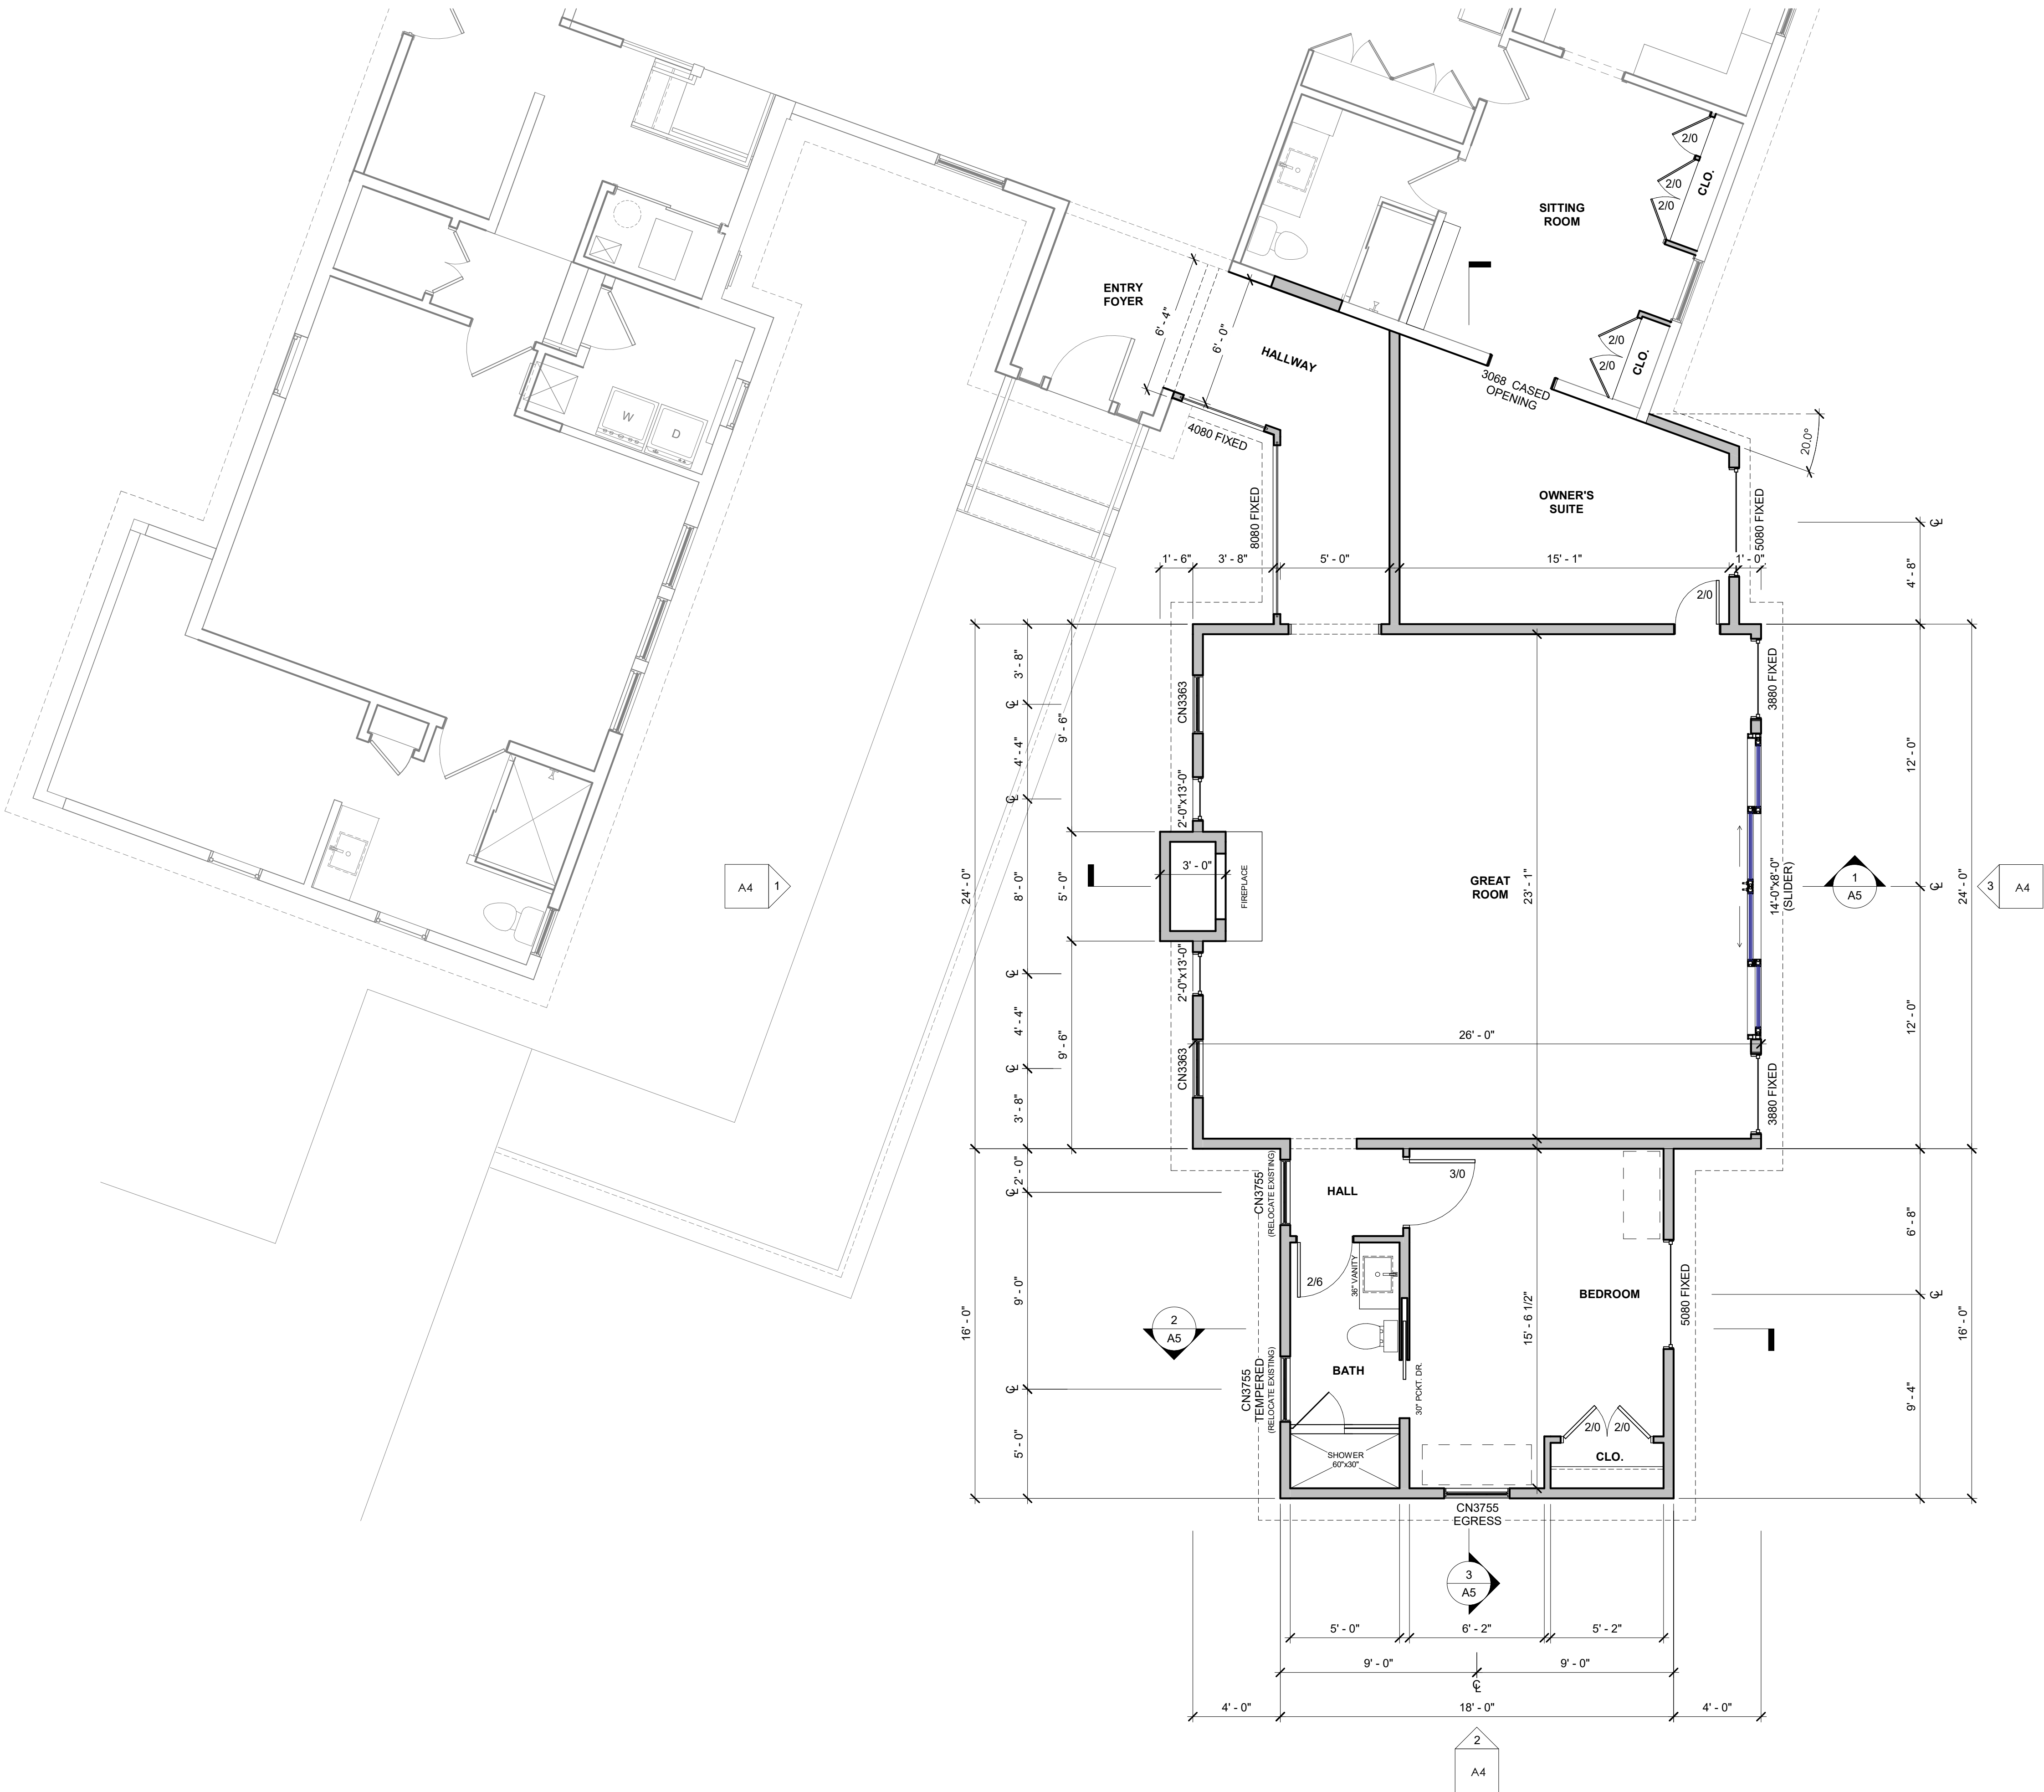

1 ADDITION - FIRST FLOOR PLAN
A2 SCALE: 1/4" = 1'-0"



GENERAL NEW WORK NOTES

(APPLICABLE TO THE NEW CONSTRUCTION DRAWINGS, UNLESS NOTED OTHERWISE)

- A. CONTRACTOR SHALL FIELD VERIFY ALL EXISTING OR CURRENT CONSTRUCTION RELATED CONDITIONS PRIOR TO THE START OF NEW CONSTRUCTION.
- B. ANY AND ALL DISCREPANCIES SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT
- C. DIMENSIONS ARE GENERALLY GIVEN FROM THE FACE OF THE WALL TO FACE OF WALL OR COLUMN CENTERLINE
- D. MECHANICAL, ELECTRICAL, AND PLUMBING (M.E.P.) ITEMS AND EQUIPMENT APPEARING ON ARCHITECTURAL DRAWINGS ARE SHOWN FOR CLARITY, AND ARE NOT MEANT TO BE ALL INCLUSIVE.
- E. PATCH AND REPAIR ALL PENETRATIONS, ETC., TO PROVIDE FOR SMOOTH SURFACES READY FOR THE APPLICATION OF NEW FINISHES.
- F. PATCH AND REPAIR ALL PENETRATIONS IN WALLS RESULTING FROM THE REMOVAL OF MECHANICAL/ELECTRICAL FIXTURES TO MATCH ADJACENT CONSTRUCTION. PREPARE THE AREA FOR NEW FINISHES.
- G. EVERY EFFORT HAS BEEN MADE TO IDENTIFY THOSE DIMENSIONS WHICH MAY VARY WITH +/- DIMENSIONS NOT SO NOTED ARE INTENDED TO BE HELD. ALL DIMENSIONS, HOWEVER, SHALL BE FIELD VERIFIED BY THE CONTRACTOR PRIOR TO FABRICATION OR INSTALLATION OF BUILDING COMPONENTS.
- H. GENERAL CONTRACTOR TO CONFIRM EACH LOCATION FOR WALL MOUNTED ITEMS INCLUDING BUT NOT LIMITED TO EQUIPMENT, ACCESSORIES, OUTLETS, ETC. WITH THE OWNER PRIOR TO INSTALLATION.
- I. ALL WORK SHALL CONFORM TO LOCAL BUILDING CODES AND REGULATIONS AND SHALL BE INSTALLED ACCORDING TO THE JOINT REQUIREMENTS AND DECISIONS OF ALL LOCAL AUTHORITIES. IF ANY CONTRACTOR OR SUBCONTRACTOR PERFORMS ANY WORK CONTRARY TO THE LOCAL BUILDING CODES, ORDINANCES, RULES OR REGULATIONS WITHOUT PRIOR WRITTEN NOTICE TO THE OWNER, THE CONTRACTOR SHALL BEAR ALL COSTS ARISING THERE FROM.
- J. COORDINATE WITH M&E REQUIREMENTS FOR CONDITIONS THAT WILL DISTURB EXISTING CONDITIONS AND WHICH WILL REQUIRE SELECTIVE DEMOLITION, PATCHING, AND FINISHING. OUTSIDE OF THAT SHOWN ON THE ARCHITECTURAL DRAWINGS.
- K. CONTRACTOR TO PROVIDE SOLID BLOCKING FOR ALL WALL MOUNTED EQUIPMENT AND ACCESSORIES. CONTRACTOR TO COORDINATE SPECIFIC PLACEMENT OF BLOCKING WITH EQUIPMENT AND ACCESSORIES REQUIREMENTS. SEE TYPICAL ACCESSORY MOUNTING CONDITIONS.
- L. LOCATE DOORS 6" FROM ADJACENT WALL TO HINGE SIDE FRAME OPENING, U.N.O.
- M. PATCH EXISTING CONCRETE FLOOR SLAB AS NECESSARY TO PRODUCE A FLAT, LEVEL SURFACE FOR APPLICATIONS OF NEW FINISHES. AT SPACES RECEIVING CARPET, CONCRETE FLOORS SHALL BE A CLEAN, DRY SURFACE FREE OF CRACKS, MOISTURE, OIL, GREASE, DIRT, AND ANY FOREIGN MATERIALS.
- N. ADJACENT WALLS WHICH APPEAR TO ALIGN IN PLAN SHALL BE CONSTRUCTED TO ALIGN IN PLAN.

SPECIFIC NEW WORK PLAN NOTES

1. ALL EXTERIOR WALLS ARE TO BE 2x6 STUDS FRAMED @ 16" O.C. UNLESS NOTED OTHERWISE.
2. ALL INTERIOR WALLS ARE TO BE 2x4 STUDS FRAMED @ 16" O.C. UNLESS NOTED OTHERWISE.
3. ADD SOLID BLOCKING AT ALL BEAMS & HEADERS GREATER THAN 4" W/ 2x4 JACK STUDS UNLESS NOTED OTHERWISE.
4. PROVIDE SMOKE DETECTORS AS REQUIRED BY LOCAL CODE, WIRED TO A NEARBY CIRCUIT (WITH BATTERY BACKUP) AND INTER-CONNECTED FOR SIMULTANEOUS ACTIVATION.

NUTTLE
BUILDERS, INC.



kezlo group
PO Box 1086 844.495.3956
Brookhaven, PA 19015 www.kezlo.com

THE INFORMATION CONTAINED HEREIN MAY NOT
BE USED OR REPRODUCED WITHOUT THE
WRITTEN PERMISSION OF KEZLO GROUP, LLC.

SEAL

CONSULTANTS:

ISSUE	DATE	NUMBER
-------	------	--------

CLIENT:

MARY-ANNE SCHOEB
RICHARD SCHOEB

DATE:	02.28.2025
KEZLO GROUP PROJECT NUMBER:	24-083

PROJECT TITLE:


STAGHILL
COTTAGE -
ADDITION

SHEET TITLE:

FIRST FLOOR
PLAN, NOTES &
DETAILS

SHEET NUMBER:

A2

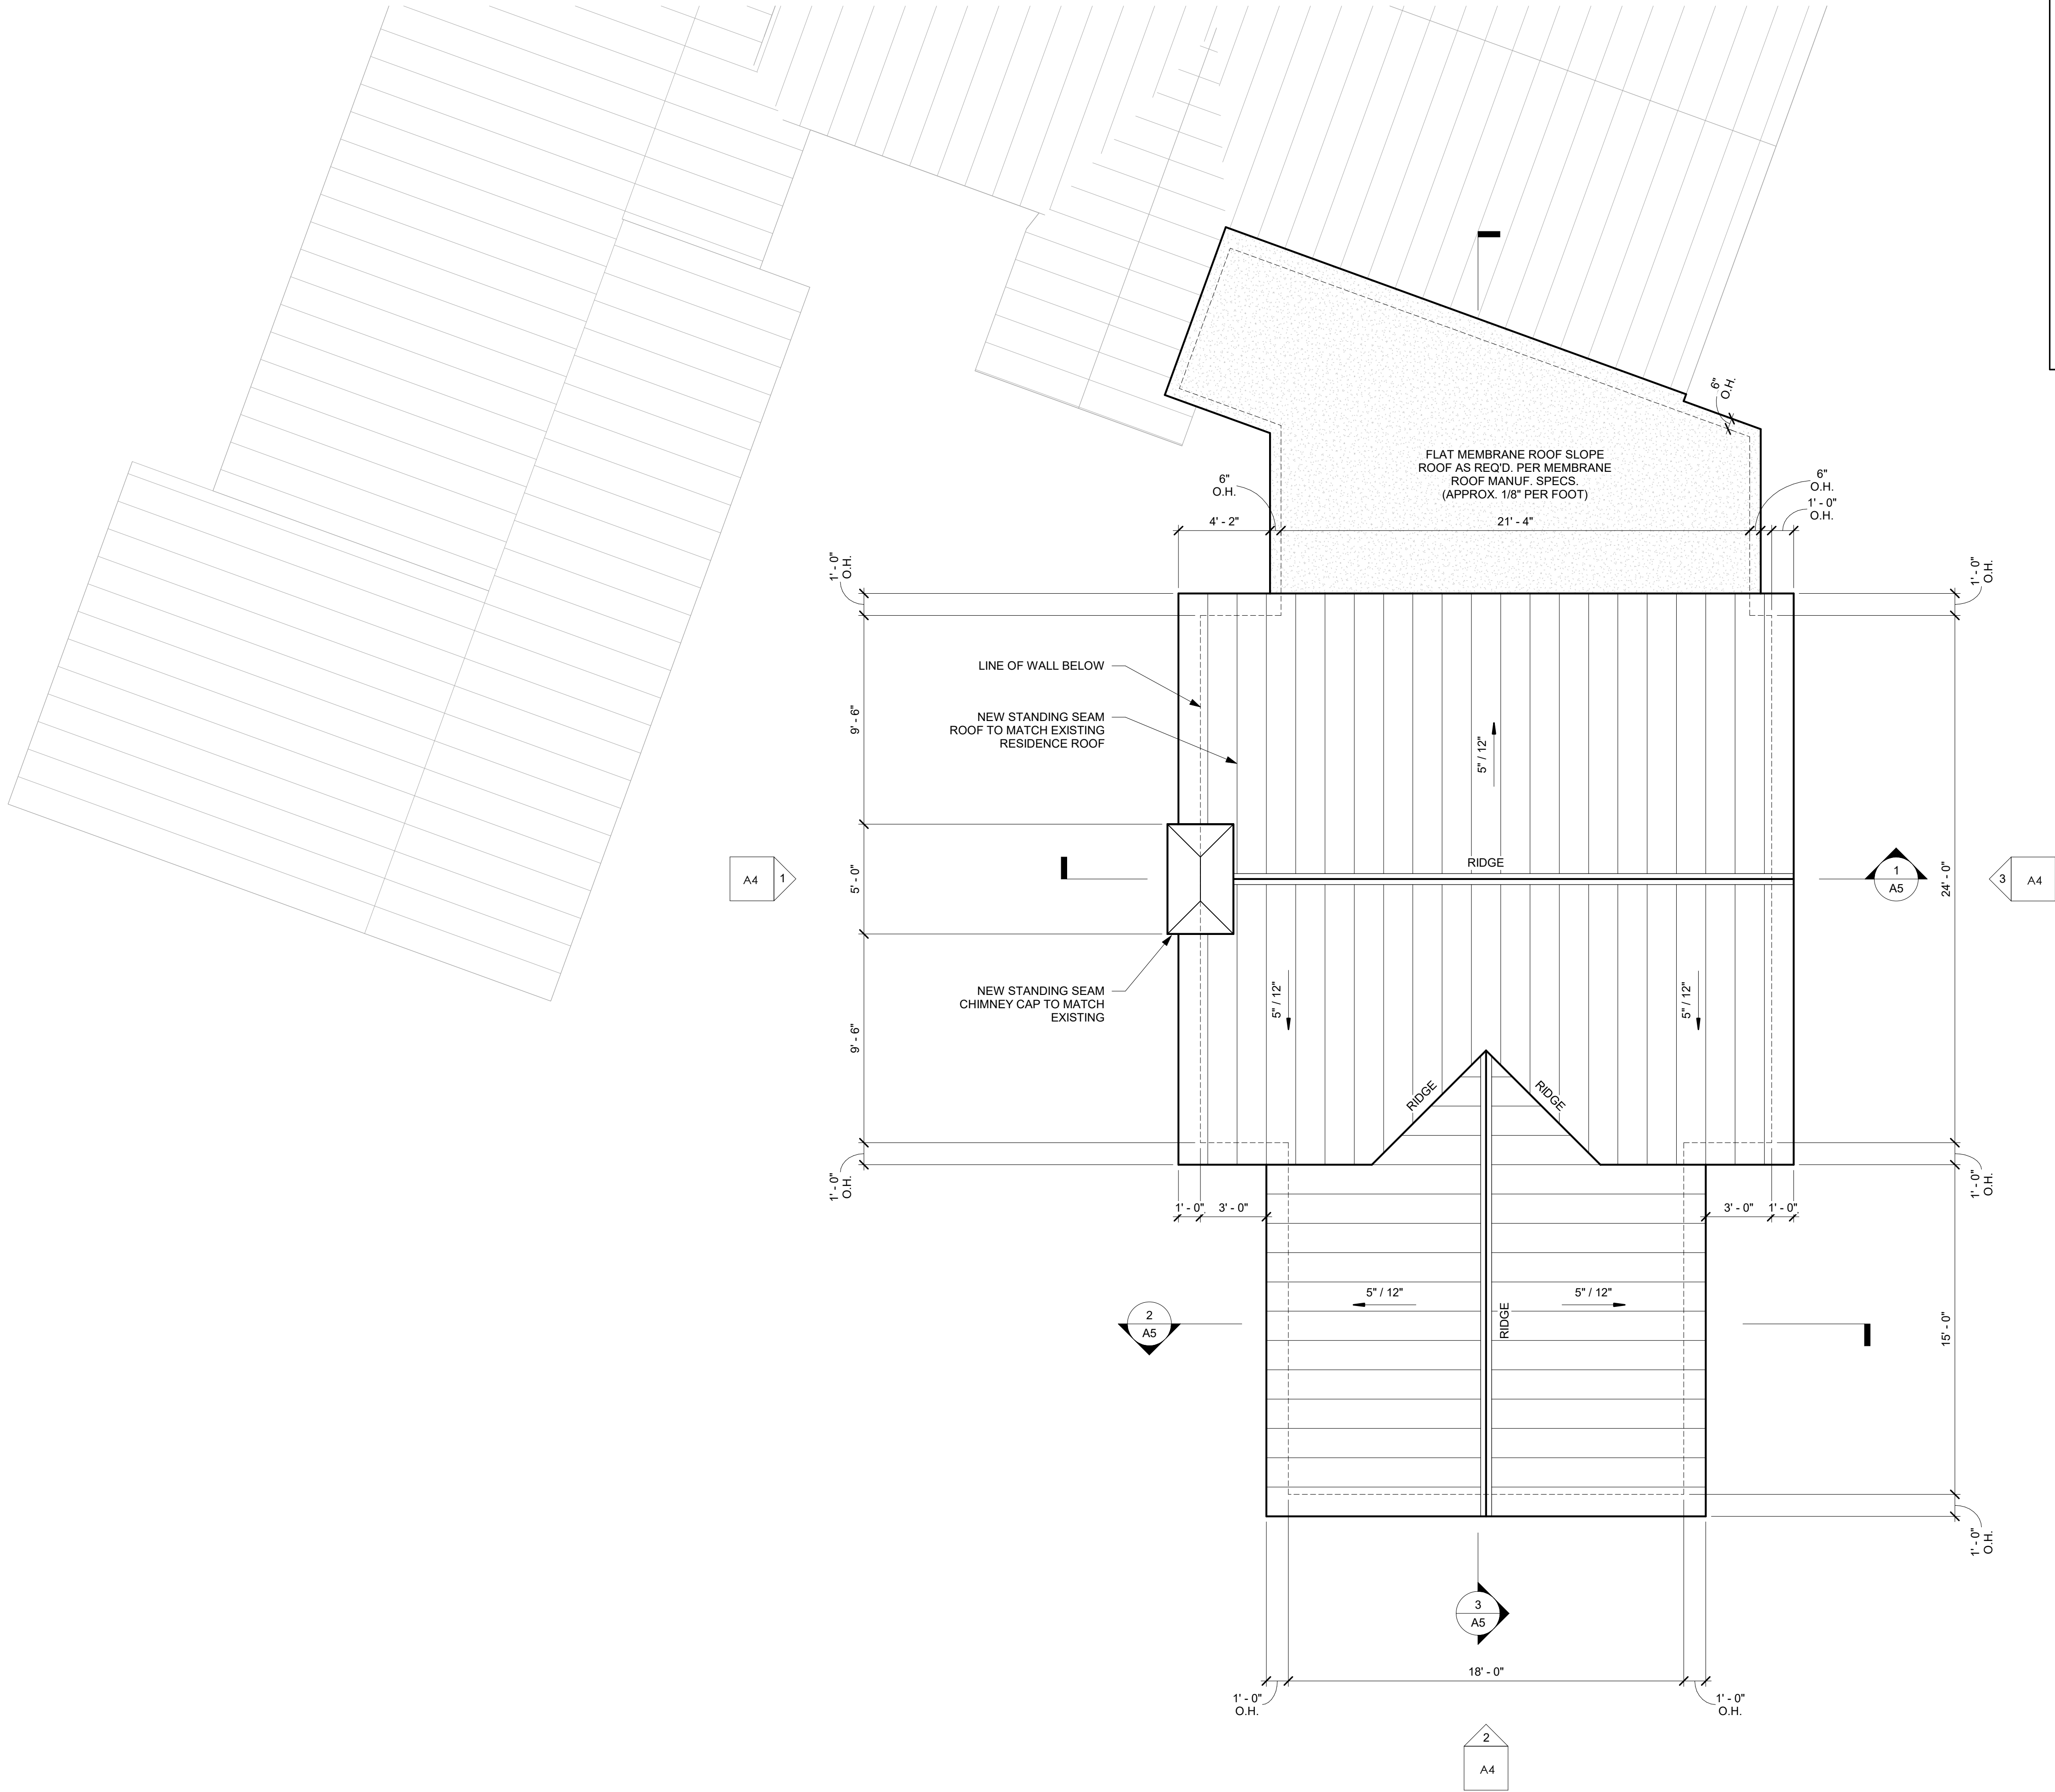

GENERAL ROOF PLAN NOTES

A. CONTRACTOR SHALL FIELD VERIFY ALL EXISTING OR CURRENT CONSTRUCTION RELATED CONDITIONS PRIOR TO THE START OF NEW CONSTRUCTION.

B. ANY AND ALL DISCREPANCIES SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT

C. DIMENSIONS ARE GENERALLY GIVEN FROM THE FACE OF THE WALL TO FACE OF WALL OR COLUMN CENTERLINE

D. MECHANICAL, ELECTRICAL, AND PLUMBING (M.E.P.) ITEMS AND EQUIPMENT APPEARING ON ARCHITECTURAL DRAWINGS ARE SHOWN FOR CLARITY, AND ARE NOT MEANT TO BE ALL INCLUSIVE.

E. PATCH AND REPAIR ALL PENETRATIONS , ETC., TO PROVIDE FOR SMOOTH SURFACES READY FOR THE APPLICATION OF NEW FINISHES.

F. EVERY EFFORT HAS BEEN MADE TO IDENTIFY THOSE DIMENSIONS WHICH MAY VARY WITH +/- DIMENSIONS NOT SO NOTED ARE INTENDED TO BE HELD. ALL DIMENSIONS, HOWEVER, SHALL BE FIELD VERIFIED BY THE CONTRACTOR PRIOR TO FABRICATION OR INSTALLATION OF BUILDING COMPONENTS.

G. GENERAL CONTRACTOR TO CONFIRM EACH LOCATION FOR WALL MOUNTED ITEMS INCLUDING BUT NOT LIMITED TO EQUIPMENT, ACCESSORIES, OUTLETS, ETC. WITH THE OWNER PRIOR TO INSTALLATION.

H. ALL WORK SHALL CONFORM TO LOCAL BUILDING CODES AND REGULATIONS AND SHALL BE INSTALLED ACCORDING TO THE JOINT REQUIREMENTS AND DECISIONS OF ALL LOCAL AUTHORITIES. IF ANY CONTRACTOR OR SUBCONTRACTOR PERFORMS ANY WORK CONTRARY TO THE LOCAL BUILDING CODES, ORDINANCES, RULES OR REGULATIONS WITHOUT PRIOR WRITTEN NOTICE TO THE OWNER, THE CONTRACTOR SHALL BEAR ALL COSTS ARISING THERE FROM.

I. CONTRACTOR TO PROVIDE BLOCKING FOR ALL ROOF MOUNTED EQUIPMENT AND ACCESSORIES. CONTRACTOR TO COORDINATE SPECIFIC PLACEMENT OF BLOCKING WITH EQUIPMENT AND ACCESSORIES REQUIREMENTS.

1 ADDITION - ROOF PLAN
A3 SCALE:1/4" = 1'-0"



NUTTLE
BUILDERS, INC.



kezlo group
PO Box 1086 844.495.3956
Brookhaven, PA 19015 www.kezlo.com

THE INFORMATION CONTAINED HEREIN MAY NOT
BE USED OR REPRODUCED WITHOUT THE
WRITTEN PERMISSION OF KEZLO GROUP, LLC.

SEAL

CONSULTANTS:

ISSUE	DATE	NUMBER
-------	------	--------

CLIENT:

MARY-ANNE SCHOEB
RICHARD SCHOEB

DATE: 02.28.2025

KEZLO GROUP PROJECT NUMBER: 24-083

PROJECT TITLE:


STAGHILL
COTTAGE -
ADDITION

SHEET TITLE:


ROOF PLAN,
NOTES &
DETAILS

SHEET NUMBER:


A3

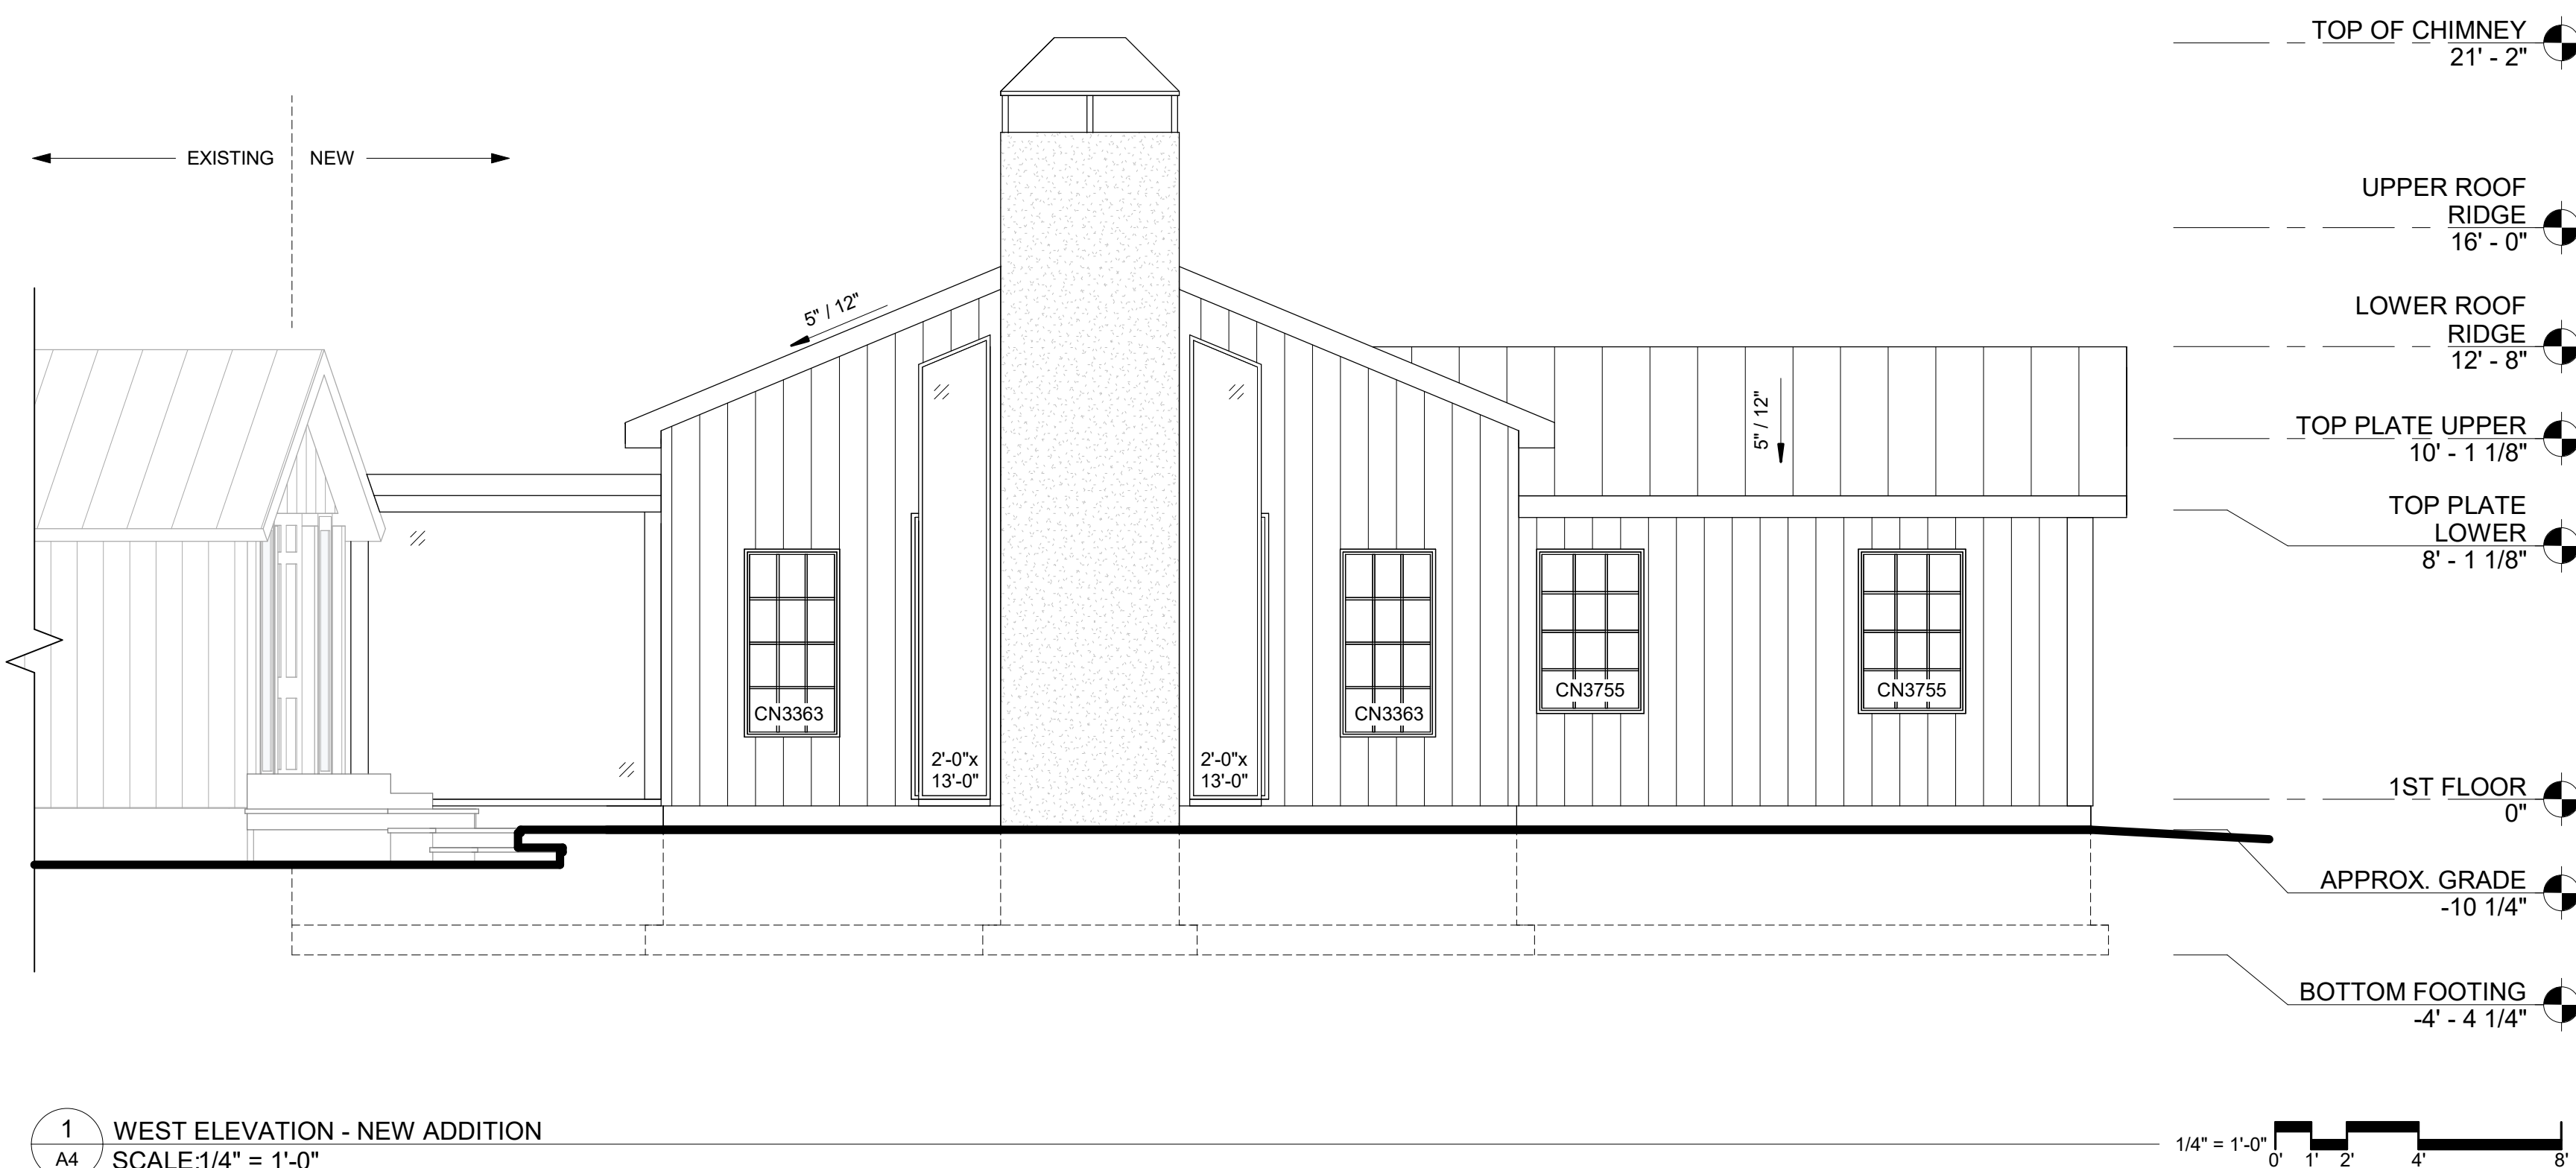

1 WEST ELEVATION - NEW ADDITION
SCALE:1/4" = 1'-0"

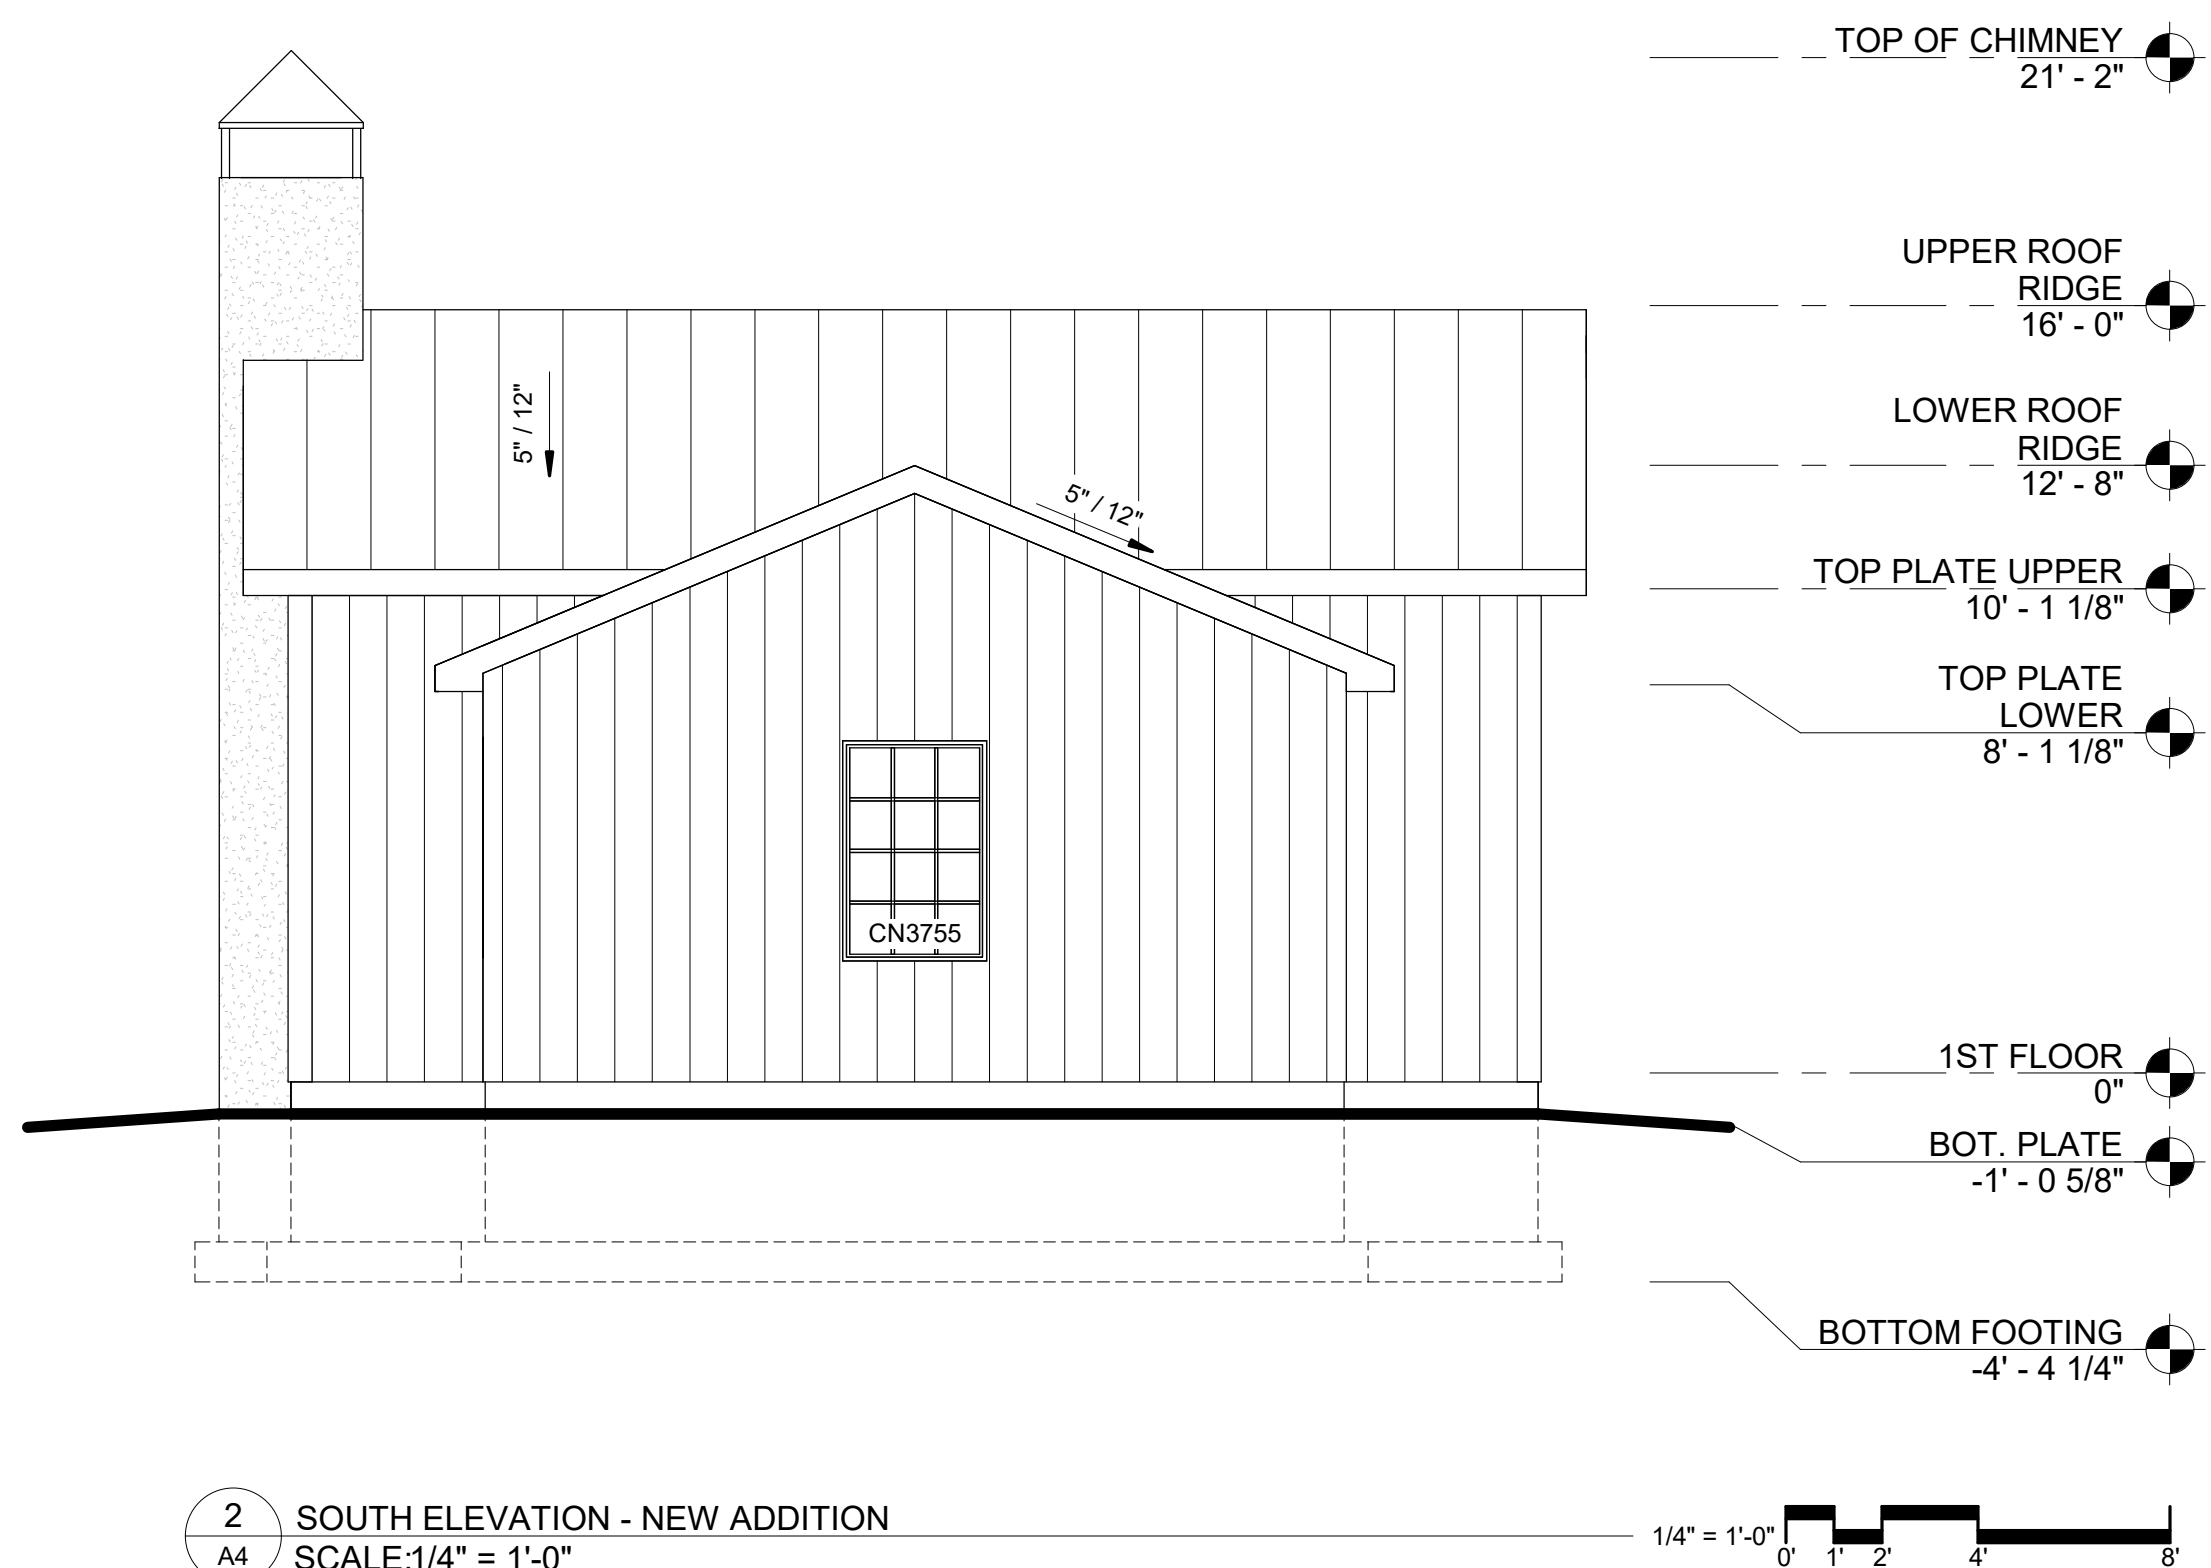

2 SOUTH ELEVATION - NEW ADDITION
SCALE:1/4" = 1'-0"

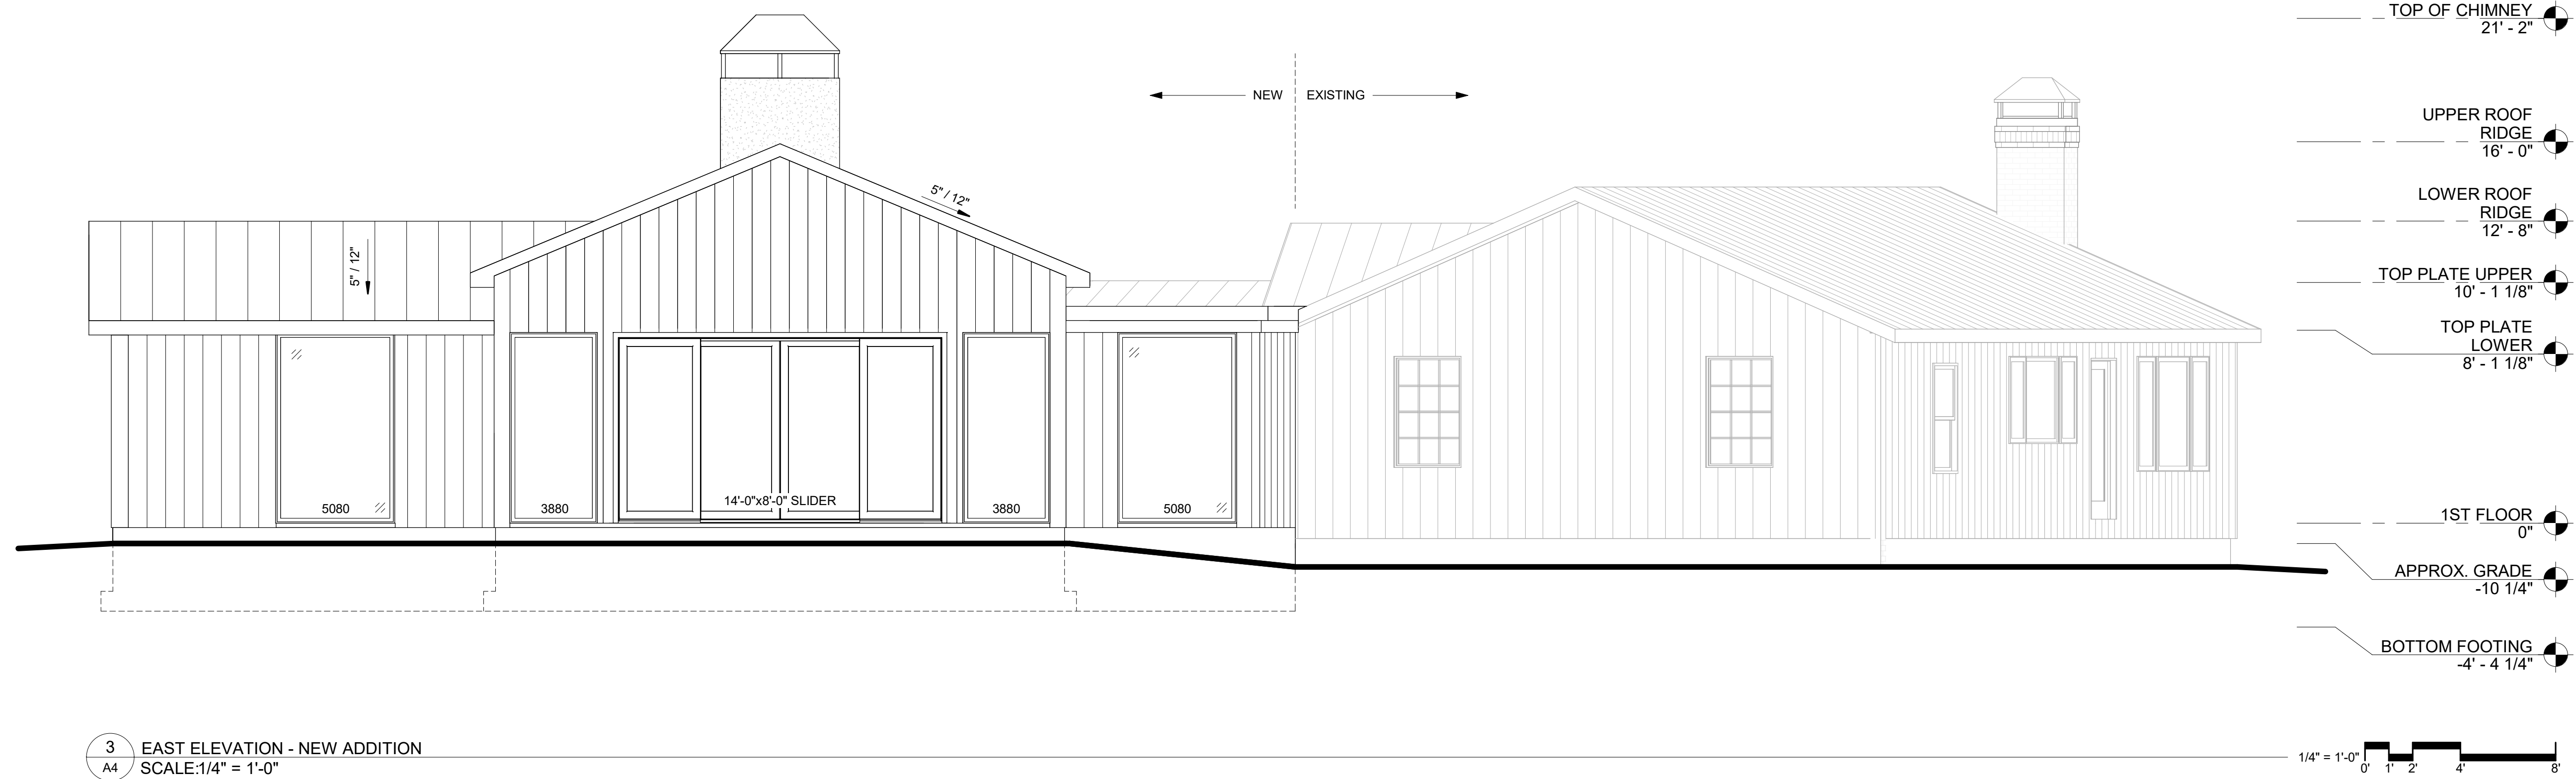

3 EAST ELEVATION - NEW ADDITION
SCALE:1/4" = 1'-0"



SEAL

CONSULTANTS:

ISSUE	DATE	NUMBER
-------	------	--------

CLIENT:

MARY-ANNE SCHOEB
RICHARD SCHOEB

DATE: 02.28.2025

KEZLO GROUP PROJECT NUMBER: 24-083

PROJECT TITLE:


**STAGHILL
COTTAGE -
ADDITION**

SHEET TITLE:


**EXTERIOR
ELEVATIONS,
NOTES &
DETAILS**

SHEET NUMBER:


A4

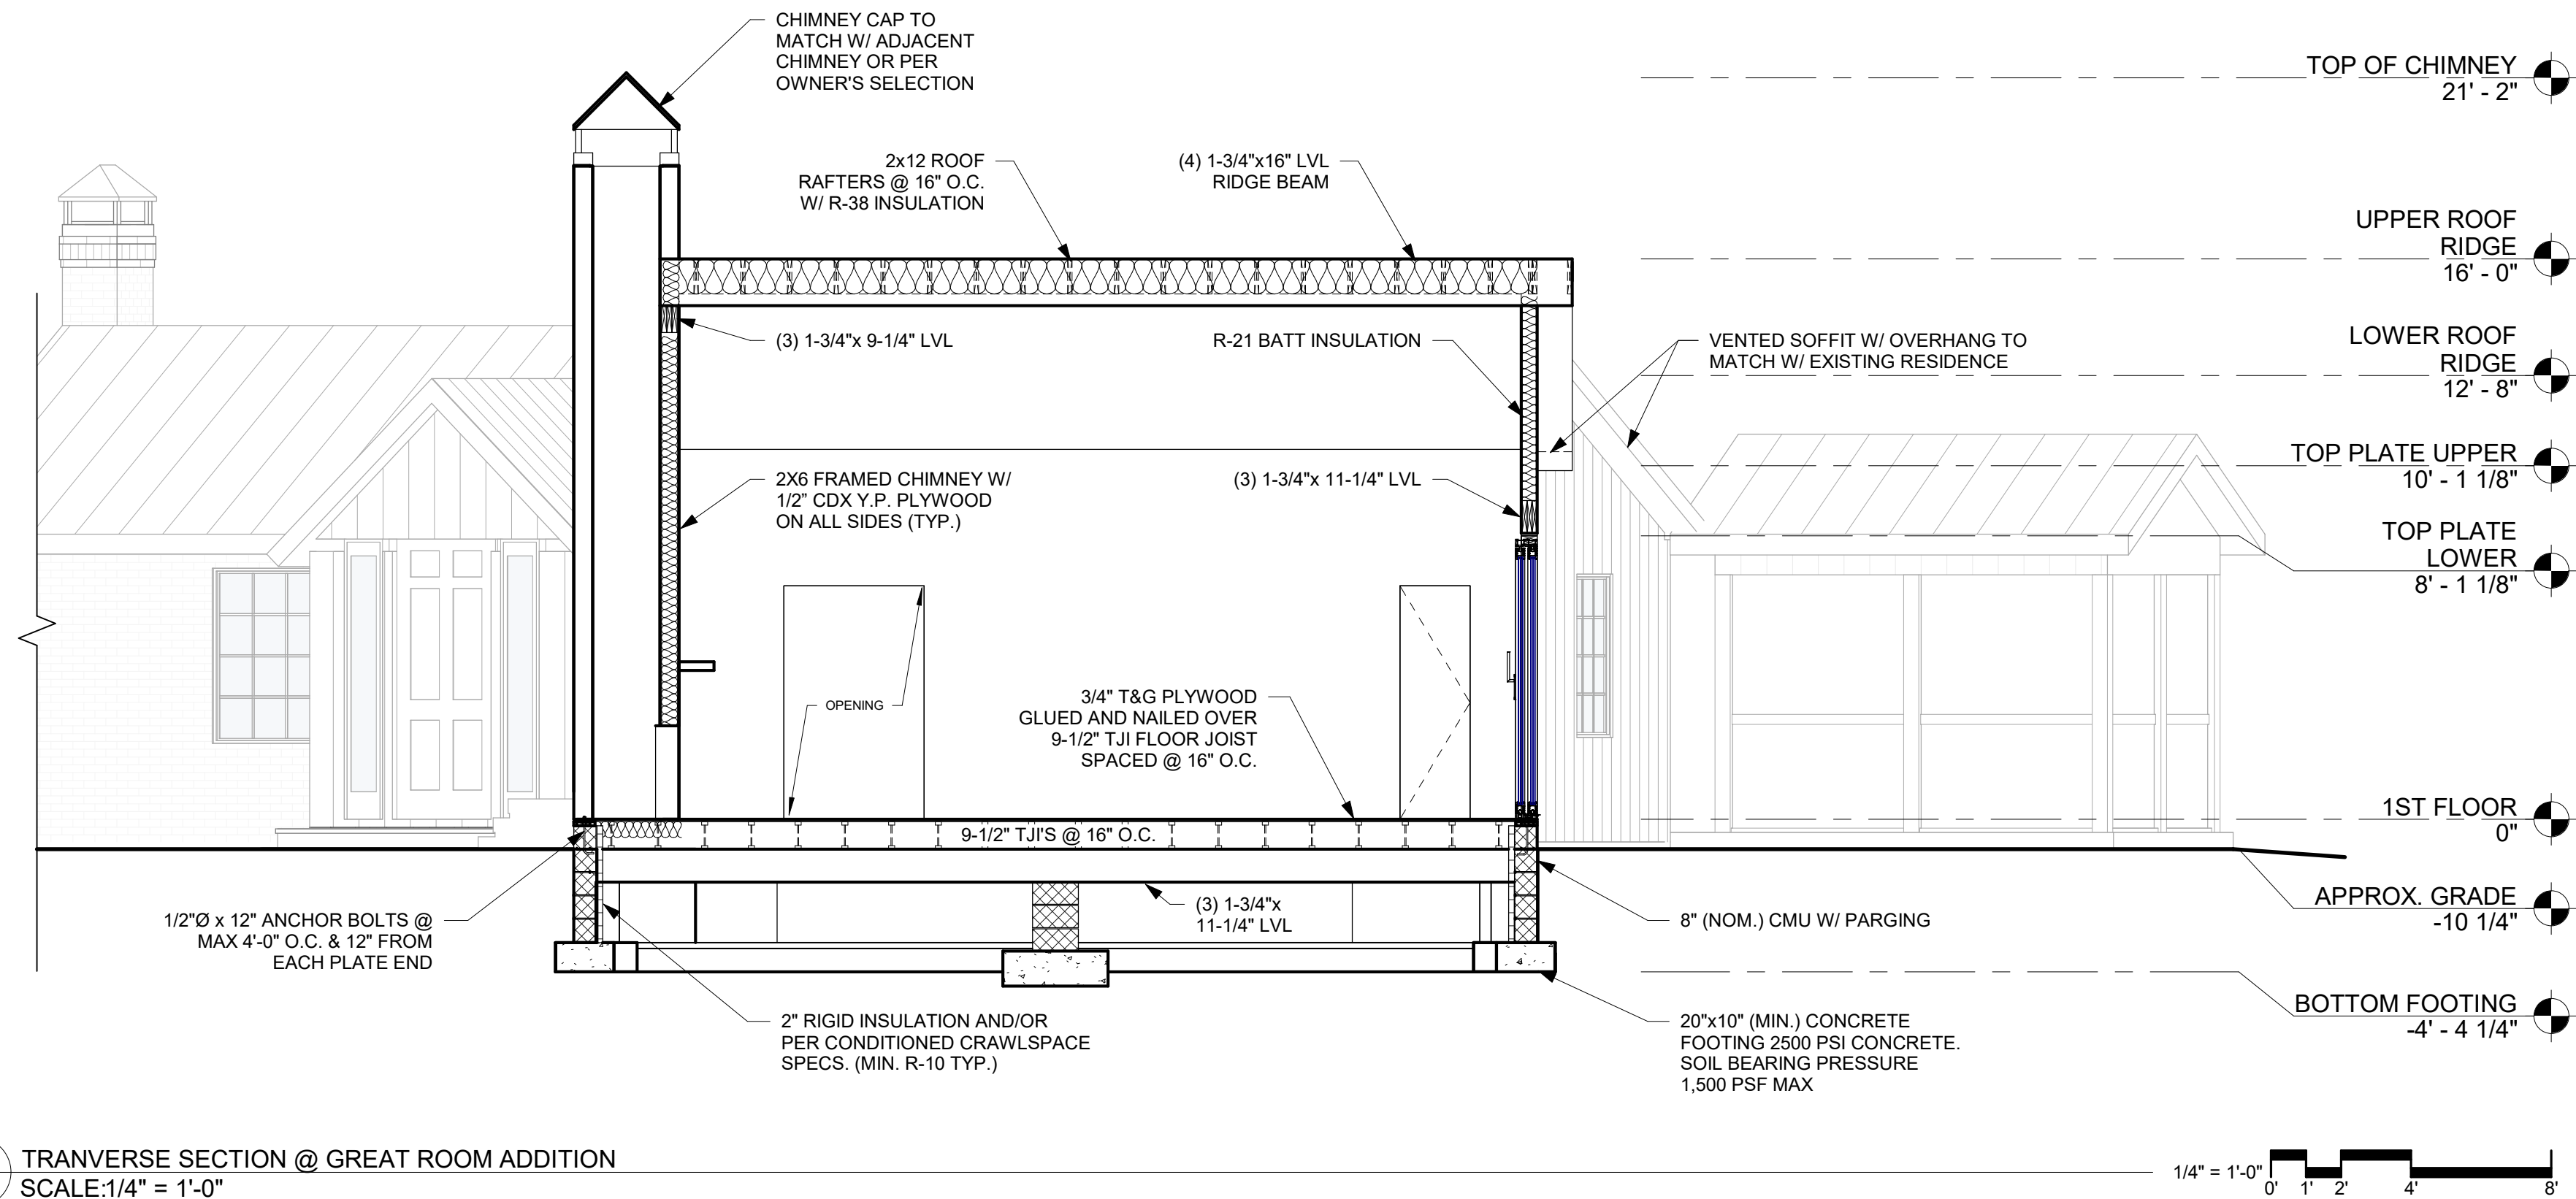



1 TRANVERSE SECTION @ GREAT ROOM ADDITION
A5 SCALE:1/4" = 1'-0"

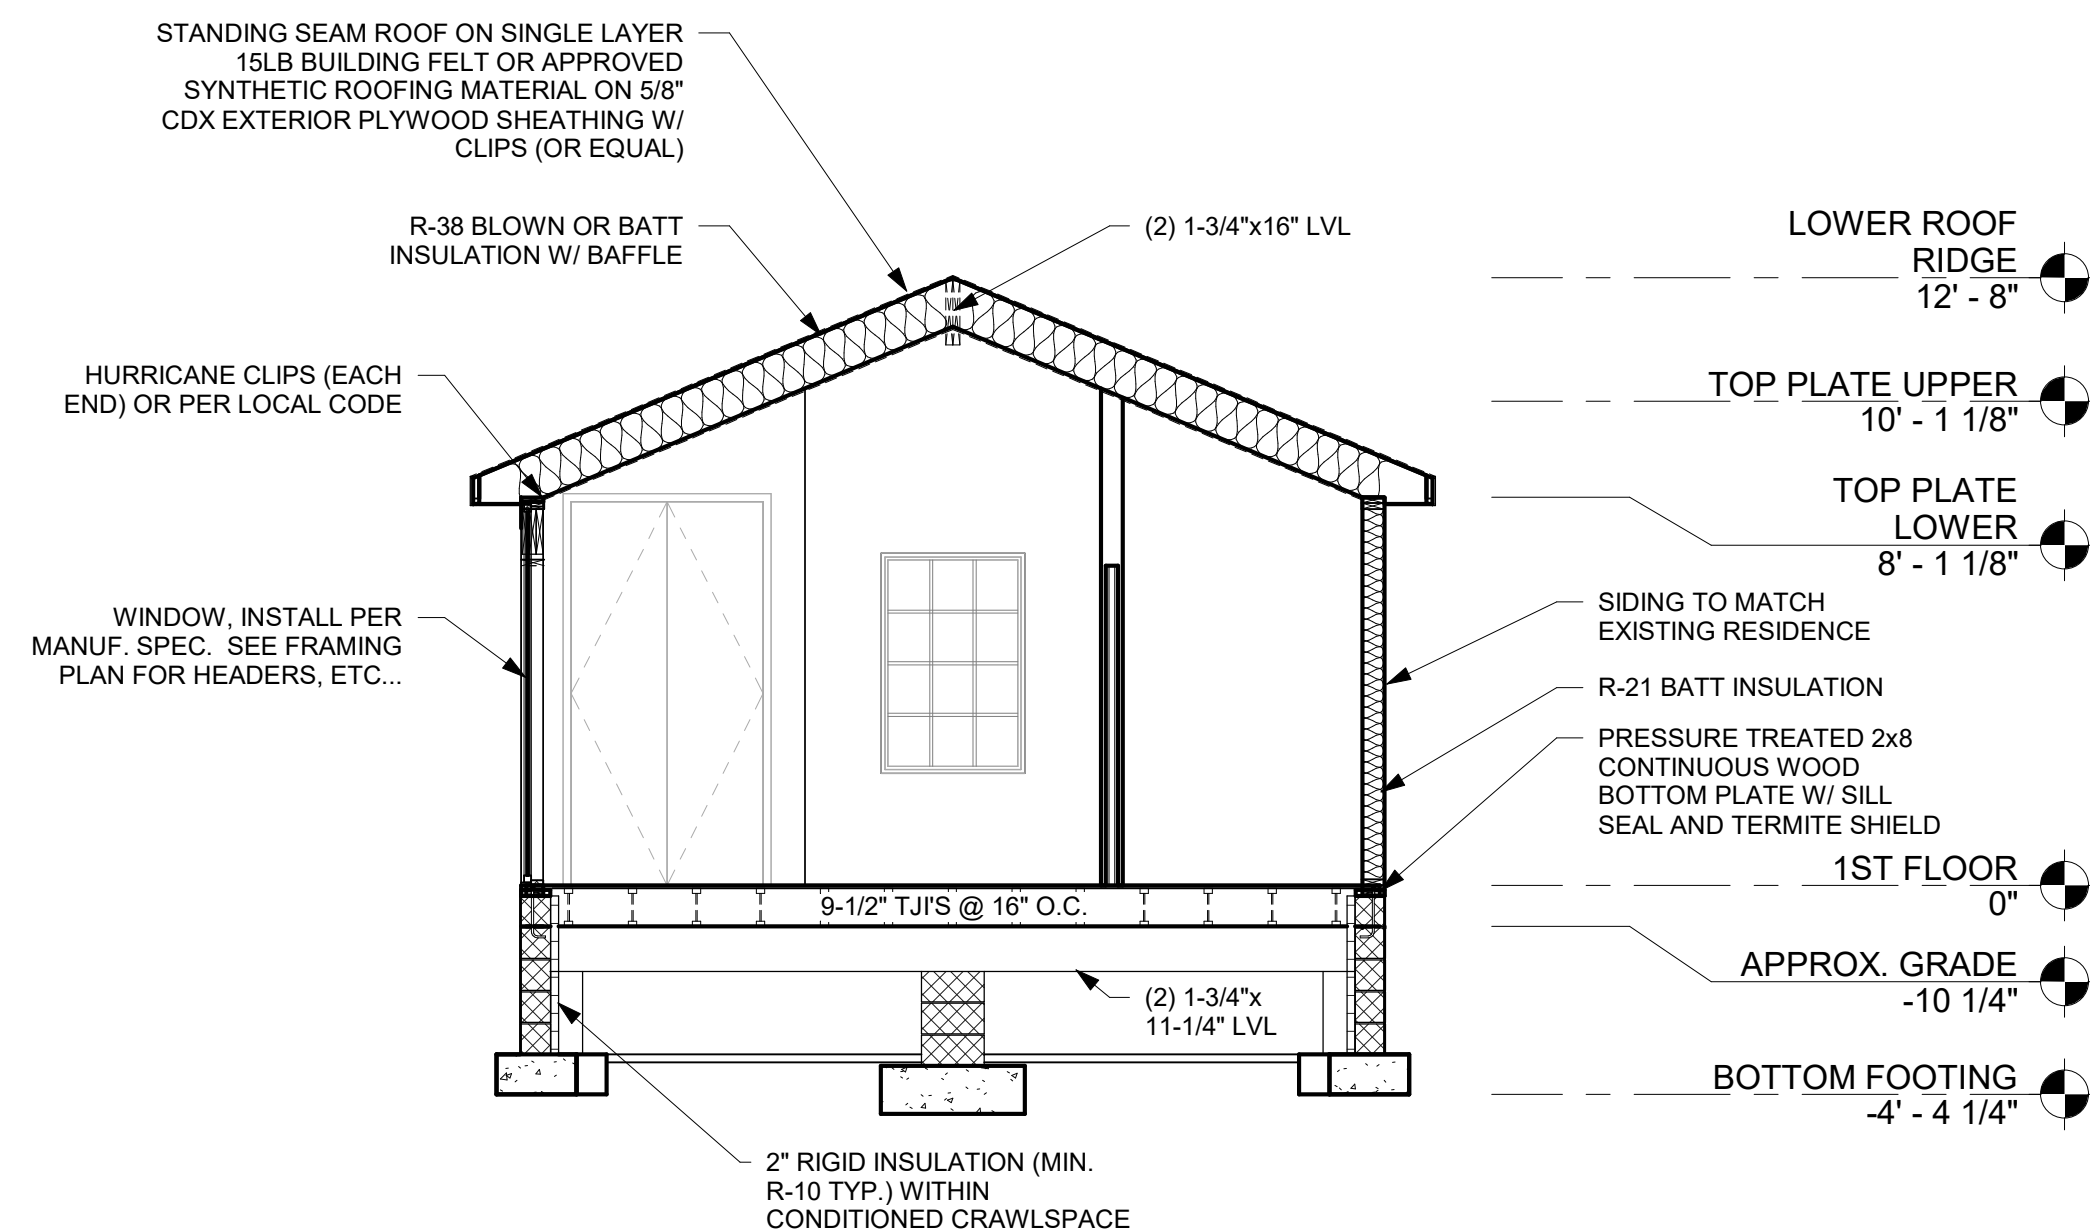


2 TRANVERSE SECTION @ BEDROOM ADDITION
A5 SCALE:1/4" = 1'-0"

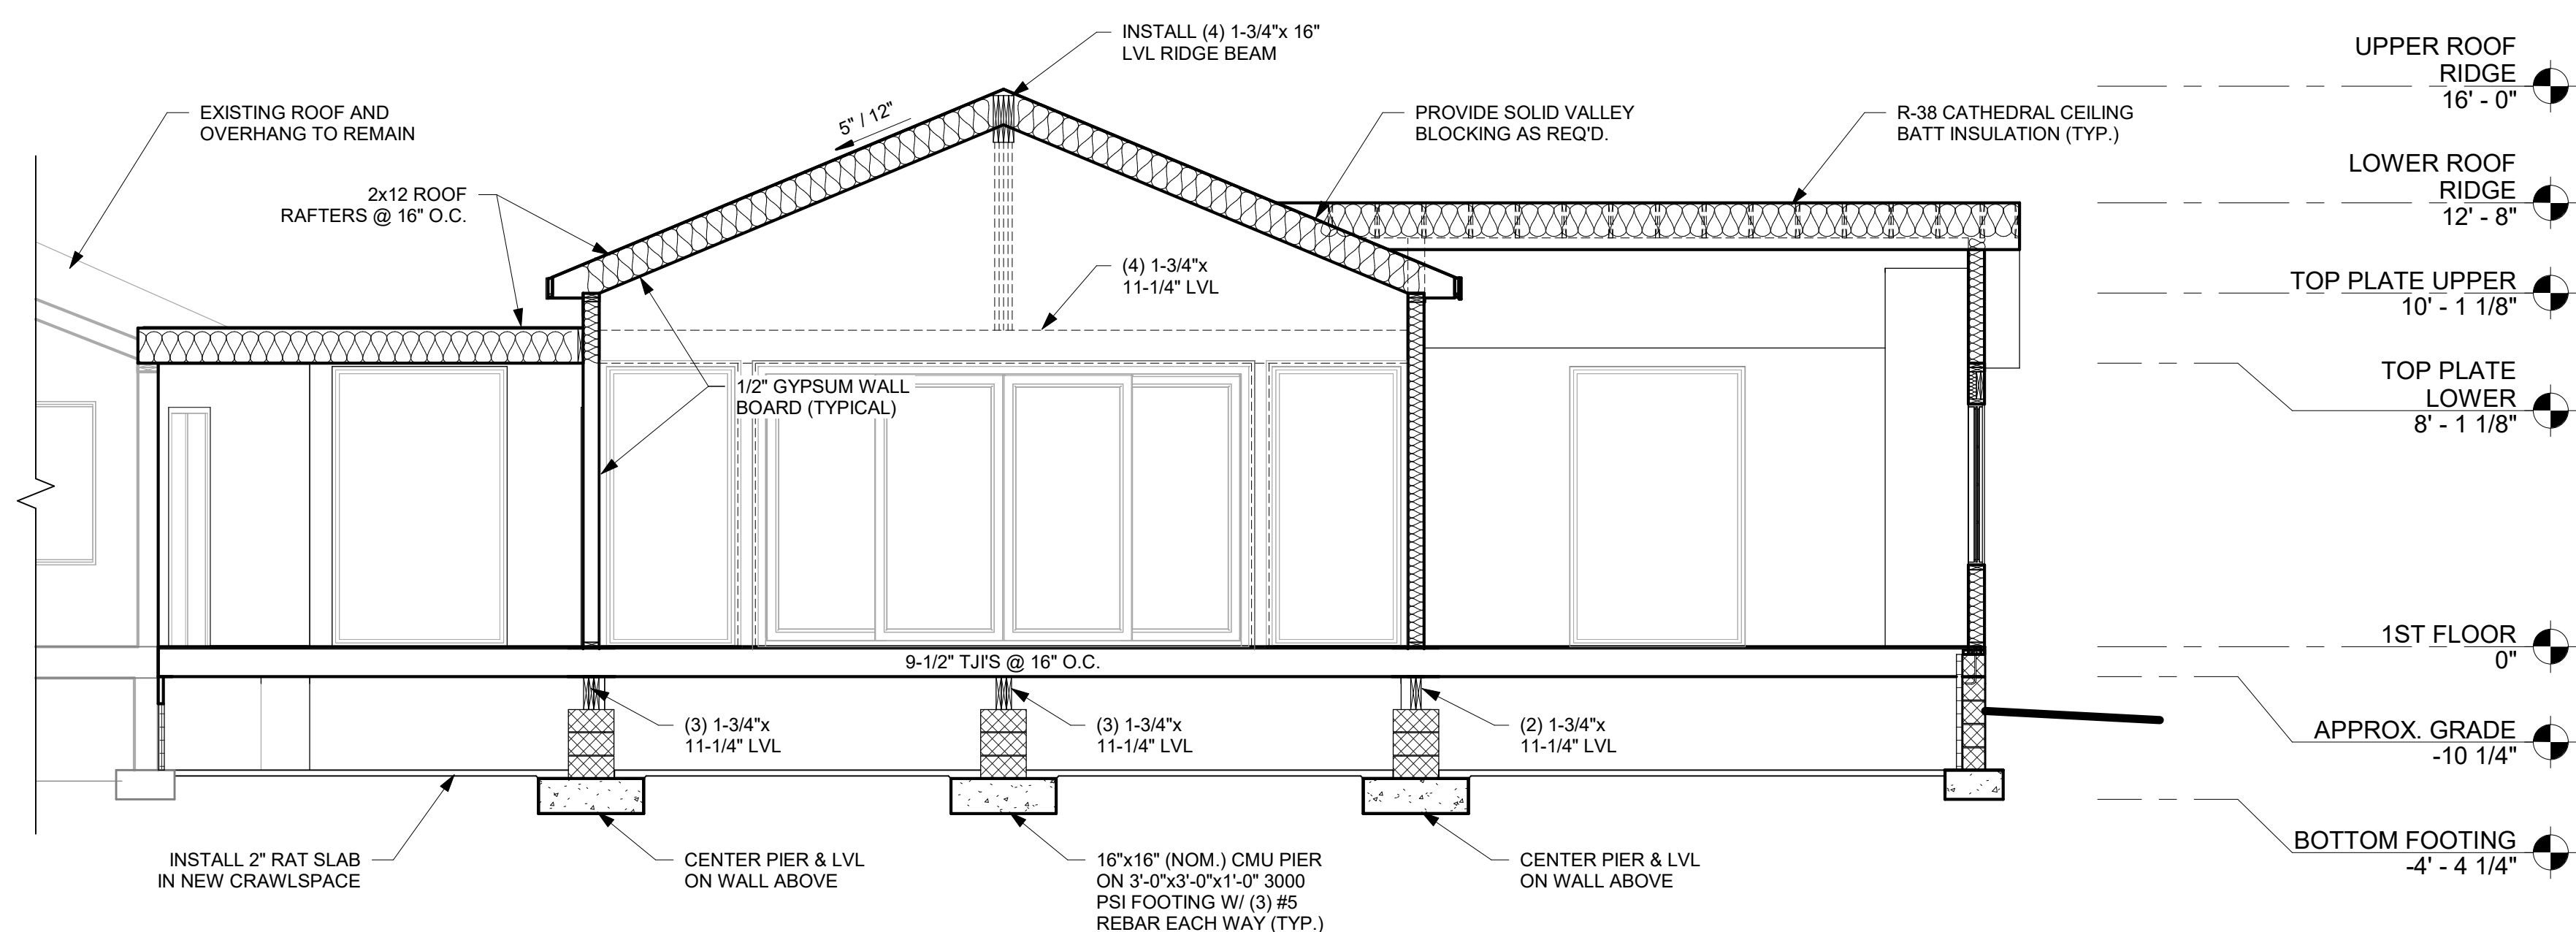


3 LONGITUDINAL SECTION @ ADDITION
A5 SCALE:1/4" = 1'-0"



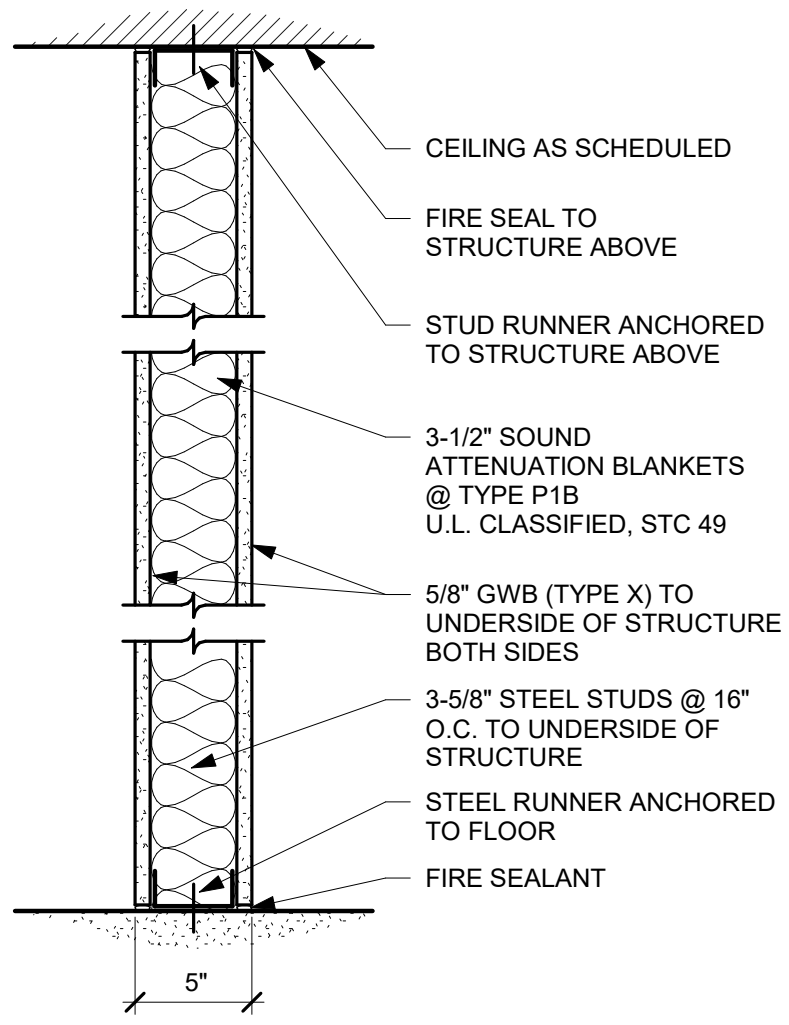


ONE HOUR RATED PARTITION

U.L. NO. U465 SCALE: 1 1/2" = 1'-0"

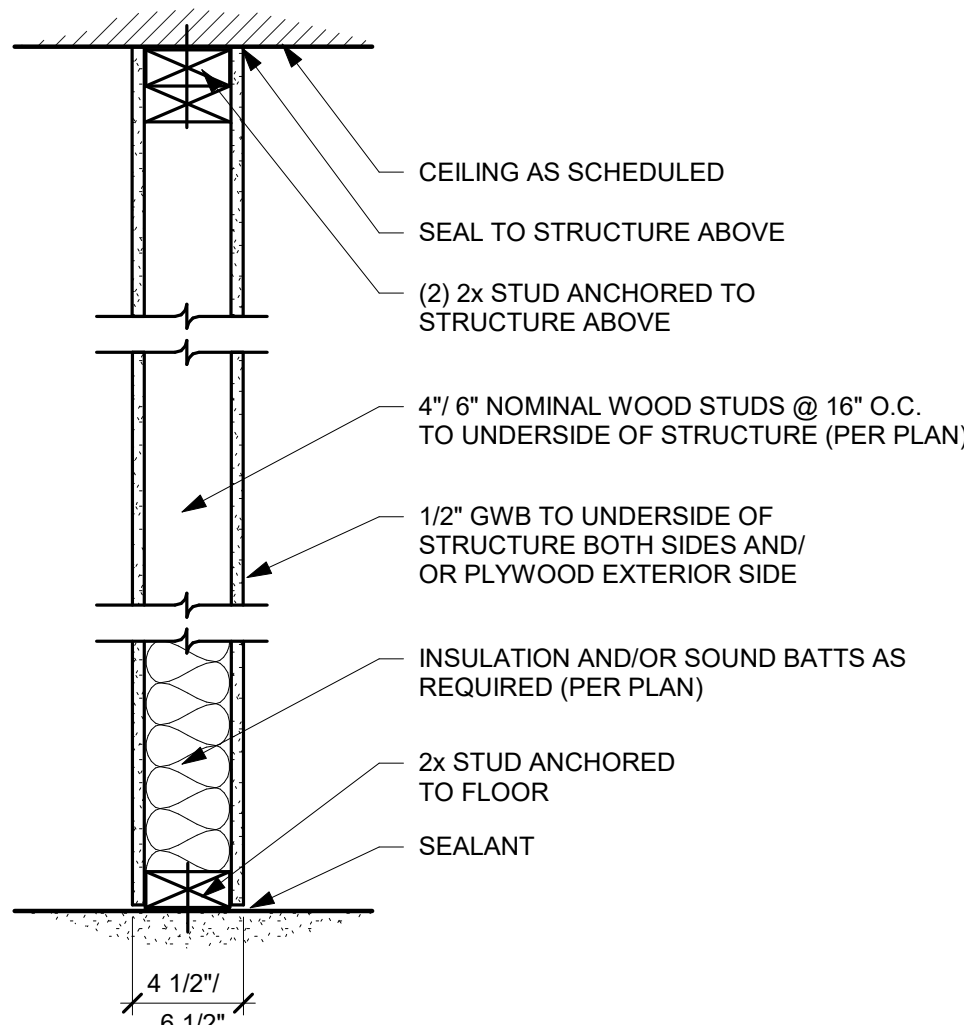


NON-RATED PARTITION

SCALE: 1 1/2" = 1'-0"

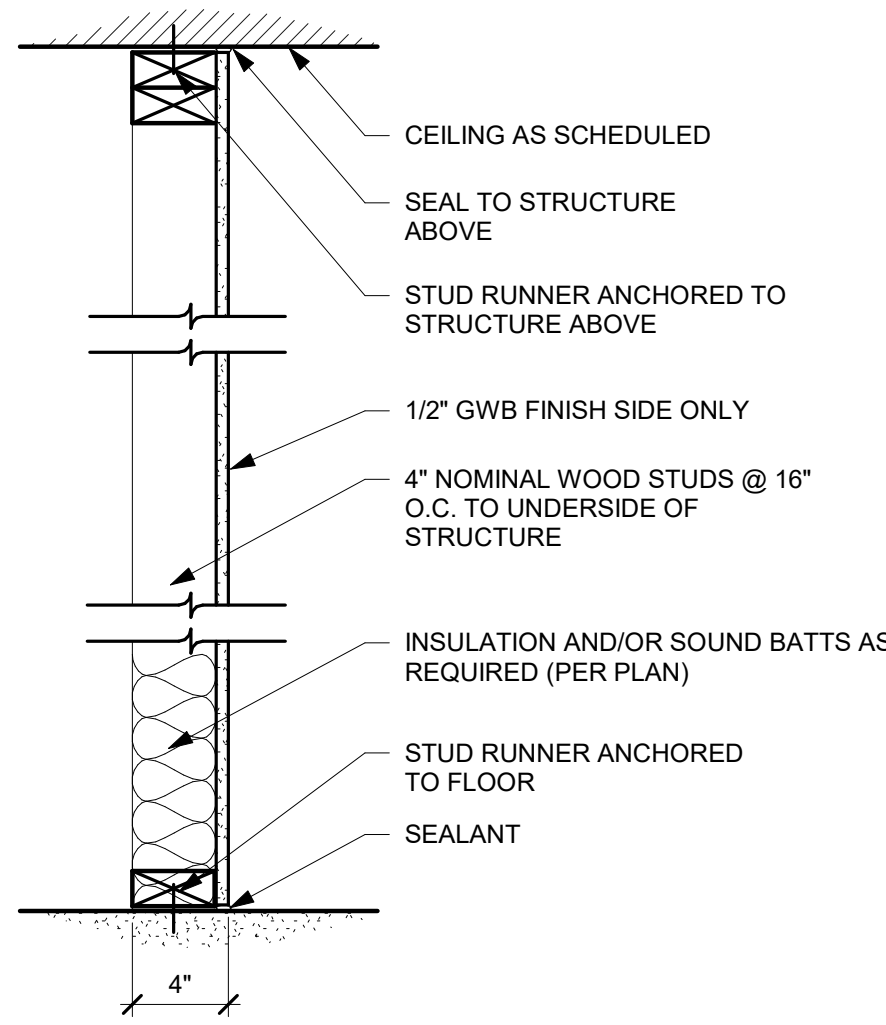

NON-RATED PARTITION


SCALE: 1 1/2" = 1'-0"

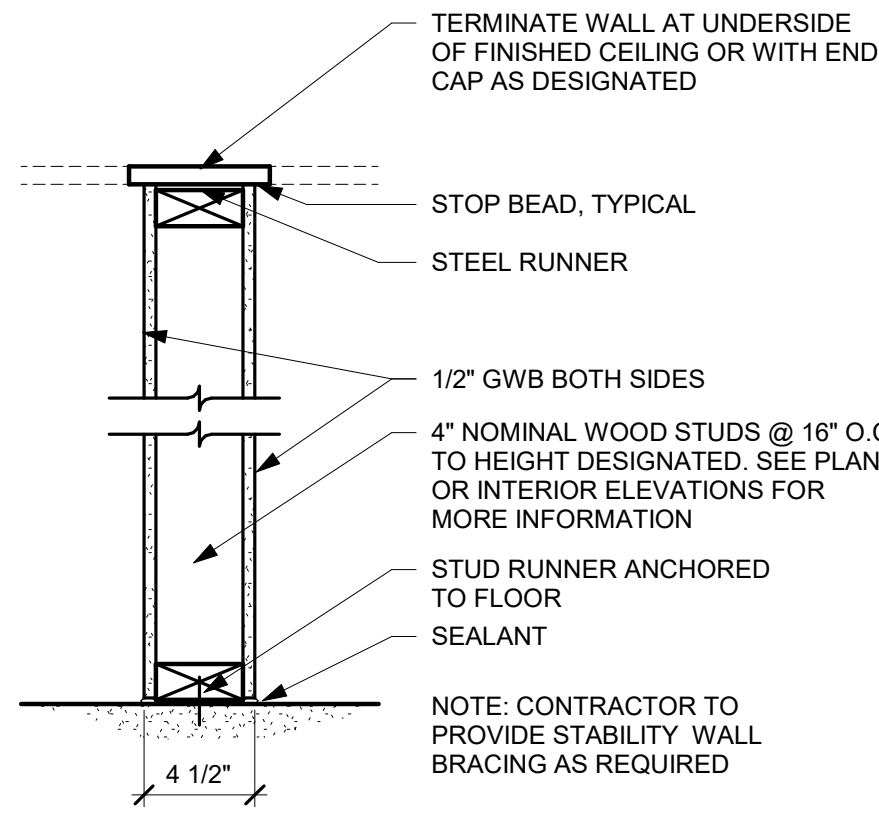

LOW WALL PARTITION


SCALE: 1 1/2" = 1'-0"

1 GENERAL - PARTITION TYPES
A7 SCALE: 1 1/2" = 1'-0"

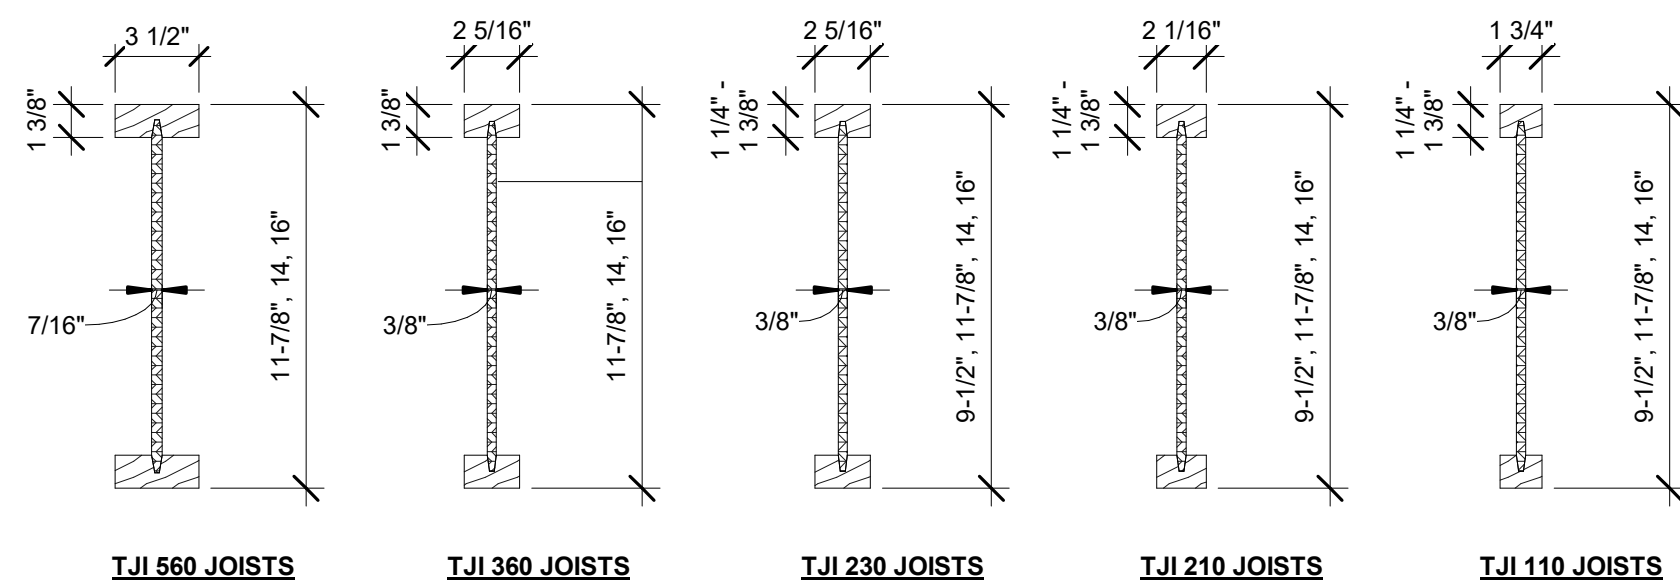


*NOTE: FOR REFERENCE ONLY. MAY VARY PER MANUFACTURER


2 TJI TYPICAL MEMBER PROFILES
A7 SCALE: 1 1/2" = 1'-0"

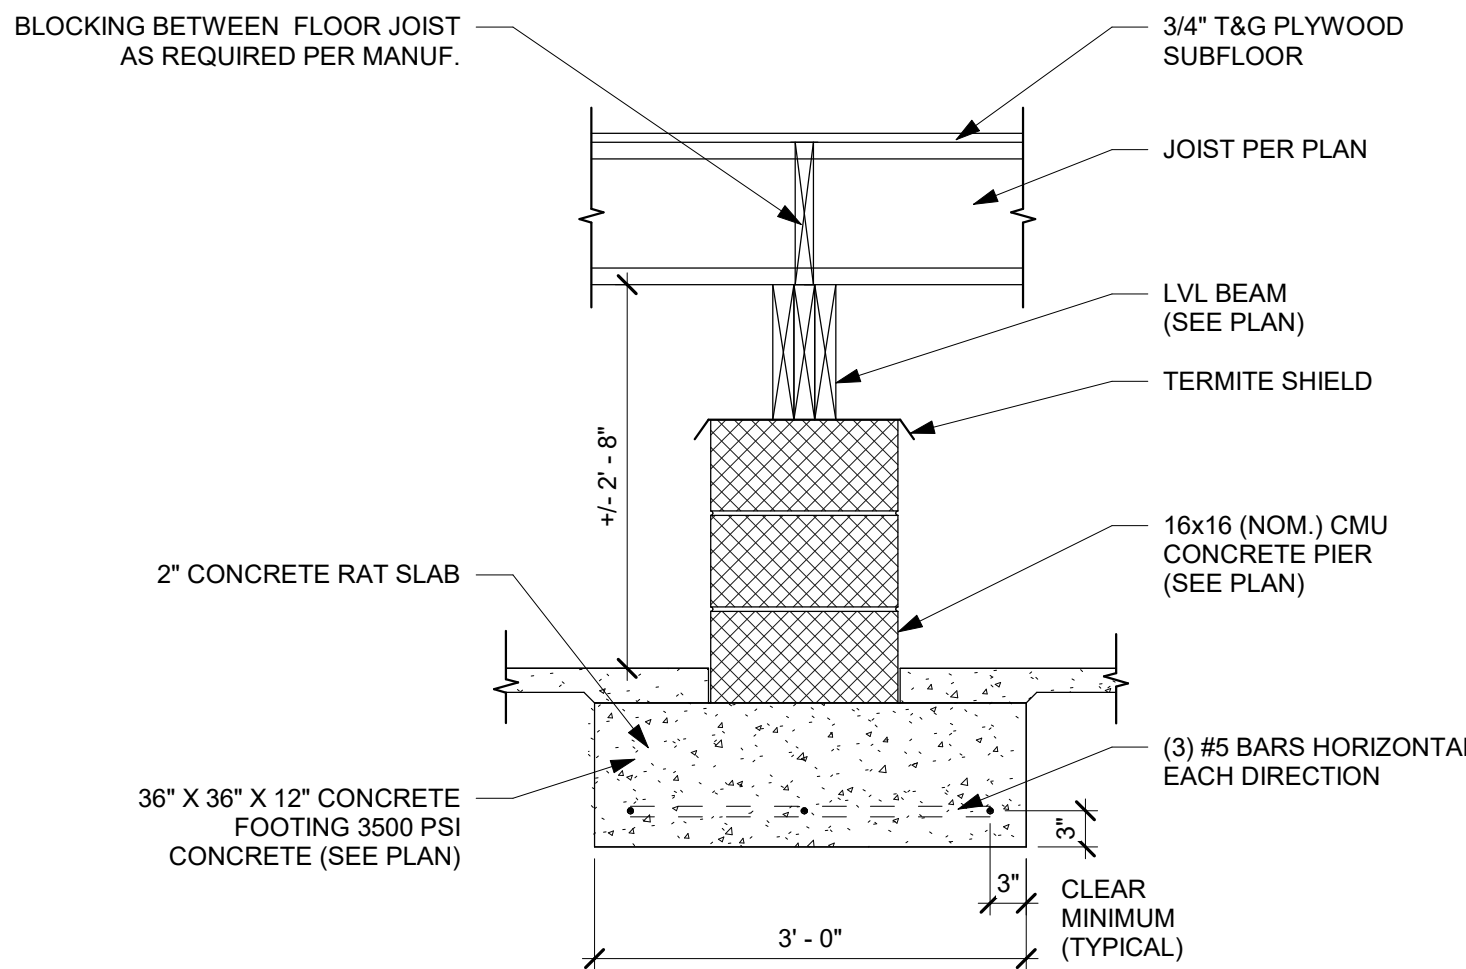

4 TYPICAL CONC. PIER & BEAM FOOTING
A7 SCALE: 3/4" = 1'-0"

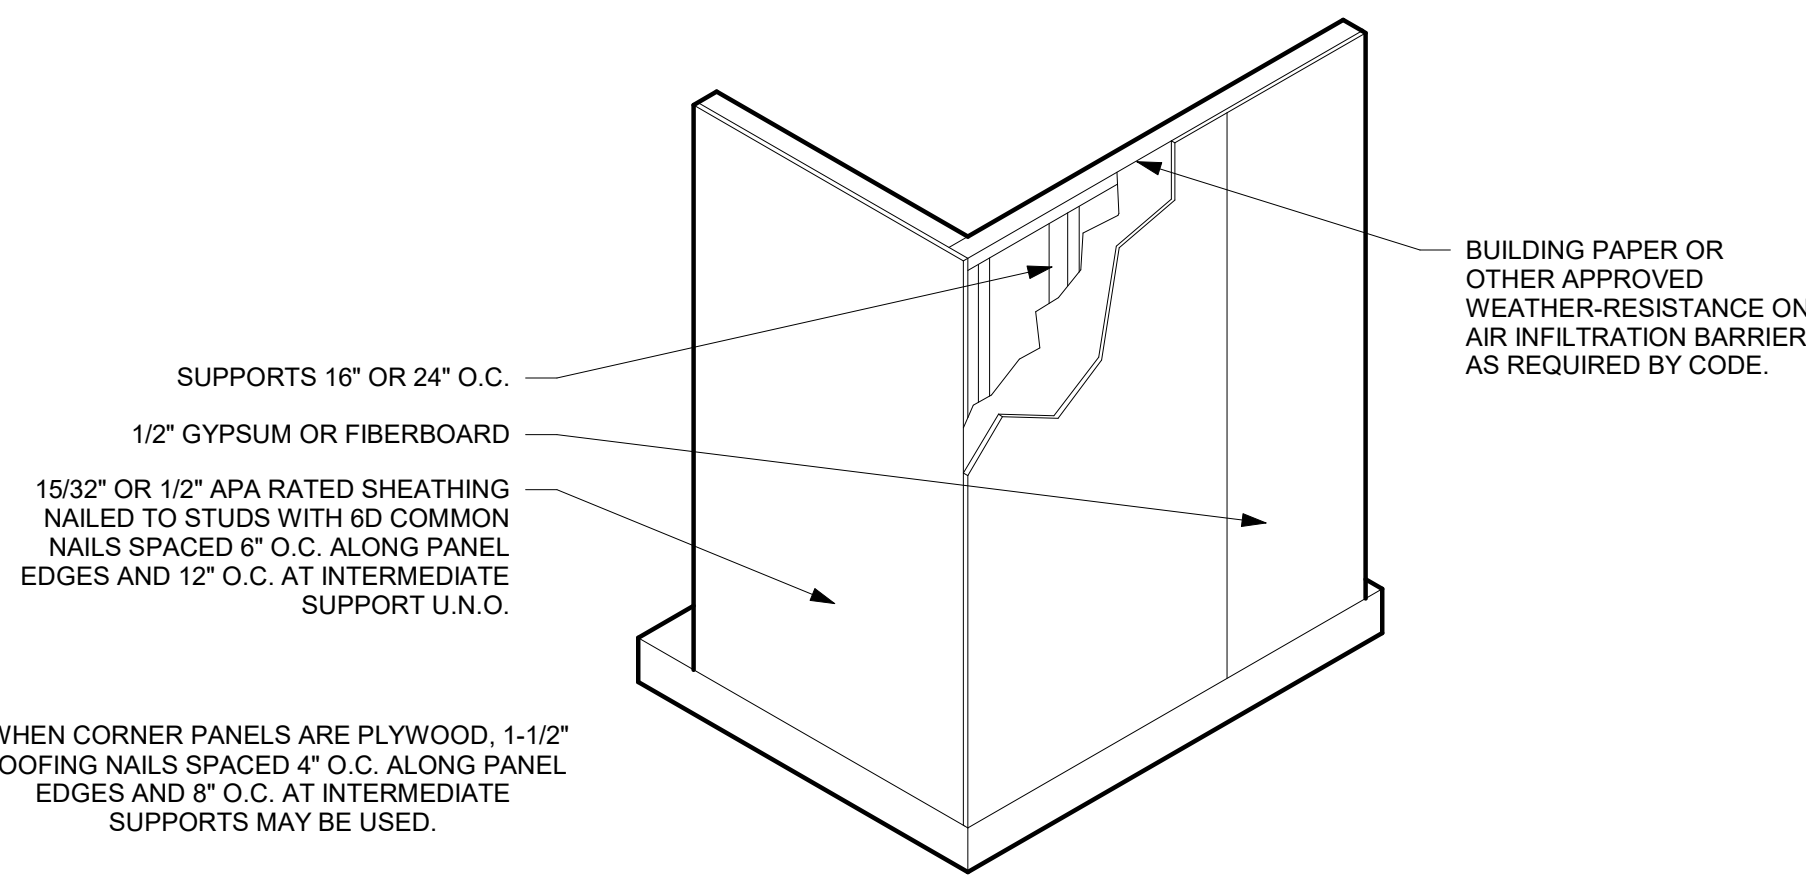


APA PANEL CORNER BRACING

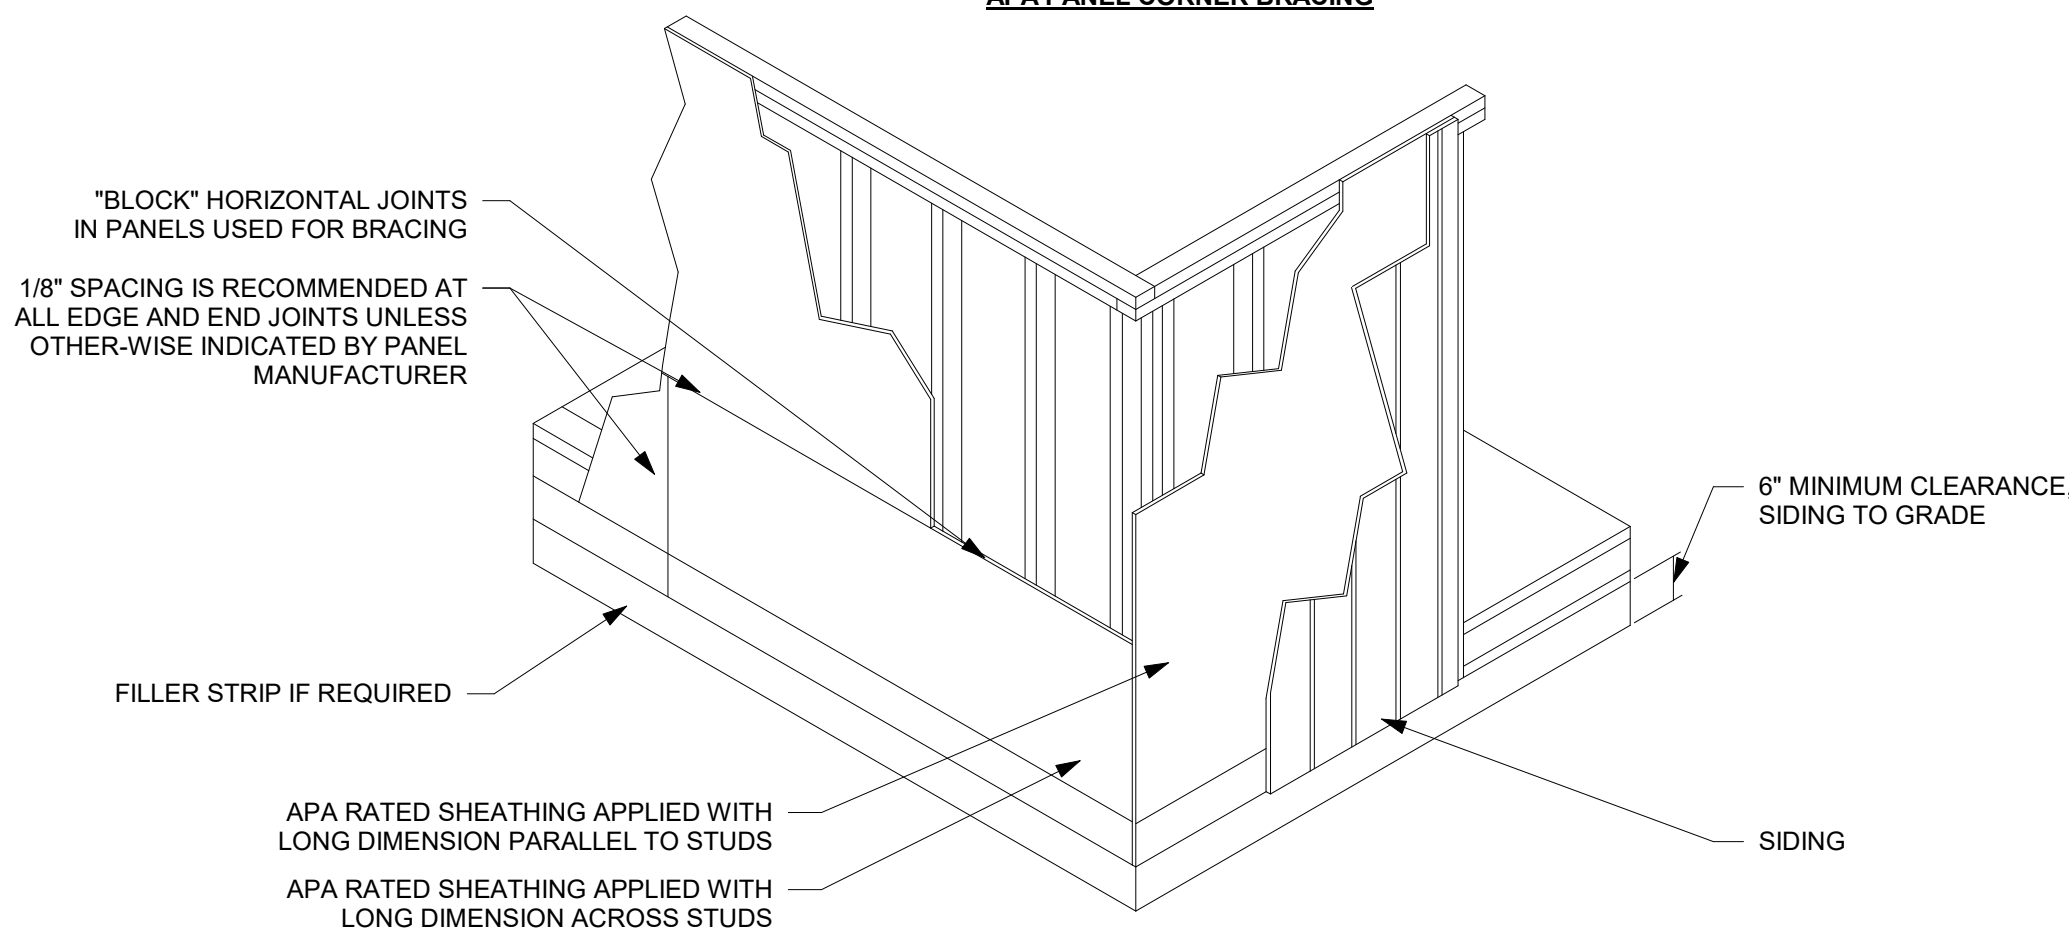

APA PANEL WALL SHEATHING

3 GENERAL - APA PANELING DETAILS
A7 SCALE: 1/2" = 1'-0"

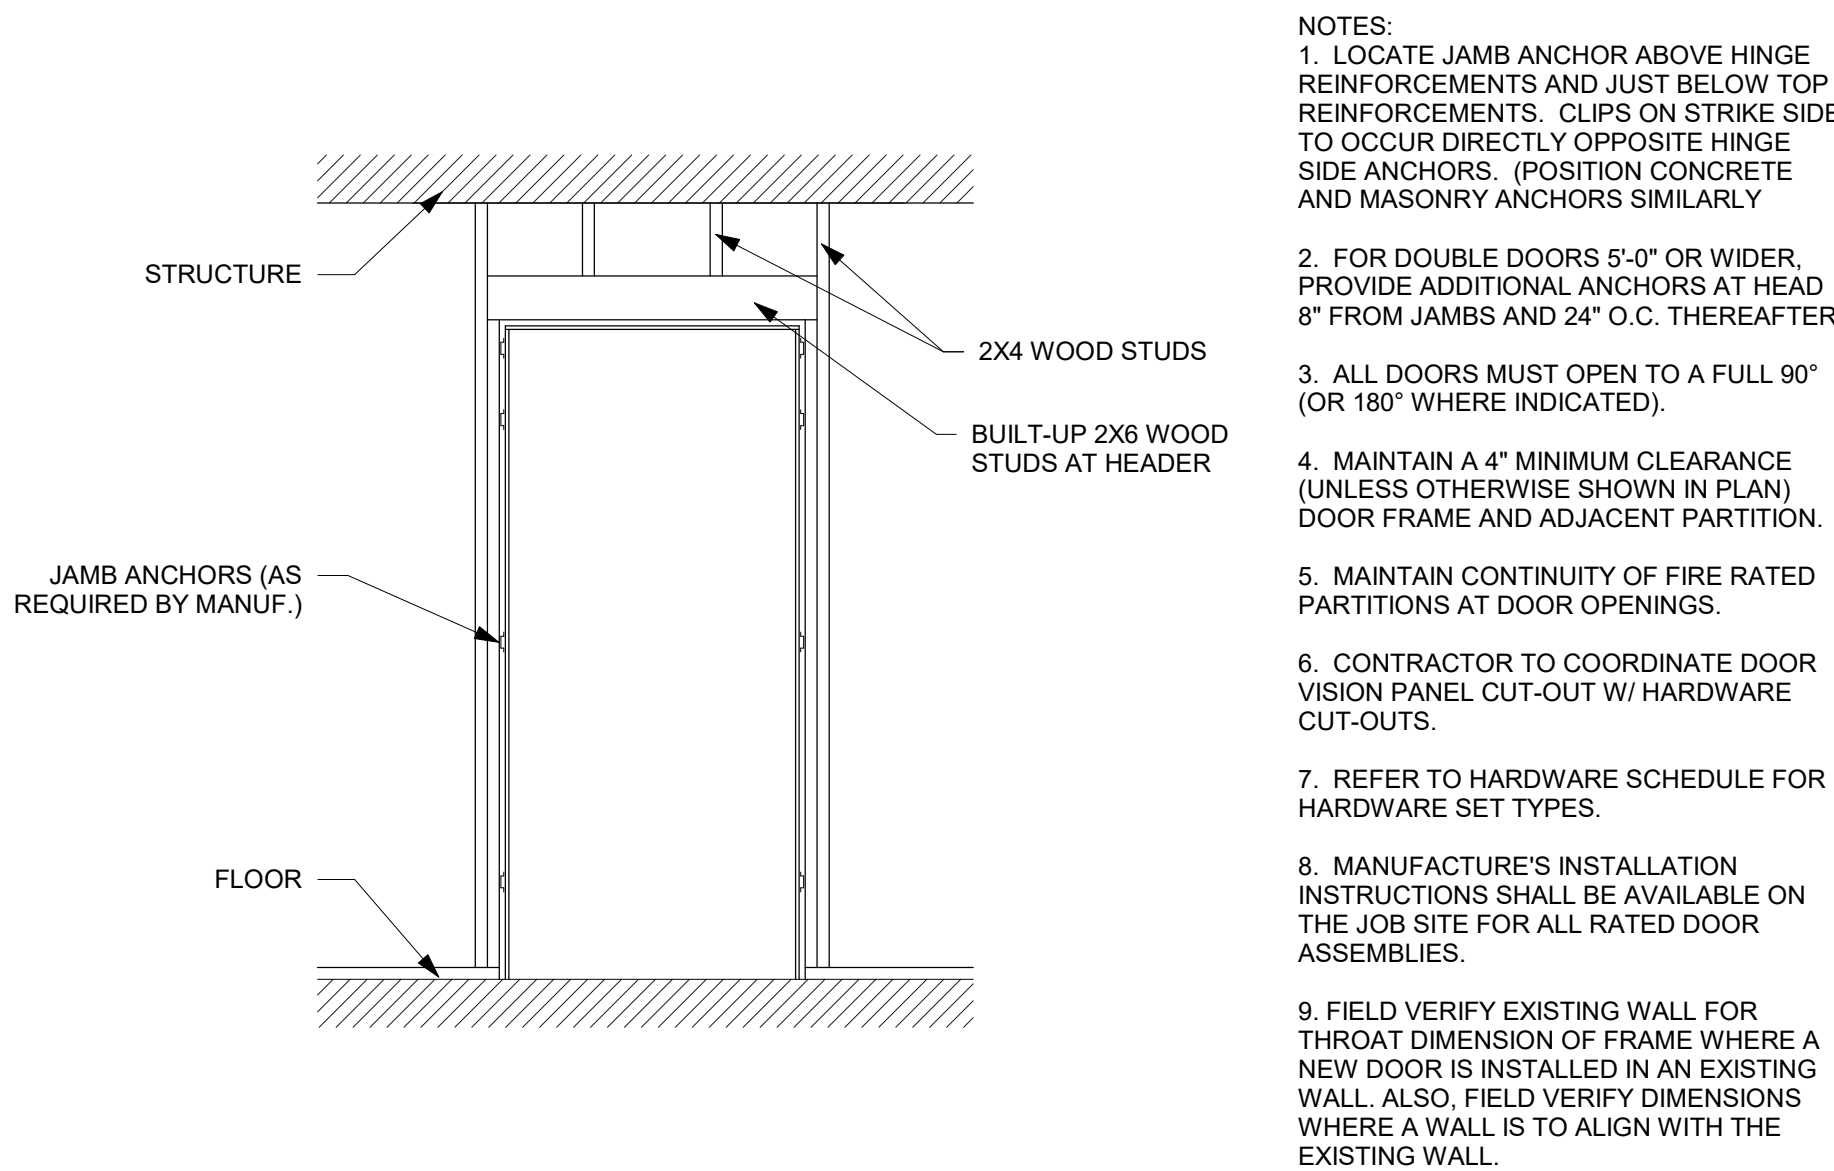

5 GENERAL - DOOR NOTES & FRAME DETAILS
A7 SCALE: 1/2" = 1'-0"

GENERAL CONSTRUCTION NOTES

CODE AND DESIGN LOADING

- DESIGN SHALL CONFORM WITH THE PROVISIONS OF THE INTERNATIONAL RESIDENTIAL CODE AND ITS SUPPLEMENTS.
- LIVE LOADS:
 - FLOOR LIVE LOAD = 40 PSF
 - SLEEPING ROOMS..... = 30 PSF
 - ROOF = 40 PSF
 - GROUND SNOW LOAD..... = 40 PSF
- BASIC WIND SPEED:
 - WIND DESIGN = 115 MPH
 - 3 SECOND GUSTS
 - SEISMIC DESIGN CATEGORY = A
- SOIL:
 - ASSUMED SOIL BEARING CAPACITY = 1500 PSF
 - ASSUMED SOIL LATERAL PRESSURE WITH SURCHARGES AND PER AGI 318-14 = 60 PCF
- FROST/FOOTING DEPTH
 - DEPTH TO BOTTOM OF FOOTER = 30 INCHES

GENERAL

- THE CONTRACTOR IS CAUTIONED NOT TO STORE ANY CONSTRUCTION MATERIALS OR UNDERTAKE ANY CONSTRUCTION OPERATION WHICH WILL EXCEED THE DESIGN LOADS NOTED.
- THE CONTRACTOR IS ADVISED THAT ALL PLANS, DIMENSIONS, AND DETAILS DEPICT FIELD CONDITION AS SHOWN. MINOR VARIATIONS ARE TO BE EXPECTED.
- IT IS THE CONTRACTOR'S RESPONSIBILITY TO SATISFY HIMSELF AS TO THE LOCATION OF ANY UTILITIES IN THE IMMEDIATE VICINITY OF CONSTRUCTION TO PREVENT DAMAGE TO THE UTILITIES.
- CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND ELEVATIONS, INCLUDING EXISTING CONDITIONS, PRIOR TO FABRICATION AND ERECTION OF STRUCTURE.

LINTELS







- ALL STEEL LINTELS IN MASONRY WALLS SHALL BE STEEL ANGLES WITH SIZE AS FOLLOWS FOR EACH 4" OF WALL THICKNESS OR FRACTION THERE-OF (UNLESS NOTED ON DRAWINGS).

SPANS	ANGLE SIZE
UNDER 6'-0"	4" X 3 1/2" X 5/16"
6'-0" TO 7'-11"	6" X 3 1/2" X 5/16"
8'-0" TO 10'-0"	8" X 4" X 9/16"

LINTEL ANGLES SHALL HAVE A MINIMUM END BEARING OF 9" BUT NO LESS THAN 1" OF BEARING FOR EACH FOOT OF OPENING WIDTH. ALL STEEL LINTELS SHALL BE TACK WELDED TOP AND BOTTOM IN SUCH A MANNER AS TO INSURE THAT THE 2 OR 3 ANGLES WILL ACT AS ONE MEMBER. ALL EXTERIOR EXPOSED STEEL LINTELS ARE TO BE PAINTED WITH RUST-O-LEUM PAINT OR AN EQUAL EQUIVALENT.

WOOD FRAMING

- ALL WOOD FRAMING SHALL BE FABRICATED AND ERECTED IN ACCORDANCE WITH THE FOURTH EDITION OF THE AMERICAN INSTITUTE OF TIMBER CONSTRUCTION'S "TIMBER CONSTRUCTION MANUAL" IN CONJUNCTION WITH AITC 105 "RECOMMENDED PRACTICE FOR THE ERECTION OF STRUCTURAL TIMBER FRAMING," AITC 106 "CODE OF STANDARD PRACTICE" AND "THE NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION," LATEST EDITION, AS PUBLISHED BY THE NATIONAL FOREST PRODUCTS ASSOCIATION.
- ALL LUMBER SHALL BE NO. 2 SPRUCE-PINE-FIR (SPF) 19% MAXIMUM MOISTURE CONTENT OR BETTER.
- ALL SOLID SAWN WOOD MEMBER SIZES ARE DESIGNATED USING NOMINAL DIMENSIONS.
- CUTTING AND NOTCHING OF WOOD FRAMING SHALL ONLY BE PERMITTED AS SHOWN ON DRAWINGS. ANY ADDITION CUTTING OR NOTCHING SHALL REQUIRE THE APPROVAL OF THE STRUCTURAL ENGINEER.
- ALL STUD WALLS SHALL HAVE WOOD BLOCK MID-HEIGHT AND/OR AT PLYWOOD JOINTS UNLESS NOTED OTHERWISE.
- ALL PLYWOOD SHALL MEET THE REQUIREMENTS OF THE PLYWOOD DESIGN SPECIFICATIONS AS PUBLISHED BY THE AMERICAN PLYWOOD ASSOCIATION.
- ALL SHEATHING FOR THE EXTERIOR WALLS AND ROOF SHALL BE 1/2" CDX EXTERIOR GRADE PLYWOOD (OR APPROVED SIMILAR).
- ATTACH ALL ROOF SHEATHING PANELS WITH SIMPSON PSCl PANEL SHEATHING CLIPS OR APPROVED EQUIVALENT. MATCH CLIP SIZE TO PANEL THICKNESS. USE MIN. ONE CLIP PER RAFTER/ TRUSS BAY.
- PLYWOOD/OSB SHALL BE SECURELY FASTENED 3/8" FROM THE EDGE, NOT LESS THAN 4 INCHES ON CENTER AT ALL EDGES, AND NOT LESS THAN 12 INCHES ON CENTER FOR ALL INTERMEDIATE SUPPORTS. USE 8d RING OR SCREW SHANK NAILS FOR ALL PLYWOOD/OSB THICKNESS.
- PLYWOOD/OSB SHEATHING SHALL BE CONTINUOUS OVER A MINIMUM OF TWO SPANS.

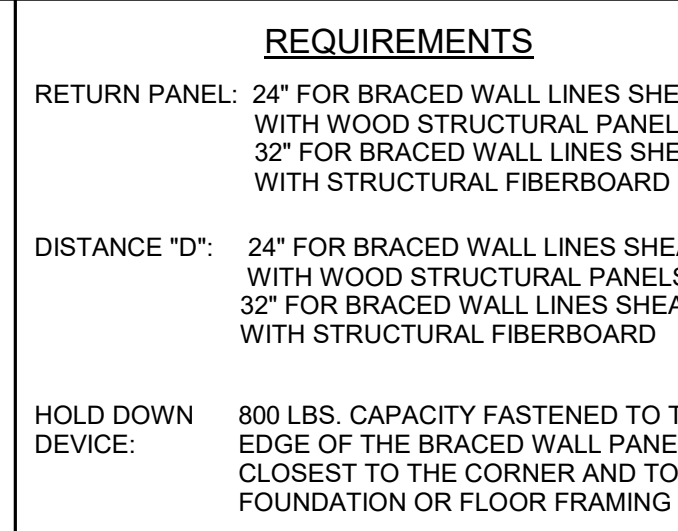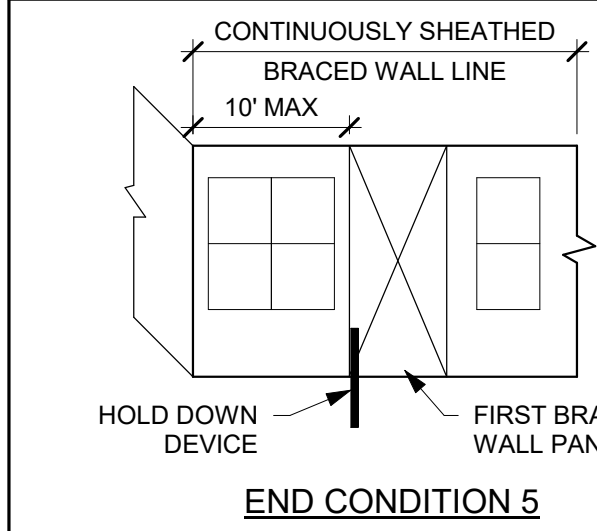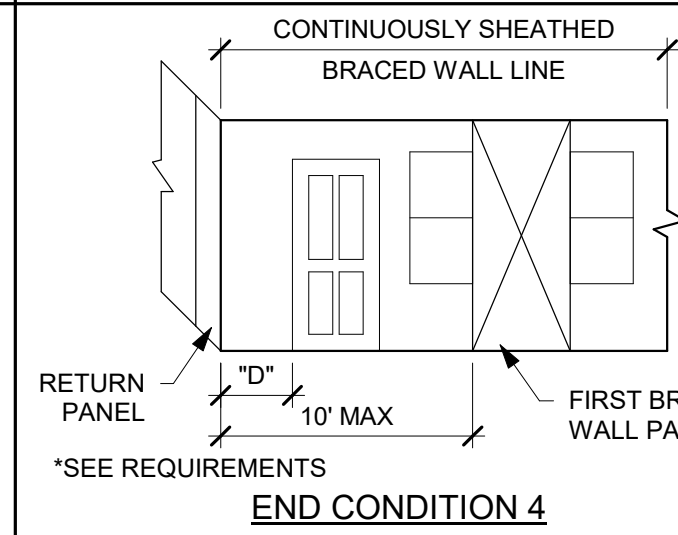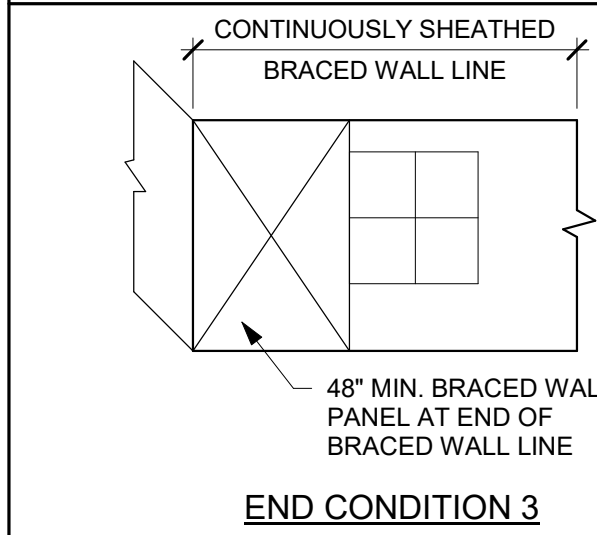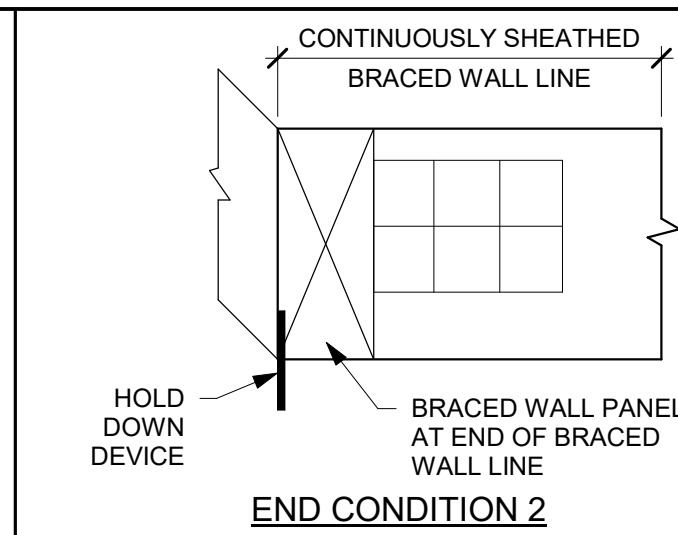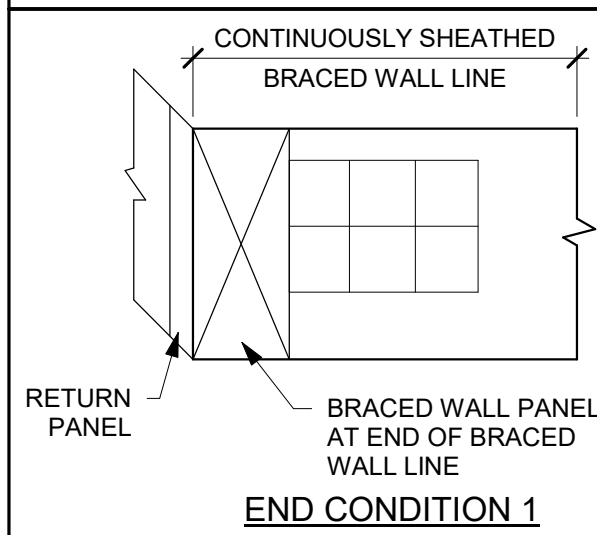

NUTTLE
BUILDERS, INC.



kezlo group

PO Box 1086
Brookhaven, PA 19015
844.495.3956
www.kezlo.com

THE INFORMATION CONTAINED HEREIN MAY NOT
BE USED OR REPRODUCED WITHOUT THE
WRITTEN PERMISSION OF KEZLO GROUP, LLC.

SEAL

CONSULTANTS:

ISSUE DATE NUMBER

CLIENT:

MARY-ANNE SCHOEB
RICHARD SCHOEB

DATE: 02.28.2025

KEZLO GROUP PROJECT NUMBER: 24-083

PROJECT TITLE:


STAGHILL
COTTAGE -
ADDITION

SHEET TITLE:


TYPICAL
CONSTRUCTION
DETAILS

SHEET NUMBER:

A7

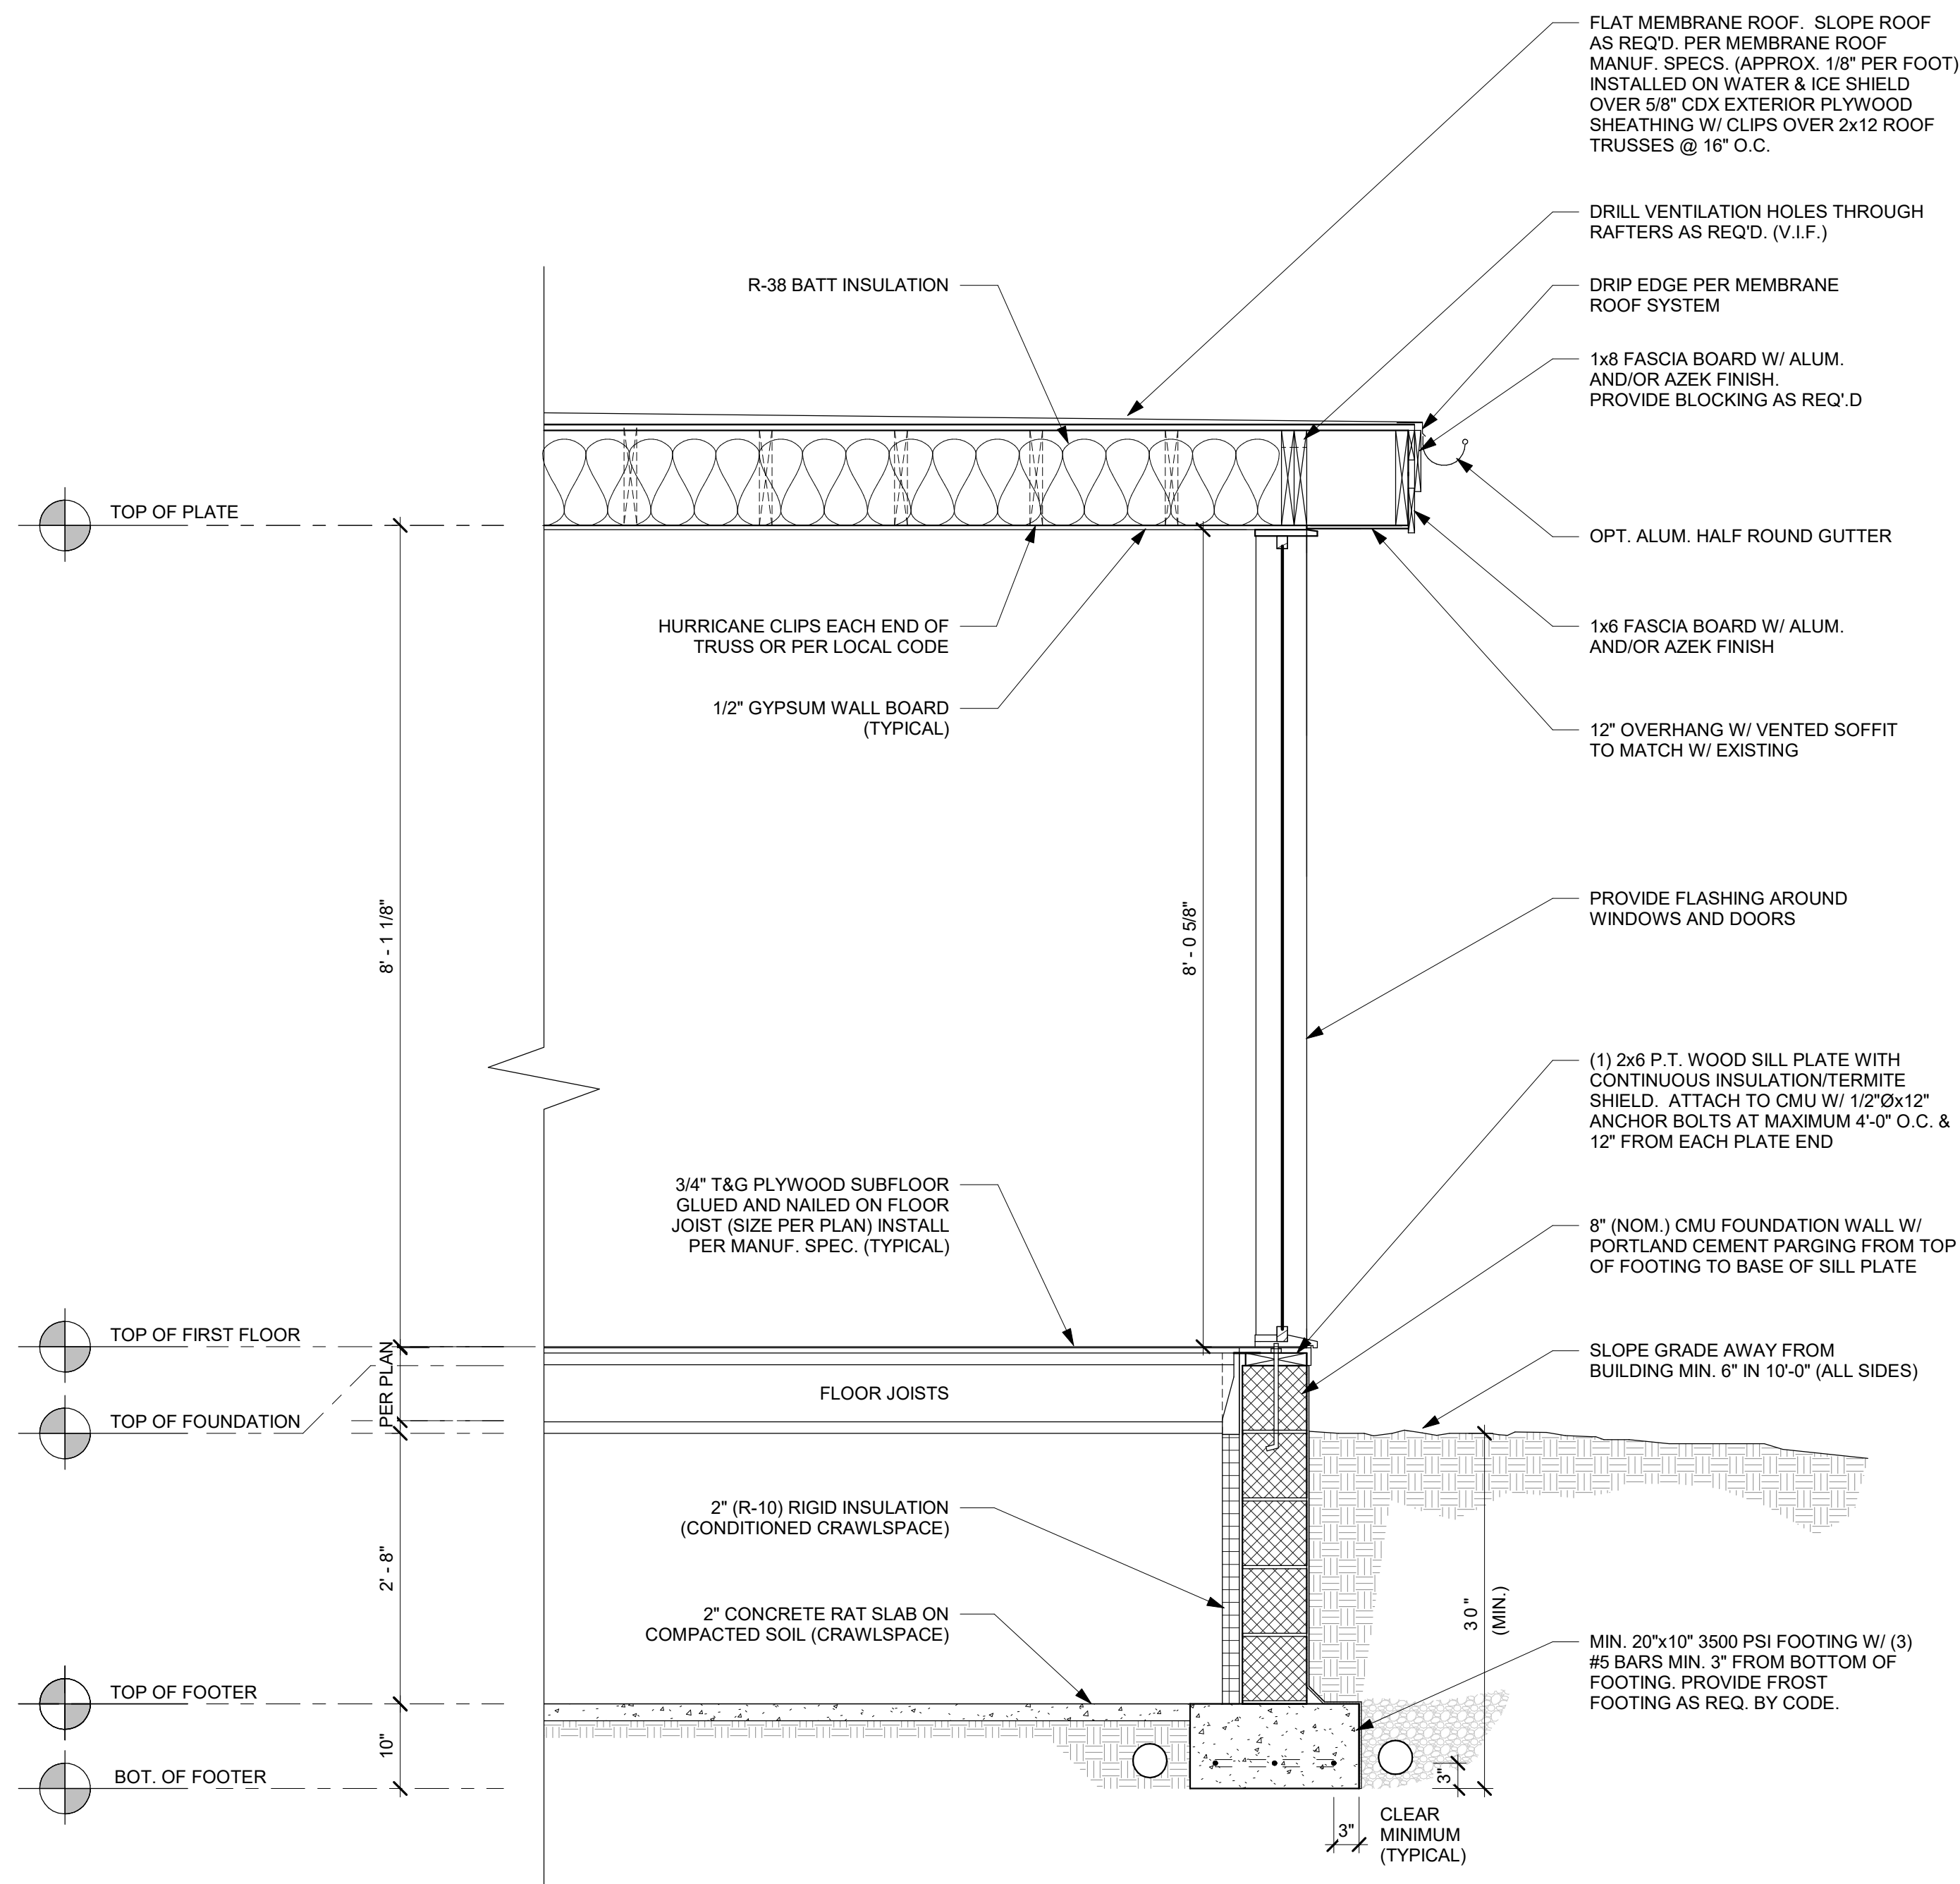

1
A8 TYPICAL WALL SECTION @ FLAT ROOF
SCALE: 3/4" = 1'-0"

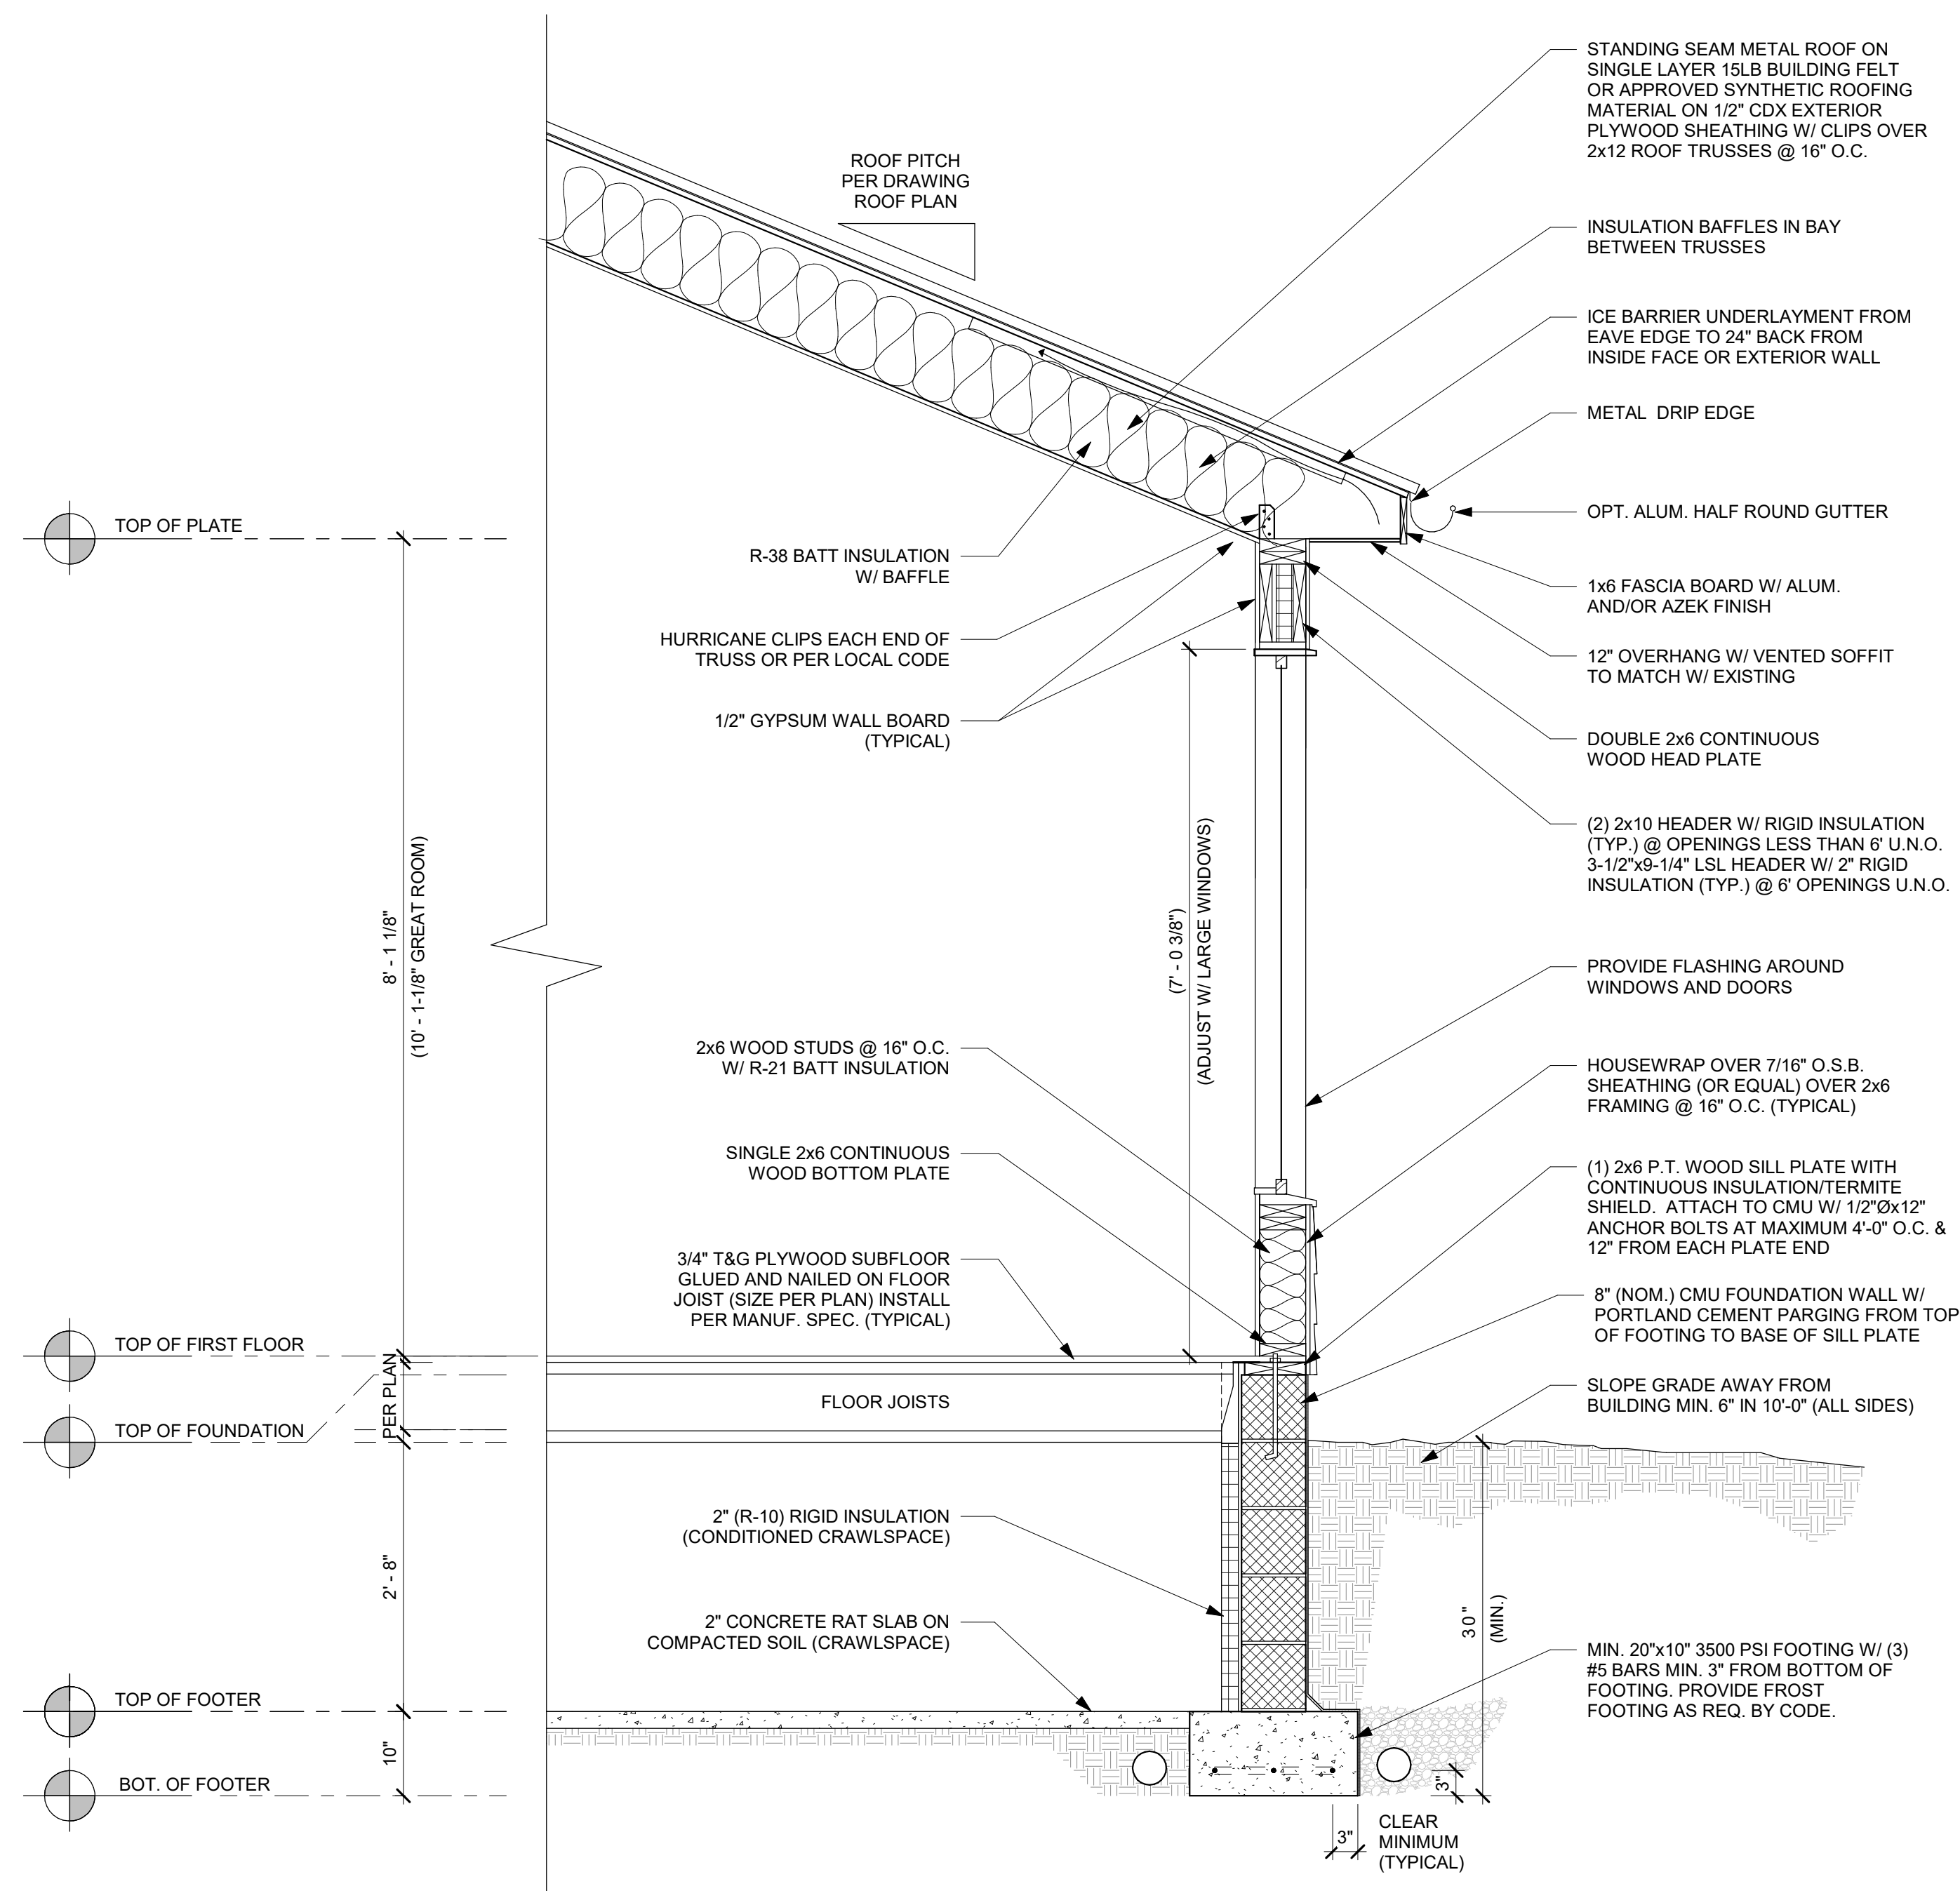

2
A8 TYPICAL WALL SECTION @ PITCHED ROOF
SCALE: 3/4" = 1'-0"