

PROGRESS PRINT: NOT FOR CONSTRUCTION

GAIKWAD RESIDENCE
191 GROVE STREET
BRAINTREE, MA 02184

ANY DEVIATION FROM THESE PLANS
REQUIRING ROCKWOOD DESIGN INC.
TO ACQUIRE STRUCTURAL REDESIGN FOR
BUILDING DEPARTMENT SIGN-OFFS WILL BE
BILLED TO CLIENT ON AN HOURLY BASIS.

SEE SHEET A1 FOR DRAWING INDEX

IF PRINTED ON 11X17, ALL SCALE IS HALF.

PLEASE REFER TO ENGINEERING PACKET
FOR ALL STRUCTURAL DETAILS

CONTRACTOR TO VERIFY ALL DIMENSIONS
AND SETBACKS PRIOR TO CONSTRUCTION

OWNER:

AMAR GAIKWAD
191 GROVE STREET
BRAINTREE, MA 02184
CELL: (508)-250-8152
EMAIL: GAIKWAD.AMAR@GMAIL.COM

DESIGNER:


ROCKWOOD DESIGN, INC.
1020 PLAIN STREET - SUITE 320
MARSHFIELD, MA 02050
PHONE: (781)-837-3140
FAX: (781)-837-3126
EMAIL: PHIL@ROCKWOODDESIGN.COM
WEBSITE: WWW.ROCKWOODDESIGN.COM

STRUCTURAL
ENGINEER:


ZBA SET - 6/17/2021

Rockwood
Design, Inc.

1020 Plain Street - Suite 320
Marshfield, MA 02050
Phone: (781)-837-3140
Fax: (781)-837-3126
Email: phil@rockwooddesign.com
Website: www.rockwooddesign.com

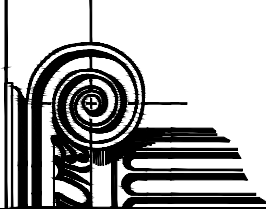

PROGRESS PRINT: NOT FOR CONSTRUCTION

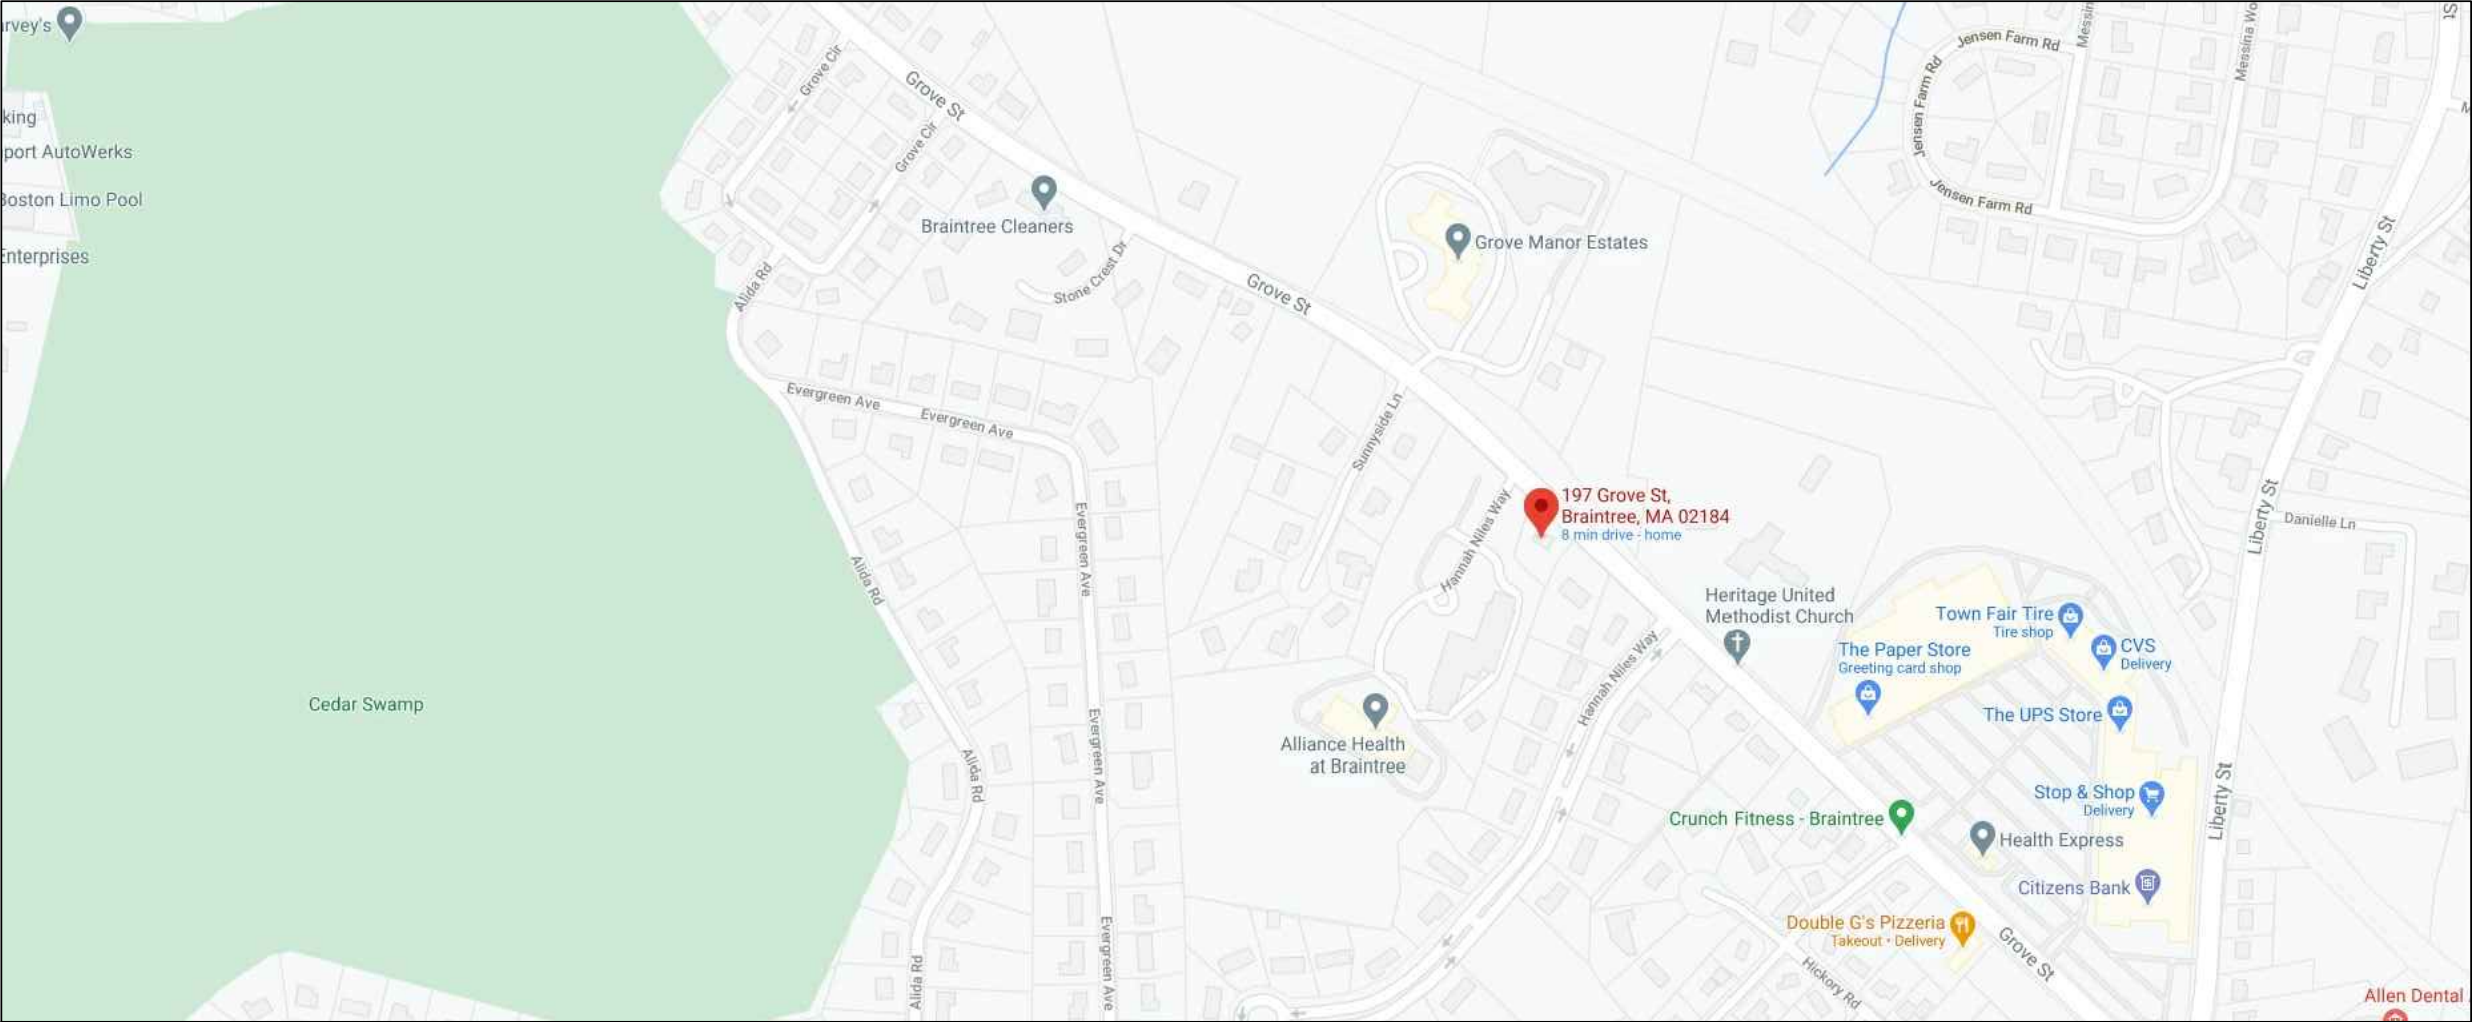

LOCUS MAP

PROGRESS PRINT: NOT FOR CONSTRUCTION

GENERAL NOTES:

1. GENERAL CONTRACTOR TO CONFORM TO ALL LOCAL AND STATE BUILDING CODE REQUIREMENTS.
2. GENERAL CONTRACTOR TO VERIFY ALL CONDITIONS AND DIMENSIONS SHOWN ON THE DRAWINGS AND NOTIFY THE ENGINEER OF ANY DISCREPANCIES.
3. THE ENGINEER IS RESPONSIBLE ONLY FOR INFORMATION SHOWN ON THE CERTIFIED ENGINEER'S DRAWINGS. THE DESIGN AND LAYOUT OF ALL OTHER INFORMATION IS THE RESPONSIBILITY OF OTHERS AND MUST CONFORM TO THE MASSACHUSETTS BUILDING CODE REQUIREMENTS. REFER TO STRUCTURAL ENGINEERING BY OTHERS FOR CERTIFIED BEAM CALCULATIONS AND CERTIFIED WIND DESIGN DETAILS.
4. ALL HEATING, PIPING, INSULATION, ELECTRICAL, FIREPROOFING AND OTHER REQUIREMENTS ARE THE RESPONSIBILITIES OF OTHERS.
5. NOTIFY THE ENGINEER OF ANY ARCHITECTURAL MODIFICATIONS OR DIMENSION CHANGES THAT MAY AFFECT THE STRUCTURAL DESIGN.

STRUCTURAL STEEL NOTES:

3. ALL STEEL BEAMS SHALL BE NEW STEEL CONFORMING TO THE A.I.S.C. SPECIFICATIONS FOR DESIGN, FABRICATION AND ERECTION OF STRUCTURAL STEEL FOR BUILDINGS AND A.S.T.M. - GRADE 50. ALL CAP AND BASE PLATES AND OTHER MISCELLANEOUS STEEL MAY BE A.S.T.M. GRADE A36.
2. ALL SCHEDULE 40 PIPE SHALL BE NEW STEEL CONFORMING TO THE A.I.S.C. SPECIFICATIONS FOR DESIGN, FABRICATION AND ERECTION OF STRUCTURAL STEEL FOR BUILDINGS AND A.S.T.M. SPECIFICATION A53, TYPE "E" OR "B", GRADE "B", WITH A MINIMUM YIELD STRESS OF 35 K.S.I.
3. ALL SHOP AND FIELD WELDS SHOWN SHALL BE MADE BY APPROVED CERTIFIED WELDERS AND SHALL CONFORM TO THE A.W.S. CODE FOR BUILDINGS. ALL WELDS SHALL DEVELOP THE FULL STRENGTH OF THE MATERIAL BEING WELDED. USE EXX 10 ELECTRODES.
4. NO PERMANENT CONNECTIONS SHOULD BE MADE UP UNTIL THE STRUCTURE HAS BEEN PROPERLY ALIGNED. PROVIDE TEMPORARY BRACING AS REQUIRED.
5. STEEL FABRICATOR IS RESPONSIBLE FOR FINAL LENGTHS, CONNECTION DETAILS AND DESIGN IN ACCORDANCE WITH THE MINIMUM REQUIREMENTS OF THE LATEST EDITION OF THE A.I.S.C. DETAILING MANUAL. SUBMIT SHOP DRAWINGS WITH ALL DETAILS TO THE GENERAL CONTRACTOR PRIOR TO FABRICATION.
6. USE 1/2" MINIMUM CAP PLATE AND BASE PLATES (6x6 MINIMUM) FULLY WELDED ALL AROUND AT COLUMNS WITH 3/16" FILLET WELD, OR AS OTHERWISE SPECIFIED ON THE DRAWINGS. ALL STEEL COLUMN EXTERIOR BASE PLATE SHALL BE BOLTED TO THE CONCRETE FOUNDATIONS WITH 4-5/8" DIAMETER ANCHOR BOLTS.
7. ALL STEEL SHALL HAVE TWO COATS OF RUST-INHIBITOR PRIMER PAINT. TOUCH UP ALL WELDS, SCRATCHES OR SCRAPES IN PAINT AFTER ERECTION.
8. STEEL BEAM MAY BE SPICED AT STEEL COLUMN CAP PLATE WITH A MAXIMUM GAP BETWEEN BEAMS OF 1/4". USE 1/4" TIE PLATE WELDED TO WEBS.
9. FRAME JOISTS TO TOP OF BEAM ON A 2x8 TOP NAILER THRU-BOLTED WITH 1/2" DIAMETER BOLTS STAGGERED AT 24" O.C. JOISTS TO BE ANCHORED TO THE TOP NAILER WITH SIMPSON H4 HURRICANE CLIPS. FLUSH FRAME JOISTS TO THE FULL DEPTH WEB BLOCKING FASTENED TO THE BEAM WITH 1/2" DIAMETER THRU-BOLTS AT 24" O.C. STAGGERED TOP AND BOTTOM.

(WINDOWS SHOWN FOR ESTIMATING AND PERMITTING ONLY
FINAL ORDER TO BE VERIFIED AND APPROVED BY OWNER)

WINDOW SCHEDULE

[illegible]

EXTERIOR DOOR SCHEDULE

[illegible]

FRAMING NOTES:

1. ALL FRAMING LUMBER SHALL BE HEM-FIR GRADE NO. 2 OR S.P.F. (SPRUCE-PINE-FIR) GRADE NO. 2 OR APPROVED EQUIVALENT (UNLESS OTHERWISE SPECIFIED) AND SHALL MEET THE REQUIREMENTS OF THE AMERICAN FOREST AND PAPER ASSOCIATION. THE MINIMUM ALLOWABLE BENDING STRESS (FB) SHALL BE 1050 P.S.I. THE MINIMUM ALLOWABLE COMPRESSION STRESS (FC) SHALL BE 450 P.S.I. THE MINIMUM ALLOWABLE MODULUS OF ELASTICITY (E) SHALL BE 1,400,000 P.S.I. OTHER FRAMING MATERIAL FOR INTERIOR NON-LOAD BEARING STUDS MAY BE SUBSTITUTED ONLY UPON APPROVAL OF THE ENGINEER.
2. ALL PRESSURE TREATED (CCA TREATED) DIMENSIONAL FRAMING LUMBER SHALL BE SOUTHERN YELLOW PINE GRADE NO. 2. THE MINIMUM ALLOWABLE BENDING STRESS (FB) SHALL BE 1,050 P.S.I. THE MINIMUM ALLOWABLE COMPRESSION STRESS (FC) SHALL BE 565 P.S.I. THE MINIMUM ALLOWABLE MODULUS OF ELASTICITY (E) SHALL BE 1,600,000 P.S.I.
3. ALL LVLS TO BE MANUFACTURED BY TRUS JOIST, GEORGIA PACIFIC OR APPROVED EQUAL. THE MINIMUM ALLOWABLE BENDING STRESS (FB) SHALL BE 2,300 P.S.I. THE MINIMUM ALLOWABLE COMPRESSION STRESS (FC) PERPENDICULAR TO THE GRAIN SHALL BE 750 P.S.I. THE MINIMUM ALLOWABLE MODULUS OF ELASTICITY (E) SHALL BE 2,000,000 P.S.I. ALL PARALAMS EXPOSED TO THE WEATHER SHALL BE PRESSURE TREATED (CCA TREATED). INSTALL MICROLAMS AND PARALAMS IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS.
4. USE 3/4" TONGUE AND GROOVE STRUCTURAL GRADE FIT PLYWOOD FLOOR SHEATHING, 5/8" EXTERIOR STRUCTURAL GRADE FIR (C.D.X.) PLYWOOD ROOF SHEATHING AND 1/2" EXTERIOR STRUCTURAL GRADE FIR (C.D.X.) AT WALLS. ALL JOINTS SHALL BE BLOCKED WITH LUMBER OR OTHER APPROVED SUPPORTS.
5. ALL EXTERIOR AND INTERIOR STUD WALLS TO BE 2X4 MINIMUM @ 16" O.C. UNLESS NOTED OTHERWISE.
6. PROVIDE ADEQUATE WALL RESISTANCE TO RAKING BY DIAGONAL CORNER WIND BRACING ANCHORED TO BILL PLATES.
7. PROVIDE SOLID BLOCKING BETWEEN FLOOR JOISTS AND/OR DOUBLE ALL JOISTS UNDER EACH PARTITION.
8. USE FULLY NAILED METAL CONNECTORS (TECO, SIMPSON OR EQUAL), JOIST OR BEAM HANGERS WHEN JOISTS OR BEAMS FRAME INTO OTHER JOISTS OR BEAMS. PROVIDE METAL FOOT CAPS AND BASES FOR ALL JOISTS.
9. FOR NONBEARING ROUGH WINDOW OPENINGS AND INTERIOR DOOR OPENINGS UP TO 3 FEET, USE 2-2X6 HEADER BEAMS. FROM 3 FEET TO 5 FEET, USE 2-2X8 HEADER BEAMS AND FROM 5 FEET TO 7 FEET, USE 2-2X10 HEADER BEAMS AND USE LVLS FOR SPANS EXCEEDING 7 FEET, EXCEPT AS NOTED OTHERWISE ON THE PLANS OR SPECIFICATIONS. USE TRIFLES FOR 2X6 WALLS. IF LVLS ARE SPECIFIED ON THE PLANS, PROVIDE DOUBLE JACK STUD SUPPORTS OR AS OTHERWISE SPECIFIED ON THE PLAN.
10. ALL FRAMING TO BE INSTALLED IN ACCORDANCE WITH THE MASSACHUSETTS BUILDING CODE REQUIREMENTS AND GENERAL FRAMING PRACTICE AS DETAILED IN THE "ARCHITECTURAL GRAPHICS STANDARDS", BY RAMSEY & SLEEPER.
11. ALL PLYWOOD FLOOR SHEATHING SHALL BE GLUED TO SUPPORTING WOOD FRAMING MEMBERS USING AMERICAN PLYWOOD ASSOCIATION (A.P.A.) GLUED FLOOR SYSTEM. WOOD GLUE TO BE CONTECH, INC. PL400 SUBFLOOR CONSTRUCTION ADHESIVE, OR APPROVED EQUAL.
12. ALL WALL STUDS TO ALIGN WITH FLOOR JOISTS AND ROOF RAFTERS.
13. THE CROSS WALLS AND TIE BEAMS ARE TO PROVIDE THE LATERAL RESTRAINT FOR THE BUILDINGS AND SHOULD BE SECURELY ATTACHED AT EACH END AND/OR TO THE EXTERIOR WALLS.
14. BUILT-UP BEAMS (3 PIECES MAXIMUM) USING CONVENTIONAL FRAMING LUMBER SHALL BE FULLY SPIKED TOGETHER WITH 2-10D NAILS AT 8" O.C. AND LVLS WITH 2-16D NAILS (TOP AND BOTTOM) AT 8" O.C., OR AS OTHERWISE NOTED ON THE DRAWINGS, OR AS RECOMMENDED BY THE MANUFACTURER.
15. ALL NAILS, FASTENERS AND CONCRETE EXPOSED TO THE WEATHER SHALL BE HOT-DIP GALVANIZED.
16. ALL LUMBER THAT COMES IN CONTACT WITH CONCRETE SHALL BE PRESSURE TREATED.

FLOOR PLAN LEGEND:

WALL TO BE DEMOLISHED	
EXISTING STUD WALL	
PROPOSED STUD WALL	
OBJECT ABOVE	
OBJECT BELOW	

PROPOSED SQUARE FOOTAGE NOTE:



FIRST FLOOR LIVING AREA = 1,445 FT²
SECOND FLOOR LIVING AREA = 1,500 FT²
TOTAL FINISHED LIVING AREA: = 2,945 FT²

DRAWING INDEX:

A0	COVER PAGE
A1	NOTES AND LEGENDS
A2	PROPOSED FRONT ELEVATION
A2.1	PROPOSED EXTERIOR ELEVATIONS
A3	PROPOSED GARAGE PLAN
A4	PROPOSED FIRST FLOOR PLAN
A5	PROPOSED SECOND FLOOR PLAN
A6	PROPOSED ROOF PLAN
A7	PROPOSED SECTION "A-A" AND FRONT GABLE SECTION "B-B"
A7.1	DETAIL SECTION "I"
A8	SHEAR WALL DETAILS
A9	PROPOSED FOUNDATION PLAN
B1	DETAIL SECTION "Y"
B2	
B3	
B4	

FOUNDATION NOTES/LEGEND:

- 1) SEE "STRUCTURAL ENGINEERING AND UFGM ANALYSIS" BOOKLET NO. 21- BY _____ ENGINEERING, LLC DATED MAY/ 2021 FOR ADDITIONAL NOTES AND DETAILS
- 2) ALL NEW FOUNDATION WALLS SHALL BE DAMP PROOFED WITH A BITUMINOUS COATING.
- 3) 6 SQ. FT. OF VENTILATION REQUIRED FOR EVERY 1,500 SQ. FT. OF BASEMENT AREA.
- 4) OPENING FOR UNDER-FLOOR VENTILATION: 1 SQ. FT. OPENING/150 SQ. FT. OF CRAWL SPACE AREA

	1 DENOTES FOUNDATION WALL TO BE DEMOLISHED
	2 DENOTES EXISTING FOUNDATION WALL
	3 DENOTES PROPOSED FOUNDATION WALL ATOP FOOTING
	4 DENOTES PROPOSED LOW FOUNDATION WALL W/ 2x6 STUD WALL ATOP
	5 DENOTES ARCHITECTURAL BUILDING SECTION
	6 DENOTES DETAIL IN "STRUCTURAL ELEMENTS" BOOKLET BY STRUCTURAL ENGINEER

FRAMING NOTES/LEGEND:

- 1) SEE "STRUCTURAL ENGINEERING AND WFCM ANALYSIS"
BOOKLET NO. 21-____ BY _____ ENGINEERING, LLC
DATED MAY/____/2021 FOR ADDITIONAL NOTES AND DETAILS
- 2) ALL FRAMING MEMBERS SHALL BE FASTENED IN ACCORDANCE WITH MANUFACTURER'S
RECOMMENDATIONS AND THE COMMONWEALTH OF MASSACHUSETTS 780 CMR

LAMINATED POST
 DOUGLAS FIR
 POST SIZE
 JACK STUDS
 KING STUDS
 POST UP
 SEE FRAMING PLAN
 OF FLOOR ABOVE
 FOR TYPE AND SIZE

METAL HANGERS
 STEEL BEAM
 LVL BEAM
 BEARING WALL
 BEARING WALL ABOVE
 FRAMING BELOW
 EXISTING FRAMING
 PROPOSED FRAMING
 SMOKE DETECTOR
 SMOKE/CO₂
 HEAT SMOKE
 BATHROOM FAN/LIGHT

ANY DEVIATION FROM THESE PLANS
REQUIRING ROCKWOOD DESIGN INC.
TO ACQUIRE STRUCTURAL REDESIGN FOR
BUILDING DEPARTMENT SIGN-OFFS WILL BE
BILLED TO CLIENT ON AN HOURLY BASIS.

SEE SHEET A1 FOR DRAWING INDEX

IF PRINTED ON 11X17, ALL SCALE IS HALF

CONTRACTOR TO VERIFY ALL DIMENSIONS
AND SETBACKS PRIOR TO CONSTRUCTION

PLEASE REFER TO ENGINEERING PACKET
FOR ALL STRUCTURAL DETAILS

FOUNDATION & CONCRETE NOTES:

9. SPREAD FOOTINGS SHALL BEAR LEVEL ON UNDISTURBED SOIL HAVING AN ALLOWABLE BEARING CAPACITY OF TWO TONS PER SQUARE FOOT.
10. IF BEARING MATERIALS WITH A LOWER BEARING CAPACITY THAN TWO TONS PER SQUARE FOOT ARE ENCOUNTERED AT THE SPECIFIED ELEVATIONS, THE UNDERLYING UNSUITABLE MATERIAL SHALL BE REMOVED AND REPLACED WITH SUITABLE MATERIAL TO BE APPROVED BY THE ENGINEER/ARCHITECT.
11. THE ENGINEER ASSUMES NO RESPONSIBILITY FOR THE VALIDITY OF SUBSURFACE CONDITIONS.
12. NO FOUNDATION SHALL BE PLACED IN WATER OR ON FROZEN GROUND.
13. FOOTINGS SHALL BE PROTECTED AGAINST FROST UNTIL PROJECT IS COMPLETED.
14. BACKFILL UNDER ANY PORTION OF THE FOOTINGS AND SLABS SHALL BE COMPACTED IN 6" LIFTS OF 95% COMPACTED GRAVEL AS APPROVED BY THE ENGINEER.
15. CONCRETE WORK SHALL CONFORM TO THE LATEST AMERICAN CONCRETE INSTITUTE CODE FOR "BUILDING CODE REQUIREMENTS FOR REINFORCED CONCRETE" AND "SPECIFICATIONS FOR STRUCTURAL CONCRETE FOR BUILDINGS".
16. CONCRETE FOUNDATION WALLS AND FOOTINGS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 3,000 P.S.I. AT 28 DAYS AND 3,500 P.S.I. FOR SLABS, WITH A SLUMP OF NO MORE THAN 4" AND AIR ENTRAINMENT OF 4-6%. THE USE OF CALCIUM CHLORIDE IS NOT PERMITTED. PROVIDE PROPER CONCRETE PROTECTION FOR HEAT IN COLD WEATHER AND MAINTAIN PROPER CURING PROCEDURES IN ACCORDANCE WITH THE A.C.I.
17. STEEL REINFORCEMENT SHALL CONFORM TO A.S.T.M. 615, GRADE 60.
18. ALL CONCRETE SLABS ON THE GROUND SHALL BE REINFORCED WITH 6x6-10/10 (MIN.) WELDED WIRE FABRIC PLACED AT MID-DEPTH, OR AS OTHERWISE SHOWN ON THE DRAWINGS. WELDED WIRE FABRIC REINFORCEMENT SHALL CONFORM TO A.S.T.M. A183, AND SHALL LAP 6" MINIMUM OR ONE SPACE, WHICHEVER IS LARGER, AND SHALL BE WIRED TOGETHER. PROVIDE SUFFICIENT CHAIR OR SUPPORT BARS AS NECESSARY TO POSITION WELDED WIRE FABRIC.
19. WHERE CONTINUOUS BARS ARE CALLED FOR THEY SHALL BE RUN CONTINUOUSLY AROUND CORNERS AND LAPPED AT NECESSARY SPICES OR HOOKED AT DISCONTINUOUS ENDS. LAPS SHALL BE 40 BAR DIAMETERS, UNLESS OTHERWISE SHOWN.
20. NOTIFY BUILDING DEPARTMENT FOR INSPECTION OF COMPLETED INSTALLATION OF REINFORCEMENT AT LEAST 24 HOURS PRIOR TO SCHEDULED PLACEMENT OF CONCRETE.
21. PLACEMENT OF CONCRETE POURS FOR FOUNDATION WALLS SHOULD HAVE A VERTICAL 2"x4" KEY WITH CONTINUOUS REINFORCING (40 BAR DIAMETER MINIMUM) THRU THE CONSTRUCTION JOINT.
22. ALL REINFORCING BARS SHALL BE COLD BENT IN ACCORDANCE TO THE PROPER RADI ESTABLISHED BY THE AMERICAN CONCRETE INSTITUTE. UNDER NO CONDITIONS SHALL HEAT BE APPLIED TO THE BARS TO OBTAIN BENDS.
23. THE USE OF CONTROL JOINTS IN THE SLAB IS RECOMMENDED TO CONTROL CRACKING. SAW CUT TO A DEPTH ONE HALF INCH NOT-TO-EXCEED 10 FEET BY 10 FEET.
24. DAMP PROOF ALL FOUNDATION WALLS BELOW GRADE, OTHER THAN FROST WALLS.

[illegible]

ZBA SET: 6/17/2021

A1
OF A8

PROGRESS PRINT: NOT FOR CONSTRUCTION

CONTRACTOR TO VERIFY ALL DIMENSIONS
AND SETBACKS PRIOR TO CONSTRUCTION



42
OF 48

**Rockwood
Design, Inc.**
1020 Plain Street - Suite 320
Marshfield, MA 02050
Phone: (781)-837-3140
Fax: (781)-837-3126
Email: phil@rockwooddesign.com
Website: www.rockwooddesign.com

COPYRIGHT © 2021 BY ROCKWOOD DESIGN, INC. THE ARCHITECTURAL PLANS, DRAWINGS, DESIGNS, SPECIFICATIONS AND OTHER ARRANGEMENTS ON THIS SHEET ARE AND SHALL REMAIN THE PROPERTY OF ROCKWOOD DESIGN, INC. NO PART THEREOF SHALL BE COPIED, DISCLOSED TO OTHERS, OR USED IN CONNECTION WITH ANY WORK OR PROJECT, OTHER THAN THE SPECIFIED PROJECT FOR WHICH THEY HAVE BEEN PREPARED AND DEVELOPED, WITHOUT THE EXPRESS KNOWLEDGE AND WRITTEN CONSENT OF ROCKWOOD DESIGN, INC.

PROGRESS PRINT: NOT FOR CONSTRUCTION

IF PRINTED ON 11X17, ALL SCALE IS HALF.

CONTRACTOR TO VERIFY ALL DIMENSIONS
AND SETBACKS PRIOR TO CONSTRUCTION





**Rockwood
Design, Inc.**
1020 Northfield Rd., 320
Northfield, MA 02059
Phone: (781)-837-3140
Fax: (781)-837-3126
Email: info@rockwooddesign.com
Website: www.rockwooddesign.com

DATE: 6/11/2021
DRAWN BY: PJB
CHECKED BY:

SCALE: AS NOTED

A2.1

OF A8

TITLE:
PROPOSED EXTERIOR ELEVATIONS

[illegible]

PROGRESS PRINT: NOT FOR CONSTRUCTION

PROGRESS PRINT: NOT FOR CONSTRUCTION


ANY DEVIATION FROM THESE PLANS
REQUIRING ROCKWOOD DESIGN INC.
TO ACQUIRE STRUCTURAL REDESIGN FOR
BUILDING DEPARTMENT SIGN-OFFS WILL BE
BILLED TO CLIENT ON AN HOURLY BASIS.

SEE SHEET AI FOR DRAWING INDEX

IF PRINTED ON 11X17, ALL SCALE IS HALF.

PLEASE REFER TO ENGINEERING PACKET
FOR ALL STRUCTURAL DETAILS

CONTRACTOR TO VERIFY ALL DIMENSIONS
AND SETBACKS PRIOR TO CONSTRUCTION

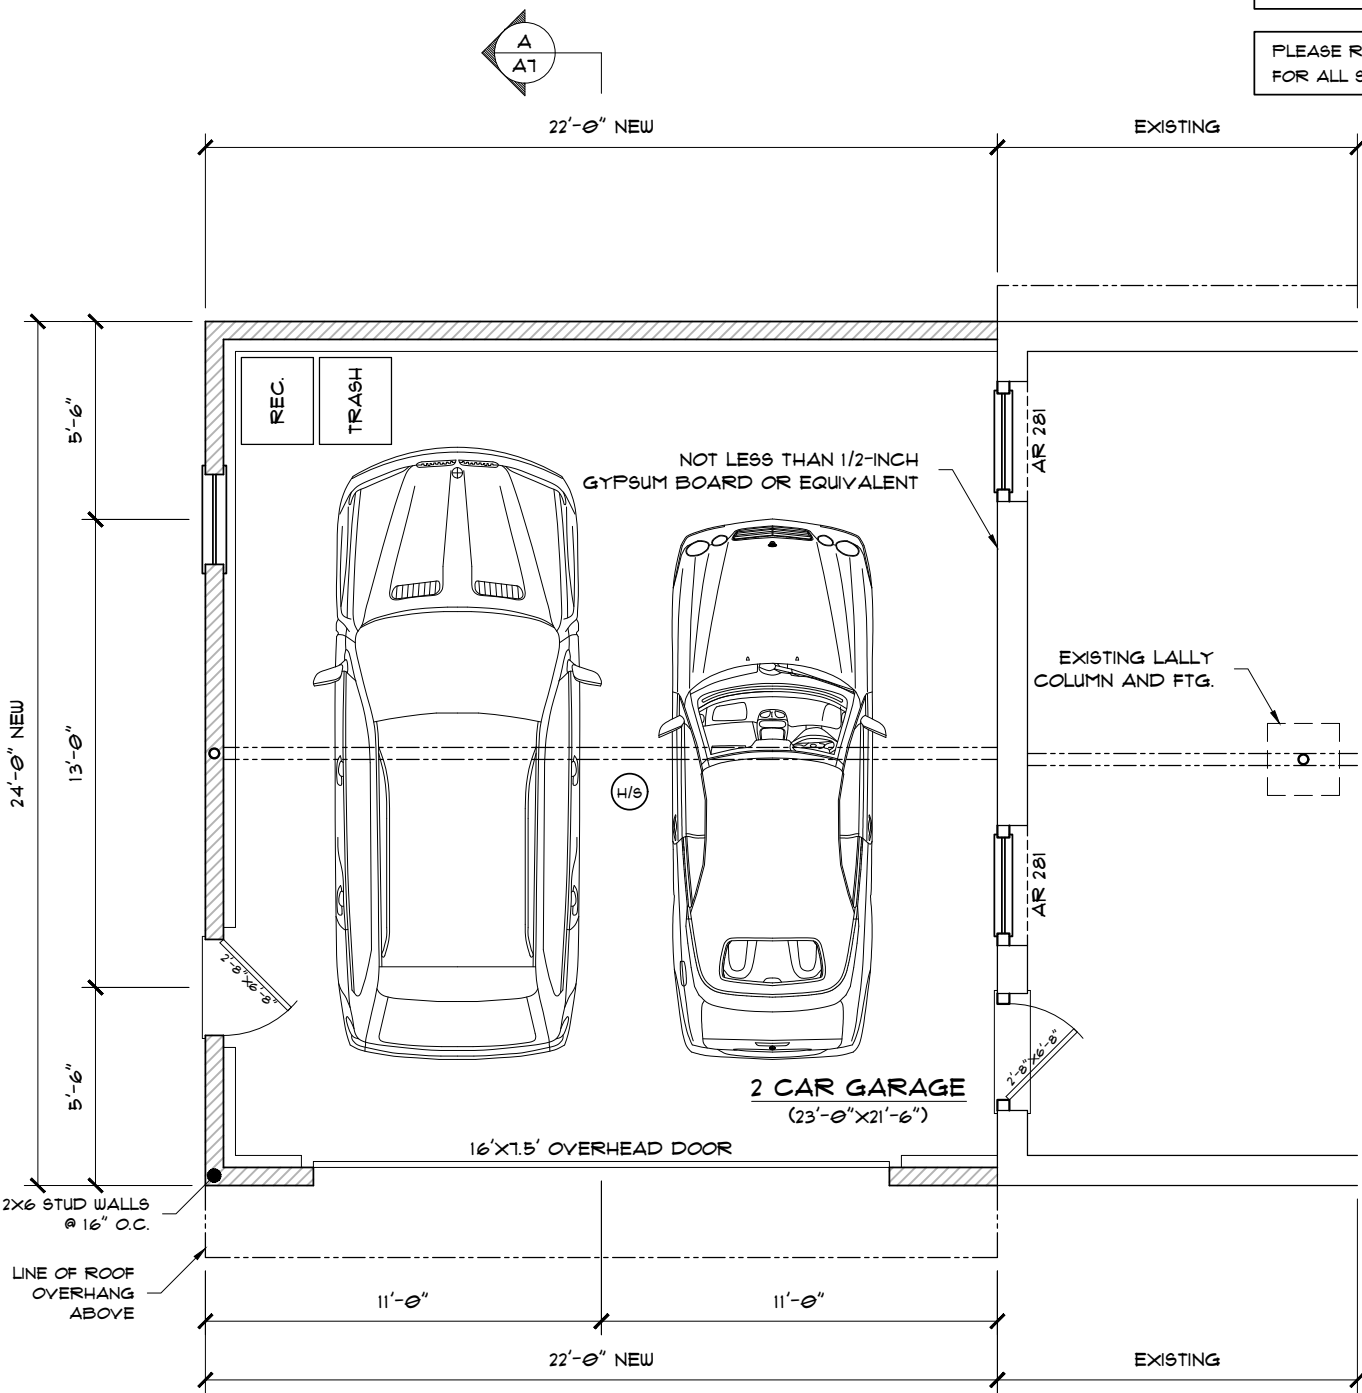

PROPOSED GARAGE PLAN

SCALE: $3/8"=1'-0"$

ZBA SET: 6/17/2021



Rockwood Design, Inc.
 1020 North Street
 North Attleboro, MA 02060
 Phone: (781) 837-3120
 Fax: (781) 837-3126
 Email: info@rockwooddesign.com
 Website: www.rockwooddesign.com

DATE: 6/11/2021

DRAWN BY: PJB

CHECKED BY:

SCALE: AS NOTED

A3
OF **A8**

TITLE: **PROPOSED GARAGE PLAN**

PROJECT:
AMAR GAIKWAD
197 GROVE STREET
BRAINTREE, MA 02184

PROGRESS PRINT: NOT FOR CONSTRUCTION

PROGRESS PRINT: NOT FOR CONSTRUCTION


ANY DEVIATION FROM THESE PLANS
REQUIRING ROCKWOOD DESIGN INC.
TO ACQUIRE STRUCTURAL REDESIGN FOR
BUILDING DEPARTMENT SIGN-OFFS WILL BE
BILLED TO CLIENT ON AN HOURLY BASIS.

SEE SHEET AI FOR DRAWING INDEX

IF PRINTED ON 11x17, ALL SCALE IS HALF.

PLEASE REFER TO ENGINEERING PACKET
FOR ALL STRUCTURAL DETAILS

CONTRACTOR TO VERIFY ALL DIMENSIONS
AND SETBACKS PRIOR TO CONSTRUCTION

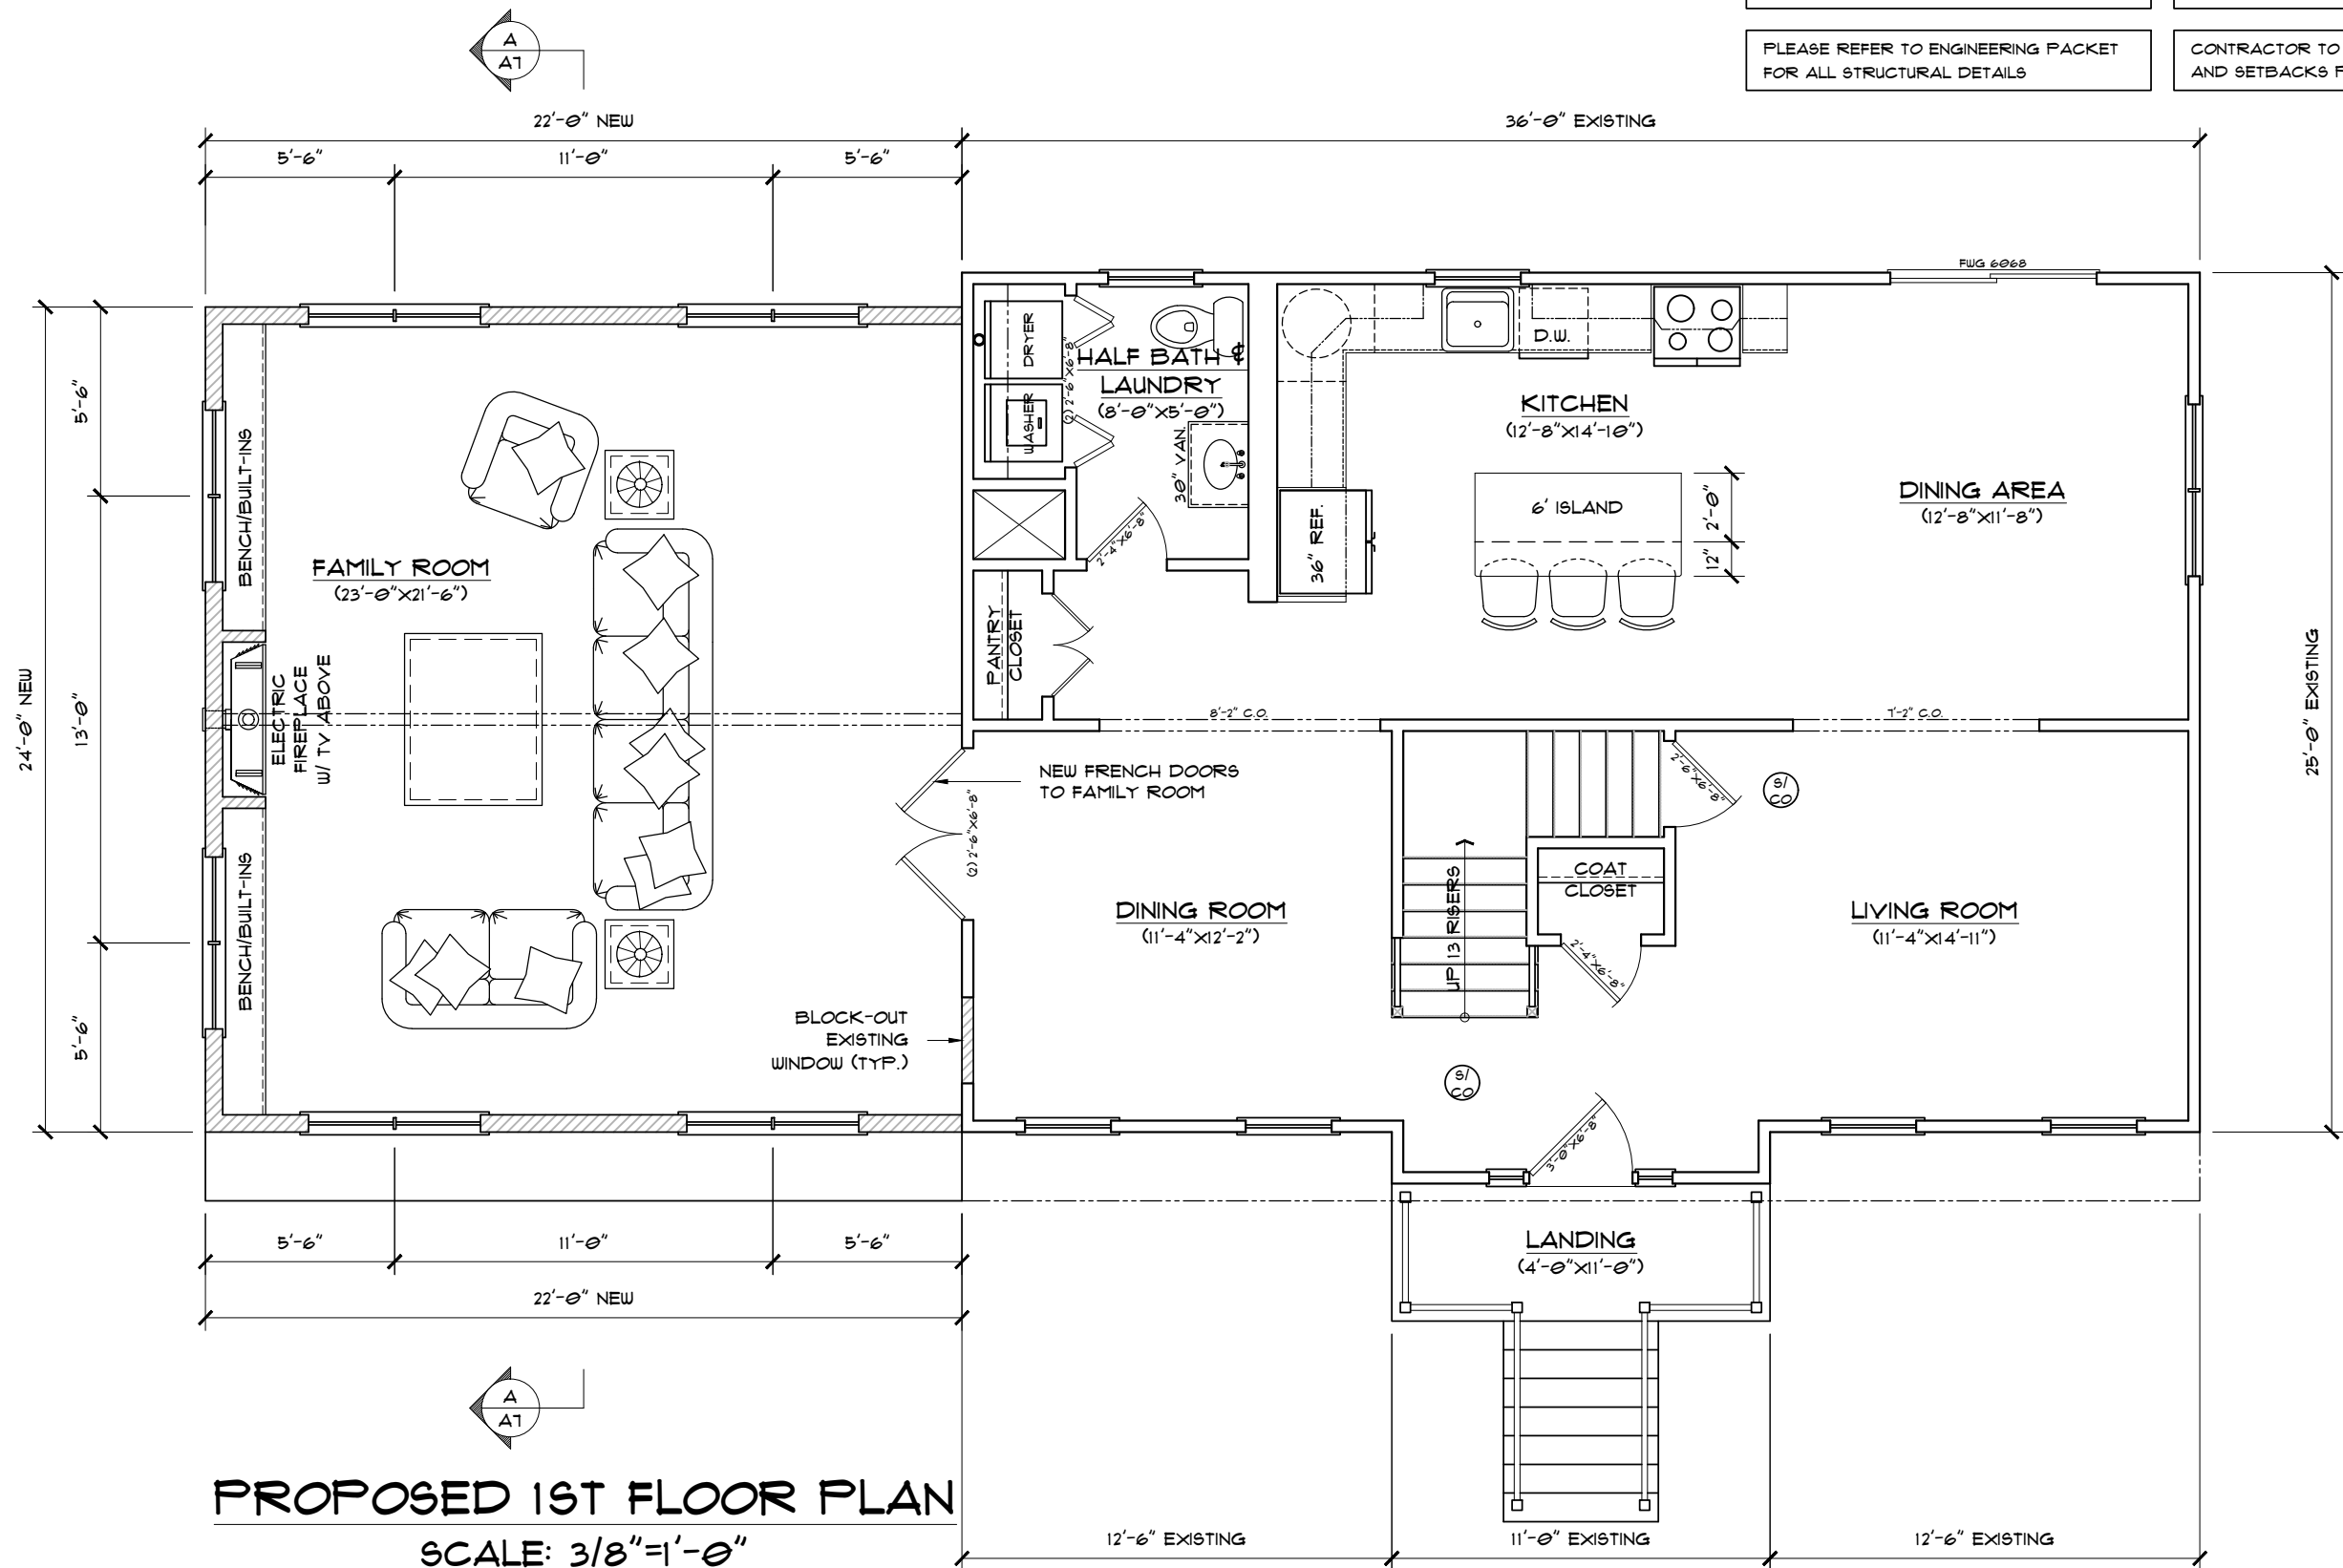

PROPOSED 1ST FLOOR PLAN
SCALE: 3/8"=1'-0"
(AREA: 1,445 FT²)

ZBA SET: 6/17/2021

[illegible]

PROGRESS PRINT: NOT FOR CONSTRUCTION

PROGRESS PRINT: NOT FOR CONSTRUCTION


ANY DEVIATION FROM THESE PLANS
REQUIRING ROCKWOOD DESIGN INC.
TO ACQUIRE STRUCTURAL REDESIGN FOR
BUILDING DEPARTMENT SIGN-OFFS WILL BE
BILLED TO CLIENT ON AN HOURLY BASIS.

PLEASE REFER TO ENGINEERING PACKET
FOR ALL STRUCTURAL DETAILS

SEE SHEET A1 FOR DRAWING INDEX

IF PRINTED ON 11X17, ALL SCALE IS HALF.

CONTRACTOR TO VERIFY ALL DIMENSIONS
AND SETBACKS PRIOR TO CONSTRUCTION

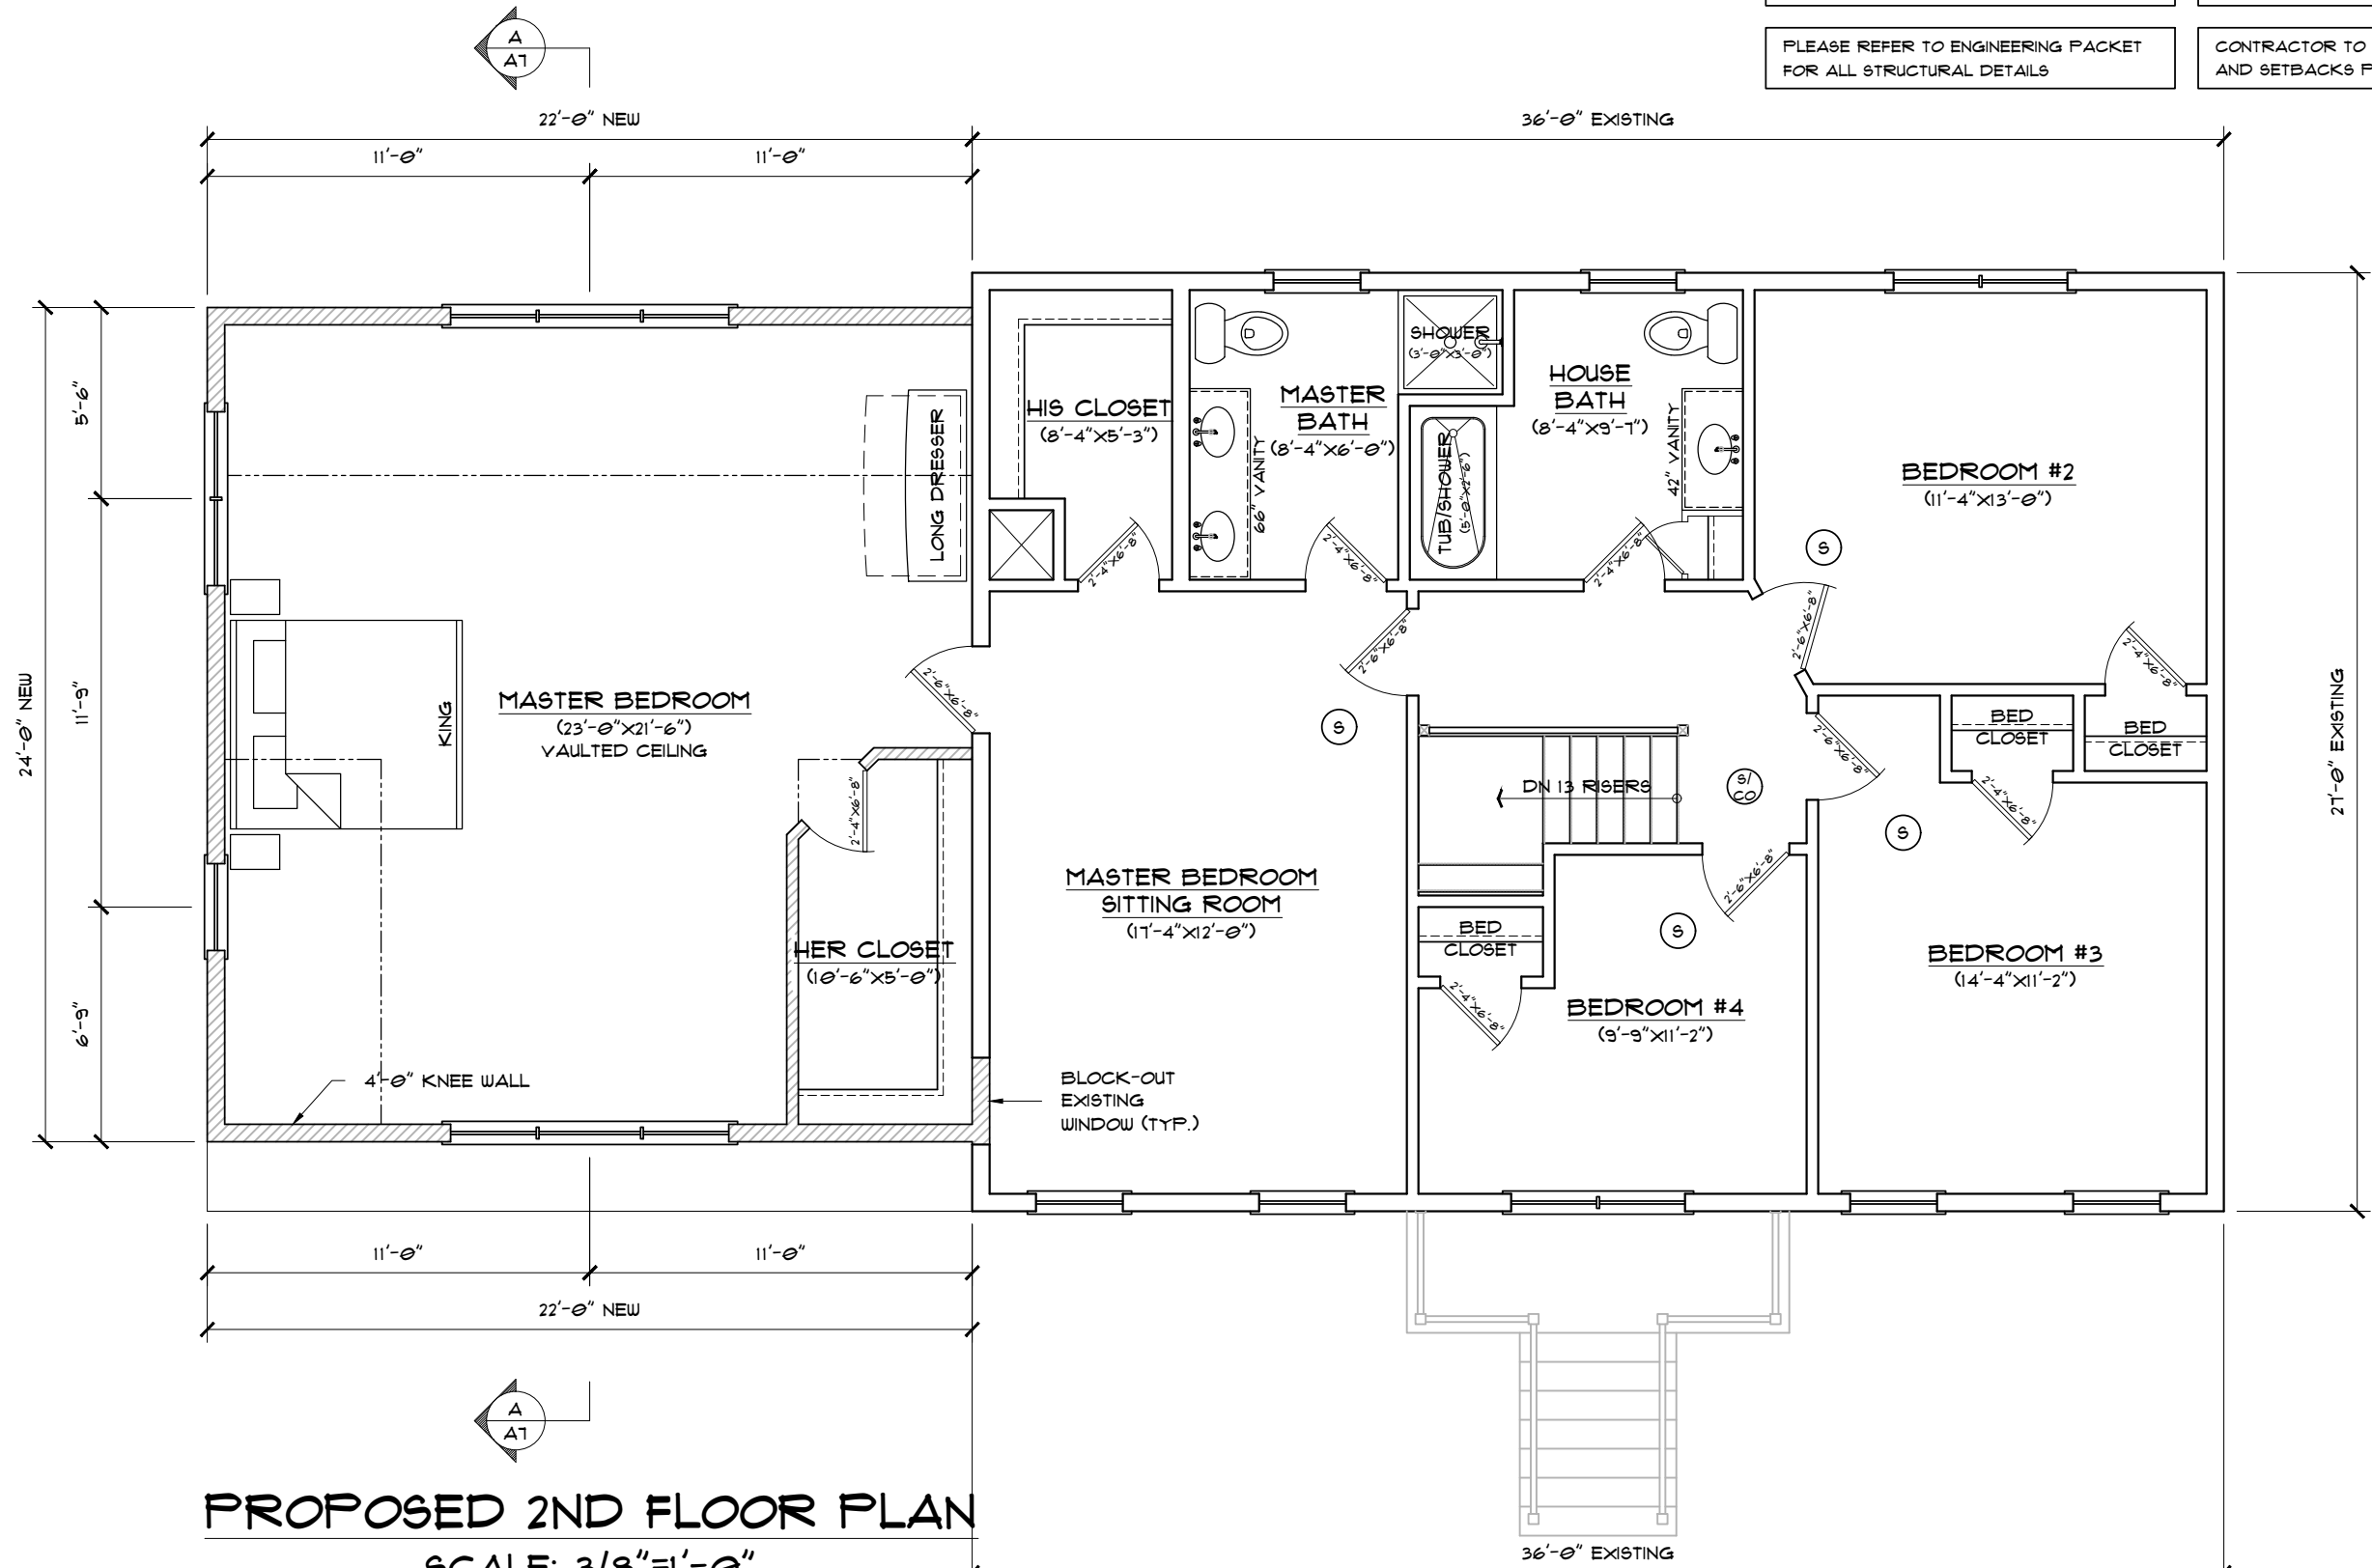

PROPOSED 2ND FLOOR PLAN
SCALE: 3/8"=1'-0"
(AREA: 1,500 FT²)

TITLE
PROPOSED SECOND FLOOR PLAN

PROJECT:
AMAR GAIKWAD
191 GROVE STREET
BRAINTREE, MA 02184

Rockwood
Design, Inc.
1020 Plain Street - Suite 320
Marblehead, MA 02050
Phone: (781)-837-3140
Fax: (781)-837-3126
Email: info@rockwooddesign.com
Website: www.rockwooddesign.com

DATE
6/17/2021

DRAWN BY:
PB

CHECKED BY:

SCALE
AS NOTED


A5
A8

PROGRESS PRINT: NOT FOR CONSTRUCTION

SEE SHEET AI FOR DRAWING INDEX

IF PRINTED ON 11X17, ALL SCALE IS HALF.

CONTRACTOR TO VERIFY ALL DIMENSIONS
AND SETBACKS PRIOR TO CONSTRUCTION

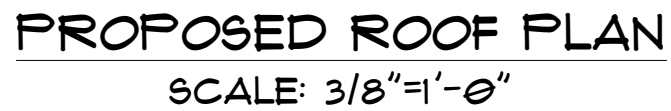

A6
OF A8

PROJECT:
AMAR GAIKWAD
197 GROVE STREET
BRANTREE, MA 02184


**Rockwood
Design, Inc.**
1020 Plain Street – Suite 320
Marshfield, MA 02050
Phone: (781)-837-3140
Fax: (781)-837-3126
Email: phil@rockwooddesign.com
Website: www.rockwooddesign.com

[illegible]

TITLE: PROPOSED ROOF PLAN

PROJECT:

CONTRACTOR TO VERIFY ALL DIMENSIONS
AND SETBACKS PRIOR TO CONSTRUCTION

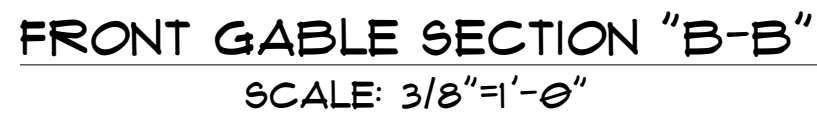

23	23	23
24	24	24
25	25	25
26	26	26
27	27	27
28	28	28
29	29	29
30	30	30
31	31	31
32	32	32
33	33	33
34	34	34
35	35	35
36	36	36
37	37	37
38	38	38
39	39	39
40	40	40
41	41	41
42	42	42
43	43	43
44	44	44
45	45	45
46	46	46
47	47	47
48	48	48
49	49	49
50	50	50
51	51	51
52	52	52
53	53	53
54	54	54
55	55	55
56	56	56
57	57	57
58	58	58
59	59	59
60	60	60
61	61	61
62	62	62
63	63	63
64	64	64
65	65	65
66	66	66
67	67	67
68	68	68
69	69	69
70	70	70
71	71	71
72	72	72
73	73	73
74	74	74
75	75	75
76	76	76
77	77	77
78	78	78
79	79	79
80	80	80
81	81	81
82	82	82
83	83	83
84	84	84
85	85	85
86	86	86
87	87	87
88	88	88
89	89	89
90	90	90
91	91	91
92	92	92
93	93	93
94	94	94
95	95	95
96	96	96
97	97	97
98	98	98
99	99	99
100	100	100

PROPOSED SECTION "A-A" AND
FRONT GABLE SECTION "B-B"

AMAR GAIKWAD
197 GROVE STREET
BRAINTREE, MA 02184

Design, Inc.
1020 Plain Street - Suite 320
Marshallfield, MA 02050
Phone: (781)-837-3140
Fax: (781)-837-3126
Email: phil@rockwooddesign.com
Website: www.rockwooddesign.com

TE:
1/2021

DRAWN BY:

CHECKED BY:

SALE:
NOTED


A7
OF A8

PROGRESS PRINT: NOT FOR CONSTRUCTION

SEE SHEET A1 FOR DRAWING INDEX

IF PRINTED ON 11X17, ALL SCALE IS HALF.

CONTRACTOR TO VERIFY ALL DIMENSIONS
AND SETBACKS PRIOR TO CONSTRUCTION

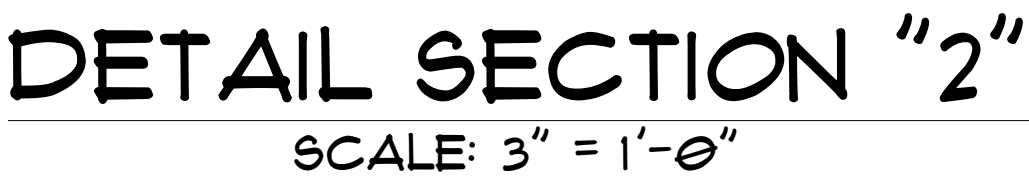

ZBA SET: 6/17/2021

A7.1
OF **A8**

PROJECT:		TITLE:	
 Rockwood Design, Inc. 1020 Plain Street - Suite 320 Marshfield, MA 02050 Phone: (508) 333-1100 Fax: (508) 333-3128 Email: phil@rockwooddesign.com www.rockwooddesign.com		DETAIL SECTION "2"	
AMAR GAIKWAD 197 GROVE STREET BRANTREE, MA 02184			
DATE	6/17/2021	REVISION	DATE
DRAWN BY	FB		
CHECKED BY:			
SCALE	AS NOTED		

PROGRESS PRINT: NOT FOR CONSTRUCTION

PROGRESS PRINT: NOT FOR CONSTRUCTION


ANY DEVIATION FROM THESE PLANS
REQUIRING ROCKWOOD DESIGN INC.
TO ACQUIRE STRUCTURAL REDESIGN FOR
BUILDING DEPARTMENT SIGN-OFFS WILL BE
BILLED TO CLIENT ON AN HOURLY BASIS.

PLEASE REFER TO ENGINEERING PACKET
FOR ALL STRUCTURAL DETAILS

SEE SHEET AI FOR DRAWING INDEX

IF PRINTED ON 11X17, ALL SCALE IS HALF.

CONTRACTOR TO VERIFY ALL DIMENSIONS
AND SETBACKS PRIOR TO CONSTRUCTION

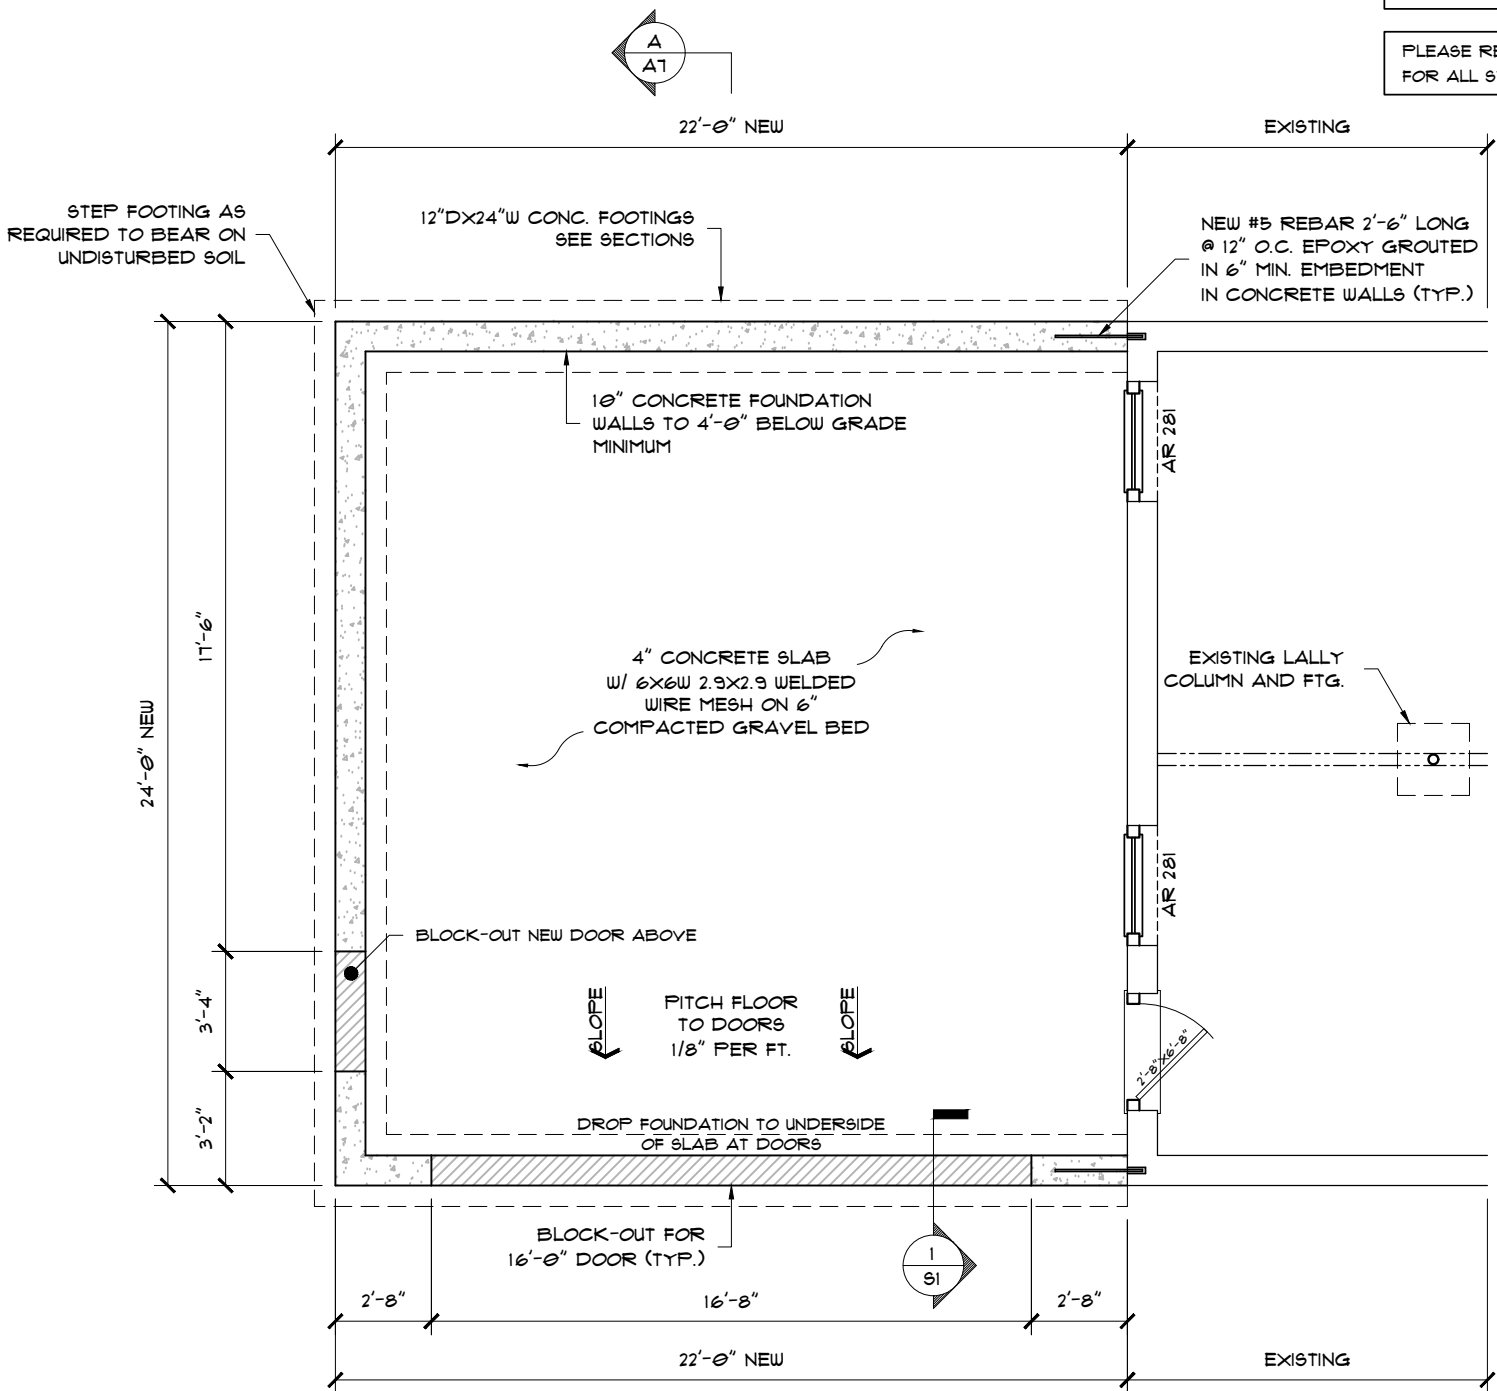

PROPOSED FOUNDATION PLAN

SCALE: $3/8" = 1' - 0"$

ZBA SET: 6/17/2021

**Rockwood
Design, Inc.**
1020 Rte. 32A • Suite 320
Norfolk, MA 02050
Phone: (781)-837-3140
Fax: (781)-837-3126
E-mail: info@rockwooddesign.com
Web site: www.rockwooddesign.com



DATE: 6/17/2021
DRAWN BY: PJB
CHECKED BY:
SCALE: AS NOTED

S1
OF S4

TITLE:
PROPOSED FOUNDATION PLAN

PROJECT:
AMAR GAIKWAD
197 GROVE STREET
BRANTREE, MA 02184

PROGRESS PRINT: NOT FOR CONSTRUCTION


ANY DEVIATION FROM THESE PLANS
REQUIRING ROCKWOOD DESIGN INC.
TO ACQUIRE STRUCTURAL REDESIGN FOR
BUILDING DEPARTMENT SIGN-OFFS WILL BE
BILLED TO CLIENT ON AN HOURLY BASIS.

SEE SHEET A1 FOR DRAWING INDEX

IF PRINTED ON 11X17, ALL SCALE IS HALF.

PLEASE REFER TO ENGINEERING PACKET
FOR ALL STRUCTURAL DETAILS

CONTRACTOR TO VERIFY ALL DIMENSIONS
AND SETBACKS PRIOR TO CONSTRUCTION

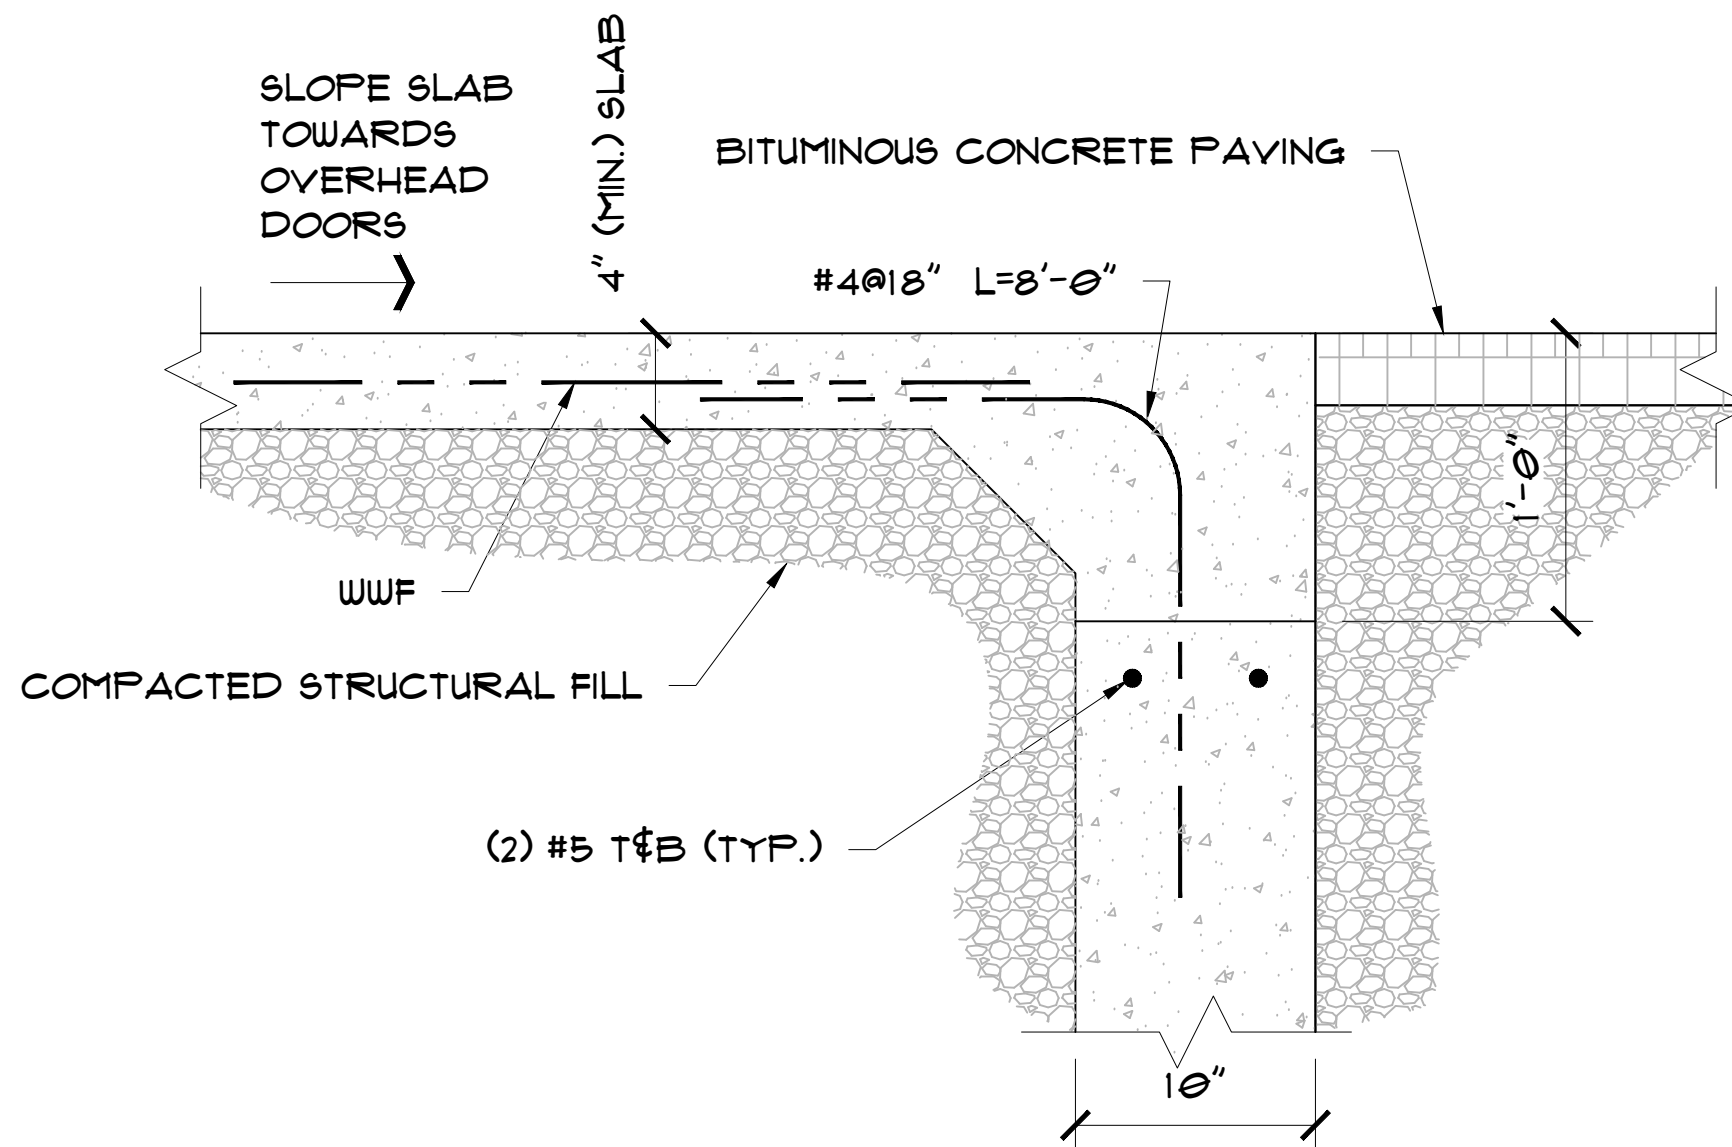

DETAIL "1"

SCALE: 3"=1'-0"

PROGRESS PRINT: NOT FOR CONSTRUCTION

ZBA SET: 6/17/2021

S1.1

OF S 4

TITLE: **DETAIL SECTION "1"**

PROJECT:
AMAR GAIKWAD
197 GROVE STREET
BRANTREE, MA 02184

**Rockwood
Design, Inc.**
020 Plain Street - Suite 320
Marshfield, MA 02050
Phone: (781)-837-3140
Fax: (781)-837-3126
Email: phil@rockwooddesign.com
Webster: www.rockwooddesign.com

DATE:
6/17/202

DRAWN BY
BB

CHECKED BY _____

SCALE:
AS NOTED

DESCRIPTION