© Copyright protected. See Design Agreement. For use on this project only. Unauthorized reproduction of any part of this material is prohibited.

DEFERRED PERMIT SUBMITTALS

REFERENCE SECTION 01 33 16 - DELEGATED DESIGN PROCEDURES
DIVISION 03 - SECTION 03 38 00: POST-TENSIONED CONCRETE
DIVISION 06 - SECTION 06 17 33: WOOD I-JOISTS
DIVISION 06 - SECTION 06 17 53: SHOP-FABRICATED WOOD TRUSSES
DIVISION 05 - SECTION 05 73 00: DECORATIVE METAL RAILINGS AND ATTACHMENTS
DIVISION 08 - SECTION 08 44 13 ALUMINUM FRAMED STOREFRONTS
DIVISION 23 - MECHANICAL ATTACHMENT OF ROOF CURBS & EQUIPMENT TO ROOF STRUCTURE
DIVISIONS 22, 23 & 26 - SEISMIC BRACING OF MEP EQUIPMENT

SEPARATE PERMIT SUBMITTALS

1
DIVISION 08 - KNOX BOX (TO BE OBTAINED FROM FIRE MARSHAL'S OFFICE)
DIVISION 10 - OCCUPANT LOAD SIGNS (TO BE OBTAINED FROM FIRE MARSHAL'S OFFICE)
DIVISION 21 - FIRE SUPPRESSION SYSTEM
DIVISION 22 - PLUMBING TRADE PERMIT
DIVISION 26 - ELECTRICAL TRADE PERMIT
DIVISION 28 - FIRE DETECTION AND ALARM
~~DEMOLITION PERMIT~~
5 TENANT IMPROVEMENTS

DISCLAIMER

THE WRITTEN AGREEMENT, DRAWINGS, SPECIFICATIONS AND ANY ADDENDA COMPRISE THE CONTRACT FOR THIS PROJECT. THEY SHALL BE TREATED AS ONE ENTITY, EQUALLY, WITHOUT PRIORITY. ITEMS, ELEMENTS, FIXTURES, SYSTEMS AND EQUIPMENT SHOWN SHALL BE FURNISHED AND INSTALLED EVEN THOUGH TYPICALLY SHOWN ELSEWHERE. THEREFORE IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO READ AND COMPREHEND ALL THESE DOCUMENTS IN ORDER TO COMPLETE THE WORK. IF A CONTRACTOR CHOOSES TO NOT THOROUGHLY REVIEW THE ENTIRE SET OF CONTRACT DOCUMENTS, THEY DO SO AT THEIR OWN RISK AND AGREE TO FURNISH & INSTALL ALL ITEMS NOTED ABOVE AT NO ADDITIONAL COST OR DELAY TO THE OWNER. (THE ONLY EXCEPTION TO THIS IS THAT THE SPECIFICATIONS SHALL TAKE PRECEDENCE OVER GENERAL NOTES ON THIS SHEET.)

PROJECT DIRECTORY

OWNER DEVELOPER: **MV2, LLC**
7661 SW Capitol Highway
Portland, OR 97219
TEL: (503) 445-7557
ATTN: Seth Henderson
seth@uaapdx.com

ARCHITECT OF RECORD: **SERA Design and Architecture, Inc.**
338 NW Fifth Avenue
Portland, OR 97209
TEL: (503) 445-7372
ATTN: Ben Rippe
benr@seradesign.com

CIVIL ENGINEER: **Humber Design Group, Inc.**
117 SE Taylor Street, Suite 001
Portland, OR 97214
TEL: (503) 946-6690
ATTN: Martha Williams, Project Manager
martha.williams@hdgpdx.com

LANDSCAPE ARCHITECT: **SHAPIRO / DIDWAY**
1204 SE Water Ave
Portland, Oregon 97214
t. 503.232.0520
ATTN: Steve Shapiro
steve@shapiro-la.com

STRUCTURAL ENGINEER: **Froelich Engineers**
6969 SW Hampton Street
Portland, OR 97223
TEL: (503) 624-7005
ATTN: Todd Nagele
tnagele@froelich-engineers.com

MECHANICAL DESIGN/BUILD: **Jacobs Heating & Air Conditioning**
4474 SE Milwaukie Avenue
Portland, OR 97202
TEL: (503) 234-7331
ATTN: Scott Leverenz
scott@jacobshvac.com

PLUMBING DESIGN/BUILD: **Andersen Mechanical**
16285 SW 85th Ave, Suite 410
Tigard, OR 97224
TEL: (503) 992-666416285
ATTN: Mark Gerstlauer
mark@andersenmechanical.com

ELECTRICAL DESIGN/BUILD: **Prairie Electric**
6000 NE 88th Street
Vancouver, WA 98665
TEL: (360) 573-2750
ATTN: Thayer Hendrickson, PE
thayerh@prairielectric.com


FIRE PROTECTION DESIGN/BUILD: **Blackstone Fire Protection, LLC**
612 NE Squire Road
Washougal, WA 98671
ATTN: Ryan
ryan@blackstonefire.com

APPLICANT: **Faster Permits**
2000 SW 1st Ave Suite 420
Portland, OR 97201
ATTN: Mike Coyle
mike@fasterpermits.com


ENVELOPE CONSULTANT: **Professional Roof Consultants, Inc.**
1108 SE Grand Avenue, Suite 300
Portland, OR 97214
TEL: (503) 280-8759
ATTN: Jose Ponce
jose.ponce@professionalroofconsultants.com

ACOUSTICAL CONSULTANT: **ABD Engineering and Design**
321 SW 4th Ave., STE 700
Portland, OR 97204
TEL: (503) 616-4524
ATTN: Peter Allen, PE
pallen@abdengineering.com

GENERAL SITE PLAN - NTS

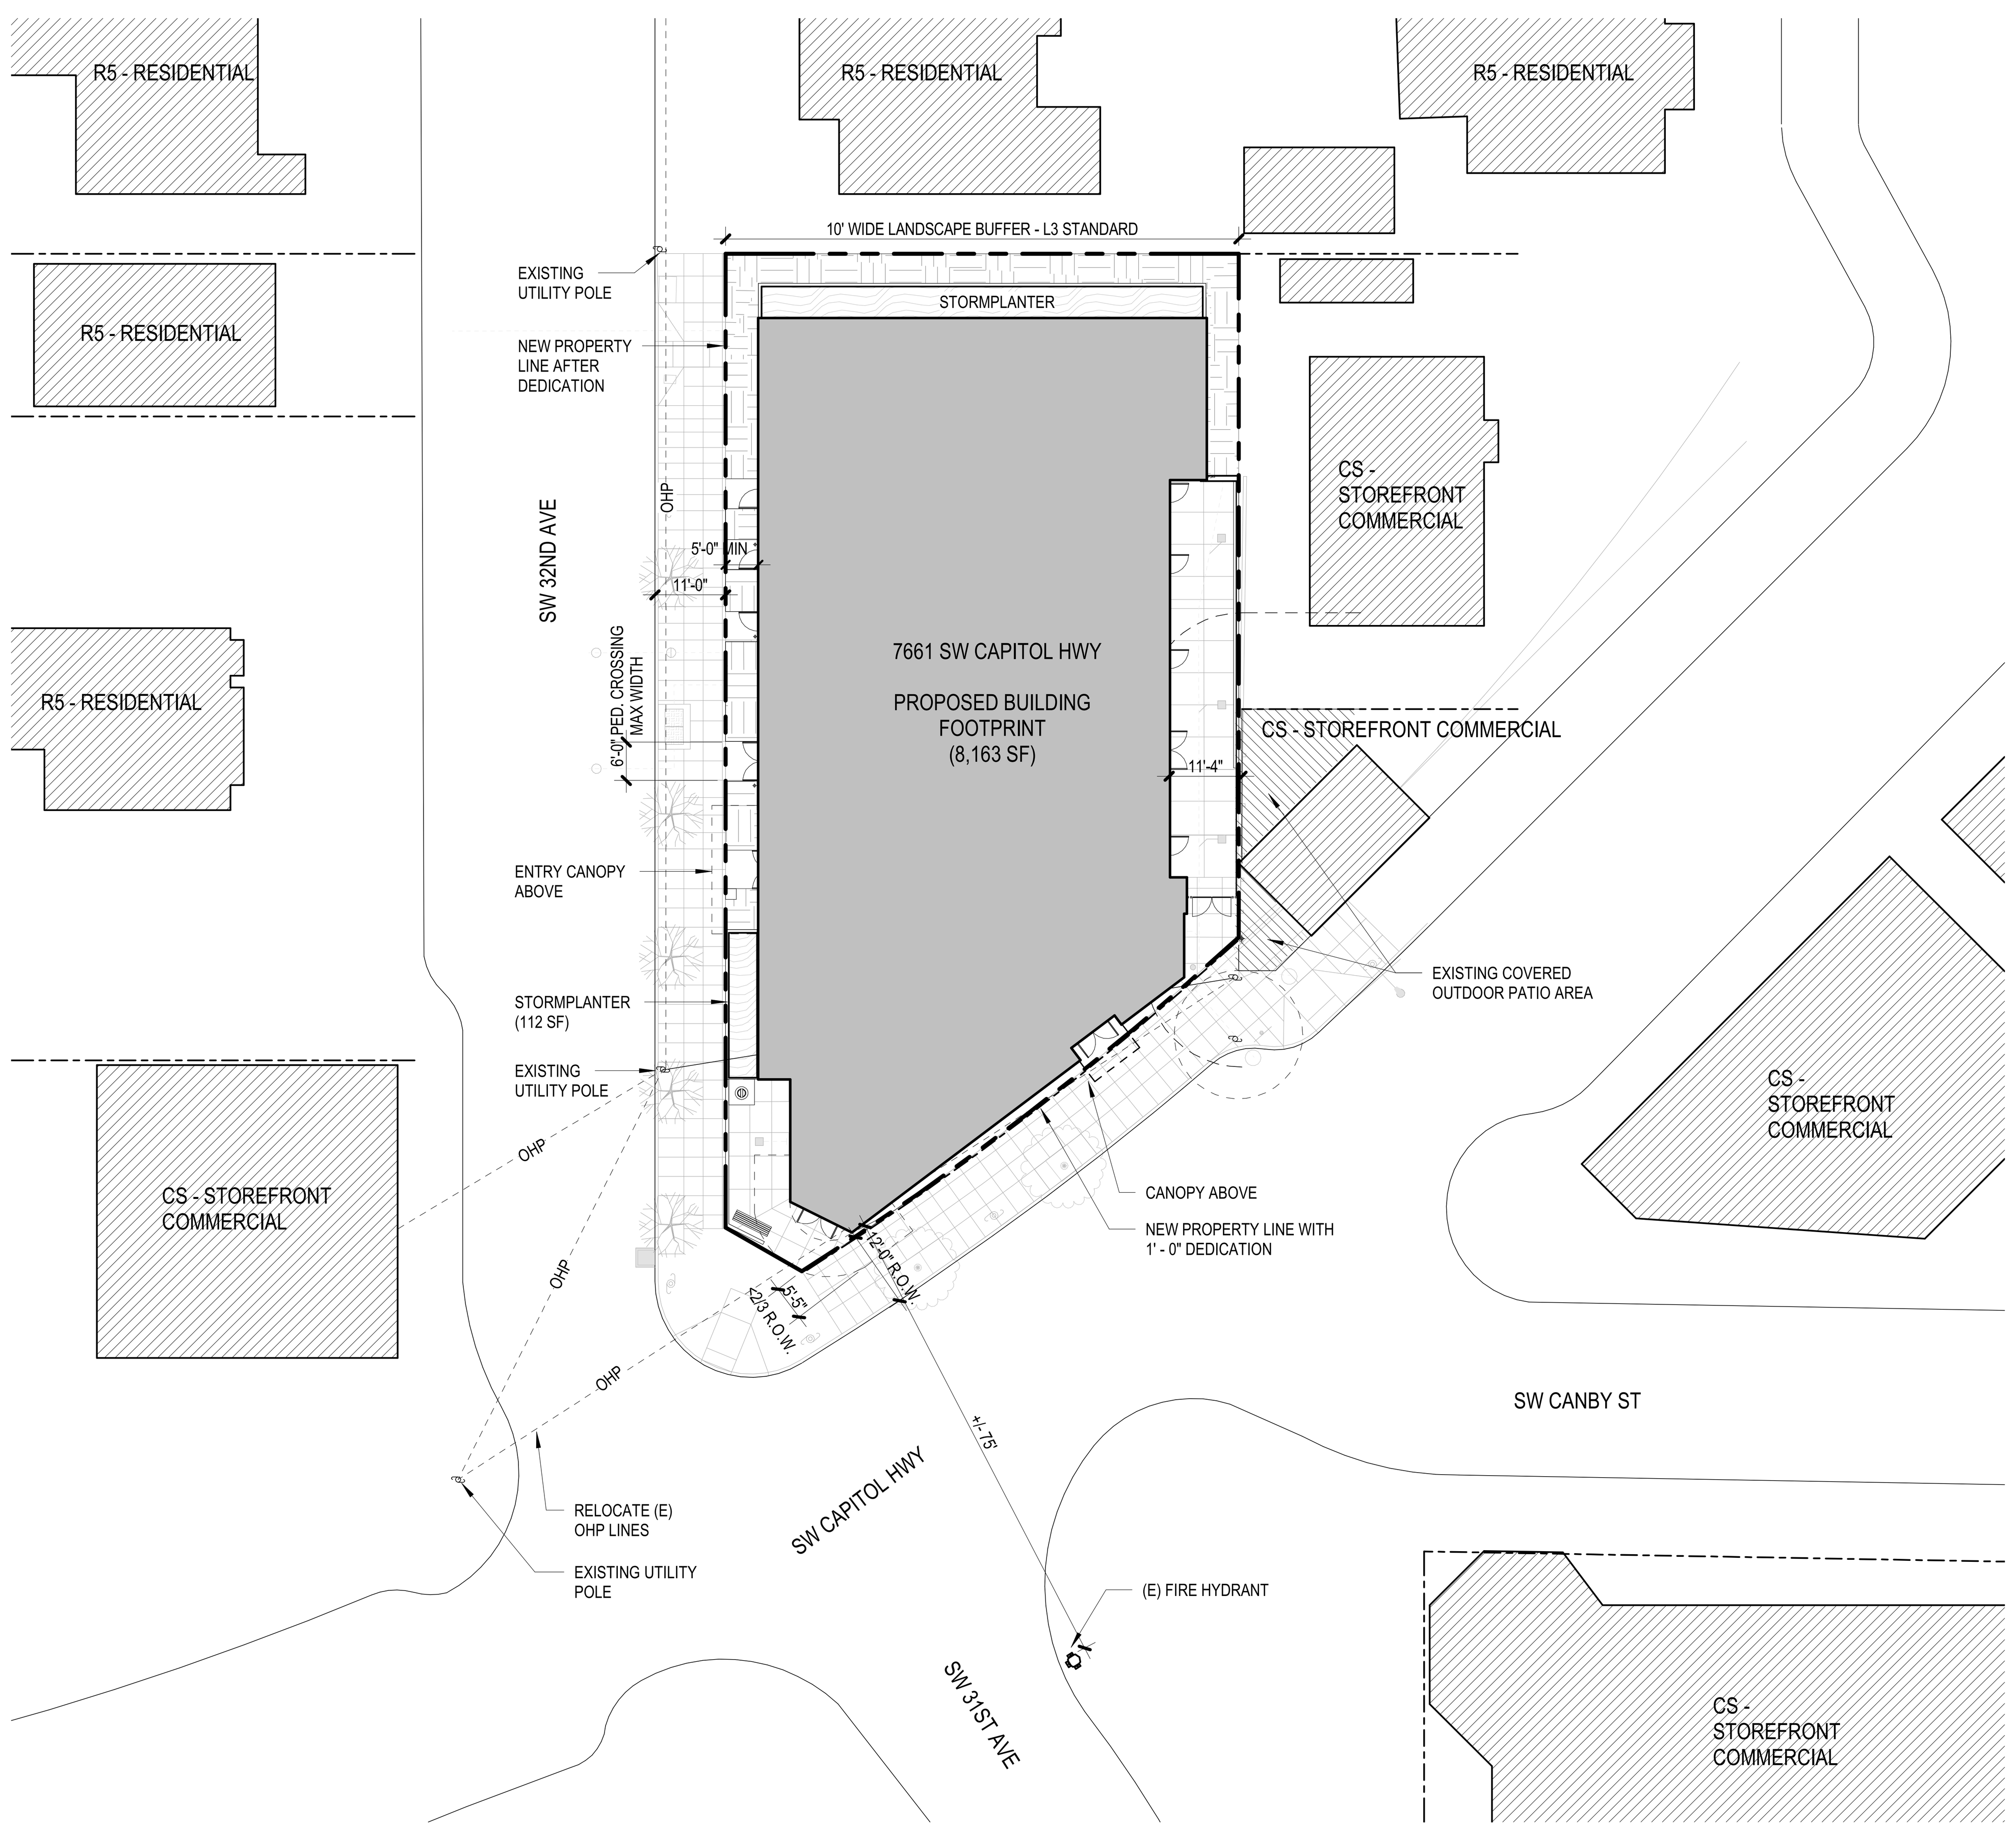

SYMBOLS LEGEND

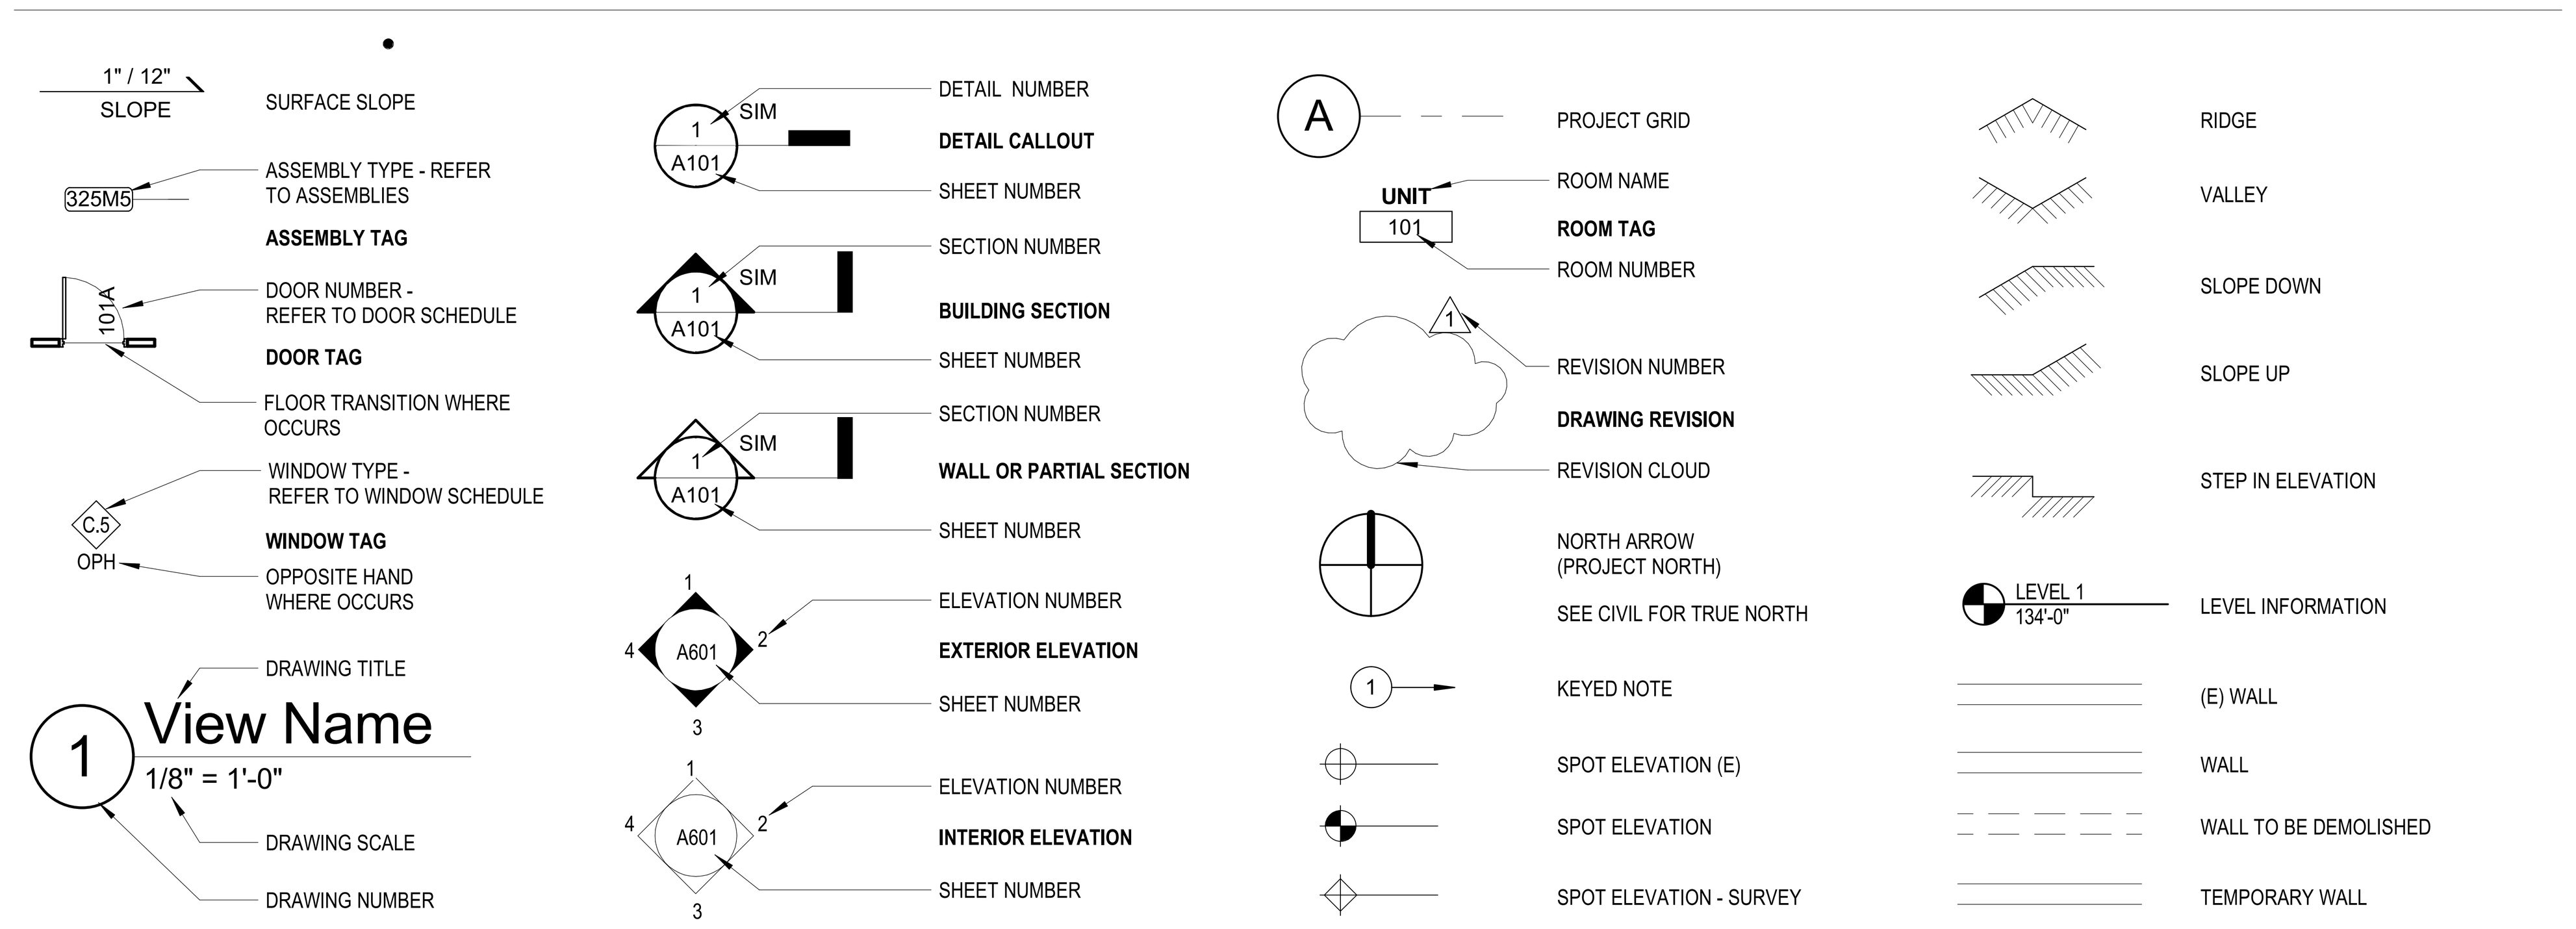


MATERIAL CODES

ACT-#	SUSPENDED ACOUSTICAL CEILING
AWCS-#	ACOUSTICAL WALL OR CEILING SYSTEM
BR-#	BRICK
CHW-#	CABINET HARDWARE
CONC-#	CONCRETE
CORK-#	CORK
CPT-#	CARPET
CTP-#	COUNTERTOP
EP-#	EPOXY PAINT
F-#	FABRIC
FAF-#	FLUID-APPLIED FLOORING
FRP-#	FIBERGLAS REINFORCED PLASTIC PANELING
GL-#	GLAZING
GLF-#	GLAZING FILM
HPC-#	HIGH-PERFORMANCE COATING
MIR-#	MIRROR
MTL-#	METAL
MTLB-#	METAL BASE
MTLC-#	METAL CEILING
MTLP-#	METAL PANELING
P-#	PAINT
PL-#	PLASTIC LAMINATE
RAF-#	RESILIENT ATHLETIC FLOORING
RB-#	RESILIENT BASE
RF-#	RESILIENT FLOORING
SS-#	STAINLESS STEEL
SSF-#	SIMULATED STONE FABRICATIONS
ST-#	STONE CLADDING
STN-#	STAIN
T-#	TILE
TF-#	THERMOFOIL
TZ-#	TERRAZZO
VDB-#	VISUAL DISPLAY BOARD
VP-#	VENEER PLASTERING
WCV-#	WALL COVERING
WD-#	WOOD
WDB-#	WOOD BASE
WDC-#	WOOD CEILING
WDF-#	WOOD FLOORING
WDP-#	WOOD PANELING
WOM-#	WALK OFF MAT
WP-#	WALL PROTECTION
WT-#	WINDOW TREATMENT

ABBREVIATIONS

---	NONE
&	AND
@	AT
±	APPROXIMATELY
CL	CENTERLINE
Ø	DIAMETER
#	NUMBER
"	INCH(ES)
'	FOOT (FEET)
ACSF	ACCESS FLOORING
ADJ	ADJACENT
AFF	ABOVE FINISH FLOOR
AHJ	AUTHORITY HAVING JURISDICTION
BO	BOTTOM OF
BOB	BOTTOM OF BEAM
BOT	BOTTOM
BOS	BOTTOM OF STEEL
CODE	APPLICABLE REGULATIONS GOVERNING CONTRACT SCOPE OF WORK, SEE CODE COMPLIANCE SUMMARY SHEETS
CJ	CONTROL JOINT
CLG	CEILING
CLR	CLEAR
CMU	CONCRETE MASONRY UNIT
CO	CLEAN OUT
DS	DOWN SPOUT
DW	DISHWASHER
DWG	DRAWING
(E)	EXIST(ING)
EJ	EXPANSION JOINT
EQ	EQUAL
EXP	EXPOSED STRUCTURE
FD	FLOOR DRAIN
FE	FIRE EXTINGUISHER
FEC	FIRE EXTINGUISHER CABINET
FF EL	FINISH FLOOR ELEV
FO	FACE OF
FOB	FACE OF BEAM
FOC	FACE OF CONCRETE
FOF	FACE OF FINISH
FOM	FACE OF MASONRY
FOS	FACE OF STUD
FOW	FACE OF WALL
GA	GAUGE
GB	GYPSUM BOARD
GALV	GALVANIZED
HB	HOSE BIB
HS	HEAT STRENGTHENED
ID	INSIDE DIAMETER
MAX	MAXIMUM
MH	MANHOLE
MIN	MINIMUM
MO	MASONRY OPENING
MTL	MATERIAL
MW	MICROWAVE
NIC	NOT IN CONTRACT
NTS	NOT TO SCALE
OAE	OR APPROVED EQUAL
OC	ON CENTER
OD	OUTSIDE DIAMETER
OFD	OVERFLOW DRAIN
OF/CI	OWNER FURNISHED, CONTRACTOR INSTALLED
OF/OI	OWNER FURNISHED, OWNER INSTALLED
OPH	OPPOSITE HAND
PFN	PREFINISHED (ALTERNATE PREFIN)
PLAS	PLASTER
RCP	REFLECTED CEILING PLAN
RD	ROOF DRAIN
REF	REFRIGERATOR
RO	ROUGH OPENING
ROW	RIGHT OF WAY
SF	SQUARE FOOT (FEET)
SHTHG	SHEATHING
SIM	SIMILAR
SST	STAINLESS STEEL (BASE, WALL PANEL, OR COVERING)
STN	STAIN
T	TEMPERED
TO	TOP OF
TOB	TOP OF BEAM
TOC	TOP OF CONCRETE
TOD	TOP OF STEEL DECK
TOP	TOP OF PARAPET
TOS	TOP OF STEEL
TOW	TOP OF WALL
T/M	TO MATCH
TYP	TYPICAL
UNO	UNLESS NOTED OTHERWISE
VIF	VERIFY IN FIELD

VICINITY MAP

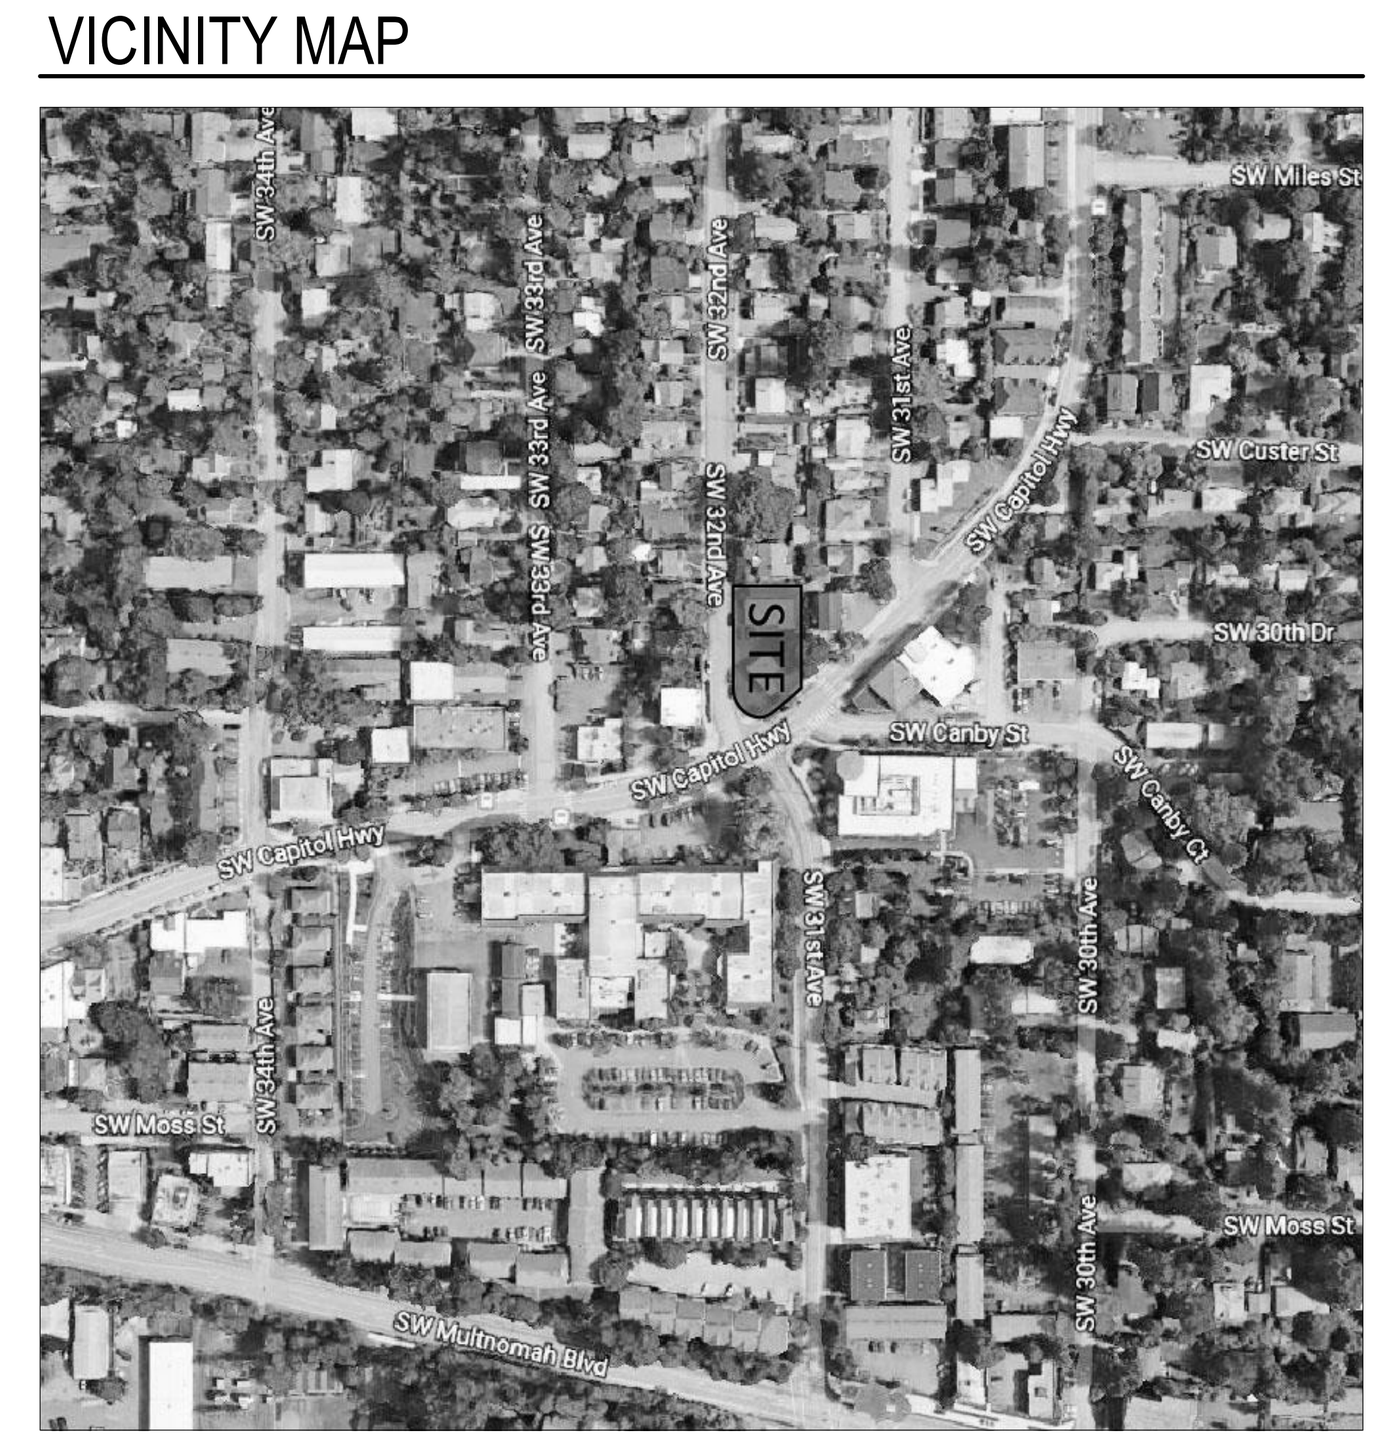

GENERAL NOTES

A. FIELD VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS PRIOR TO PROCEEDING WITH THE WORK.

B. DIMENSIONS TAKE PRECEDENCE OVER DRAWINGS. DO NOT SCALE DRAWINGS. NOTIFY ARCHITECT OF DISCREPANCIES PRIOR TO PROCEEDING WITH THE WORK.

C. CONTRACTOR IS SOLELY RESPONSIBLE FOR CONSTRUCTION MEANS AND METHODS AND SHALL MAINTAIN THE STRUCTURAL INTEGRITY OF CONSTRUCTION UNTIL FINAL LATERAL AND VERTICAL CARRYING SYSTEMS ARE COMPLETED.

D. DIMENSIONS SHOWN ARE TO FACE OF STUD, FACE OF CONCRETE, FACE OF MASONRY, GRID/COLUMN LINE, CENTER OF ELEMENT, COUNTERTOP EDGE, OR AS NOTED.

E. CONTRACTOR IS RESPONSIBLE FOR VERIFICATION AND COORDINATION OF SUBCONTRACTORS WORK, COMPLIANCE WITH DRAWINGS AND SPECIFICATIONS, ACCURATE LOCATION OF STRUCTURAL MEMBERS, OPENINGS FOR MECHANICAL, ELECTRICAL, AND MISCELLANEOUS EQUIPMENT. CONTRACTOR SHALL VERIFY DIMENSIONS AND OPENING SIZES (CLEARANCES REQUIRED) FROM THE MANUFACTURERS PRIOR TO CONSTRUCTION OF OR INSTALLATION OF EQUIPMENT, FURNISHINGS, AND ACCESSORIES.

F. DETAILS NOTED AS "TYPICAL" OR "TYP" APPLY IN ALL CASES UNLESS SPECIFICALLY REFERENCED. DETAILS THAT ARE SPECIFICALLY REFERENCED SHALL TAKE PRECEDENCE OVER DETAILS NOTED AS "TYPICAL" OR "TYP". SPECIFIC NOTES AND DETAILS SHALL TAKE PRECEDENCE OVER GENERAL NOTES AND DETAILS.

G. CONTRACTOR IS RESPONSIBLE FOR THE COMPLETE SECURITY OF THE SITE WHILE THE PROJECT IS IN PROGRESS UNTIL PROJECT COMPLETION.

H. LOCATE EXISTING UTILITIES WHETHER INDICATED OR NOT AND PROTECT FROM DAMAGE. CONTRACTOR SHALL BEAR REPAIR OR REPLACEMENT EXPENSES OF UTILITIES OR OTHER PROPERTY DAMAGED BY OPERATIONS IN CONJUNCTION WITH THE PROSECUTION OF THE WORK.

I. PROVIDE ACCESS PANELS AS REQUIRED. LOCATION, FINISH, AND TYPE SHALL BE APPROVED BY ARCHITECT PRIOR TO OBTAINING AND INSTALLING. ACCESS PANEL LOCATIONS NOT APPROVED BY ARCHITECT WILL BE SUBJECT TO MODIFICATION AT NO ADDITIONAL COST. PROVIDE RATED ACCESS PANELS WITH THE SAME RATING AS THE ASSEMBLY IN WHICH THEY ARE INSTALLED. ACCESS PANELS IN SHAFT WALLS, RATED FLOOR/CEILINGS OR RATED ROOF/CEILINGS SHALL BE SMOKE SEALED.

J. TEMPORARY PEDESTRIAN PROTECTION SHALL BE PROVIDED AS REQUIRED BY THE AUTHORITY HAVING JURISDICTION STANDARDS.

K. ALL PENETRATIONS THROUGH RATED ASSEMBLIES SHALL BE FIRE STOPPED PER SPECIFICATION SECTION 07 84 00 - FIRESTOPPING AND THE AUTHORITY HAVING JURISDICTION'S REQUIREMENTS. RATED ASSEMBLIES SHALL BE CONSTRUCTED TO PREVENT THE MOVEMENT OF HOT FLAME OR GASES PER OSSC SECTION 709.6.

L. ALL SAFETY GLAZING SHALL BE PERMANANTLY LABELED WITH THE MANUFACTURERS NAME AND TEST APPROVAL INFORMATION.

M. CONTRACTOR IS RESPONSIBLE FOR TRADE PERMITS, INCLUDING, BUT NOT LIMITED TO MECHANICAL, ELECTRICAL AND EXTERIOR SIGNAGE. REFERENCE DEFERRED PERMITS SUMMARY ON THIS SHEET.

N. PROVIDE BACKING, BLOCKING, OR STRAPPING AS REQUIRED FOR MOUNTING GRAB BARS, SHELVING, EQUIPMENT, HANDRAILS, ACCESSORIES, AND CASEWORK.

O. PROPOSED BUILDING FF EL OF 497.12' AS SHOWN ON THE CIVIL DRAWINGS IS EQUAL TO 100'-0" ON ALL OTHER DOCUMENTS.

P. THE CONSTRUCTION SHALL NOT RESTRICT A FIVE-FOOT CLEAR AND UNOBSTRUCTED ACCESS TO ANY WATER OR POWER FACILITIES (POWER POLES, PULL-BOXES, TRANSFORMERS, VAULTS, PUMPS, VALVES, METERS, APPURTENANCES, ETC.) OR TO THE LOCATION OF HOOK-UP. THE CONSTRUCTION SHALL NOT BE WITHIN TEN FEET OF ANY POWER LINES - WHETHER OR NOT THE LINES ARE LOCATED ON THE PROPERTY. FAILURE TO COMPLY MAY CAUSE CONSTRUCTION DELAYS AND/OR ADDITIONAL EXPENSES.

Q. CONTRACTOR SHALL SCHEDULE A FIRESTOPPING PRE-INSTALLATION MEETING WITH THE SUB-CONTRACTORS AND BUILDING INSPECTOR.

R. CONTRACTOR SHALL PROVIDE LIST OF THE FIRESTOP MATERIALS/ASSEMBLIES TO BE USED, THEIR RESPECTIVE PENETRATION TYPES/LOCATIONS, AND UL AND/OR ICC REPORTS/LISTING NUMBERS TO THE BUILDING INSPECTOR FOR REVIEW AND APPROVAL.

S. SMOKE AND FIRE DAMPERS SHALL BE INSTALLED PER 2014 OSSC SECTION 717.

T. MECHANICAL EXHAUST OF BATHROOMS AND LAUNDRY FACILITIES IS REQUIRED. AIR CHANGES AND DISTANCE OF DISCHARGE FROM OPERABLE OPENINGS SHALL BE COMPLIANT WITH OSSC 2014 SECTION 1203.

U. AN APPROVED GAS SHUT-OFF VALVE SHALL BE INSTALLED ON THE FUEL GAS LINE ON THE DOWNSTREAM SIDE OF THE UTILITY METER AND BE RIGIDLY CONNECTED TO THE EXTERIOR OF THE BUILDING OR STRUCTURE CONTAINING THE FUEL GAS PIPING.

V. THIS BUILDING MUST BE EQUIPPED WITH AN AUTOMATIC FIRE EXTINGUISHING SYSTEM COMPLYING WITH NFPA-13.

W. SPRINKLER SYSTEMS ARE TO BE APPROVED BY THE FIRE MARSHALL'S OFFICE PRIOR TO INSTALLATION.

X. REFERENCE SPECIFICATION SECTION 01 33 16 FOR ADDITIONAL INFORMATION. FIRE SPRINKLER AND FIRE ALARM SYSTEMS PERMITTED SEPARATELY.

Y. SEE SHEET S002 FOR ALL REQUIRED SPECIAL INSPECTIONS.

Z. ANTI-GRAFFITI COATINGS ARE REQUIRED AT THE GROUND LEVEL WHERE CONCRETE OR MASONRY FINISHES ARE USED. REFERENCE THE SPECIFICATION SECTION 07 19 00.

SHEET INDEX

Sheet Number	Sheet Name	SD	DD	PERMIT	GMP	Issue 5	Issue 6
GENERAL							
G001	COVER SHEET	■	■	■	■		
G002	GENERAL INFORMATION	■	■	■	■		
G003	CODE COMPLIANCE SUMMARY	■	■	■	■		
G004	CODE COMPLIANCE	■	■	■	■		
G005	CODE COMPLIANCE	■	■	■	■		
G006	APPEALS AND CODE DIAGRAMS			■	■		
G301	CODE - ELEVATIONS	■	■	■	■		
G801	ACCESSIBILITY DIAGRAMS	■	■	■	■		
G802	ACCESSIBILITY DIAGRAMS	■	■	■	■		
CIVIL							
C000	CIVIL NOTES	■	■	■	■		
C050	DEMOLITION & EROSION CONTROL PLAN	■	■	■	■		
C100	GRADING AND PAVING PLAN	■	■	■	■		
C200	UTILITY PLAN	■	■	■	■		
C300	CIVIL DETAILS	■	■	■	■		
C400	PWP - COVER SHEET		■		■		
C401	PWP - TYP. STREET SECTIONS		■		■		
C402	PWP - SW CAPITOL HWY PLAN AND PROFILE		■		■		
C403	PWP - SW 32ND AVE PLAN AND PROFILE		■		■		
C404	PWP - ENLARGED PLAN AND PROFILE				■		
C405	PWP - ENLARGED PLAN AND PROFILE				■		
C406	PWP - STANDARD DETAILS				■		
C407	PWP - STANDARD DETAILS				■		
C408	PWP - EROSION CONTROL PLAN				■		
LANDSCAPE							
L101	LANDSCAPE PLAN	■	■	■	■		
L104	LEVEL 4 LANDSCAPE PLAN	■	■	■	■		
L201	CONSTRUCTION DETAILS	■	■	■	■		
L202	PLANTING DETAILS	■	■	■	■		
L301	IRRIGATION PLAN		■	■	■		
L304	LEVEL 4 IRRIGATION PLAN		■	■	■		
L401	IRRIGATION DETAILS	■	■	■	■		
ARCHITECTURE							
A001	HORIZONTAL ASSEMBLIES	■	■	■	■		
A002	VERTICAL INTERIOR ASSEMBLIES, METAL+CONC	■	■	■	■		
A003	VERTICAL INTERIOR ASSEMBLIES - WOOD	■	■	■	■		
A004	VERTICAL ASSEMBLIES - EXTERIOR	■	■	■	■		
A021	TYPICAL RATED CONDITIONS	■	■	■	■		

SHEET INDEX

Sheet Number	Sheet Name	SD	DD	PERMIT	GMP	Issue 5	Issue 6
A050	EXISTING CONDITIONS	■	■	■	■		
A051	SITE PLAN	■	■	■	■		
A101	FLOOR PLAN - LEVEL 1	■	■	■	■		
A101S	SLAB PLAN - LEVEL 1		■	■	■		
A102	FLOOR PLAN - LEVEL 2	■	■	■	■		
A102S	SLAB PLAN - LEVEL 2		■	■	■		
A103	FLOOR PLAN - LEVEL 3	■	■	■	■		
A104	FLOOR PLAN - LEVEL 4	■	■	■	■		
A105	ROOF PLAN	■	■	■	■		
A151A	ENLARGED PLAN	■	■	■	■		
A151B	ENLARGED PLAN	■	■	■	■		
A152A	ENLARGED PLAN	■	■	■	■		
A152B	ENLARGED PLAN	■	■	■	■		
A153A	ENLARGED PLAN	■	■	■	■		
A153B	ENLARGED PLAN	■	■	■	■		
A154A	ENLARGED PLAN	■	■	■	■		
A154B	ENLARGED PLAN	■	■	■	■		
A201	REFLECTED CEILING PLAN - LEVEL 1		■	■	■		
A202	REFLECTED CEILING PLAN - LEVEL 2		■	■	■		
A203	REFLECTED CEILING PLAN - LEVEL 3		■	■	■		
A204	REFLECTED CEILING PLAN - LEVEL 4		■	■	■		
A301	BUILDING ELEVATIONS	■	■	■	■		
A302	BUILDING ELEVATIONS	■	■	■	■		
A401	BUILDING SECTIONS	■	■	■	■		
A451	WALL SECTIONS		■	■	■		
A452	WALL SECTIONS		■	■	■		
A453	WALL SECTIONS			■	■		
A501	VERTICAL CIRCULATION - ELEVATOR		■	■	■		
A502	VERTICAL CIRCULATION - NORTH STAIR		■	■	■		
A503	VERTICAL CIRCULATION - DETAILS		■	■	■		
A601	INTERIOR ELEVATIONS		■	■	■		
A602	INTERIOR ELEVATIONS - KITCHENS		■	■	■		
A611	INTERIOR ELEVATIONS - BATHROOMS		■	■	■		
A701	EXTERIOR DETAILS - GRADE			■	■		
A702	EXTERIOR DETAILS - GRADE			■	■		
A705	EXTERIOR DETAILS - BRICK & MISC			■	■		
A710	EXTERIOR DETAILS - STOREFRONT			■	■		
A711	EXTERIOR DETAILS - STOREFRONT			■	■		
A712	EXTERIOR DETAILS - ROUNDED CORNER			■	■		
A713	EXTERIOR DETAILS - CANOPIES			■	■		
A714	EXTERIOR DETAILS - SOFFIT			■	■		
A716	EXTERIOR DETAILS - STUCCO			■	■		
A719	EXTERIOR DETAILS - STUCCO			■	■		
A720	EXTERIOR DETAILS - VINYL WINDOWS		■	■	■		
A722	EXTERIOR DETAILS - PTHP			■	■		
A740	EXTERIOR DETAILS - ROOF		■	■	■		
A741	EXTERIOR DETAILS - ROOF		■	■	■		
A742	EXTERIOR DETAILS - ROOF TERRACE			■	■		
A743	EXTERIOR DETAILS - ROOF TERRACE			■	■		
A750	WINDOW WRAP SEQUENCE			■	■		
A751	PROJECT MOCKUP				■		
A801	INTERIOR DETAILS - FLOOR TRANSITIONS		■	■	■		
A802	INTERIOR DETAILS - UNIT CASEWORK		■	■	■		
A803	INTERIOR DETAILS - LOBBY & UNIT			■	■		
A804	INTERIOR DETAILS - WALLS & CEILINGS			■	■		
A805	INTERIOR DETAILS - DOORS			■	■		
A901	WINDOW SCHEDULE		■	■	■		
A902	DOOR AND OPENING SCHEDULES		■	■	■		
A921	ROOM FINISH SCHEDULE			■	■		
STRUCTURAL							
S000	COVER SHEET		■	■	■		
S001A	GENERAL STRUCTURAL NOTES		■	■	■		
S001B	GENERAL STRUCTURAL NOTES		■	■	■		
S002	SPECIAL INSPECTION		■	■	■		
S003	SCHEDULES			■	■		
S101	FOUNDATION PLAN	■	■	■	■		
S102A	2ND FLOOR TENDON PLAN	■	■	■	■		
S102B	2ND FLOOR REBAR PLAN		■	■	■		
S102C	2ND FLOOR SHEAR WALLS			■	■		
S103	3RD FLOOR FRAMING PLAN	■	■	■	■		
S104	4TH FLOOR FRAMING PLAN	■	■	■	■		
S105	ROOF FRAMING PLAN	■	■	■	■		
S301	VERTICAL CIRCULATION			■	■		
S302	STAIR DETAILS			■	■		
S303	ELEVATOR SECTION, PLANS & DETAILS			■	■		
S304	EXTERIOR BUILDING ELEVATIONS			■	■		
S400	CANOPY PLAN			■	■		
S401	CANOPY DETAILS			■	■		
S501	FOUNDATION DETAILS		■	■	■		
S502	FOUNDATION DETAILS			■	■		
S601	PT PODIUM DETAILS		■	■	■		
S602	PT PODIUM DETAILS		■	■	■		
S603	PT PODIUM DETAILS			■	■		
S611	FLOOR FRAMING DETAILS		■	■	■		
S612	FLOOR FRAMING DETAILS		■	■	■		
S701	ROOF FRAMING DETAILS		■	■	■		
S801	STANDARD SHEAR WALL DETAILS		■	■	■		
MECHANICAL							
M101	HVAC PLAN - LEVEL 1		■	■	■		
M102	HVAC PLAN - LEVEL 2		■	■	■		
M103	HVAC PLAN - LEVEL 3		■	■	■		
M104	HVAC PLAN - LEVEL 4		■	■	■		
M105	HVAC PLAN - LEVEL 5		■	■	■		
M600	HVAC SCHEDULES		■	■	■		
M601	HVAC DETAILS		■	■	■		
M602	HVAC DETAILS		■	■	■		
PLUMBING							
P001	PLUMBING LEGEND AND SCHEDULES		■	■	■		
P002	PLUMBING WATER DIAGRAMS		■	■	■		
P003	PLUMBING WASTE/VENT DIAGRAMS		■	■	■		
P100	PLUMBING FLOOR PLAN - BELOW SLAB		■	■	■		
P101	PLUMBING FLOOR PLAN - LEVEL 1		■	■	■		
P102	PLUMBING FLOOR PLAN - LEVEL 2		■	■	■		
P103	PLUMBING FLOOR PLAN - LEVEL 3		■	■	■		
P104	PLUMBING FLOOR PLAN - LEVEL 4		■	■	■		
P105	PLUMBING FLOOR PLAN - LEVEL 5		■	■	■		
G100	GAS SCHEDULES				■		
G101	GAS - LEVEL 1				■		
G102	GAS - LEVEL 2				■		
G103	GAS - LEVEL 3				■		
G104	GAS - LEVEL 4				■		
G105	GAS - LEVEL 5				■		
ELECTRICAL							
E001	COVER SHEET - ELECTRICAL		■	■	■		
E051	SITE PLAN - ELECTRICAL			■	■		
E101	LEVEL 1 FLOOR PLAN - POWER		■	■	■		
E102	LEVEL 2 FLOOR PLAN - POWER		■	■	■		
E103	LEVEL 3 FLOOR PLAN - POWER		■	■	■		
E104	LEVEL 4 FLOOR PLAN - POWER		■	■	■		
E105	LEVEL 5 FLOOR PLAN - POWER		■	■	■		
E301	DETAILS - ELECTRICAL		■	■	■		
E401	ENLARGED UNIT PLANS - ELECTRICAL		■	■	■		
E402	ENLARGED UNIT PLANS - ELECTRICAL		■	■	■		
E403	ENLARGED UNIT PLANS - ELECTRICAL		■	■	■		
E501	ONE-LINE DIAGRAM - ELECTRICAL		■	■	■		
E502	SCHEDULES - ELECTRICAL		■	■	■		
E503	CALCULATIONS - ELECTRICAL		■	■	■		
TECHNOLOGY							
T001	COVER SHEET - TECHNOLOGY			■	■		
T101	LEVEL 1 - TECHNOLOGY			■	■		
T102	LEVEL 2 - TECHNOLOGY			■	■		
T103	LEVEL 3 - TECHNOLOGY			■	■		
T104	LEVEL 4 - TECHNOLOGY			■	■		
T501	DIAGRAM - TECHNOLOGY			■	■		
FIRE PROTECTION							
FP001	SITE PLAN			■	■		
FP002	FIRST AND SECOND FLOOR PLANS			■	■		
FP003	THIRD AND FOURTH FLOOR PLANS			■	■		
FP004	ATTIC AND SECTION			■	■		

SERA

ARCHITECTURE
URBAN DESIGN + PLANNING
INTERIOR DESIGN

PORTLAND OREGON 97209
P: 503.445.7372
F: 503.445.7395
SERADESIGN.COM

REGISTERED ARCHITECT
3680
KURT K. SCHULTZ
PORTLAND, OR
STATE OF OREGON

MULTNOMAH STATION APARTMENTS

MULTNOMAH STATION, LLC
SW 32nd & CAPITOL HWY
PORTLAND, OR 97219

REVISIONS

1	City Comments	05/14/2018
5	City Comments	7/13/2018

CHECKED BY:
ISSUE DATE: JULY 13, 2018
PROJECT NO.: 1703050

GENERAL INFORMATION

G002

GMP SET

SERA Design and Architecture, Inc.