

FRAMING PLAN LEGEND:

A = ## K	AXIAL LOAD IN BEAM FOR CONNECTION DESIGN
M = ## K-FT	MOMENT LOAD IN BEAM FOR CONNECTION DESIGN
	MOMENT CONNECTION
	CANTILEVER MOMENT CONNECTION
	DIRECTION OF DECK SPAN
EOA	EDGE OF ANGLE
	COMPOSITE DECK OPENING, SEE DETAILS A1/S-505 AND B1/S-505
	CMU WALL

FRAMING PLAN NOTES:

- SEE SHEETS S-001 AND S-002 FOR GENERAL STRUCTURAL NOTES, BEAM LEGEND, AND ABBREVIATION KEY.
- SEE SHEET S-505 & S-506 FOR TYPICAL STEEL DETAILS.
- SEE NOTE D ON S-001 FOR DELEGATED CONNECTION DESIGN REQUIREMENTS.
- ALL CONNECTION DESIGN LOADS ARE SERVICE (ASD) LOADS.
- 2ND FLOOR TOP OF CONCRETE FLOOR ELEVATION = 12'-0 1/2", UNLESS NOTED OTHERWISE
- COMPOSITE METAL DECK SHALL BE 2" THICK WITH 2 1/2" NORMAL WEIGHT CONCRETE FOR A TOTAL SLAB DECK THICKNESS OF 4 1/2". REINFORCE WITH 6x6 W2.9xW2.9 WELDED WIRE REINFORCEMENT PLACED 1" BELOW TOP OF DECK. REFER TO GENERAL NOTE G ON SHEET S-002 FOR ADDITIONAL DECK REQUIREMENTS.
- PROVIDE #4 x 4'-0" LONG BARS SPACED AT 24" ON-CENTER AT 3/4" BELOW TOP OF DECK CENTERED OVER ALL GIRDERS.
- FOR ADDITIONAL REINFORCEMENT AT RE-ENTRANT CORNERS, SEE DETAIL B3/S-501
- BEAMS SHALL BE EQUALLY SPACED BETWEEN COLUMN LINES, UNLESS NOTED OTHERWISE.
- JOIST TOP CHORD EXTENSIONS SHALL BE TYPE "R" W/ END DEPTH OVER THE ENTIRE EXTENDED LENGTH, SEE A2/S-304



3500 Parkway Lane
Suite 500
Peachtree Corners
Georgia 30092

Copyright © 2023 by Pond & Company. All rights reserved. No copying or duplication of these documents is allowed without the expressed written agreement of Pond & Company.

EOR/AOR SEAL

100% DESIGN
SUBMITTAL - NOT FOR
CONSTRUCTION

CLIENT INFORMATION

CITY OF PORT
WENTWORTH

PROJECT NAME

PORT
WENTWORTH
FIRESTATION



DRAWING ISSUE

DATE

DESCRIPTION

MARK

DESIGNED BY: MJF
DRAWN BY: MJF
CHECKED BY: RGN
SUBMITTED BY: MM
DATE: 9/08/2023
PROJECT #: 1230237


SHEET TITLE

SECOND LEVEL +
APPARATUS
ROOF FRAMING
PLAN

SHEET NUMBER


S-120

ORIGINAL SHEET SIZE:
22" X 34"

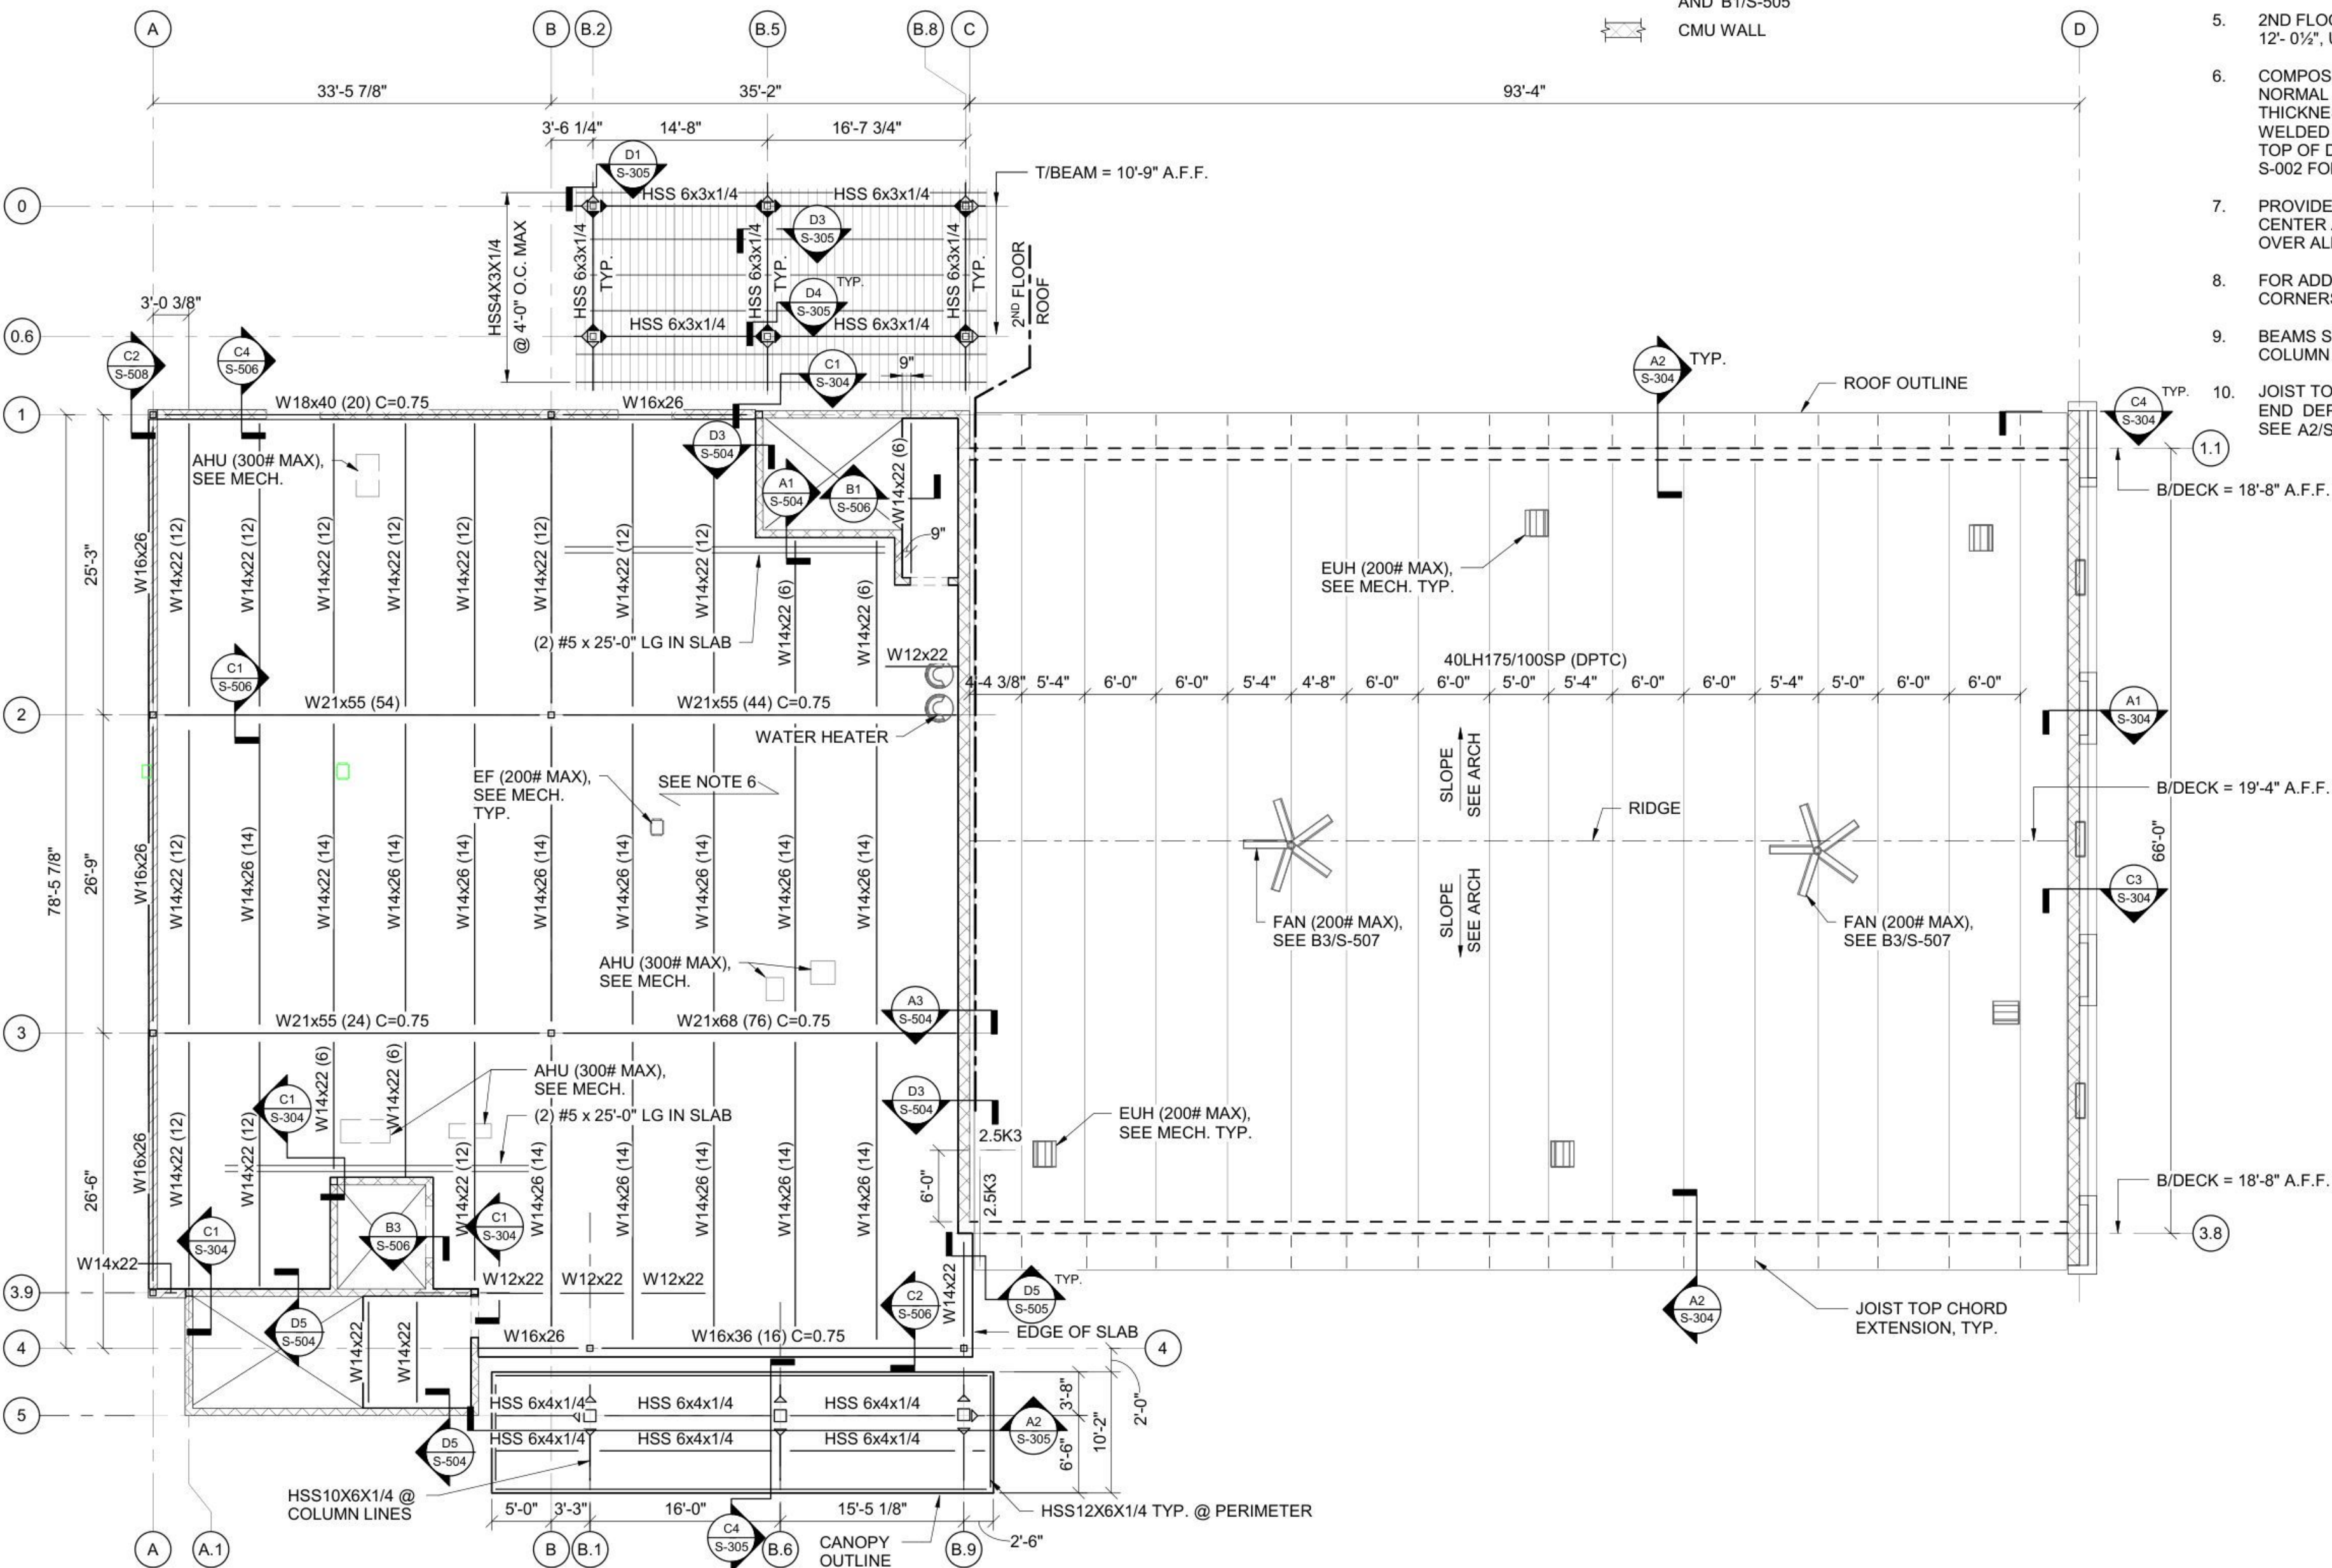

A1 2ND FLOOR & APPARATUS ROOF FRAMING PLAN

SCALE: 1/8" = 1'-0"

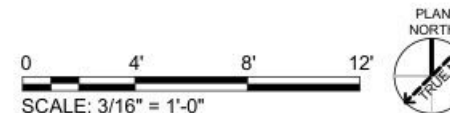

100% DESIGN SUBMITTAL - NOT FOR CONSTRUCTION