TUCKER-JONES
ENGINEERS ASSOCIATED, P.C.
3300 CAHABA ROAD, SUITE 210
BIRMINGHAM, ALABAMA 35223
PHONE: 205.879.5660
FAX: 205.879.5606
PROJECT #22076

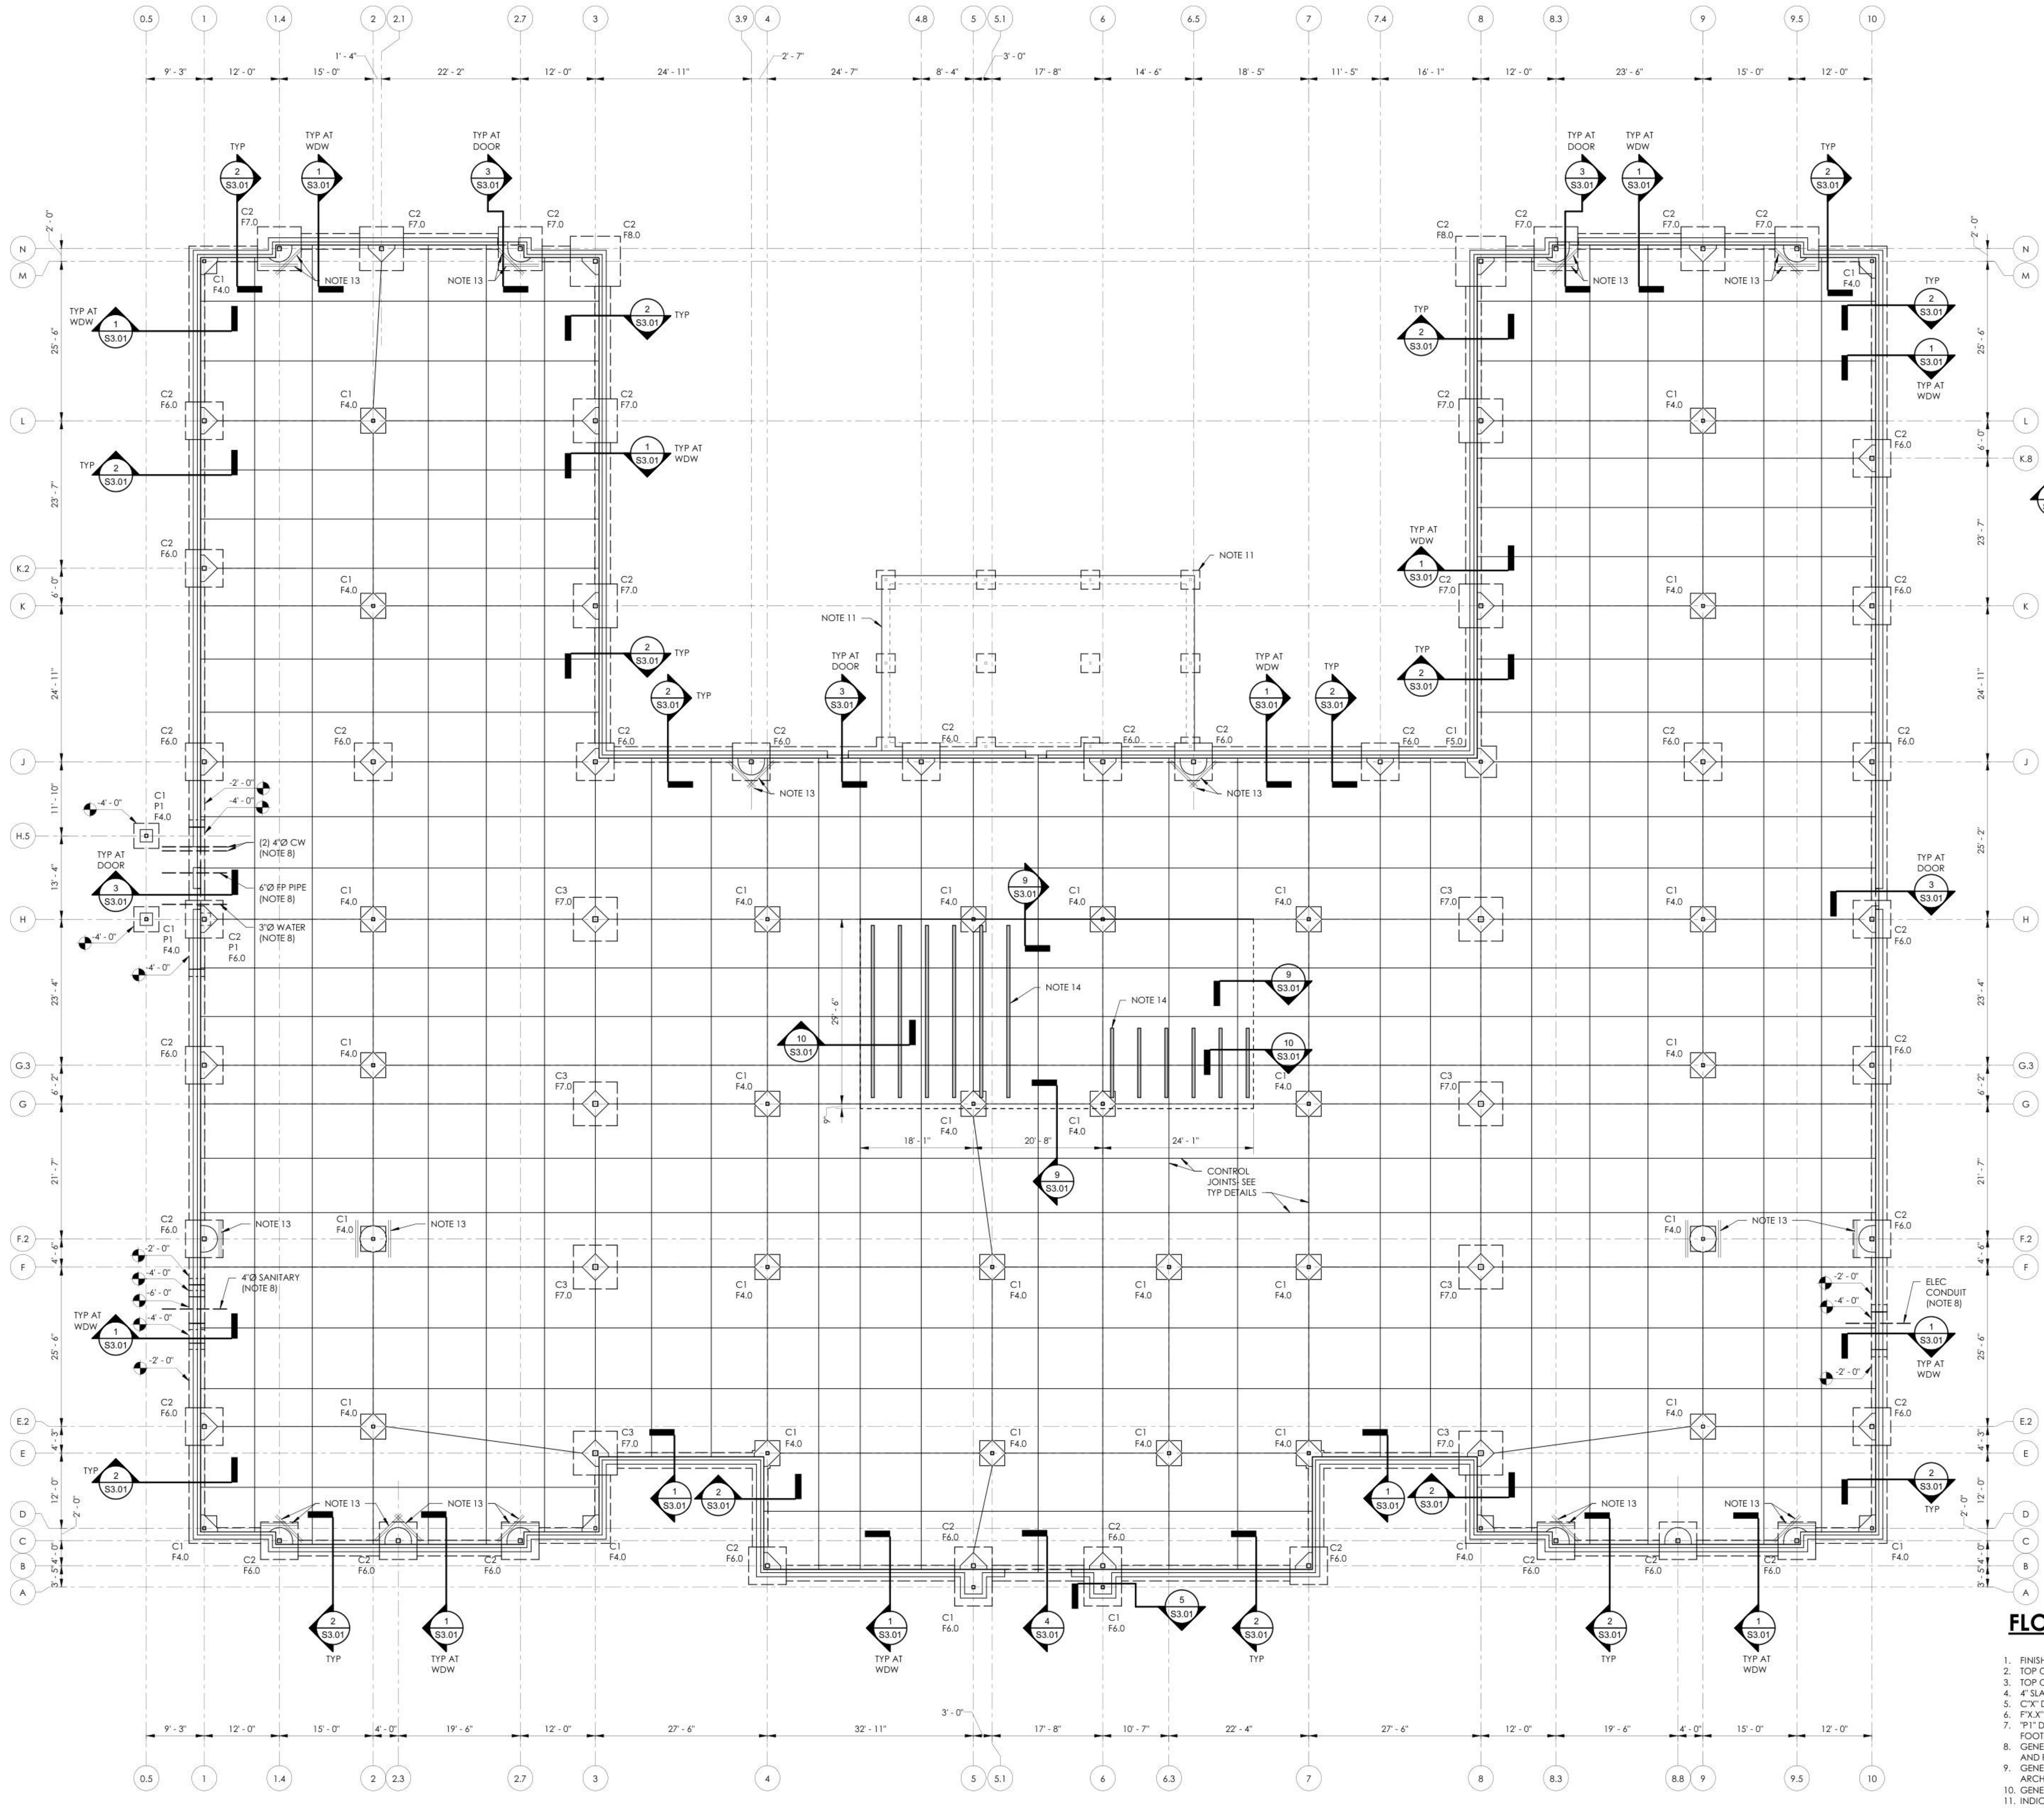

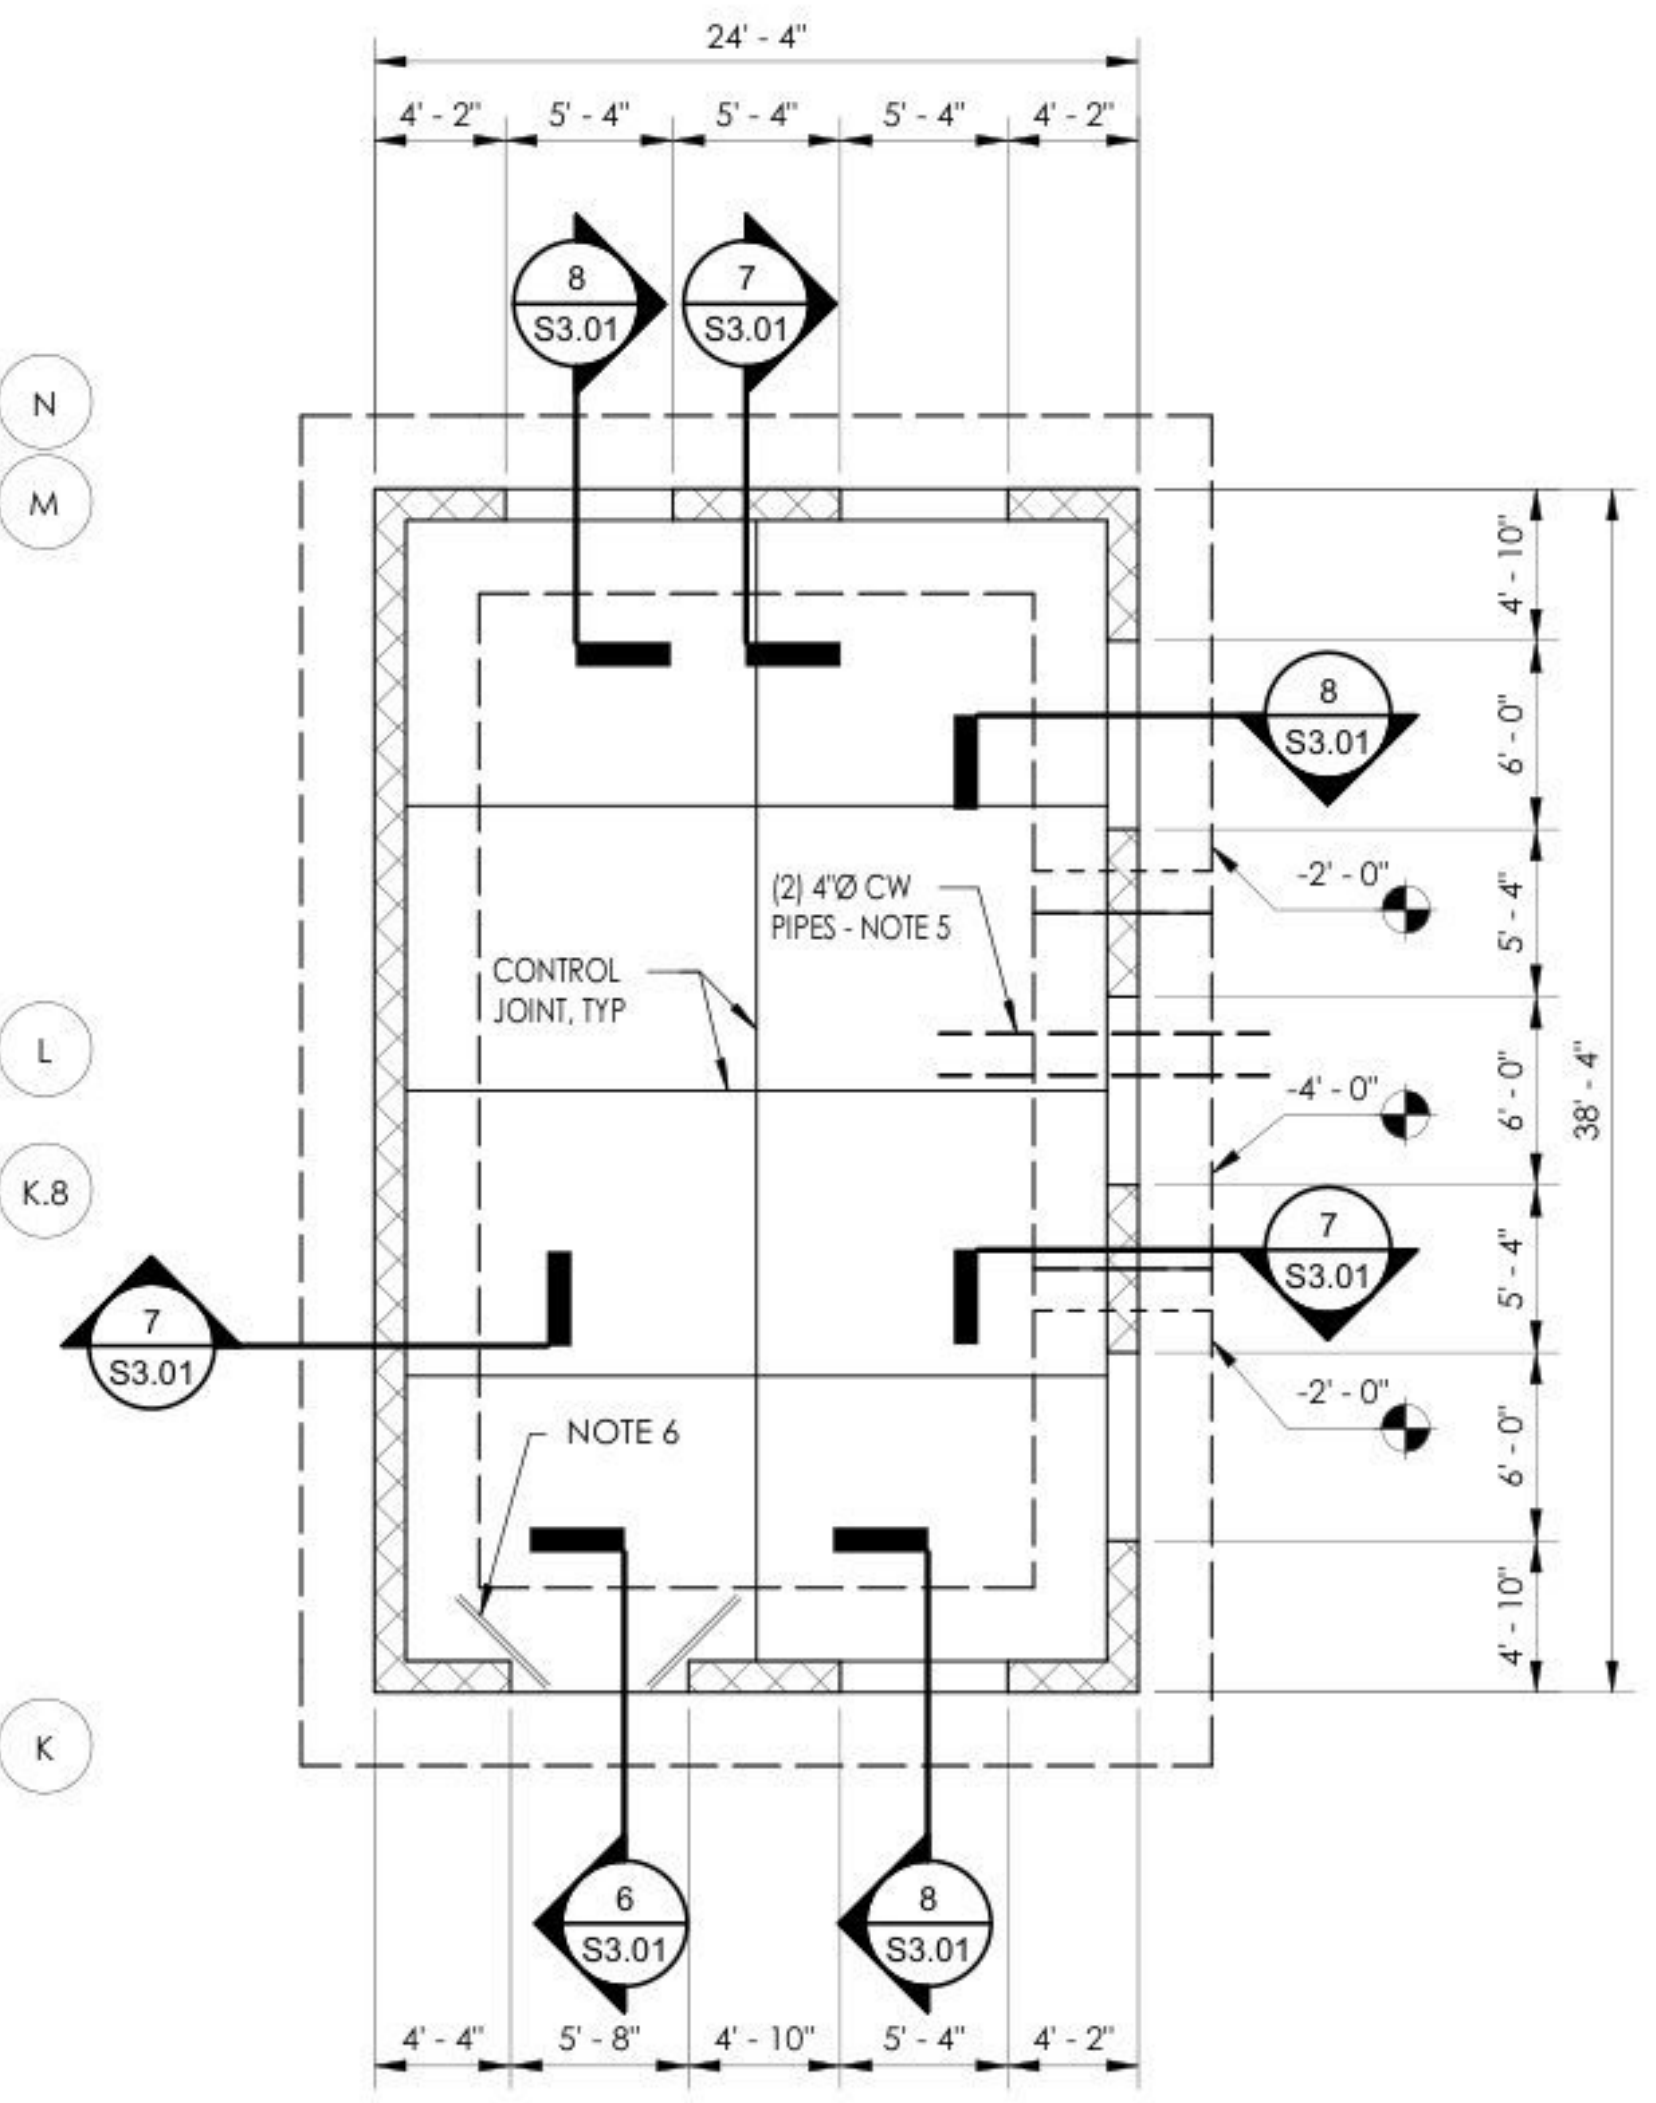

MECHANICAL ENCLOSURE FLOOR AND FOUNDATION PLAN

SCALE: 1/8" = 1'-0"

PROJECT NORTH

1. FINISH FLOOR (TOP OF SLAB) ELEVATION 0'-0", COORDINATE ACTUAL ELEVATION LEVEL WITH CIVIL DRAWINGS.
2. TOP OF FOOTING ELEVATION -2'-0" BELOW FINISH FLOOR, UNLESS NOTED.
3. SEE CIVIL, ARCHITECTURAL, AND MECHANICAL DRAWINGS FOR LOCATION AND PLAN ORIENTATION ON SITE.
4. PROVIDE 12" THICK SLAB ON GRADE REINFORCED WITH #5@16" EACH WAY, TOP AND BOTTOM. SEE PLAN FOR SLAB CONTROL JOINTS (10'-0" MAXIMUM SPACING FOR CONTROL JOINTS). SEE GENERAL NOTES AND TYPICAL DETAILS.
5. GENERAL CONTRACTOR COORDINATE LOCATION OF ALL FOOTING STEPS WITH CIVIL, UTILITY AND PLUMBING DRAWINGS.
6. PROVIDE 2#5 X 4'-0" LONG AT CORNER OF DOOR OPENING. PLACE IN TOP THIRD OF SLAB DEPTH.

FLOOR AND FOUNDATION PLAN

SCALE: 3/32" = 1'-0"

PROJECT NORTH

1. FINISH FLOOR (TOP OF SLAB) ELEVATION 0'-0", UNLESS NOTED.
2. TOP OF INTERIOR FOOTING ELEVATION -2'-0" BELOW FINISH FLOOR, UNLESS NOTED.
3. TOP OF EXTERIOR FOOTING ELEVATION -2'-0" BELOW FINISH FLOOR, UNLESS NOTED.
4. 4" SLAB ON GRADE, UNLESS NOTED. SEE GENERAL NOTES AND TYPICAL DETAILS.
5. C"X" DENOTES COLUMN. SEE COLUMN SCHEDULE ON SHEET S1.04.
6. F"X.X" DENOTES COLUMN FOOTING. SEE FOOTING SCHEDULE ON SHEET S1.04.
7. "P1" DENOTES COLUMN PEDESTAL. SEE "TYPICAL COLUMN BASE PLATE, PEDESTAL AND FOOTING DETAIL ON SHEET S1.04.
8. GENERAL CONTRACTOR COORDINATE LOCATION OF ALL FOOTING STEPS WITH CIVIL, UTILITY AND PLUMBING DRAWINGS.
9. GENERAL CONTRACTOR COORDINATE FLOOR DEPRESSION DEPTH, SIZE AND LOCATION WITH ARCHITECTURAL DRAWINGS.
10. GENERAL CONTRACTOR COORDINATE LOCATION OF TILE JOINTS WITH CONTROL JOINTS.
11. INDICATES METAL CANOPY COLUMN AT PATIO AREA, SEE ARCHITECTURAL DRAWINGS FOR LOCATION OF PRE-FABRICATED METAL CANOPY COLUMNS. SEE "TYPICAL ALUMINIUM CANOPY COLUMN FOOTING DETAIL" ON SHEET S1.03 FOR FOOTING AND SLAB REINFORCING.
12. PROVIDE SLAB CONTROL JOINTS AT 12'-0" MAX SPACING IN EACH DIRECTION.
13. PROVIDE 2#4 X6'-0" LONG RE-ENTRANT REINFORCEMENT IN TOP OF SLAB. PROVIDE 2" CLEAR FROM TOP OF SLAB.
14. INDICATES RECESSED TRACK FOR HIGH DENSITY FILING SYSTEM IN SLAB ON GRADE. COORDINATE LOCATION OF TRACKS WITH FINAL SELECTED FILING SYSTEM MANUFACTURER.

GMC
2400 5th Avenue South, Suite 200
Birmingham, AL 35233
T 205.879.4462
GMCNETWORK.COM

ISSUE	DATE
BID SET	09/09/2024

DRAWN BY: CSS
CHECKED BY: CSS

TUSCALOOSA COUNTY DHR
Tuscaloosa, Alabama

GMC # ABHM220021

No. 31254
CHRISTOPHER S. STOREY
09/09/2024

FLOOR AND FOUNDATION PLAN

S2.01

sheet __ of __

9/7/2024 12:36:29 PM