

Cullen Residence

3 Spingler Ave.

3 Spingler Ave, South Hamilton, MA

CONSTRUCTION DOCUMENTS

DRAWING INDEX

SHEET NAME	SHEET NUMBER	ISSUE DATE 1	ISSUE DATE 2	ISSUE DATE 3
COVER SHEET	A-0.0			
PROJECT INFORMATION	A-0.1			
CIVIL SITE PLAN (S.1)	C.1			
PROJECT SCOPE INFORMATION	A-0.2			
FOUNDATION PLAN	A-1.0			
FOUNDATION DETAILS	A-1.1			
BASEMENT FLOOR PLAN	A-1.2			
FIRST FLOOR PLAN	A-1.3			
SECOND FLOOR PLAN	A-1.4			
ROOF PLAN	A-1.5			
FRONT & SIDE ELEVATIONS	A-2.0			
REAR & SIDE ELEVATIONS	A-2.1			
BUILDING SECTION	A-3.0			
BUILDING SECTION	A-3.1			
BUILDING SECTION	A-3.2			
GENERAL NOTES	A-4.0			
GENERAL DETAILS	A-6.0			
WINDOW & DOOR DETAILS	A-6.1			
GENERAL STRUCTURAL NOTES	S-0.1			
FIRST FLOOR FRAMING PLAN	S-1.0			
SECOND FLOOR FRAMING PLAN	S-1.1			
ROOF FRAMING PLAN	S-1.3			
STRUCTURAL DETAILS	S-1.4			
STRUCTURAL DETAILS	S-1.5			
BASEMENT FLOOR ELECTRICAL PLAN	E-1.0			
FIRST FLOOR ELECTRICAL PLAN	E-1.1			
SECOND FLOOR ELECTRICAL PLAN	E-1.2			



Revisions/Project Status	
Issue	Date & Issue Description
△	

Cullen Residence
3 Spingler Ave.
3 Spingler Ave, South Hamilton, MA

GENERIC NOTES

1. THE CONSTRUCTION SHALL STRICTLY CONFORM WITH ALL CODES HAVING JURISDICTION IN THE BUILDING OF THIS PROJECT, INCLUDING, BUT NOT LIMITED TO: FEDERAL, STATE, CITY, COUNTY, BUILDING, ZONING, ELECTRICAL, MECHANICAL, FIRE, LIFE SAFETY, AND HANDICAP CODES. UNLESS OTHERWISE NOTED WORK SHOULD BE PERFORMED BY LICENSED AND INSURED SUBCONTRACTORS. INSURANCE CERTIFICATES, IN WRITING, WILL BE PRESENTED TO THE ARCHITECT PRIOR TO THE START OF CONSTRUCTION.
2. VERIFICATION OF ALL DIMENSIONS, EXISTING CONDITIONS, AND CODE COMPLIANCE SHALL BE REQUIRED. CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS. IF ANY DISCREPANCIES ARE FOUND IN THE DRAWINGS OR SPECIFICATIONS THE SUB-CONTRACTOR MUST CONTACT THE ARCHITECT FOR VERIFICATION. ARCHITECT SHALL BE NOTIFIED IN WRITING OF ANY NON-CONFORMANCES IN THESE PLANS OR SPECIFICATIONS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR BRINGING ANY ERRORS AND OMISSIONS TO THE ATTENTION OF THE ARCHITECT IN WRITING AND SHALL AWAIT WRITTEN INSTRUCTIONS BEFORE PROCEEDING. THE CONTRACTOR WILL BE RESPONSIBLE FOR ANY ERRORS OR OMISSIONS IF THEY FAIL TO NOTIFY THE ARCHITECT PRIOR TO THE CONSTRUCTION AND OR FABRICATION OF WORK.
3. SCOPE: THE CONTRACTOR SHALL FURNISH AND INSTALL ALL MATERIALS AND LABOR TO COMPLETE THE WORK AS DESCRIBED ON THE DRAWINGS AND SPECIFICATIONS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL PERMITS, COMPLIANCE STATEMENTS, CERTIFICATE OF OCCUPANCY OR OTHER DOCUMENTATION REQUIRED.
4. WORK SHALL BE PERFORMED TO THE HIGHEST LEVEL OF STANDARDS OF EACH RESPECTIVE TRADE.
5. DEMOLISH AS REQUIRED AND REMOVE ALL DEBRIS FROM THE SITE. THE CONTRACTOR SHALL FIX AND OR REPLACE ALL ADJACENT MATERIALS INADVERTENTLY OR INCORRECTLY DISTURBED DURING THE COURSE OF CONSTRUCTION AT NO COST TO THE OWNER.
6. THE CONTRACTOR SHALL KEEP THE PREMISES CLEAN AND IN A WORKMANLIKE FASHION. THE PROJECT SHALL BE READY FOR OCCUPANCY UPON THE COMPLETION OF WORK IN A "TURN-KEY" CONDITION.
7. CONSTRUCTION SHALL BE BY DIMENSIONS DO NOT SCALE OFF OF THESE DRAWINGS.
8. SHOP DRAWINGS MAY BE REQUIRED BY THE ARCHITECT FOR ALL STRUCTURAL, MECHANICAL, ELECTRICAL, LIFE SAFETY SYSTEMS, AND SPECIALIZED CONSTRUCTION FROM THE CONTRACTOR AND/OR ALL SUBCONTRACTORS AT NO ADDITIONAL COST. SHOP DRAWINGS SHALL BE SUBMITTED TO THE OWNER FOR REVIEW AND CONFORMANCE AND THEIR INTEGRATION WITH EXISTING SYSTEMS AND CONDITIONS. WORK DONE TO LIFE SAFETY SYSTEMS MAY REQUIRE SEPARATE PERMITS. THESE SHALL BE INCLUDED IN THE BASE BID.
9. THE CONTRACTOR IS RESPONSIBLE FOR MAINTAINING THE STRUCTURAL INTEGRITY OF THE BUILDING AT ALL TIMES.
10. THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IMMEDIATELY UPON THE DISCOVERY OF ANY ENVIRONMENTALLY HAZARDOUS MATERIALS AND OR CONDITIONS.
11. ALL DEMOLITION AND REMOVAL OF BUILDING COMPONENTS SHALL BE CARRIED OUT UNDER ACCORDANCE OF THE EPA'S RENOVATE RIGHT LAWS.

ABBREVIATIONS

\$	DOLLARS
¢	AND
A	
ACOUS	ACOUSTICAL
AFF	ABOVE FINISHED FLOOR
AL	ALUMINUM
ALT	ALTERNATE
ARCH	ARCHITECTURAL
AUTO	AUTOMATIC
AVG	AVERAGE

B	
BLDG	BUILDING
BLKG	BLOCKING
BO	BOTTOM OF

C	
CAB	CABINET
CEM	CEMENT(ITIOUS)
CER	CERAMIC
CLG	CEILING
CMU	CONCRETE MASONRY UNIT
CONC	CONCRETE
CONSTR	CONSTRUCTION
CONTR	CONTRACTOR
COV	COVER
CPT	CARPET

D	
DBL	DOUBLE
DEPT	DEPARTMENT
DES	DESIGN(ED)
DET	DETAIL
DIA	DIAMETER
DIM	DIMENSION
DIV	DIVISION
DN	DOWN
DR	DOOR
DSCON	DISCONNECT
DWR	DRAWER

E	
ELEC	ELECTRICAL
EMBED	EMBED(DED)(DING)
ENGR	ENGINEER(ED)
ENTR	ENTRANCE
EQ	EQUAL
EQUIP	EQUIPMENT
EXIST	EXISTING
EXP JT	EXPANSION JOINT
EXPS	EXPOSE(D)
EXT	EXTERIOR

F	
FAB	FABRICATION
FD	FLOOR DRAIN
FEC	FIRE EXTINGUISHER AND CABINET
FHC	FIRE HOSE CABINET
FIN	FINISH
FLR	FLOOR(ING)
FR	FIRE RAT(ING)(ED)
FRMG	FRAMING
FURN	FURNITURE
FXTR	FIXTURE
G	
GA	GAUGE
GL	GLASS
GR	GRAD(E)(ING)
GWB	GYPSTUM WALL BOARD

H	
HD	HEAD
HDWD	HARDWOOD
HDWE	HARDWARE
HM	HOLLOW METAL
HORIZ	HORIZONTAL
HVAC	HEATING, VENTILATING, AND AIR CONDITIONING

I	
INFO	INFORMATION
INSUL	INSULATION
INT	INTERIOR
INTLK	INTERLOCK(ING)

J	
JAN	JANITOR

K	
KIT	KITCHEN

L	
LAV	LAVATORY
LVR	LOUVER

M	
MAX	MAXIMUM
MECH	MECHANICAL
MEMB	MEMBRANE
MET	METAL
MEZZ	MEZZANINE
MFD	MANUFACTURED
MFR	MANUFACTURER
MIN	MINIMUM
MISC	MISCELLANEOUS
MLWK	MILLWORK
MTD	MOUNTED

N	
NIC	NOT IN CONTRACT
NO	NUMBER
NTS	NOT TO SCALE

PROJECT SCOPE

THE SCOPE OF WORK SHALL INCLUDE THE CONSTRUCTION OF A SINGLE FAMILY HOME WITH TWO FLOORS FOR LIVING, A FULL HEIGHT BASEMENT AND A SLAB-ON-GRADE GARAGE. SITE WORK WILL INCLUDE A NEW SEPTIC SYSTEM, WATER WELL & DRIVEWAY.


EGRESS COMPLIANCE UNDER 2021 INTERNATIONAL RESIDENTIAL BUILDING CODE (1 & 2 FAMILY RESIDENCES) CHAPTER 3

LIFE SAFETY SYSTEMS:
A COMPLETE LIFE SAFETY SYSTEM IS TO BE SUPPLIED AND INSTALLED BY THE CONTRACTOR. THE SYSTEM SHALL BE APPROVED BY THE LOCAL FIRE DEPARTMENT AND BUILDING DEPARTMENT. PLANS WITHIN MAY NOT INDICATE ALL ELEMENTS REQUIRED BY THE LOCAL AHJ.

ELECTRICAL SYSTEMS:
THE ELECTRICAL SYSTEM SHALL BE DESIGN-BUILD AND THE SYSTEM SHALL BE APPROVED BY THE A.H.J. PRIOR TO THE COMMENCEMENT OF WORK. THIS DESIGN BUILD SYSTEM SHALL BE SUPPLIED AND INSTALLED BY THE ELECTRICAL SUB-CONTRACTOR. ELECTRICAL DRAWINGS PROVIDED FOR SCHEMATIC/PRICING PURPOSES ONLY.


MECHANICAL SYSTEMS:
THE HVAC SYSTEM SHALL BE DESIGN-BUILD AND THE SYSTEM SHALL BE APPROVED BY THE A.H.J. PRIOR TO THE COMMENCEMENT OF WORK. THIS DESIGN BUILD SYSTEM SHALL BE SUPPLIED AND INSTALLED BY THE HVAC SUB-CONTRACTOR. HVAC DRAWINGS PROVIDED FOR SCHEMATIC/PRICING PURPOSES ONLY.

PROJECT LOCUS

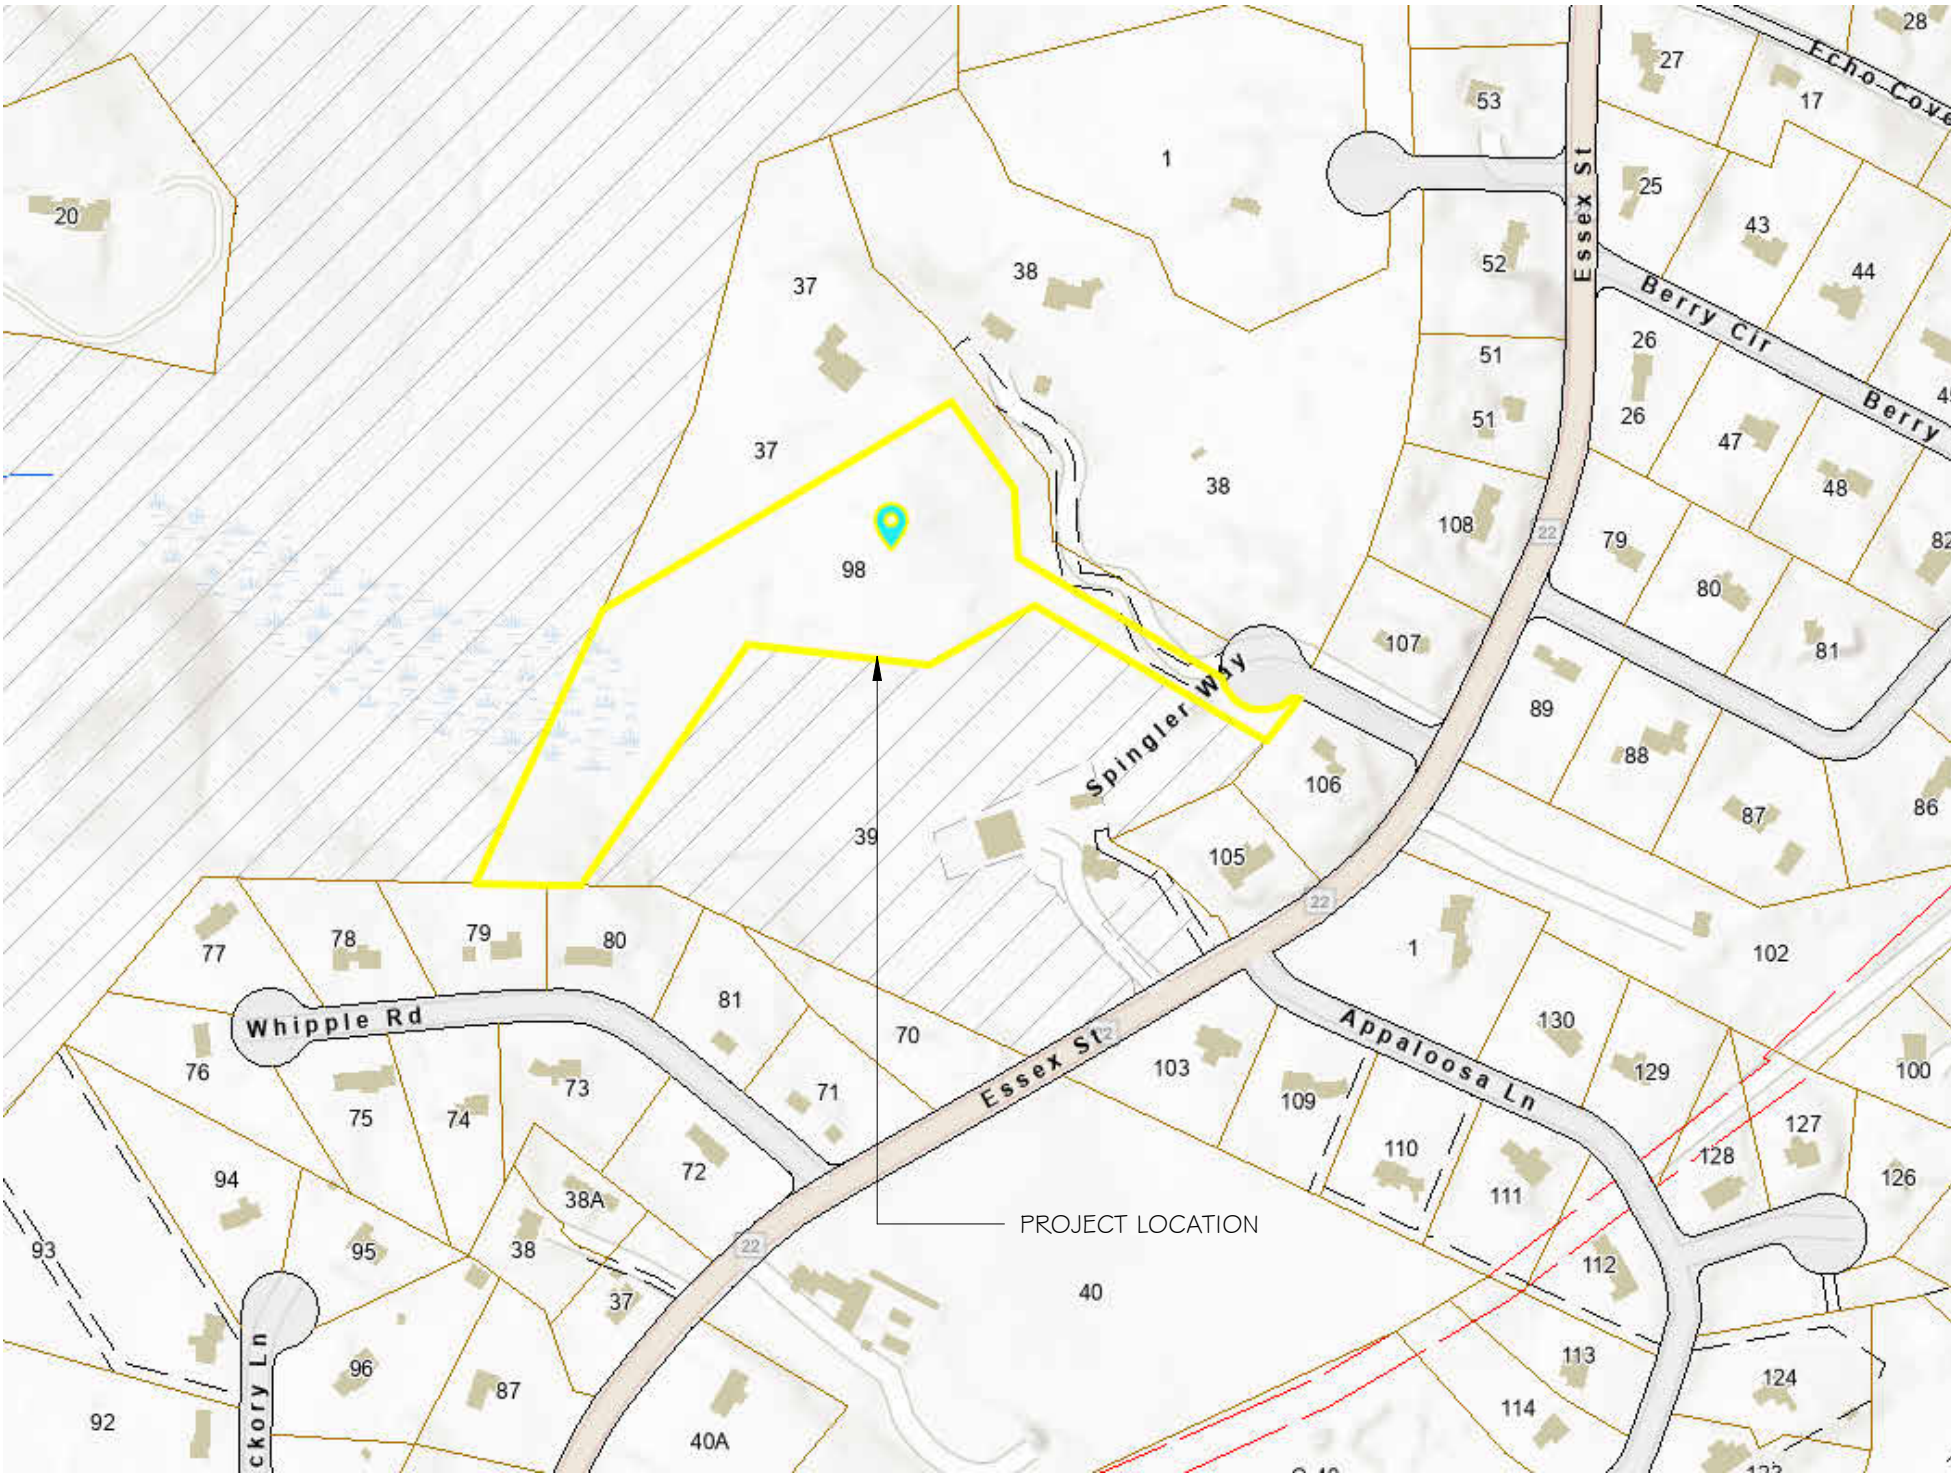


GRAPHIC SYMBOLS

CONSTRUCTION

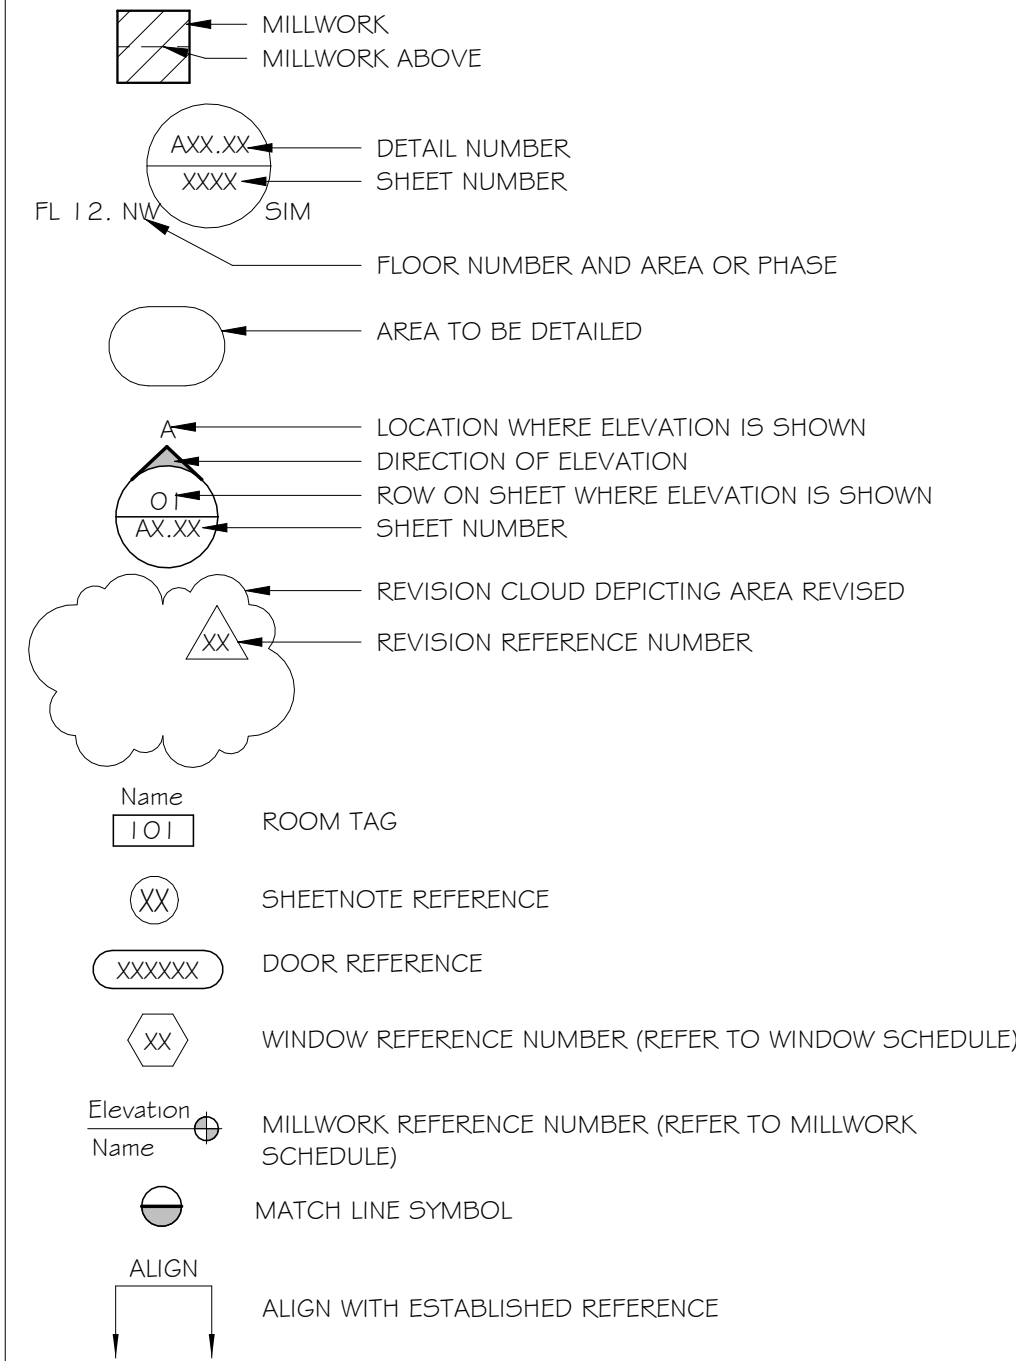

ELEVATION INDICATION

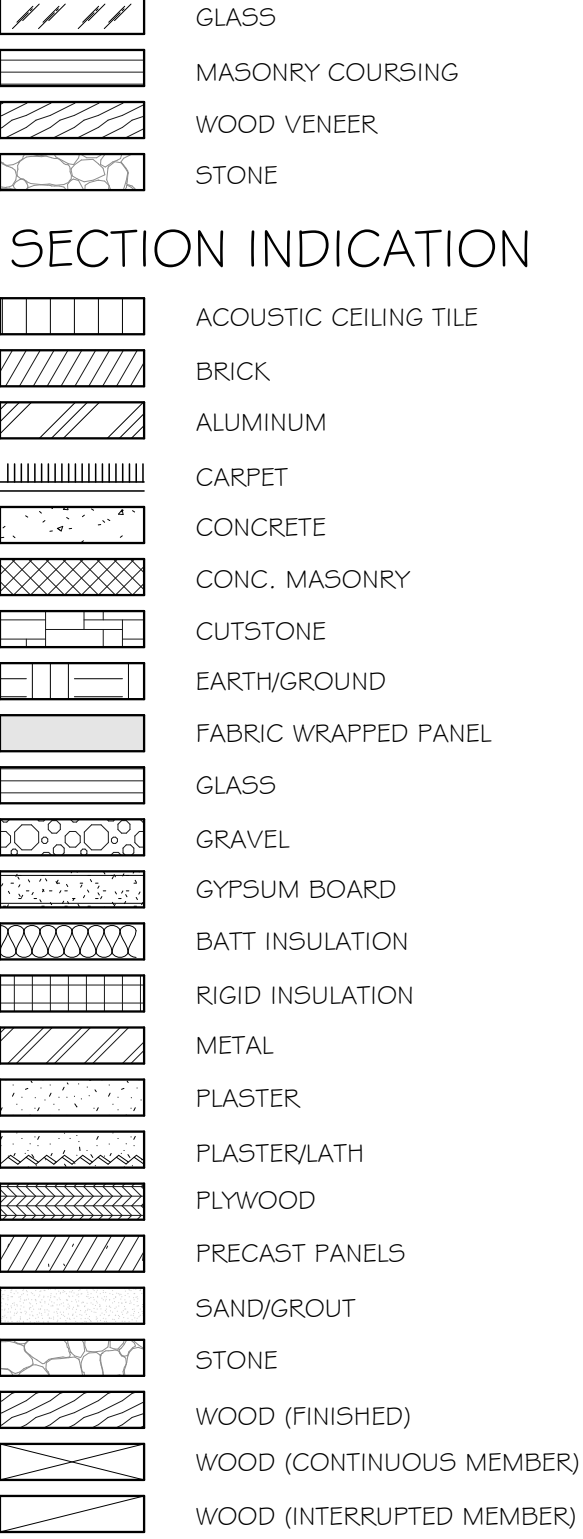

SECTION INDICATION


ELECTRICAL EQUIPMENT


DES.	DEVICE	COMMENTS
E	DENOTES EXISTING TO REMAIN	
R	DENOTES EXISTING TO BE RELOCATED	
(O)	FENDANT LIGHT	
(1)	RECESSED DOWNLIGHT	
(2)	WALL SCONCE	75 WATT PAR 30
(3)	SHOWER LIGHT	
(4)	CLOSET LIGHT	50 WATT
(5)	EXTERIOR LIGHT	
(6)	UNDER CABINET LIGHT	
(7)	PIN HOLE/REC. LIGHT	
(C)	CABLE TV	
(J)	JUNCTION BOX	
(S)	EARTH/GROUND	
(S)	CEILING MOUNTED SPEAKER	
(F)	BATHROOM FAN	
(H)	HDMI CONNECTOR	
(H)	HEAT DETECTOR	
(S)	SMOKE DETECTOR	
(Co)	CARBON MONOXIDE DETECTOR	
\$	LIGHT SWITCH	
\$D	DIMMER LIGHT SWITCH	
\$3	3WAY SWITCH	
\$T	TIMER SWITCH	
\$J	JAMB SWITCH	
\$3D	3WAY DIMMER	
⊖	OUTLET	
⊖	WATERPROOF OUTLET	WATERPROOF
⊖	GFI OUTLET	
⊖	OUTLET/220	
⊖	OUTLET WITH USB PORT	
⊖	QUADPLEX OUTLET	

Cullen Residence
3 Spangler Ave.
3 Spangler Ave., South Hamilton, MA

Revisions/Project Status

Issue Date & Issue Description



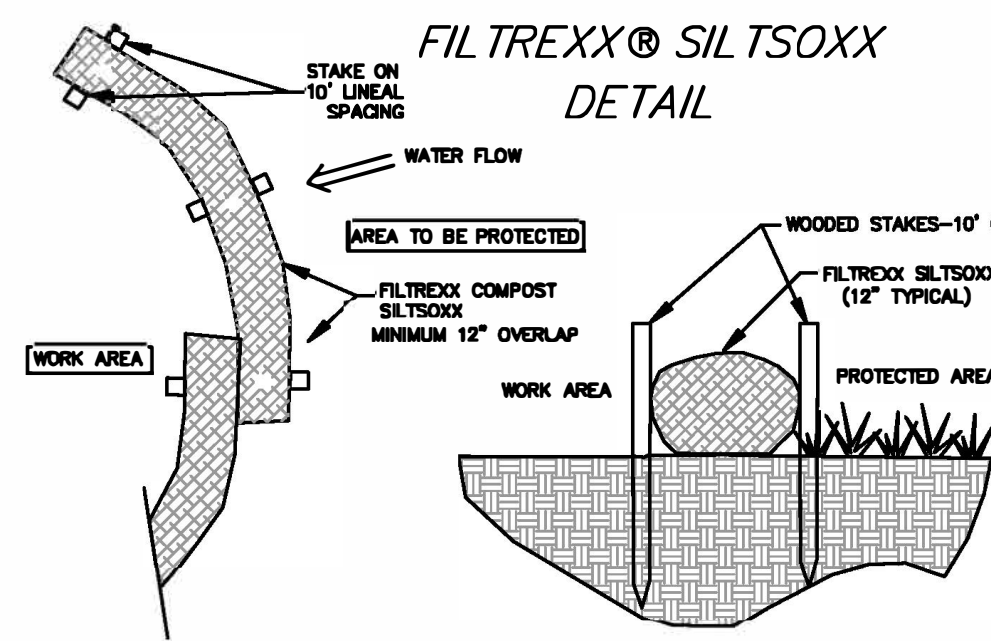

FILTREXX® SILT SOXX SECTION


USE FILTREXX SILT SOXX (OR APPROVED EQUAL), AVAILABLE THROUGH PROBARK, INC. PHONE: 978-352-7543 WEBSITE: WWW.PROBARK.COM

- NOTES:
1. ALL MATERIALS TO MEET FILTREXX SPECIFICATIONS.
 2. SILT SOXX COMPOST/SOIL/ROCK/SEED/FILL TO MEET APPLICATION REQUIREMENTS.
 3. SILT SOXX DEPICTED IS FOR MINIMUM SLOPES. GREATER SLOPES MAY REQUIRE LARGER SOCKS PER ENGINEER.
 4. COMPOST MATERIAL TO BE DISPERSED ON SITE AS DETERMINED BY ENGINEER.


FILTREXX SILT SOXX

EROSION CONTROL

(Not to scale)

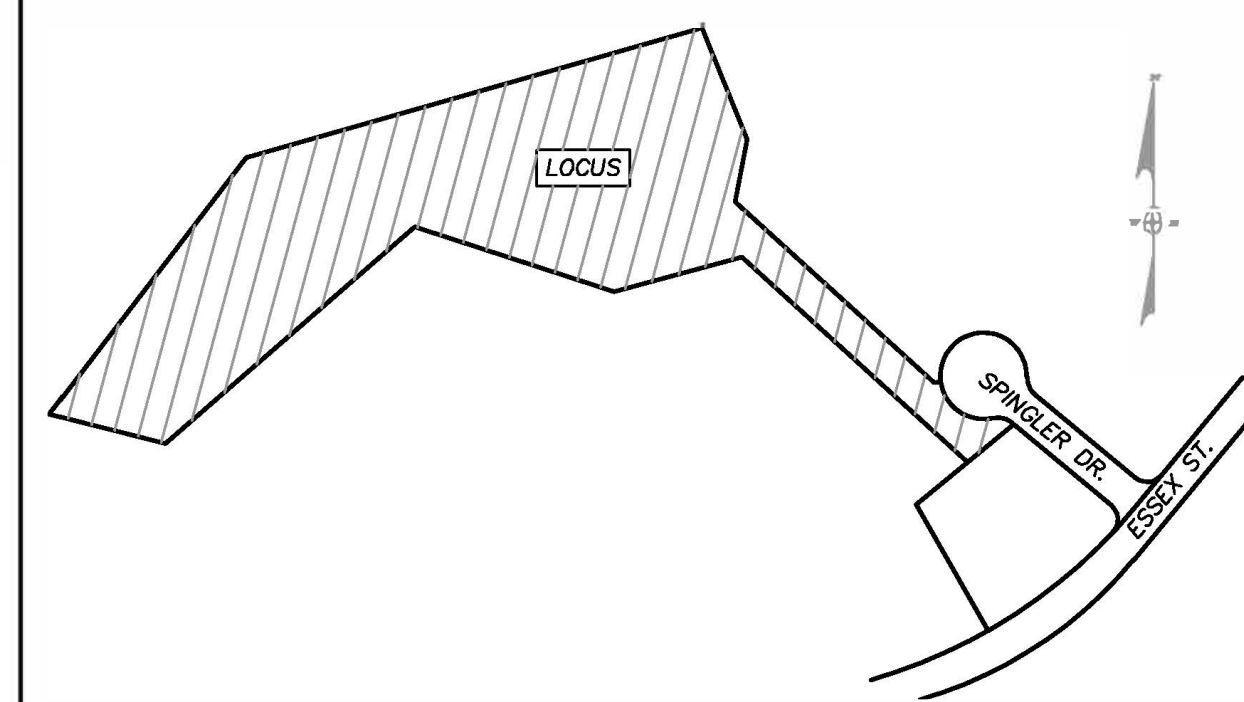

LOCUS MAP (NTS)

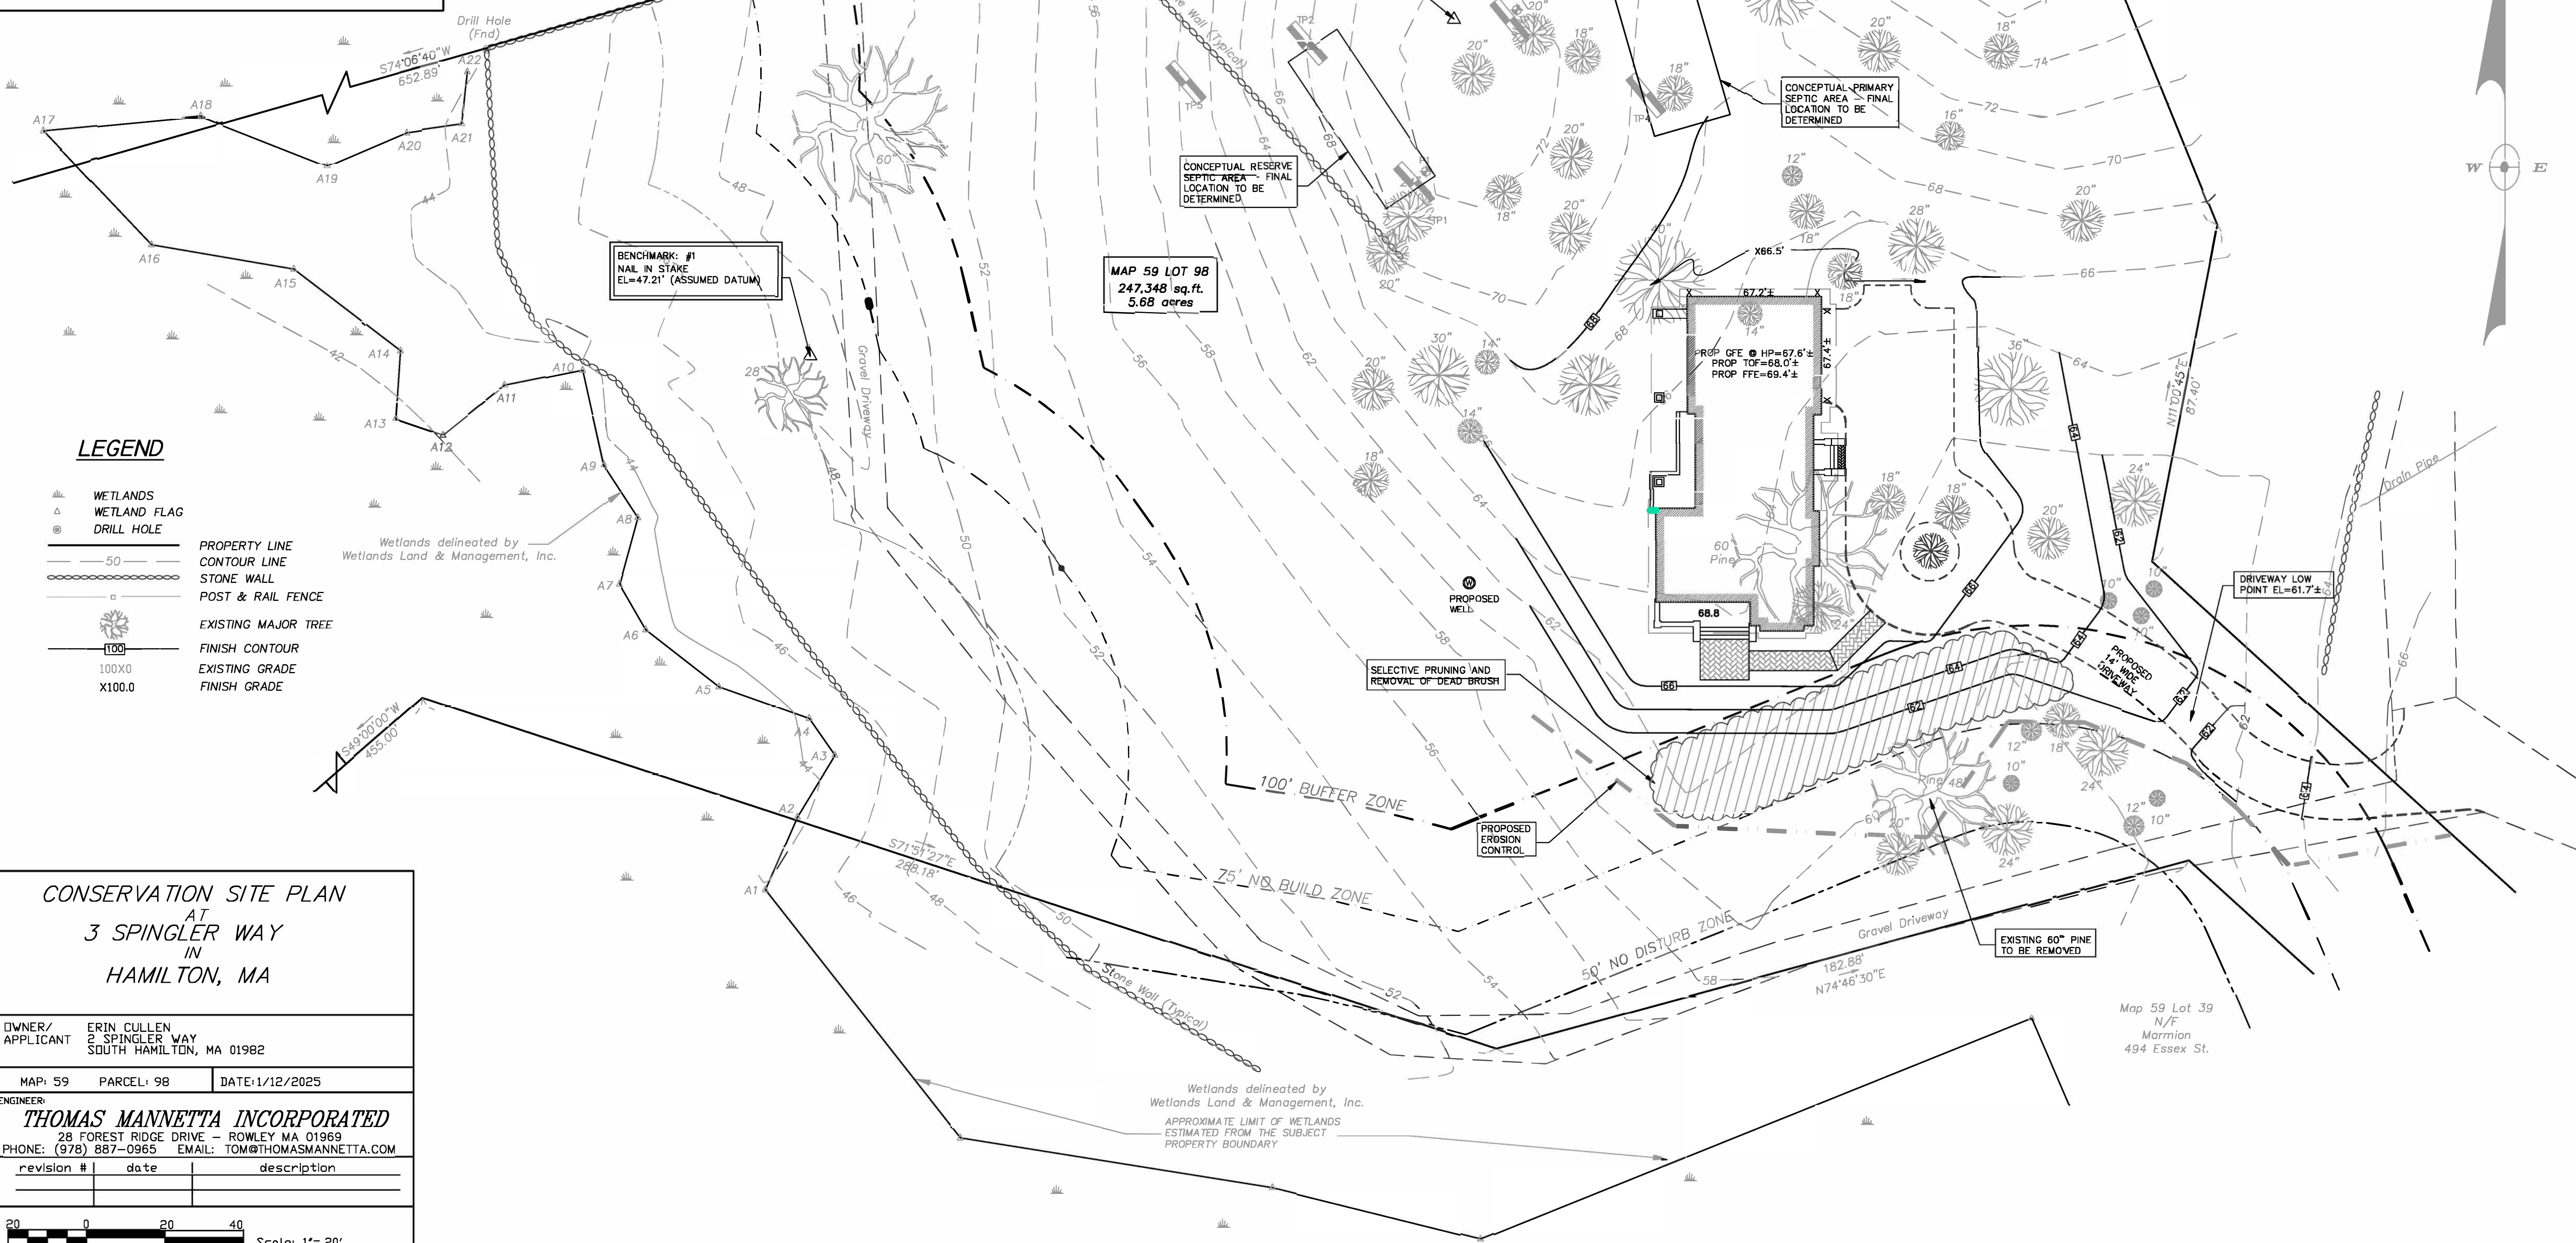

CONSERVATION SITE PLAN
AT
3 SPINGLER WAY
IN
HAMILTON, MA

OWNER/
APPLICANT ERIN CULLEN
2 SPINGLER WAY
SOUTH HAMILTON, MA 01982

MAP: 59 PARCEL: 98 DATE: 1/12/2025

ENGINEER:
THOMAS MANNETTA INCORPORATED
28 FOREST RIDGE DRIVE - ROWLEY MA 01969
PHONE: (978) 887-0965 EMAIL: TOM@THOMASMANNETTA.COM

revision #	date	description

Scale: 1"= 20'


SHEET: S1

JOB NO. 1918


DEED REF: BK. 41093 PG. 163

PROFESSIONAL ENGINEER


Date: 1/12/2025

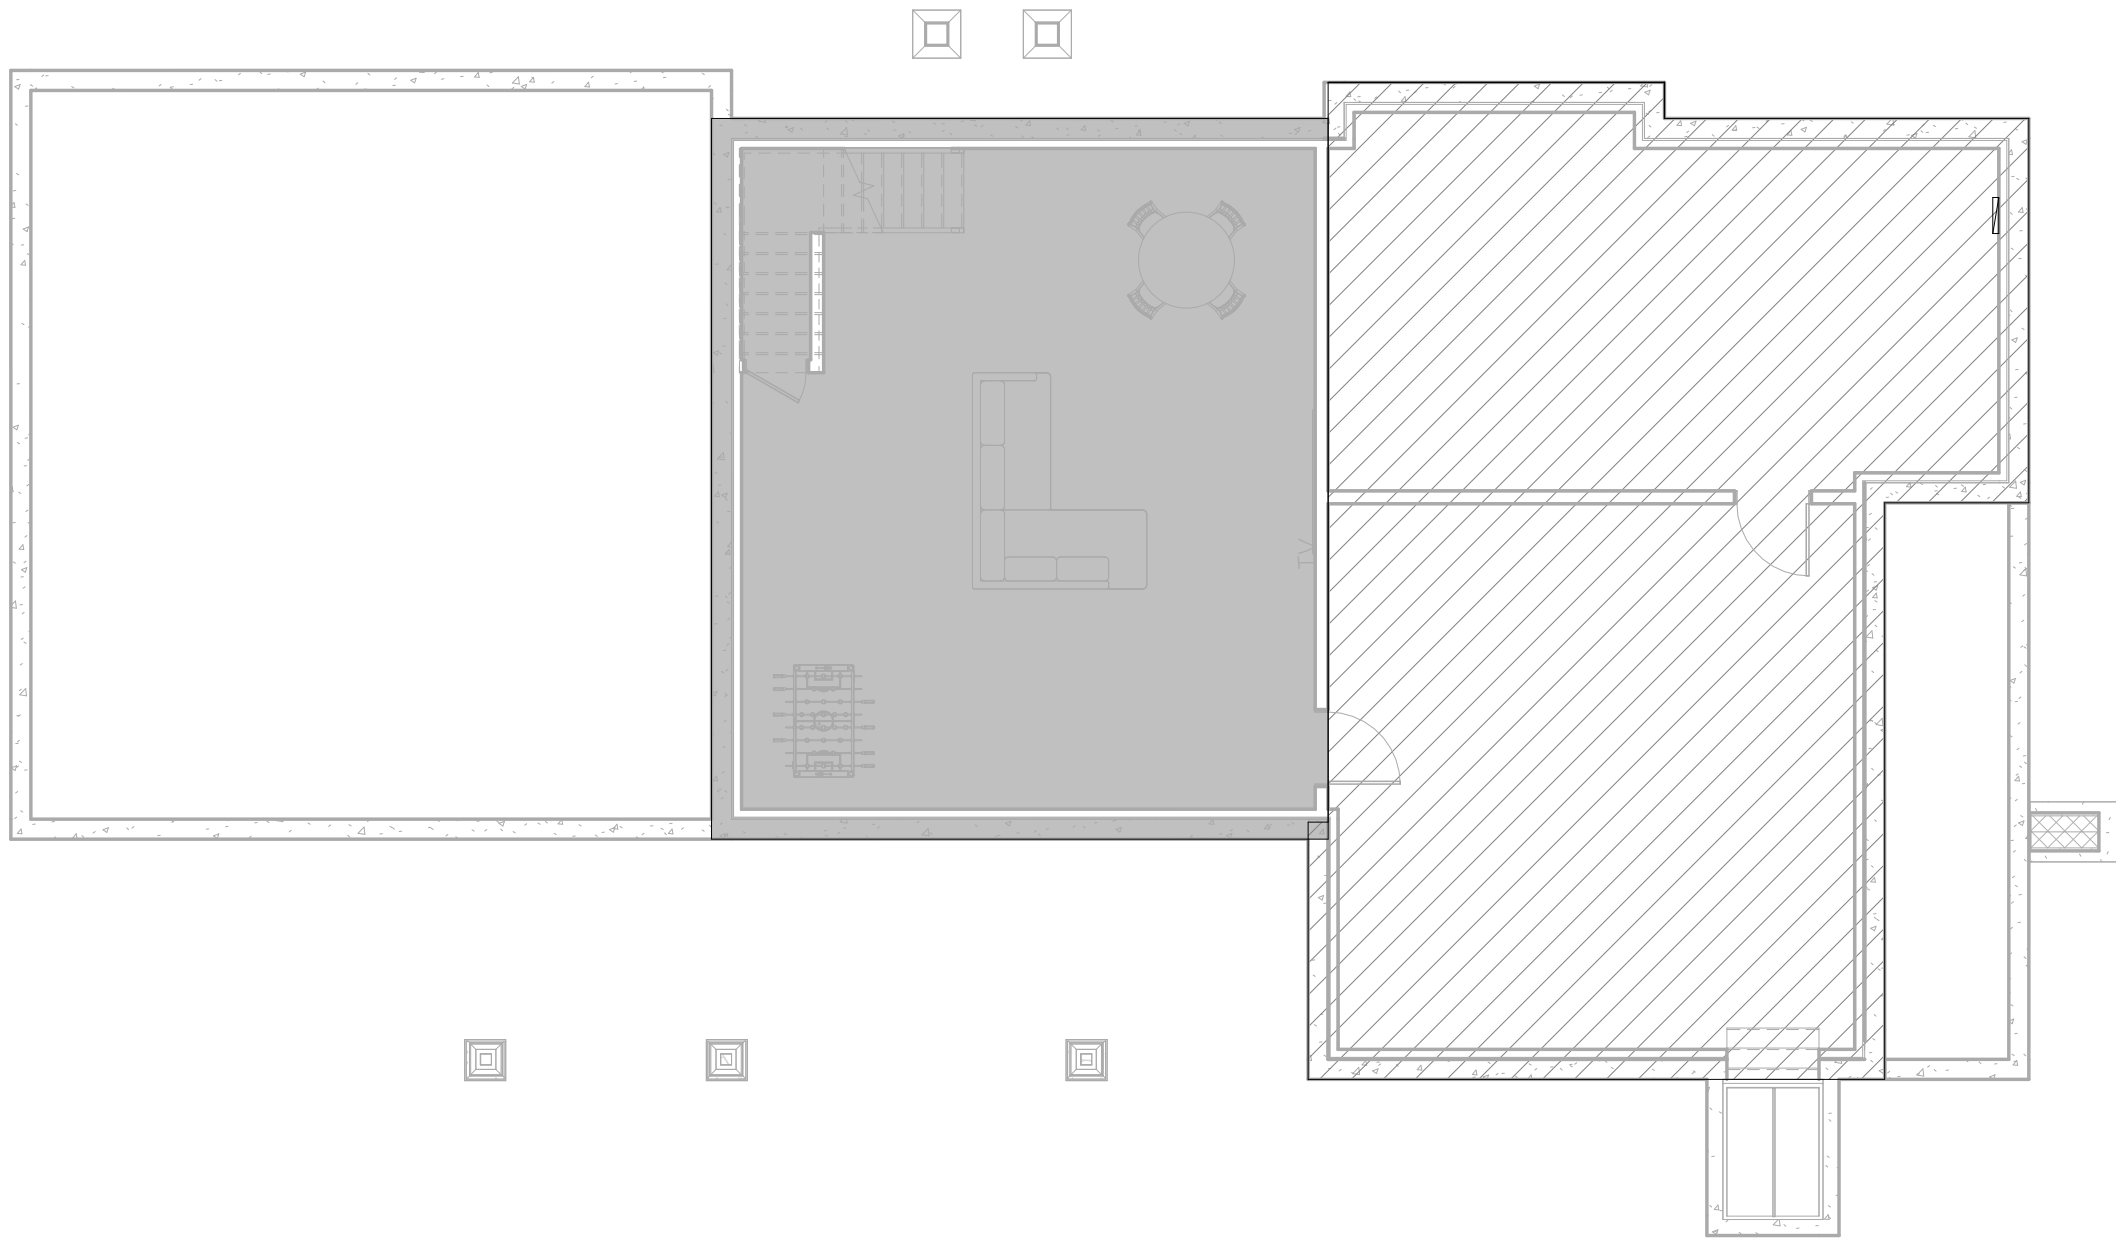

① BASEMENT FLOOR PLAN
1/8" = 1'-0"

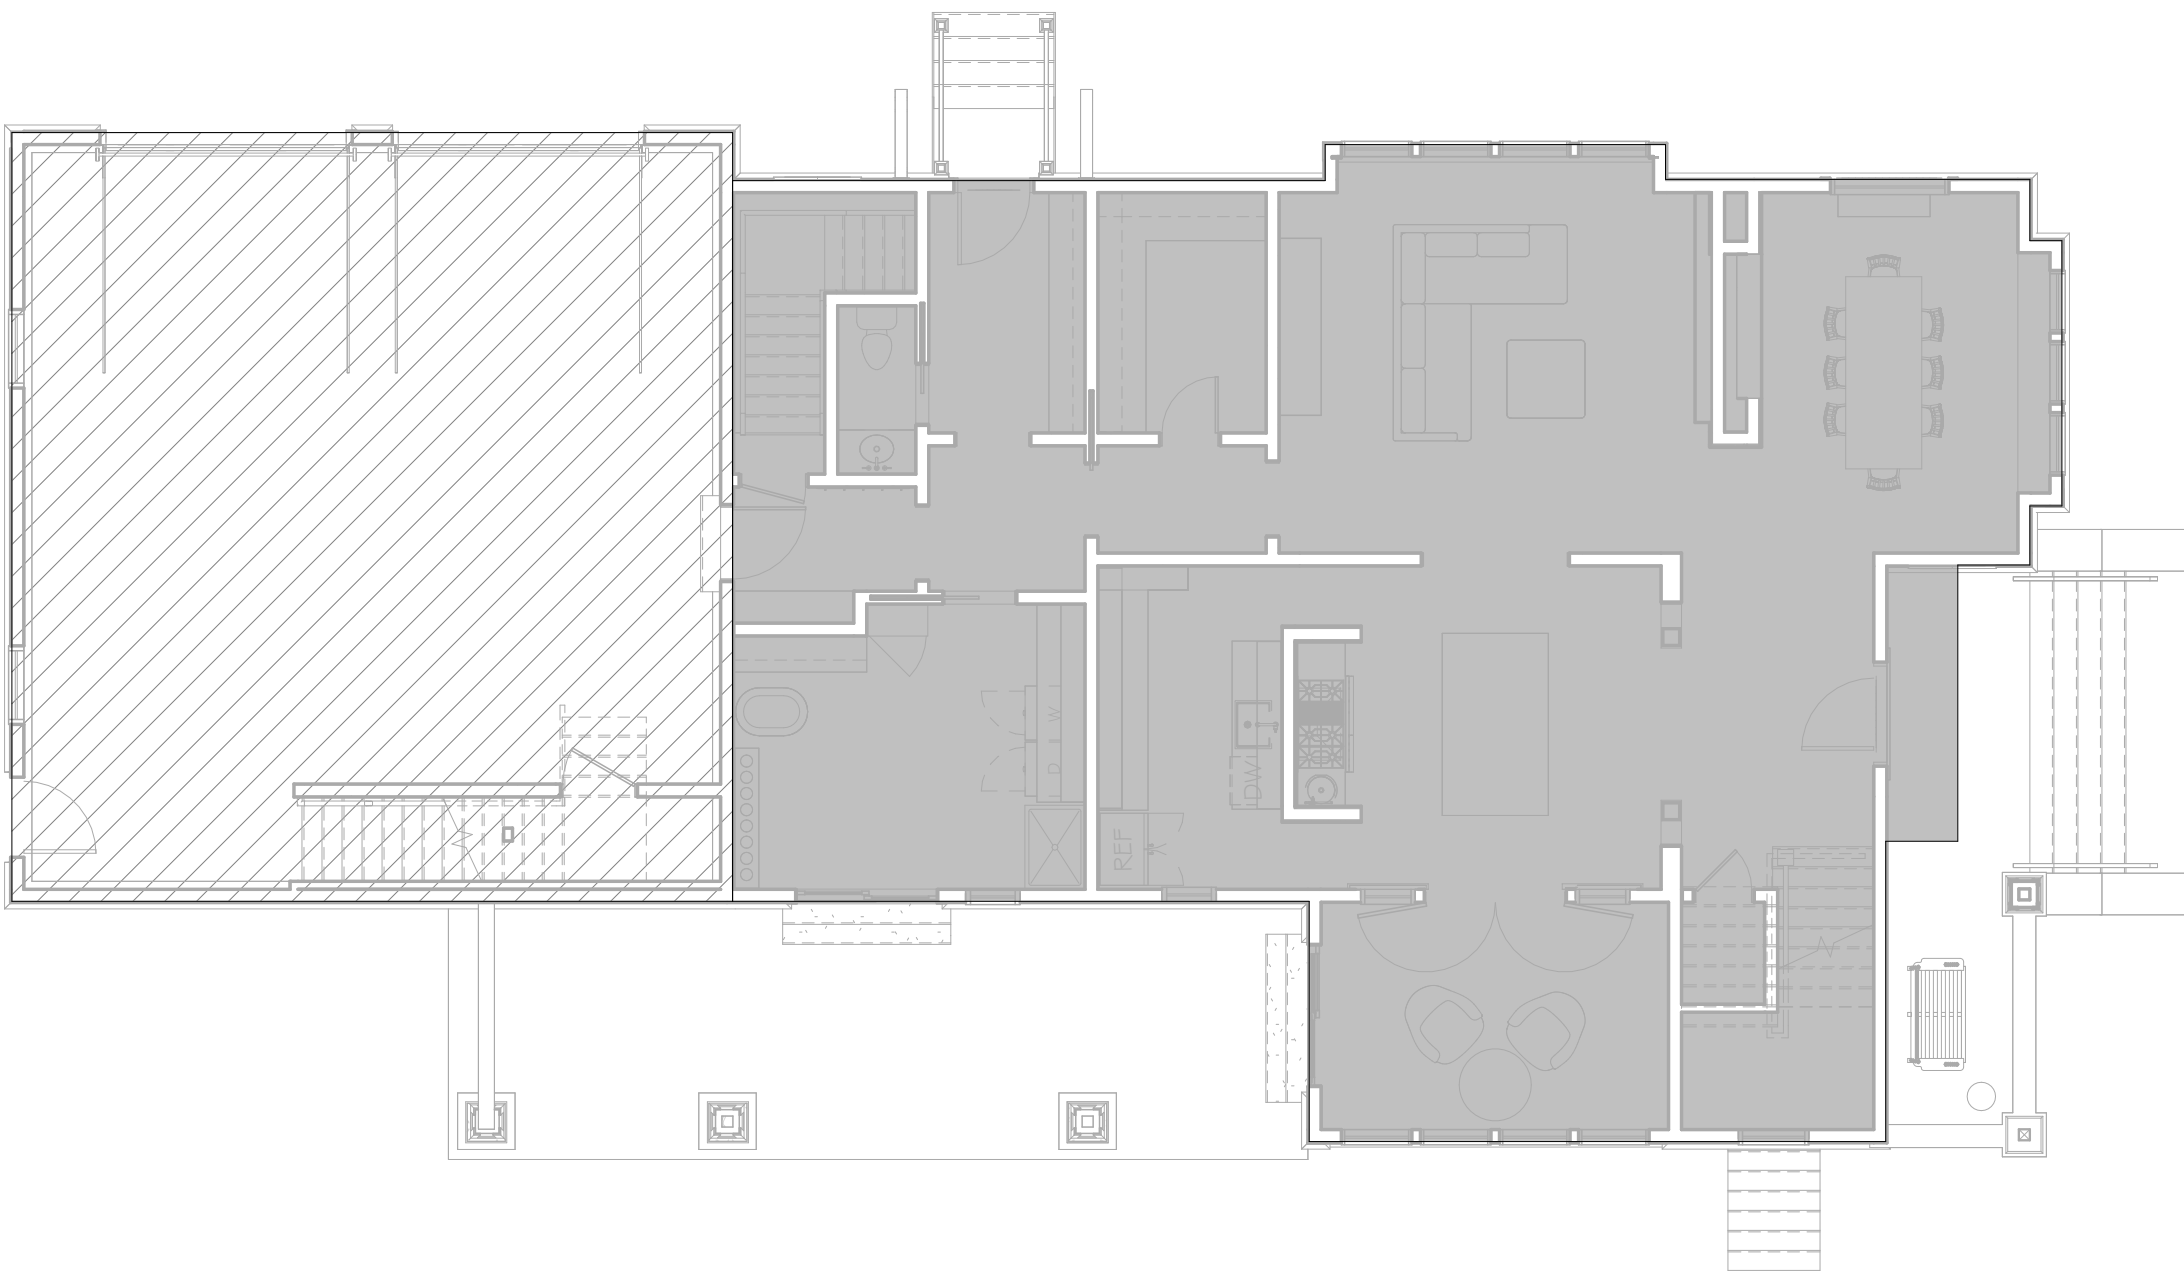

② FIRST FLOOR PLAN
1/8" = 1'-0"

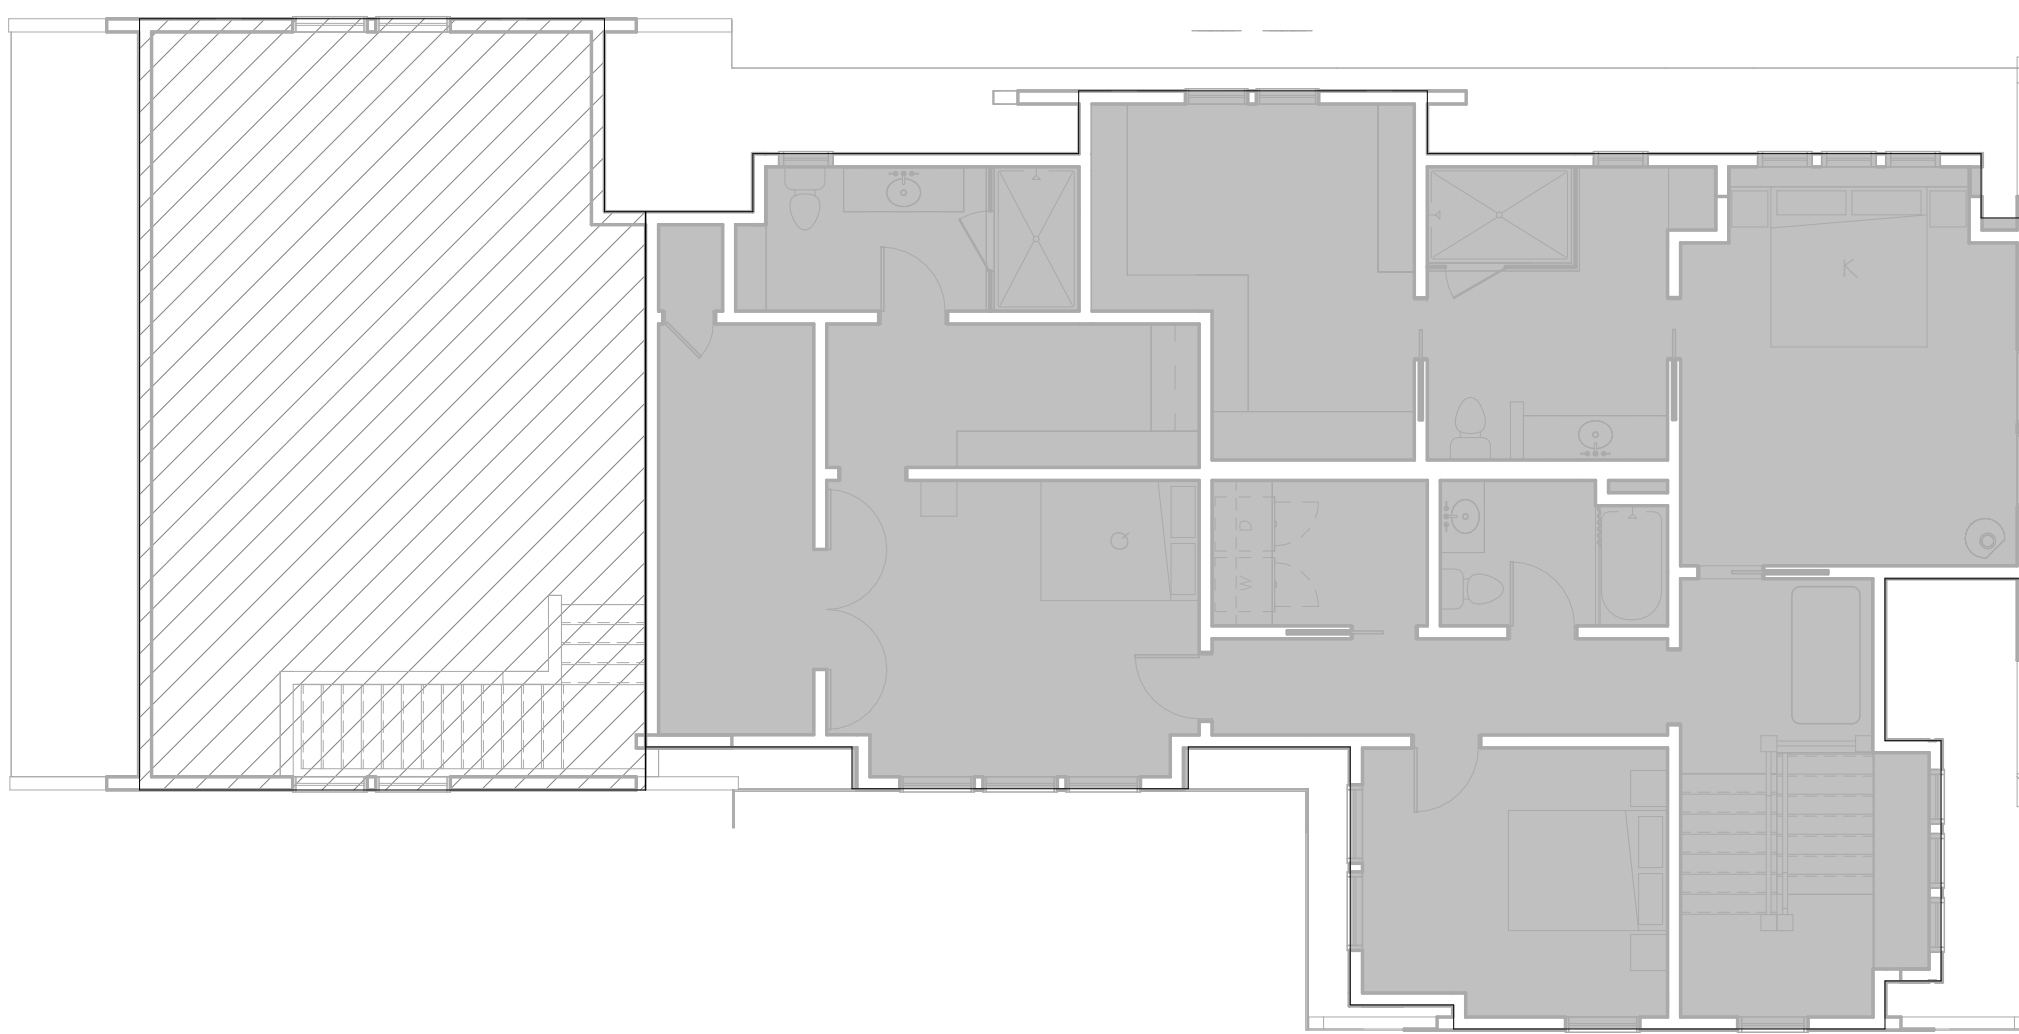

③ SECOND FLOOR PLAN
1/8" = 1'-0"

LEGEND		
FINISHED SPACES:		AREA CALCULATIONS
	BASEMENT	770 SF
	FIRST FLOOR	1,846 SF
	SECOND FLOOR	1,706 SF
	SUB TOTAL	4,322 SF
ACCESSORY SPACES:		
	BASEMENT (UNFINISHED)	1,052 SF
	GARAGE	960 SF
	ATTIC (UNFINISHED)	662 SF
	SUB TOTAL	2,674 SF
	GRAND TOTAL	6,996 SF



RED BARN
ARCHITECTURE

8-10 Martin St, Unit 4
Essex, MA 01929
978.890.7254

Project Name
3 Spangler Ave.

Description
PROJECT SCOPE INFORMATION

Scale: 1/8" = 1'-0"

Date: 03.05.2026

Drawn by: AM

Plot Date: 3/5/2026 9:30:46 AM

Revisions/Project Status		
Issue	Date	Issue Description
△		

Cullen Residence
3 Spangler Ave.
3 Spangler Ave, South Hamilton, MA

FOUNDATIONS


- F1. THESE NOTES SHALL GOVERN ON ALL STRUCTURAL FOUNDATION ELEMENTS UNLESS OTHERWISE NOTED ON PLANS.
- F2. CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND CONDITIONS IN THE FIELD PRIOR TO THE START OF CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT (IN WRITING) BEFORE PROCEEDING WITH THE AFFECTED PORTION OF WORK. THIS IS TO INCLUDE, BUT NOT LIMITED TO, CONFLICTS BETWEEN STRUCTURAL AND ARCHITECTURAL DRAWINGS AND SPECIFICATIONS.
- F3. UNLESS OTHERWISE NOTED, DETAILS SHOWN ON ANY DRAWINGS ARE TO BE CONSIDERED TYPICAL FOR ALL SIMILAR CONDITIONS.
- F4. FOUNDATIONS IS TO BE CARRIED DOWN TO UNDISTURBED NATURAL SOILS HAVING A MINIMUM BEARING CAPACITY OF 2 TON(S) PER SQUARE FOOT (ULTIMATE BEARING CAPACITY OF 4 TON(S)/S.F. THE SUITABILITY OF THE SOIL TO SUPPORT THE NEW STRUCTURE IS TO BE INDEPENDENTLY VERIFIED BY A QUALIFIED GEOTECHNICAL ENGINEER. FOUNDATIONS SHALL NOT BEAR ON ORGANIC OR CLAY SOILS
- F4. FOOTING DEPTHS SHOWN ON THE DRAWINGS REPRESENT DEPTHS REQUIRED FOR THE BUILDING AND ARE NOT TO BE CONSTRUED AS LIMITING THE AMOUNT OF EXCAVATION REQUIRED TO REACH GOOD BEARING MATERIAL.
- F5. EXTERIOR CONSTRUCTION IS TO BE CARRIED DOWN BELOW FINISHED EXTERIOR GRADE TO A MINIMUM DEPTH OF 4 FEET UNLESS NOTED OTHERWISE OR REQUIRED OTHERWISE BY LOCAL BUILDING CODE. IF LEDGE IS DISCOVERED IN EXCAVATING FOR NEW FOOTINGS, CONSULT ARCHITECT FOR INSTRUCTION ON PINNING NEW FOUNDATION CONSTRUCTION TO LEDGE.
- F6. ALL INDUSTRY SPECIFICATIONS SHALL BE OF THE LATEST EDITION.
- F7. FOUNDATION WALLS MUST BE POURED MONOLITHICALLY. HORIZONTAL COLD JOINTS IN CONCRETE WALLS SHALL NOT BE ACCEPTABLE, AND WILL BE REMOVED AND REPLACED IF THEY OCCUR. VERTICAL CONSTRUCTION # CONTROL JOINTS SHALL BE PROPOSED BY THE CONTRACTOR # COORDINATED WITH ARCHITECT
- F8. PROVIDE PERFORATED P.V.C. PERIMETER DRAIN IN CRUSHED STONE SURROUND WITH FILTER FABRIC PROTECTION.
- F9. FOOTING EXCAVATIONS ARE TO BE FINISHED BY HAND.
- F10. MAKE NO EXCAVATIONS TO THE FULL DEPTH INDICATED WHEN FREEZING TEMPERATURE MAY BE EXPECTED UNLESS THE FOUNDATIONS OR SLABS CAN BE PLACED IMMEDIATELY AFTER THE EXCAVATION HAS BEEN COMPLETED. PROTECT THE BOTTOM OF FOOTING SO EXCAVATED FROM FROST
- IF PLACING OF CONCRETE IS DELAYED, SHOULD PROTECTION FAIL, REMOVE FROZEN MATERIALS AND REPLACE WITH CONCRETE OR GRAVEL FILL, AS DIRECTED, AT NOT COST TO THE OWNER.
- F11. BACKFILL UNDER NEW STRUCTURES IS TO BE COMPACTED TO 95 PERCENT AS MEASURED BY PROCTOR DENSITY TESTS, IN 6" LIFTS.
- F12. UNLESS NOTED OTHERWISE, FOOTINGS ARE TO BE CENTERED UNDER SUPPORTED MEMBERS.
- F13. TEMPORARY BRACING SHALL BE USED DURING BACKFILLING WHERE THE PERMANENT LATERAL SUPPORT FOR THE TOP OF THE WALL IS PROVIDED BY FRAMED FLOORS WHICH ARE NOT YET PLACED.
- F14. PROVIDE 6" OF CRUSHED STONE (UNDER ALL NEW SLABS ON GRADE) COVERED BY 6 MIL POLY VAPOR BARRIER.
- F15. PROVIDE NEW PERFORATED 4" PVC FOUNDATION DRAIN IN CRUSHED STONE WRAPPED IN FILTER FABRIC AT PERIMETER OF FOUNDATION WALLS.

CONCRETE

- C1. NO BACK FILL SHALL BE PLACED AGAINST FOUNDATION WALLS RETAINING EARTH UNLESS WALLS ARE SUFFICIENTLY BRACED TO PREVENT MOVEMENT OR STRUCTURAL DAMAGE.
- C2. MAXIMUM SLUMP SHALL BE 4".
- C3. CONCRETE WORK IS TO CONFORM TO BUILDING CODE REQUIREMENTS FOR REINFORCED AND PLAIN CONCRETE (ACI 318-99) AND SPECIFICATIONS FOR STRUCTURAL CONCRETE FOR BUILDINGS (ACI 301), LATEST EDITION.) CONCRETE SHALL CONFORM TO THE LATEST A.C.I. STANDARDS
- C4. CONCRETE MIX SHALL BE SUBMITTED FOR APPROVAL. CONCRETE PLACEMENTS SHALL BE WITNESSED BY AND INDEPENDENT TESTING AND INSPECTION LAB. CONCRETE CYLINDER SHALL BE TAKEN AT THE RATE OF 1 CYLINDER PER TRUCK.
- C5. WHEN CONCRETE IS PLACED AT OR BELOW AMBIENT TEMPERATURES OF 40 DEGREES F, OR WHENEVER LOWER TEMPERATURES ARE LIKELY TO OCCUR WITH 48 HOURS AFTER PLACEMENT OF CONCRETE, COLD WEATHER CONCRETING PROCEDURES, IN ACCORDANCE TO ACI 306 SHALL BE FOLLOWED. COLD WEATHER PROTECTION SHALL ALSO APPLY TO REINFORCED BRICK AND CMU MASONRY CONSTRUCTION WHENEVER THE TEMPERATURE FALLS BELOW 40 DEGREES.
- C6. CONCRETE IS TO HAVE 4000 PSI (NORMALWEIGHT) COMPRESSIVE STRENGTH AT 28 DAYS.
- C7. CONCRETE FOR ANY EXTERIOR APPLICATION OR IN CONTACT W/ SOIL SHALL BE AIR-ENTRAINED. CONCRETE SHALL BE 4% AIR ENTRAINED AND SHALL CONFORM TO A.S.T.M. C94
- C8. STRUCTURAL STEEL BELOW GRADE IS TO BE ENCASED IN CONCRETE FOR RUST PROTECTION OR IS TO BE COATED WITH TWO HEAVY COATS OF COAL TAR EPOXY. CONCRETE COVER IS TO BE 2 INCH MINIMUM.
- C9. MINIMUM ELAPSED TIME BETWEEN ADJACENT CONCRETE PLACEMENTS SHALL BE 72 HOURS.
- C10. CONCRETE SHALL BE PLACED WITHOUT HORIZONTAL CONSTRUCTION JOINTS EXCEPT WHERE SHOWN OR NOTED. VERTICAL CONTROL AND CONSTRUCTION JOINTS SHALL BE IDENTIFIED ON THE REBAR SHOP DRAWINGS FOR APPROVAL, INCLUDING SLABS ON GRADE.
- C11. CONTRACTOR SHALL VERIFY LOCATION OF ALL DOVETAIL SLOTS FOR MASONRY ANCHORS, IF REQUIRED, WITH THE ARCHITECT.
- C12. WALLS AND SLABS TO BE PLACED MONOLITHICALLY UNLESS OTHERWISE SHOWN.
- C13. SLAB CONTROL JOINTS SHALL BE CUT AS SOON AS CONCRETE IS SAFE FOR THIS WORK

REINFORCEMENT

- R1. DETAILING, FABRICATION, AND ERECTION OF REINFORCEMENT, UNLESS OTHERWISE NOTED, SHALL CONFORM TO THE LATEST EDITIONS OF ACI "BUILDING CODE REQUIREMENTS FOR REINFORCED CONCRETE (ACI 318)" AND ACI "MANUAL OF STANDARD PRACTICE FOR DETAILING REINFORCED CONCRETE STRUCTURES (ACI 315)". REINFORCING STEEL SHOP DRAWINGS SHALL BE SUBMITTED FOR REVIEW # SHALL SHOW ALL PROPOSED CONSTRUCTION # CONTROL JOINTS
- R2. STEEL REINFORCEMENT UNLESS OTHERWISE SHOWN IS TO CONFORM TO ASTM A615 GRADE 60 (YIELD STRESS = 60,000 PSI), BLACK STEEL
- R3. WELDED WIRE FABRIC REINFORCEMENT SHALL BE ASTM A185 WWF 6 x 6 W2.9 x W2.9 IN ALL NEW 4" SLABS ON GRADE.
- R4. FOR PLACING CONCRETE AND REINFORCING REFER TO BUILDING CODE REQUIREMENTS FOR REINFORCED CONCRETE, A.C.I. 318-83, AND RECOMMENDED PRACTICE FOR COLD WEATHER CONCRETING A.C.I. 306-66.
- R5. MINIMUM CONCRETE COVER FOR REINFORCEMENT UNLESS OTHERWISE NOTED IS TO BE AS FOLLOWS:
- (A) UNFORMED SURFACES IN CONTACT WITH GROUND OR EXPOSED TO WEATHER 3 INCHES
- (B) FORMED SURFACES IN CONTACT WITH GROUND OR EXPOSED TO WEATHER 2 INCHES
- (C) EXTERIOR SLABS 2 INCHES
- (D) INTERIOR WALL 1 1/2 INCHES
- MAXIMUM DEVIATION FROM THESE REQUIREMENTS IS TO BE 1/4 INCH FOR SECTIONS 10 INCHES THICK OR LESS; AND 1/2 INCH FOR SECTIONS OVER 10 INCHES THICK.
- R6. WHERE REINFORCEMENT IS CALLED FOR IN SECTION, REINFORCEMENT IS CONSIDERED TYPICAL WHEREVER THE SECTION APPLIES.
- R7. REINFORCEMENT IS TO BE CONTINUOUS THROUGH ALL CONSTRUCTION JOINTS UNLESS OTHERWISE PLACED INDICATED ON THE DRAWINGS.
- R8. WELDED WIRE FABRIC IS TO LAP 6 INCHES OR ONE SPACE PLUS 2 INCHES, WHICHEVER IS LARGER, AND IS TO BE WIRED TOGETHER.
- R9. INSTALLATION OF REINFORCEMENT SHALL BE COMPLETED AT LEAST 24 HOURS PRIOR TO SCHEDULED CONCRETE PLACEMENT. NOTIFY ARCHITECT OR THEIR DESIGNATE OF COMPLETION AT LEAST 48 HOURS PRIOR TO SCHEDULED COMPLETION OF PLACEMENT OF REINFORCEMENT.

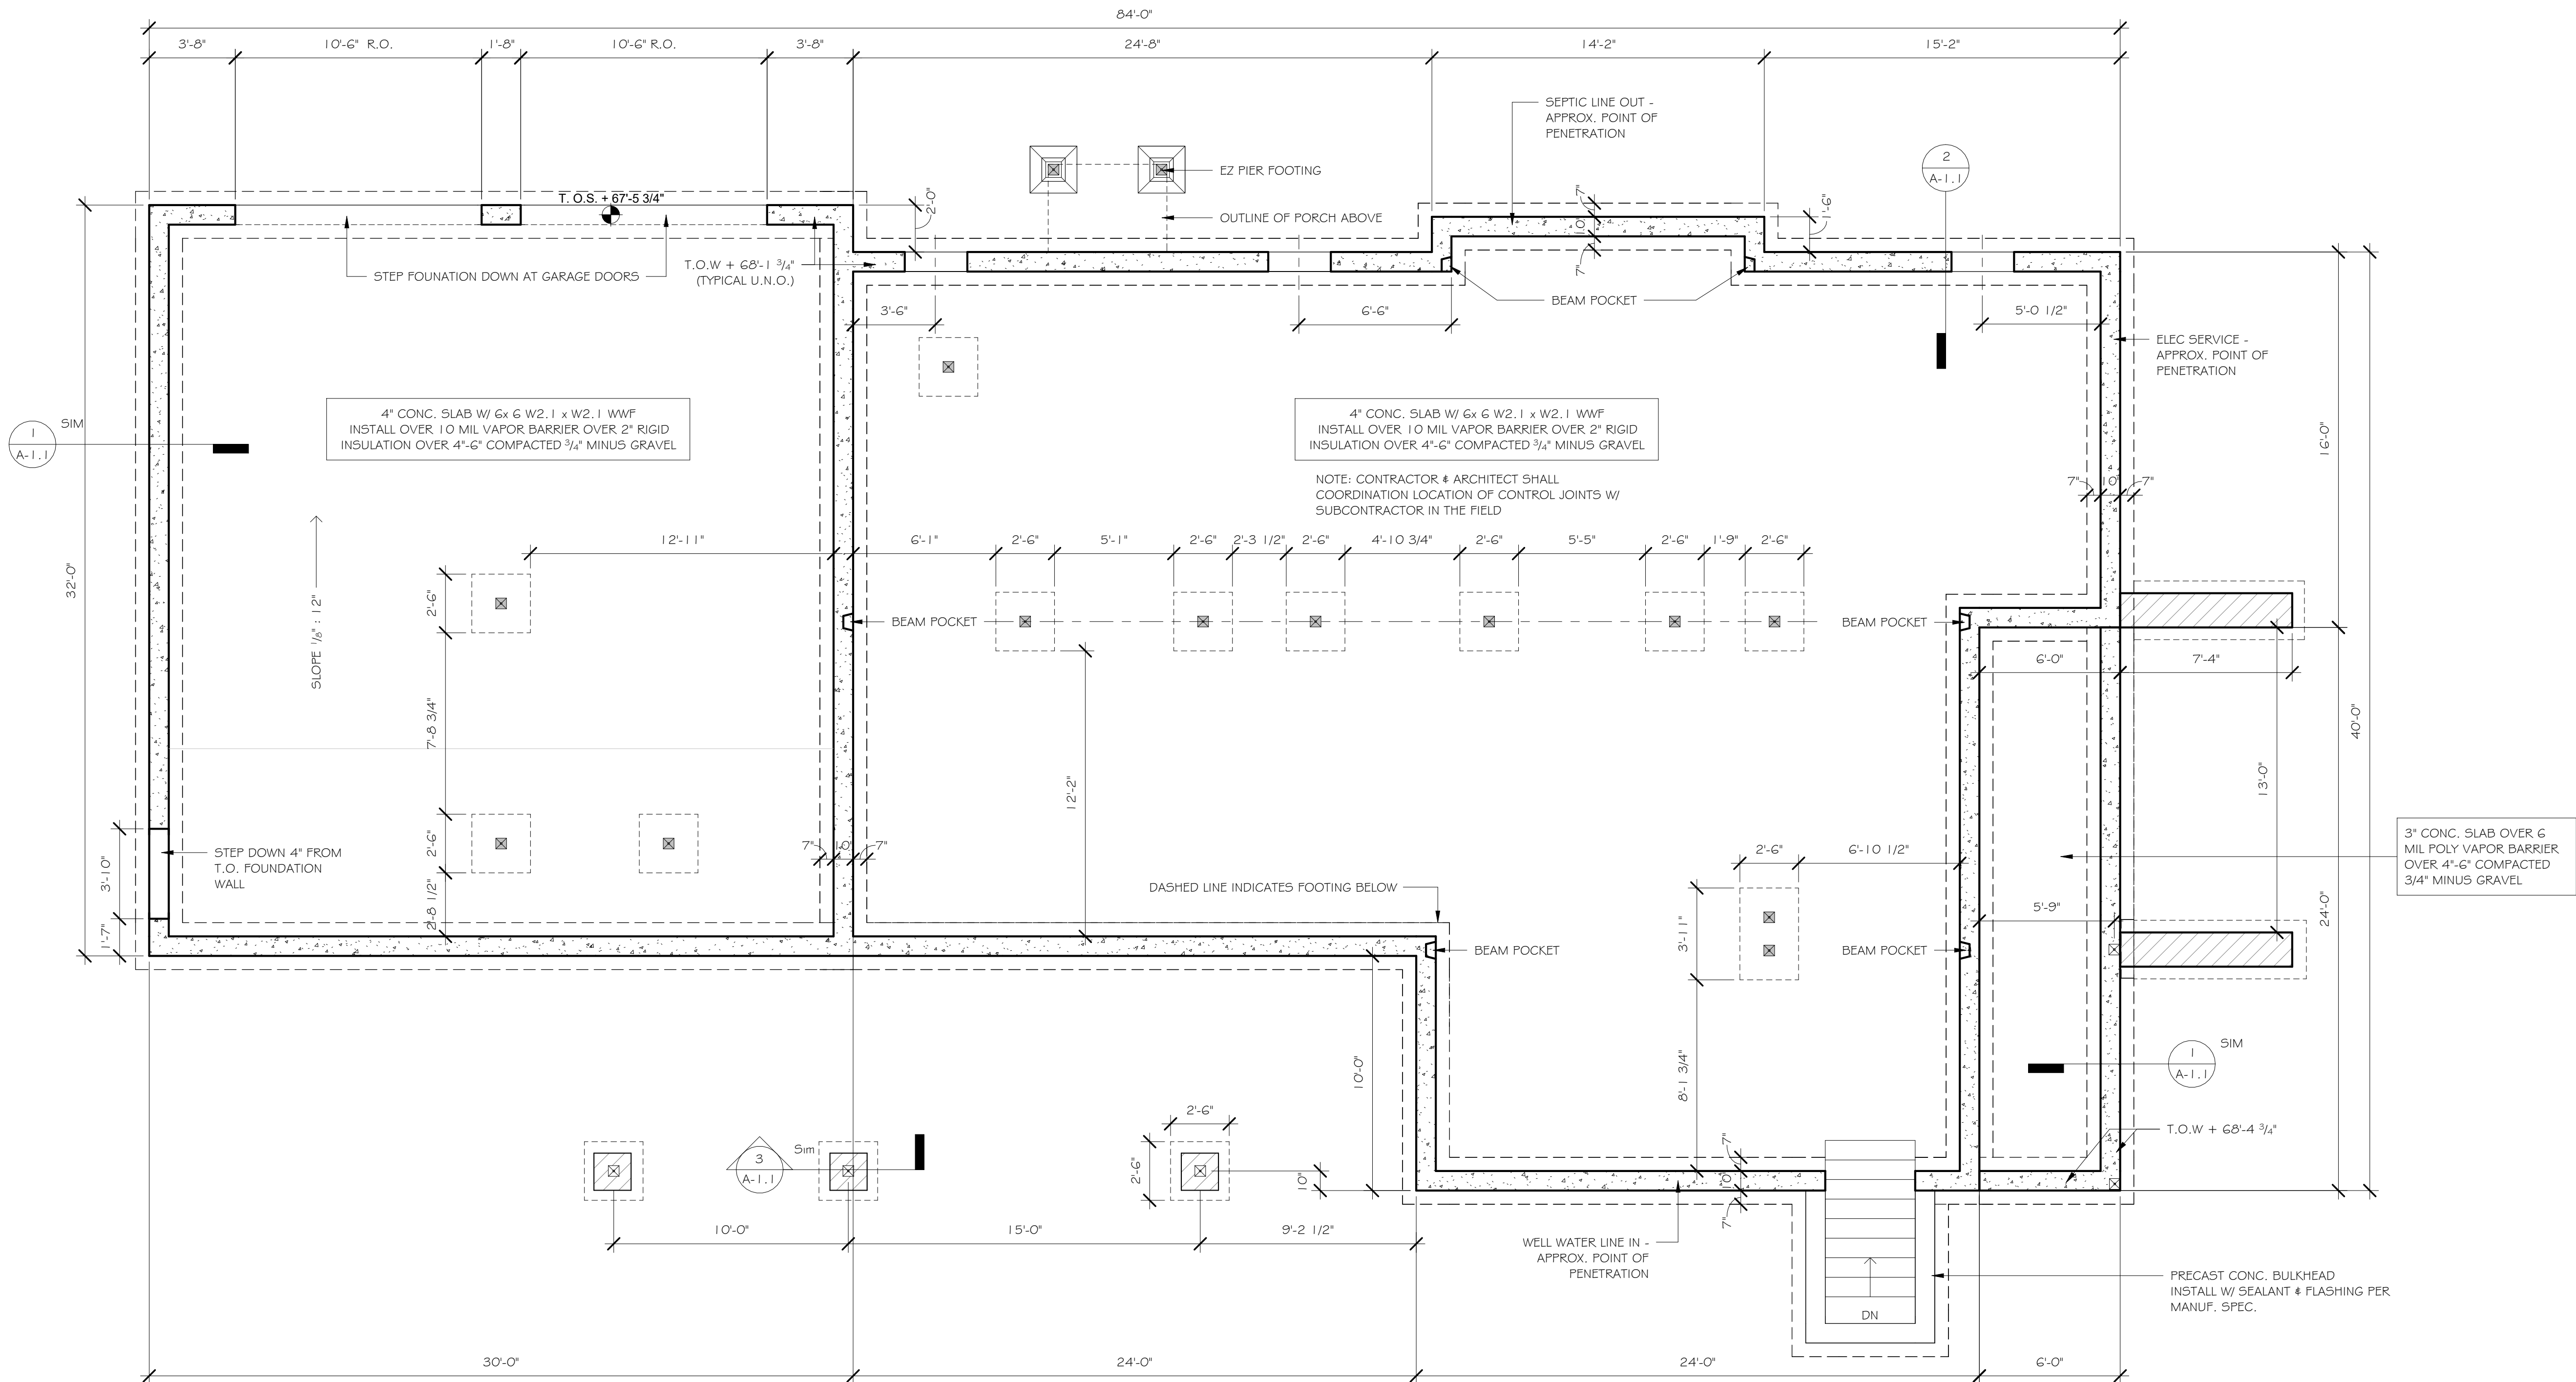

1 FOUNDATION PLAN
1/4" = 1'-0"

Revisions/Project Status

Issue Date & Issue Description

Cullen Residence


3 Spingler Ave.

3 Spingler Ave, South Hamilton, MA


© Red Barn Architecture

FOUNDATION PLAN


A-1.0

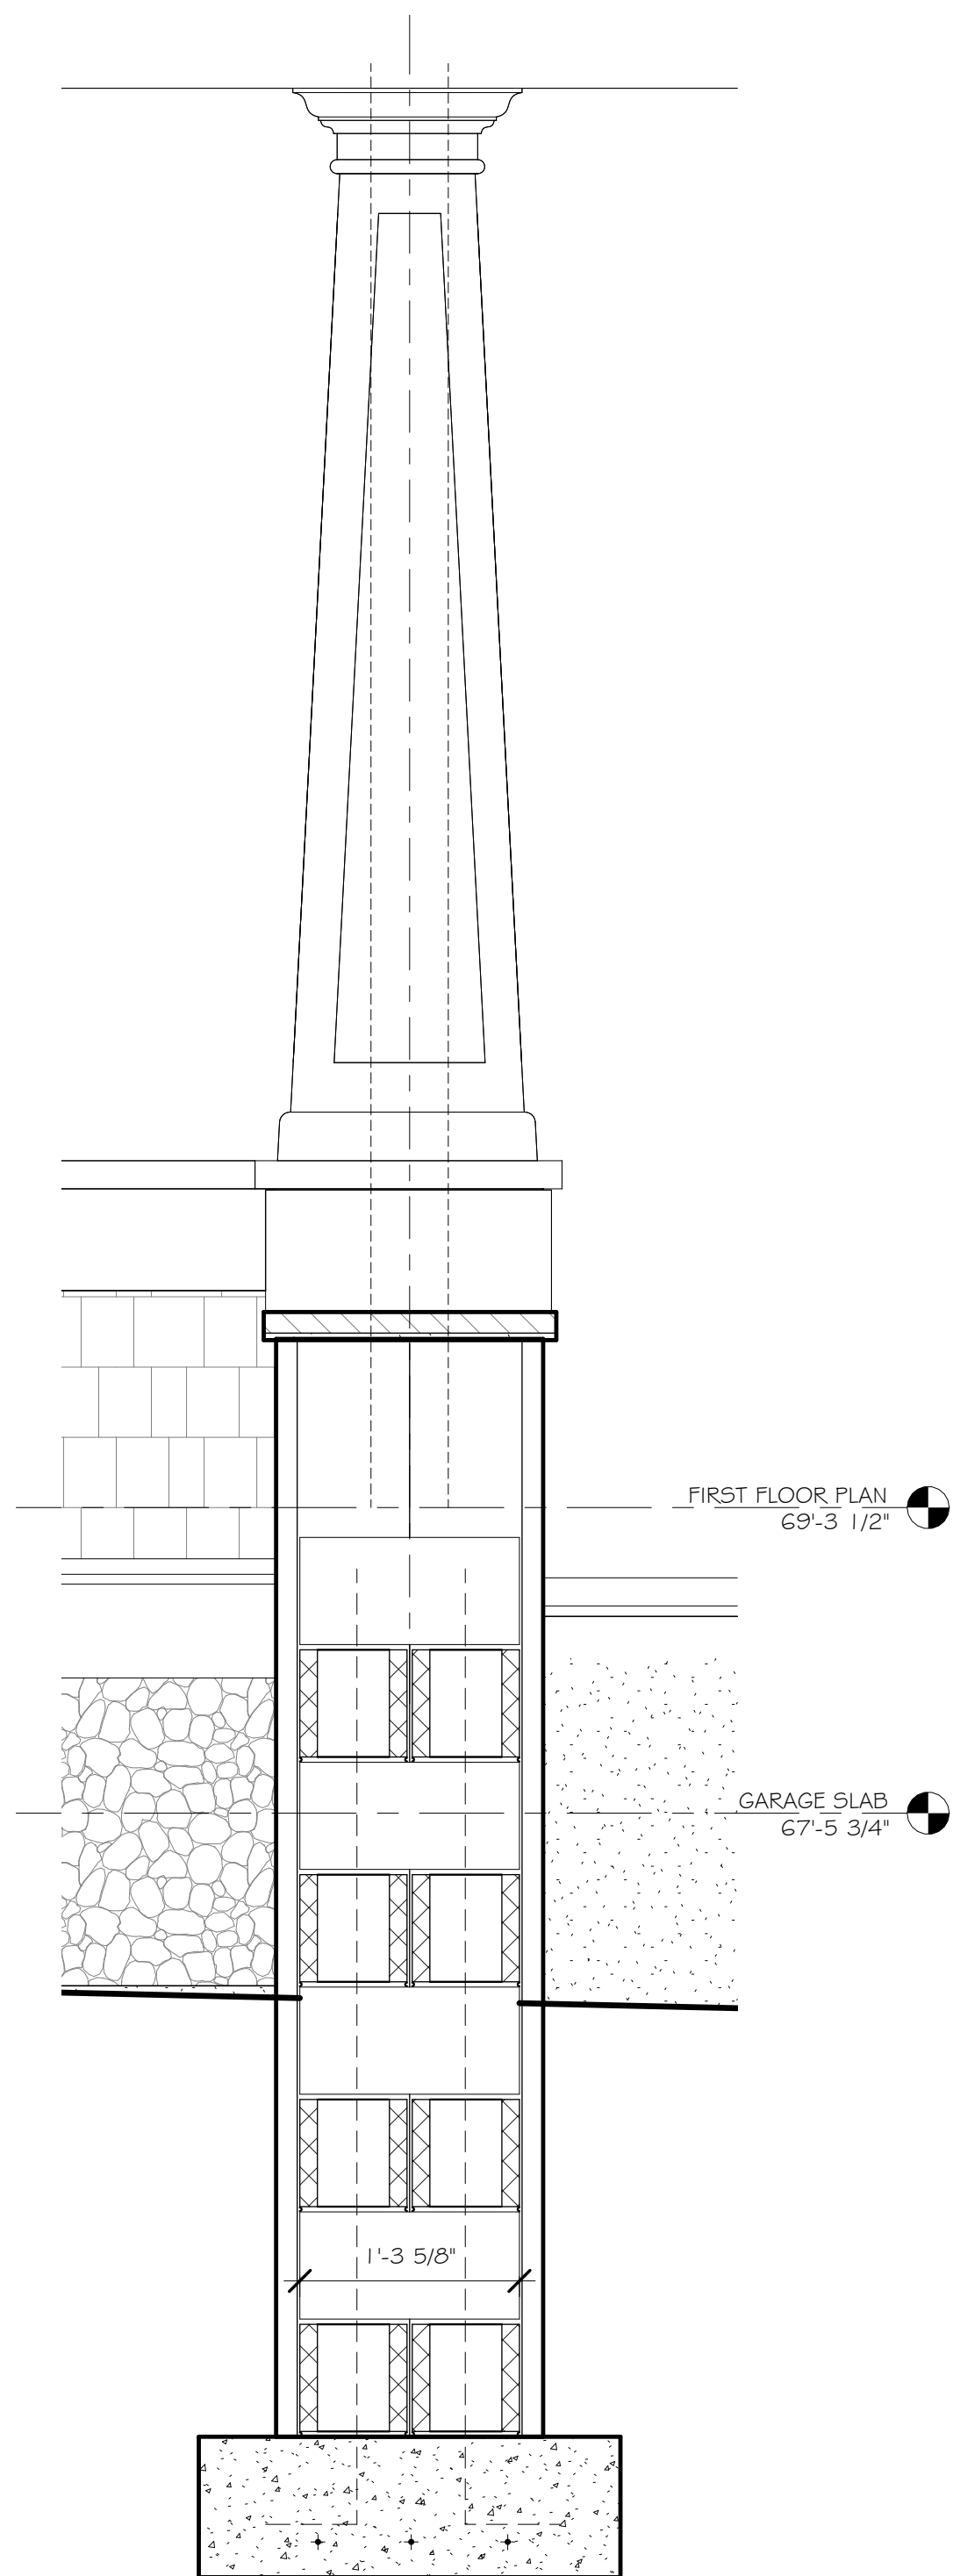

③ DETAIL SECTION AT CMU WING WALL/ COL BASE
1" = 1'-0"

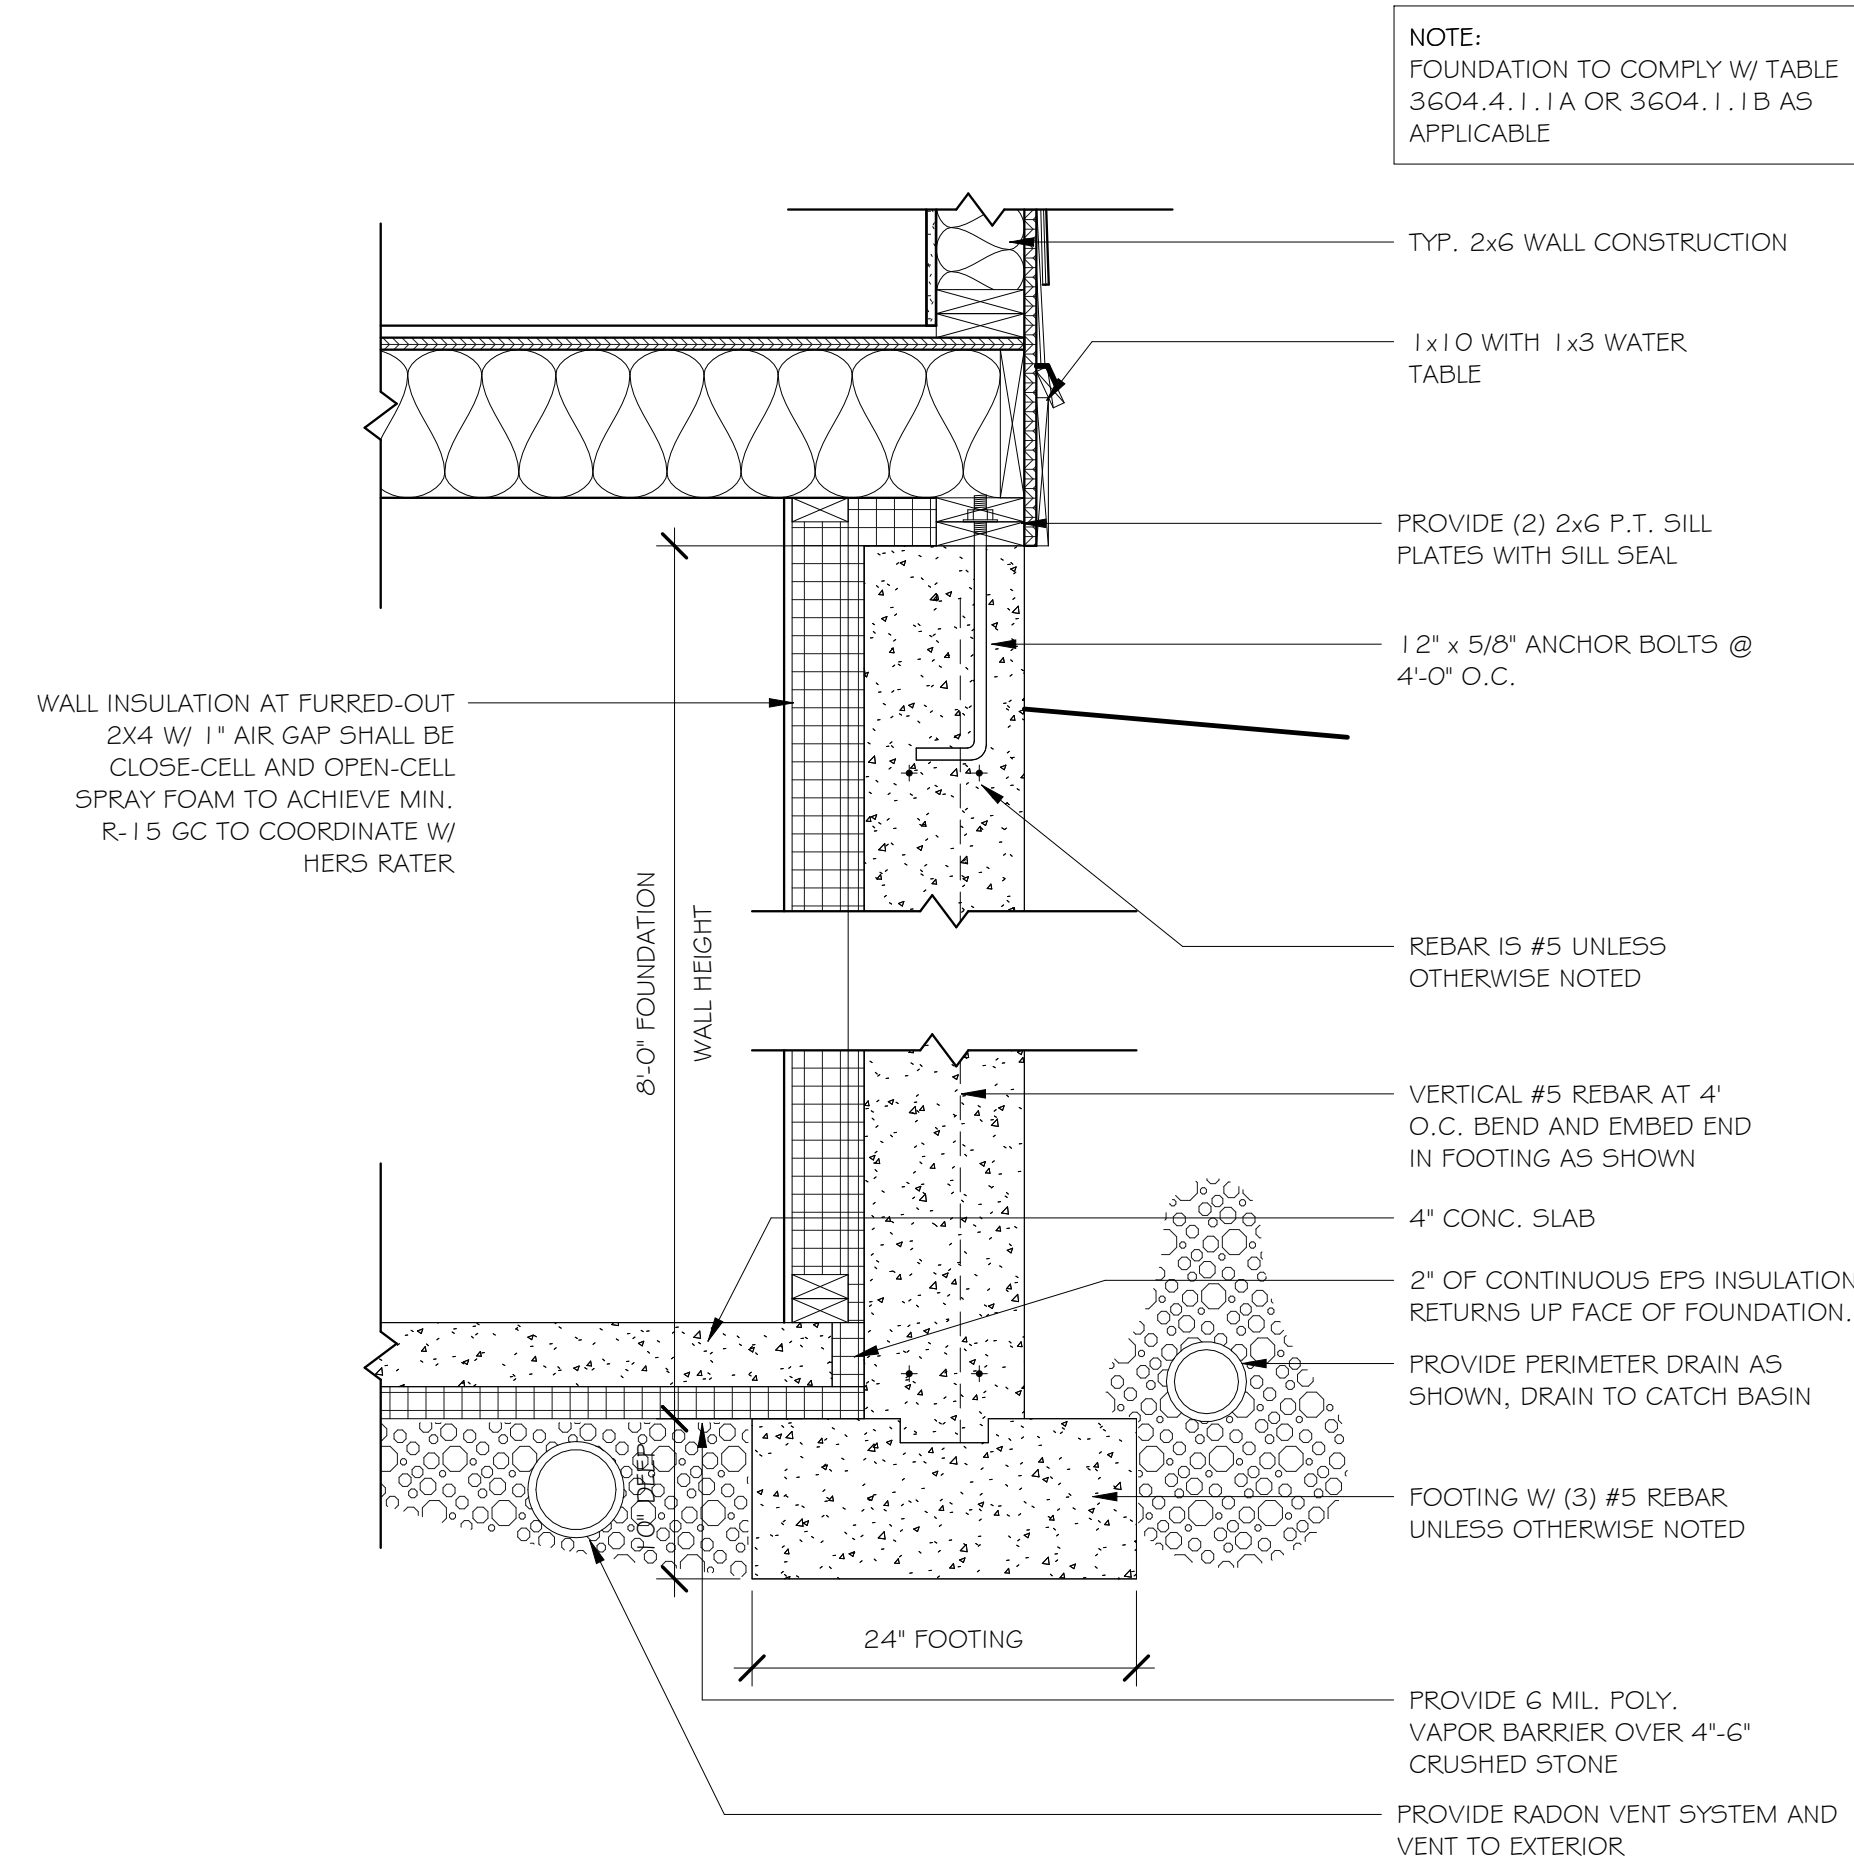


① FOUNDATION DETAIL - FULL HEIGHT
1" = 1'-0"

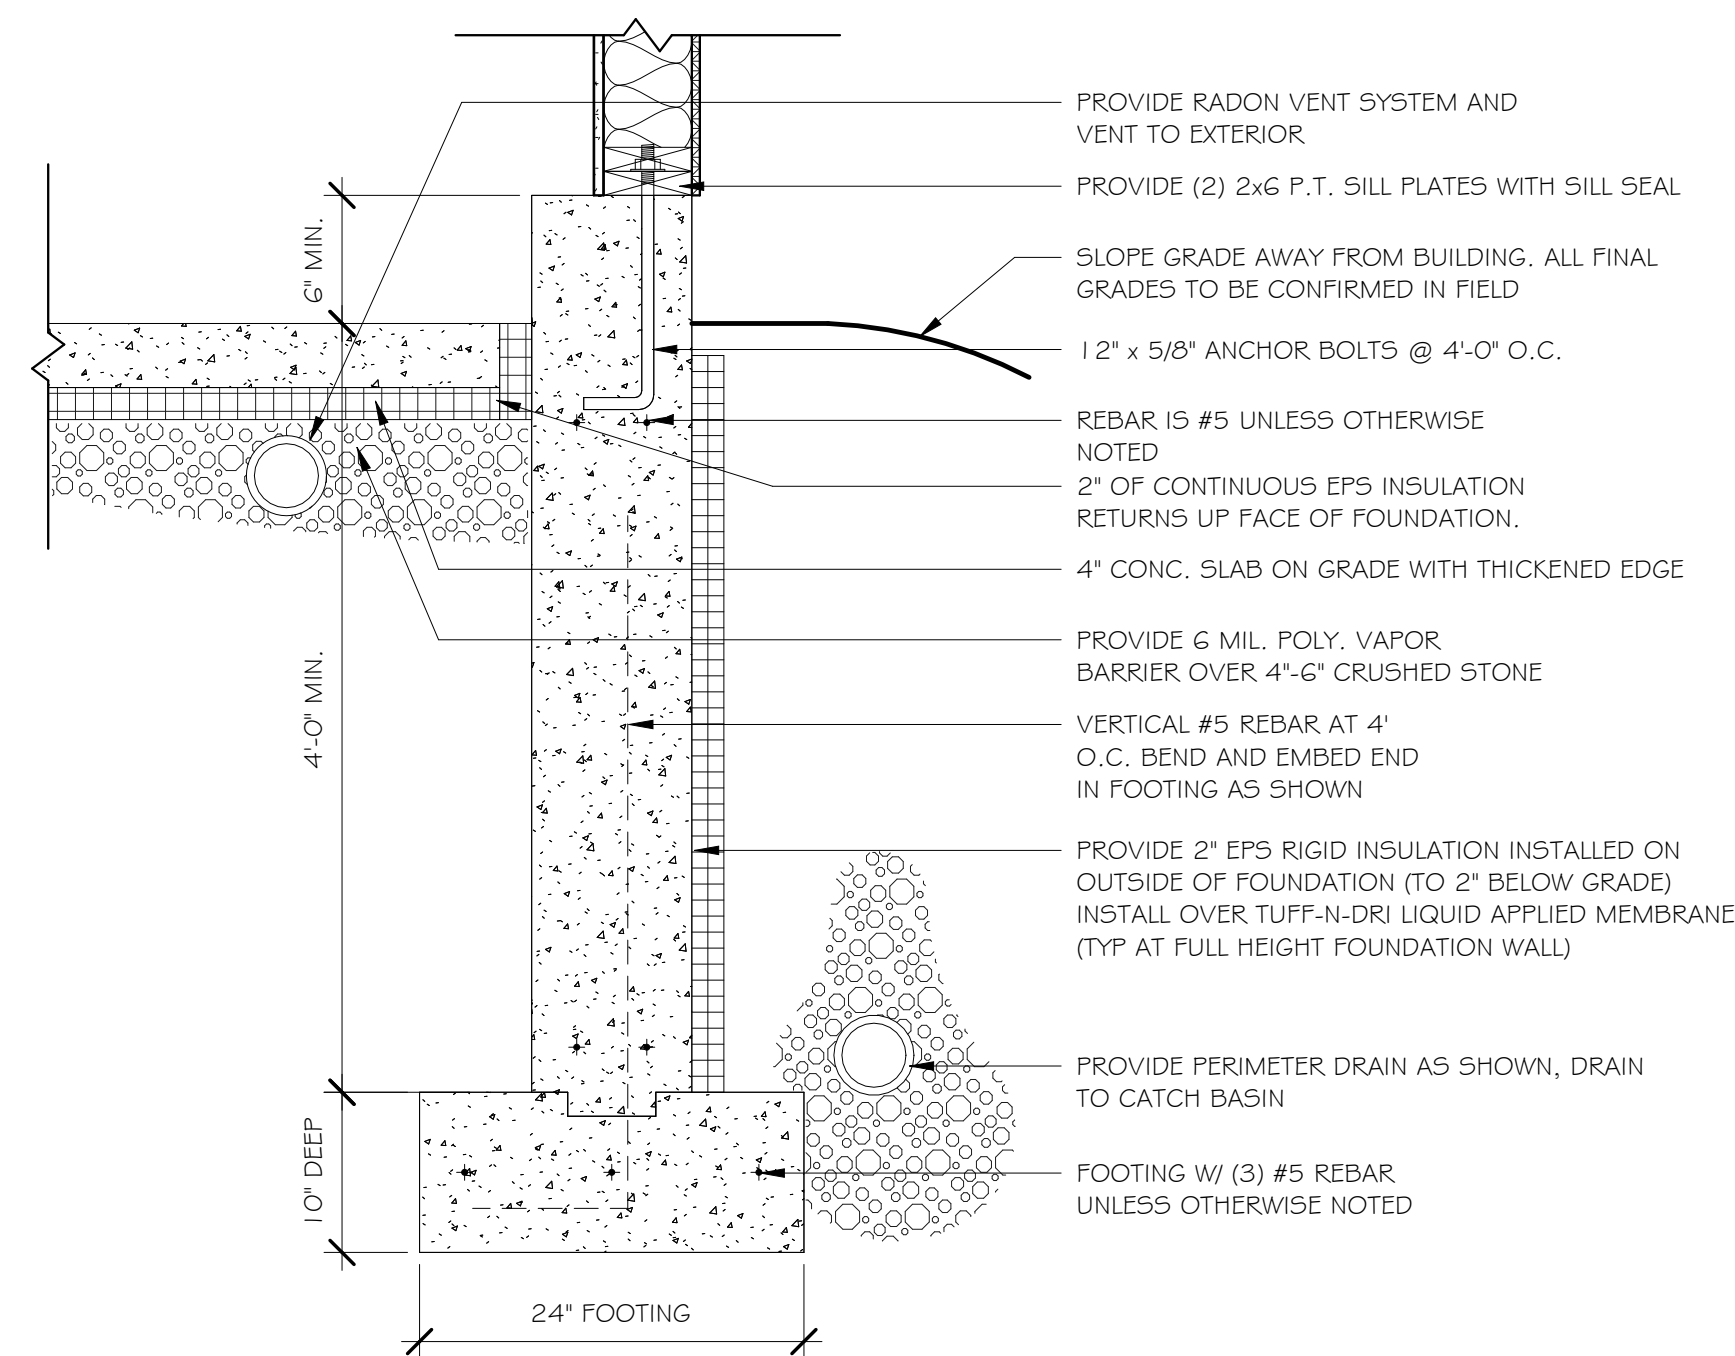

② FOUNDATION DETAIL - FROST WALL
1" = 1'-0"

Revisions/Project Status	
Issue	Date & Issue Description
△	

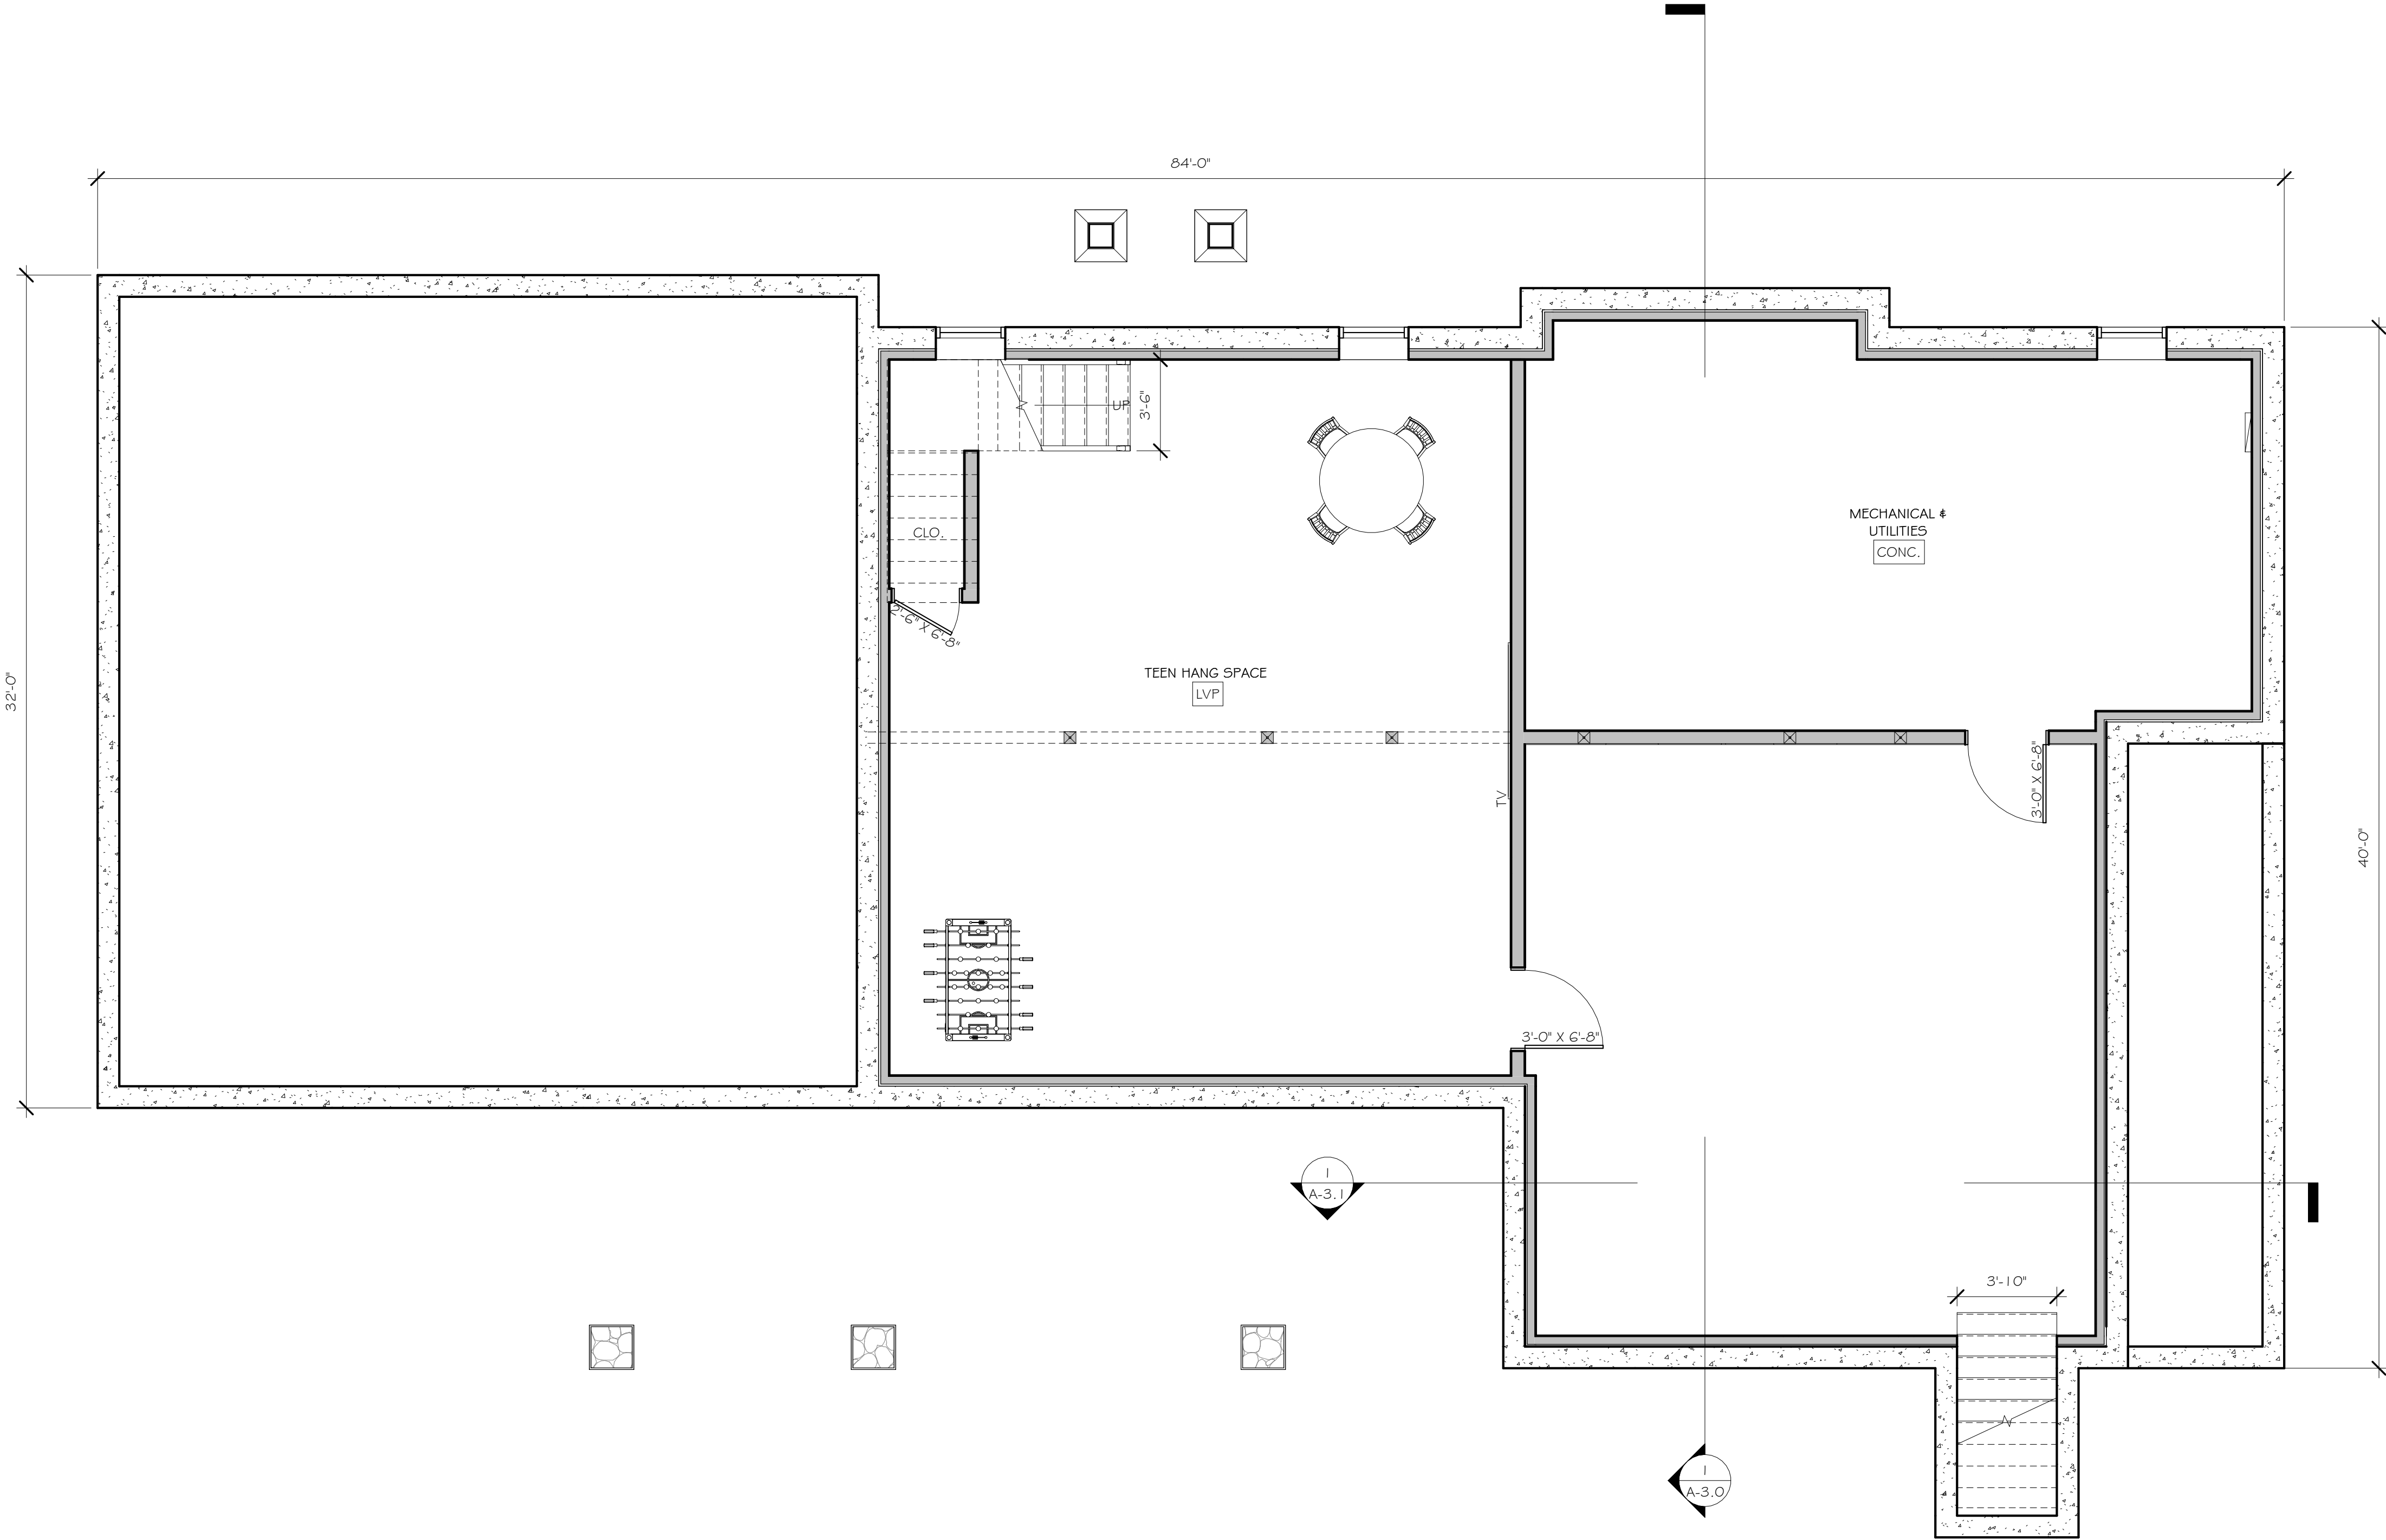

WALL LEGEND	
EXISTING WALL TO REMAIN	
PROPOSED NEW WALL	

- GENERAL CONSTRUCTION NOTES
- PROJECT SHALL INCLUDE THE CONSTRUCTION OF A SINGLE FAMILY HOME WITH TWO FLOORS FOR LIVING, A FULL HEIGHT BASEMENT AND A SLAB-ON-GRADE GARAGE.
 - ALL NEW 2x6 EXTERIOR WALLS TO RECEIVE MIN R-30 INSULATION, NEW ROOF/CEILING TO RECEIVE MIN R-49. PROVIDE R-30 INSULATION @ FIRST FLOOR FRAMING
 - WALLS SHALL BE 1/2" BLUEBOARD WITH SMOOTH SKIM COAT PLASTER FINISH
 - KITCHEN & PANTRY CABINETS & COUNTERS TO BE PROVIDED & INSTALLED BY THE CONTRACTOR (CONTRACTOR TO PROVIDE ALL UTILITIES TO APPLIANCES AS REQUIRED BY ELECTRICAL DRAWINGS AND IN ACCORDANCE W/ APPLIANCE MNFR.) PROVIDE BLOCKING IN WALL AS NECESSARY TO HANG CABINETS & SHELVES.
 - PROVIDE 1/2" HARDIE BACKER BOARD @ ALL WALL TILE APPLICATIONS
 - PROVIDE SCHLUTER SYSTEM UNDERLAY @ ALL TILE FLOOR APPLICATIONS
 - PROVIDE SCHLUTER TRANSITION STRIPS @ ALL FLOOR MATERIAL CHANGES
 - EXTERIOR DIMENSIONS SHOWN ON PLANS ARE MEASURED FROM EXTERIOR FACE OF STUD TO EXT FACE OF STUD.
 - INTERIOR DIMENSIONS SHOWN ON PLANS ARE MEASURED FROM FINISHED FACE OF WALL TO FINISHED FACE OF WALL.

1 BASEMENT FLOOR PLAN
1/4" = 1'-0"

Project Name	3 Spingler Ave.
Description	BASEMENT FLOOR PLAN
Scale:	1/4" = 1'-0"
Date:	03.05.2026
Drawn by:	AM
Plot Date:	3/5/2026 9:30:47 AM

Revisions/Project Status	
Issue	Date & Issue Description
△	


Revisions/Project Status	
Issue	Date & Issue Description
1	
2	
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	
17	
18	
19	
20	
21	
22	
23	
24	
25	
26	
27	
28	
29	
30	
31	
32	
33	
34	
35	
36	
37	
38	
39	
40	
41	
42	
43	
44	
45	
46	
47	
48	
49	
50	
51	
52	
53	
54	
55	
56	
57	
58	
59	
60	
61	
62	
63	
64	
65	
66	
67	
68	
69	
70	
71	
72	
73	
74	
75	
76	
77	
78	
79	
80	
81	
82	
83	
84	
85	
86	
87	
88	
89	
90	
91	
92	
93	
94	
95	
96	
97	
98	
99	
100	

Cullen Residence

3 Spingler Ave.

3 Spingler Ave, South Hamilton, MA

- WALL LEGEND
- EXISTING WALL TO REMAIN
- PROPOSED NEW WALL
- GENERAL CONSTRUCTION NOTES
- PROJECT SHALL INCLUDE THE CONSTRUCTION OF A SINGLE FAMILY HOME WITH TWO FLOORS FOR LIVING, A FULL HEIGHT BASEMENT AND A SLAB-ON-GRADE GARAGE.
 - ALL NEW 2x6 EXTERIOR WALLS TO RECEIVE MIN R-30 INSULATION, NEW ROOF/CEILING TO RECEIVE MIN R-49. PROVIDE R-30 INSULATION @ FIRST FLOOR FRAMING
 - WALLS SHALL BE 1/2" BLUEBOARD WITH SMOOTH SKIM COAT PLASTER FINISH
 - KITCHEN & PANTRY CABINETS & COUNTERS TO BE PROVIDED & INSTALLED BY THE CONTRACTOR (CONTRACTOR TO PROVIDE ALL UTILITIES TO APPLIANCES AS REQUIRED BY ELECTRICAL DRAWINGS AND IN ACCORDANCE W/ APPLIANCE MNFR.) PROVIDE BLOCKING IN WALL AS NECESSARY TO HANG CABINETS & SHELVES.
 - PROVIDE 1/2" HARDIE BACKER BOARD @ ALL WALL TILE APPLICATIONS
 - PROVIDE SCHLUTER SYSTEM UNDERLAY @ ALL TILE FLOOR APPLICATIONS
 - PROVIDE SCHLUTER TRANSITION STRIPS @ ALL FLOOR MATERIAL CHANGES
 - EXTERIOR DIMENSIONS SHOWN ON PLANS ARE MEASURED FROM EXTERIOR FACE OF STUD TO EXT FACE OF STUD.
 - INTERIOR DIMENSIONS SHOWN ON PLANS ARE MEASURED FROM FINISHED FACE OF WALL TO FINISHED FACE OF WALL.

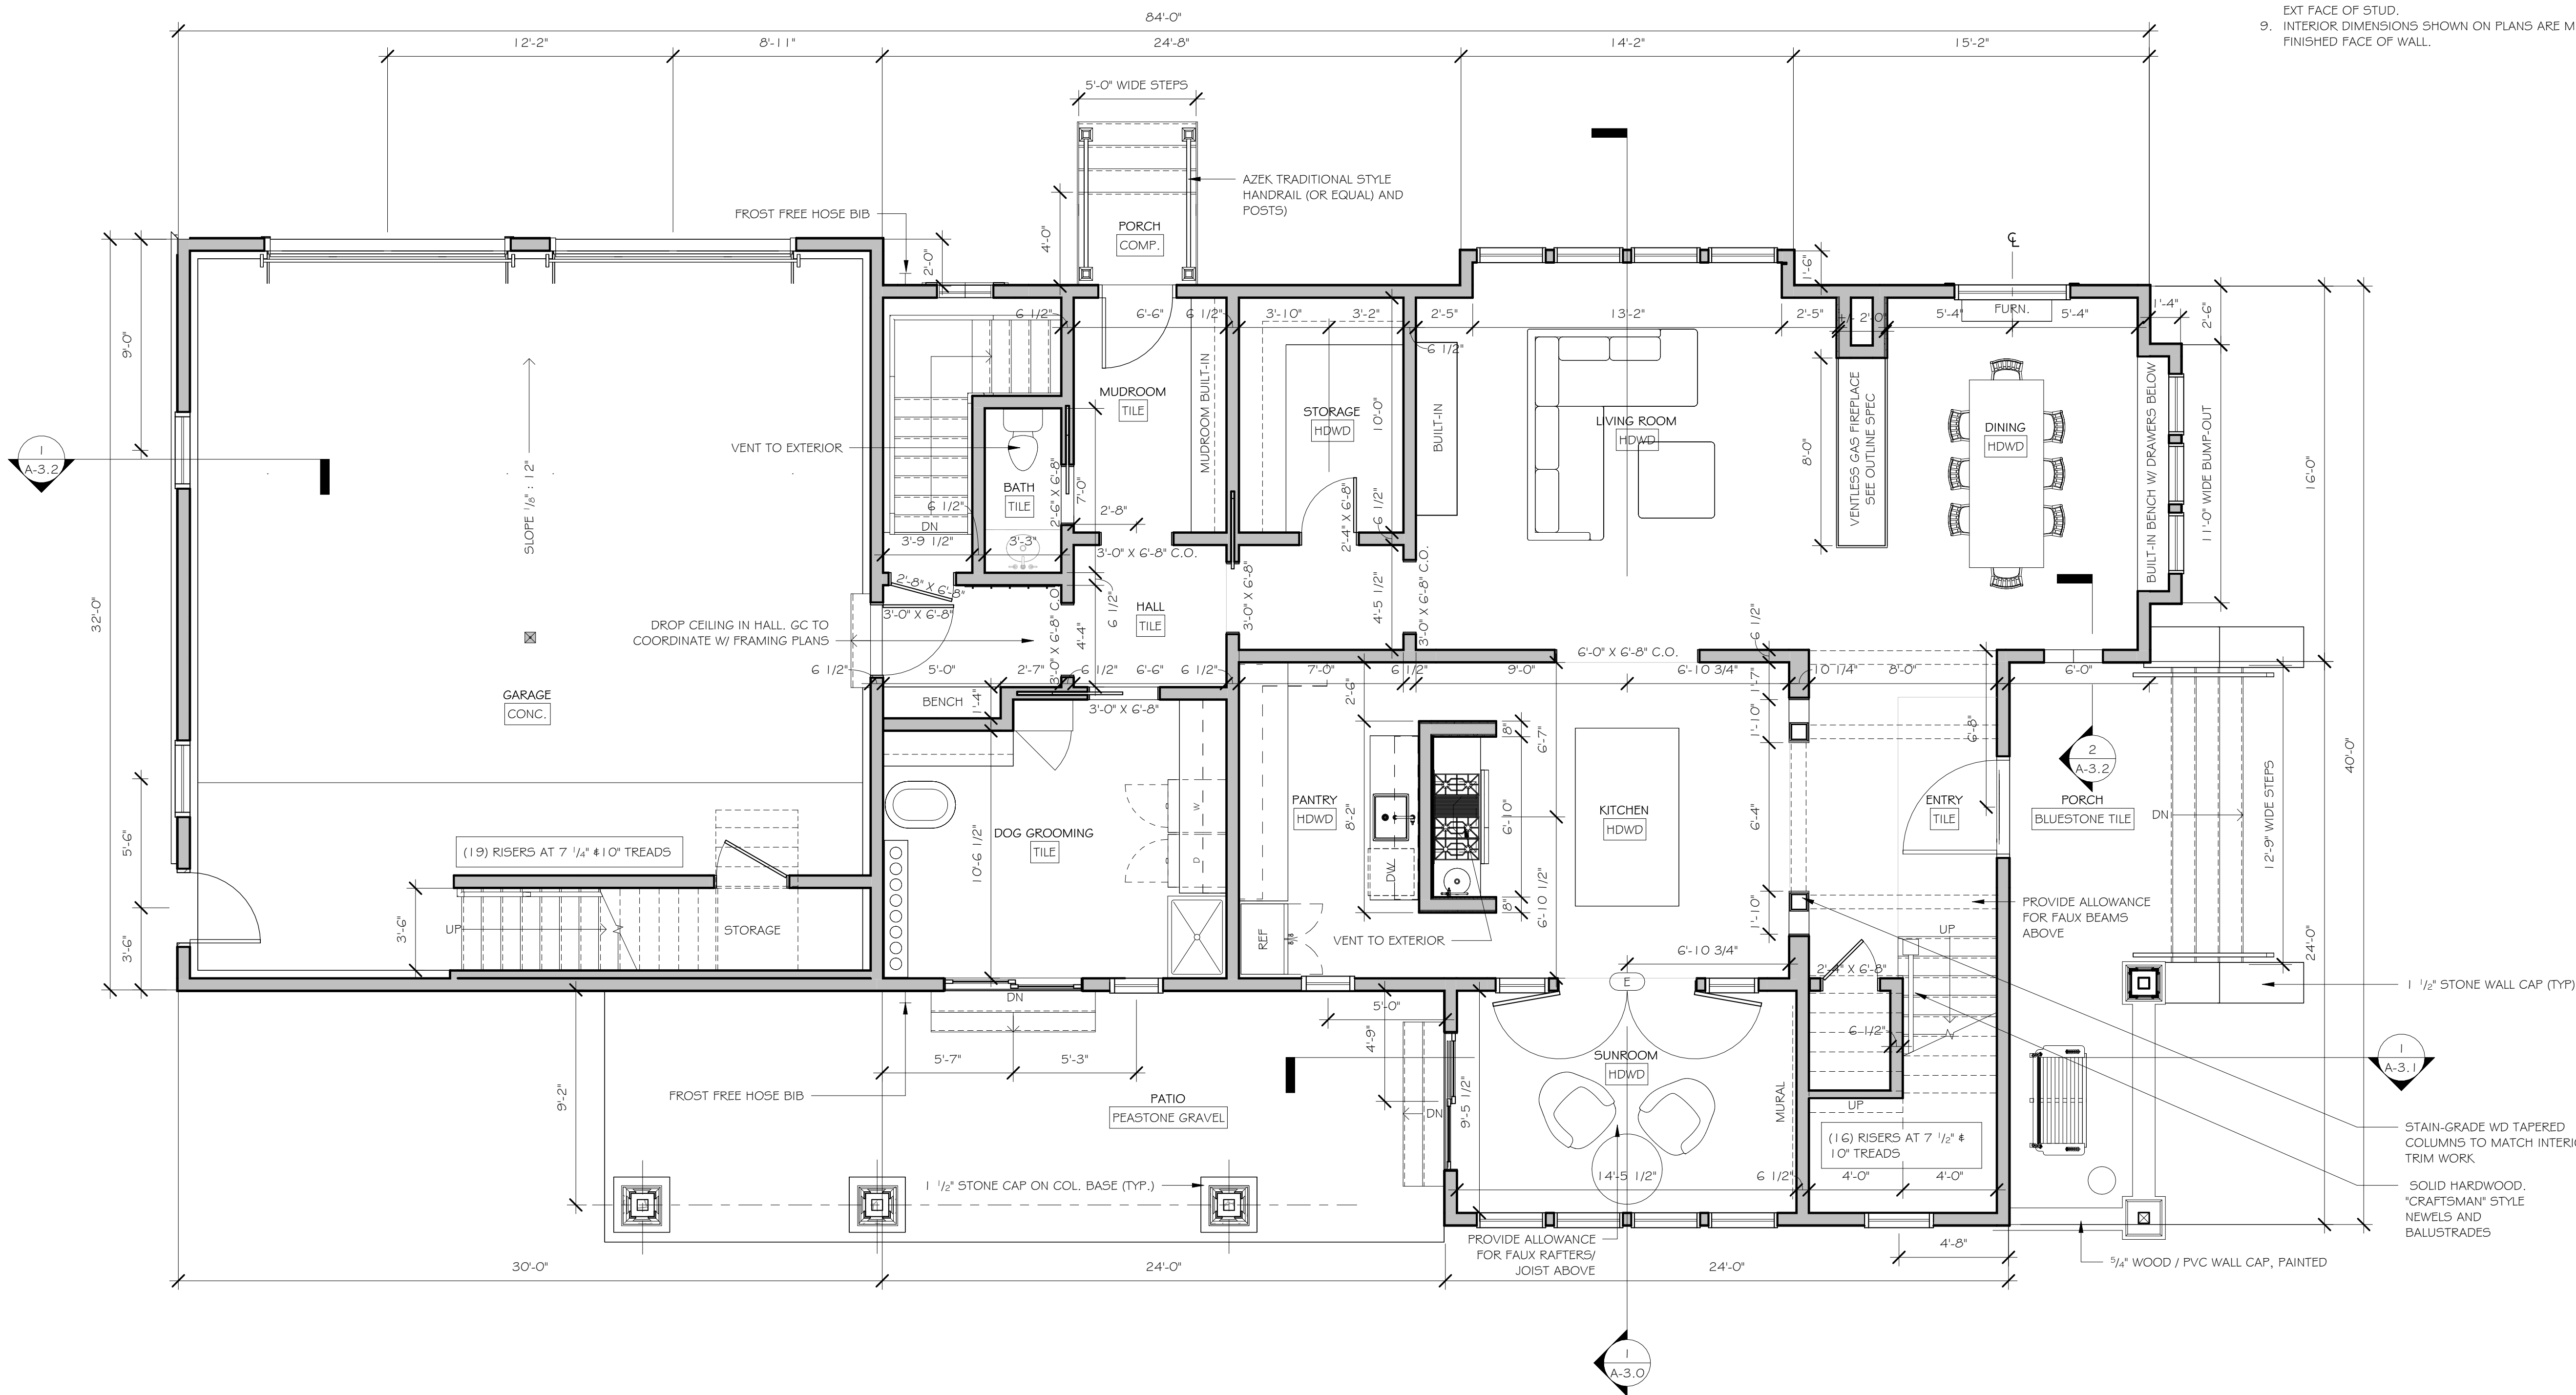

[illegible]

Cullen Residence
3 Spingler Ave.
3 Spingler Ave, South Hamilton, MA


WALL LEGEND

EXISTING WALL TO REMAIN

PROPOSED NEW WALL

GENERAL CONSTRUCTION NOTES

1. PROJECT SHALL INCLUDE THE CONSTRUCTION OF A SINGLE FAMILY HOME WITH TWO FLOORS FOR LIVING, A FULL HEIGHT BASEMENT AND A SLAB-ON-GRADE GARAGE.
2. ALL NEW 2x6 EXTERIOR WALLS TO RECEIVE MIN R-30 INSULATION. NEW ROOF/CEILING TO RECEIVE MIN R-49. PROVIDE R-30 INSULATION @ FIRST FLOOR FRAMING
3. WALL SHEATHING TO BE COMBOST SIKUM COAT FLAME RESISTANT
4. KITCHEN & PANTRY CABINETS, COUNTERTOPS TO BE PROVIDED & INSTALLED BY THE CONTRACTOR (CONTRACTOR TO PROVIDE ALL UTILITIES TO APPLIANCES AS REQUIRED BY ELECTRICAL DRAWINGS AND IN ACCORDANCE W/ APPLIANCE MNNF.) PROVIDE BLOCKING IN WALL AS NECESSARY TO HANG CABINETS & SHELVES.
5. PROVIDE 1/2" HARDIE BACKER BOARD @ ALL WALL TILE APPLICATIONS
6. PROVIDE SCHLUTER SYSTEM UNDERLAY @ ALL TILE FLOOR APPLICATIONS
7. PROVIDE SCHLUTER TRANSITION STRIPS @ FLOOR MATERIAL CHANGES
8. EXTERIOR DIMENSIONS SHOWN ON PLANS ARE MEASURED FROM EXTERIOR FACE OF STUD TO EXT FACE OF STUD.
9. INTERIOR DIMENSIONS SHOWN ON PLANS ARE MEASURED FROM FINISHED FACE OF WALL TO FINISHED FACE OF WALL.

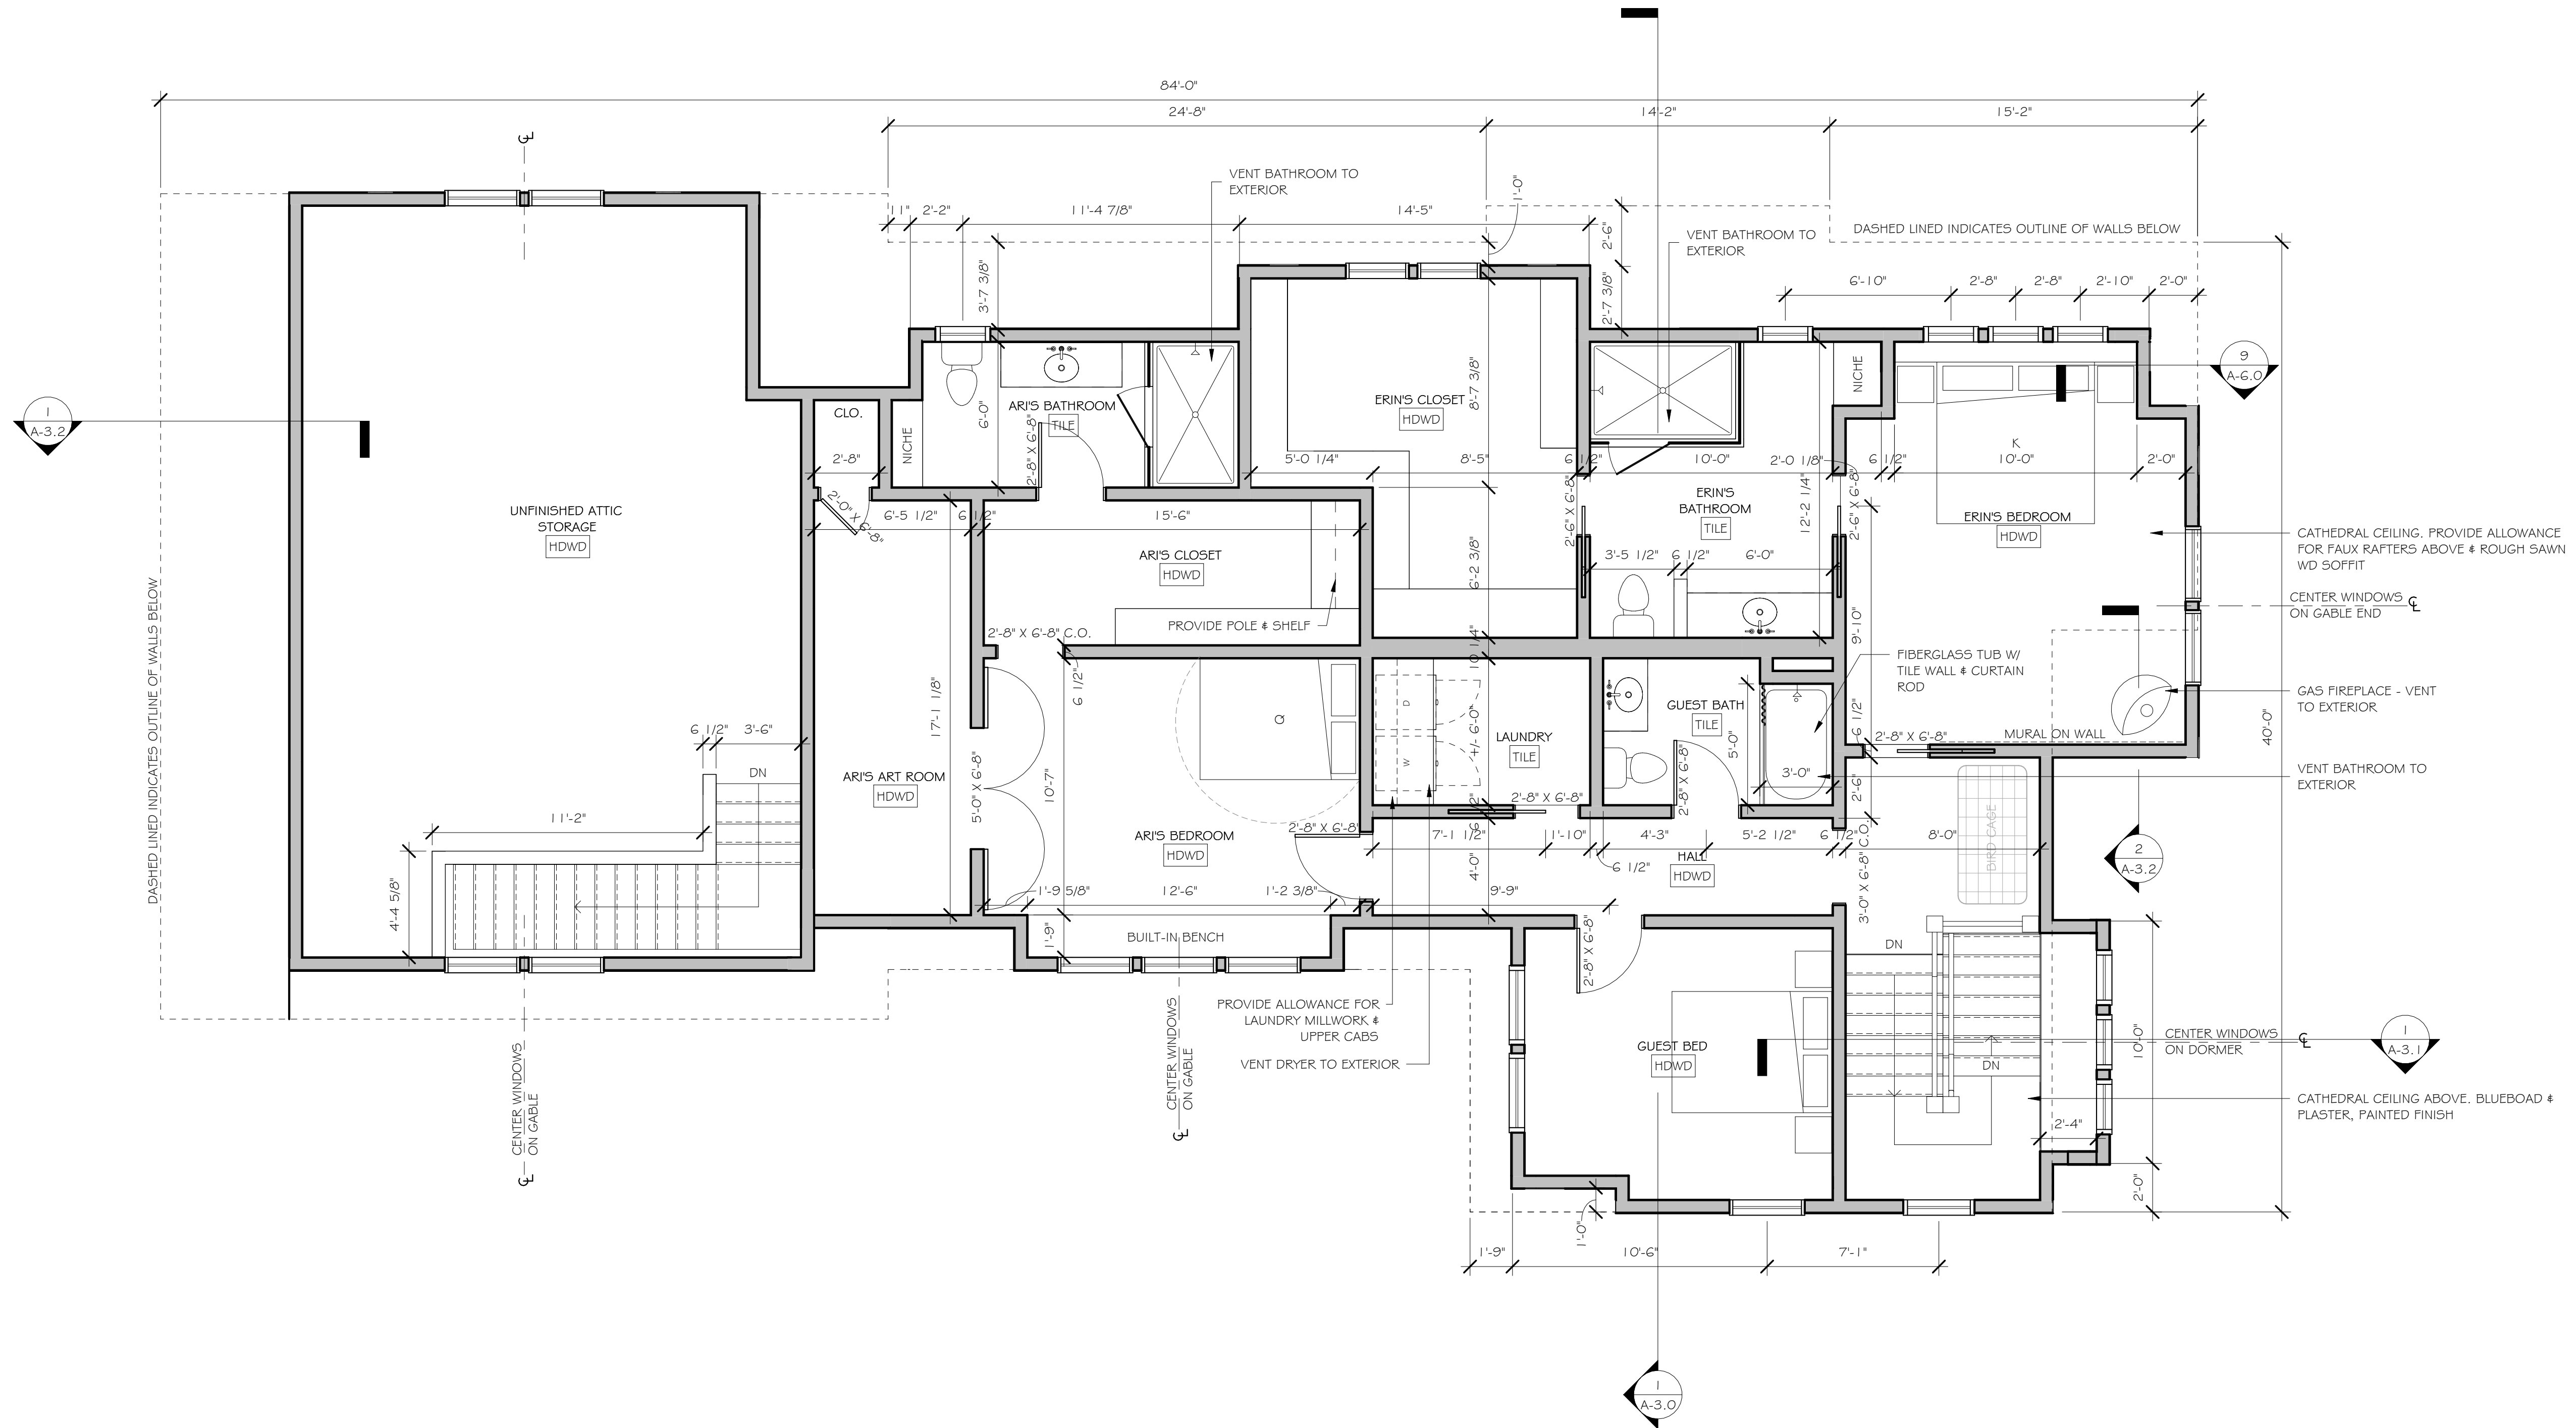

① SECOND FLOOR PLAN
1/4" = 1'-0"

Description
DOF PLAN

Date: 03.05.2026

Drawn by: AM

ot Date: 3/5/2026 9:30:49 AM


[illegible]

Cullen Residence
3 Spingler Ave.
3 Spingler Ave, South Hamilton, MA


GENERAL ROOFING NOTES


-
- Architectural roof plan showing a complex multi-pitched roof layout. The plan includes various annotations for materials, pitches, and penetrations.
- Annotations:**
- Top Left:** PROVIDE STANDING SEAM METAL ROOF OVER 5/8" ZIP SYSTEM SHEATHING. PROVIDE "HIGH TEMP" ICE AND WATER SHIELD. DRIP EDGE COLOR TO MATCH
 - Top Center:** 35 YEAR ARCHITECTURAL SHINGLES OVER 15# FELT PAPER 5/8" CDX PLYWOOD. PROVIDE ICE AND WATER AT ALL EAVE, RAKE, AND HIP/VALLEY CONDITIONS. PROVIDE ALUMINUM DRIP EDGE AT ALL EAVE AND RAKE LOCATIONS. (TYPICAL U.N.O.)
 - Center Right:** PREFERRED LOCATION FOR ROOF PENETRATIONS
 - Right Side:** ROOF CRICKET, PROVIDE MTL FLASHING CHIMNEY-ROOF CONNECTION
 - Bottom Left:** AT ROOF PITCHES BETWEEN 2°/12" AND 4°/12" PROVIDE TWO LAYERS OF ICE & WATER SHIELD
- Pitch Callouts:** 10°/12", 4°/12", 3°/12", 2°/12", 1°/12"
- Penetration Callouts:** 1 A-3.0, 2 A-3.2, 1 A-3.1

① ROOF PLAN
1/4" = 1'-0"

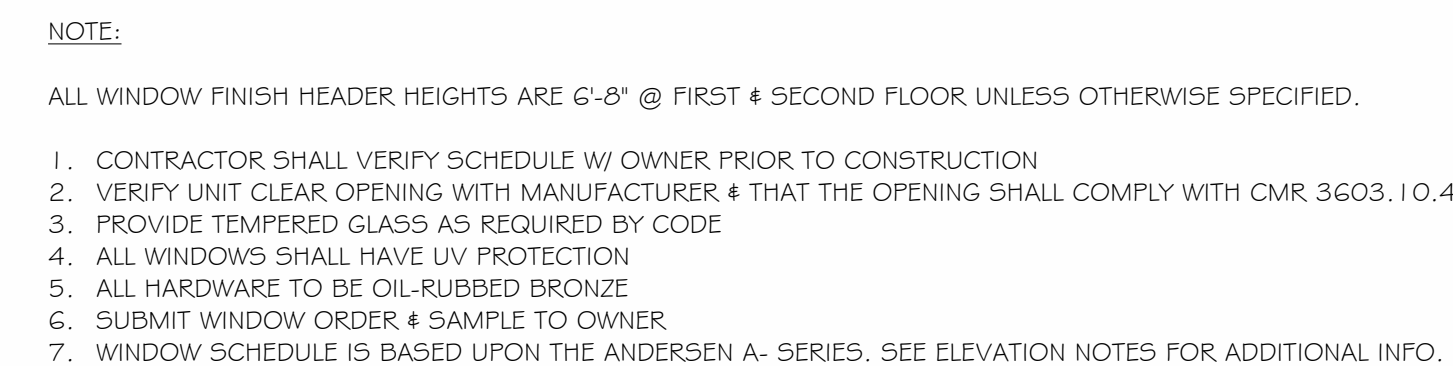


① FRONT ELEVATION
1/4" = 1'-0"



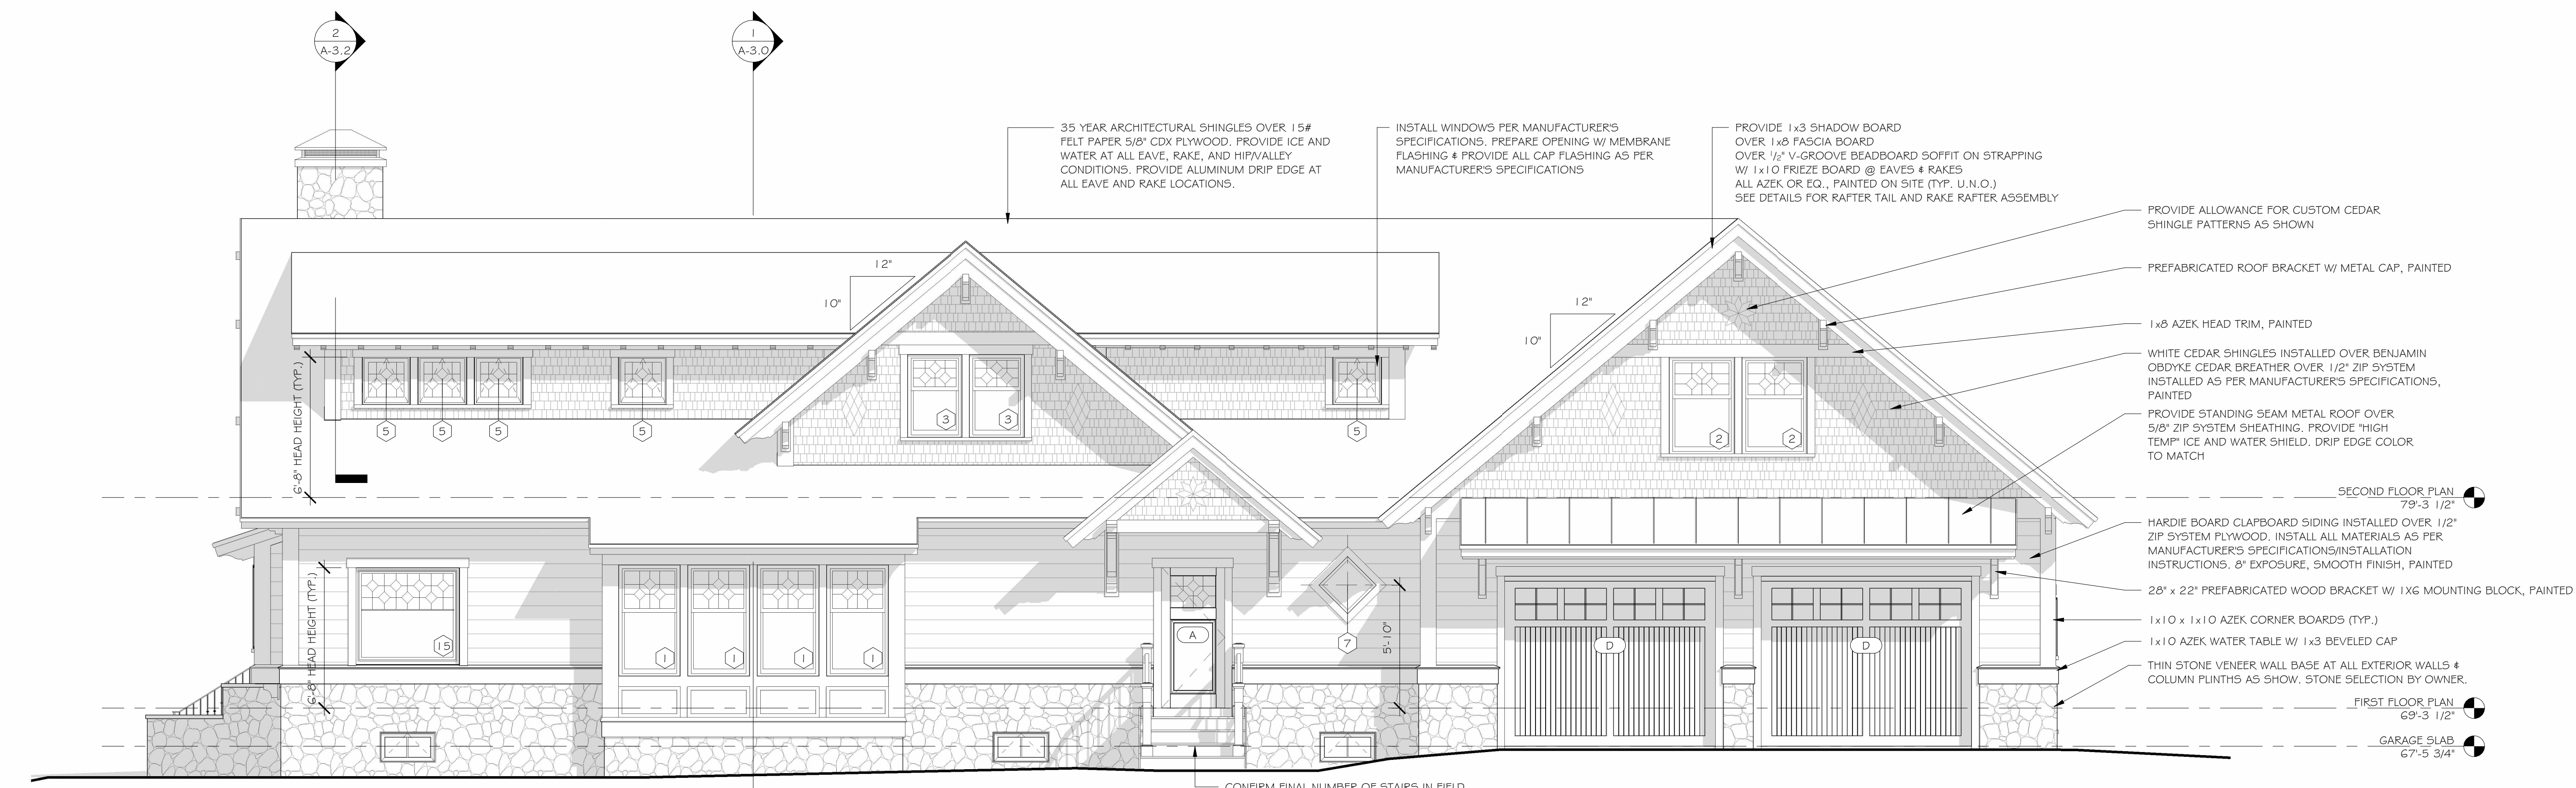

② RIGHT SIDE ELEVATION
1/4" = 1'-0"

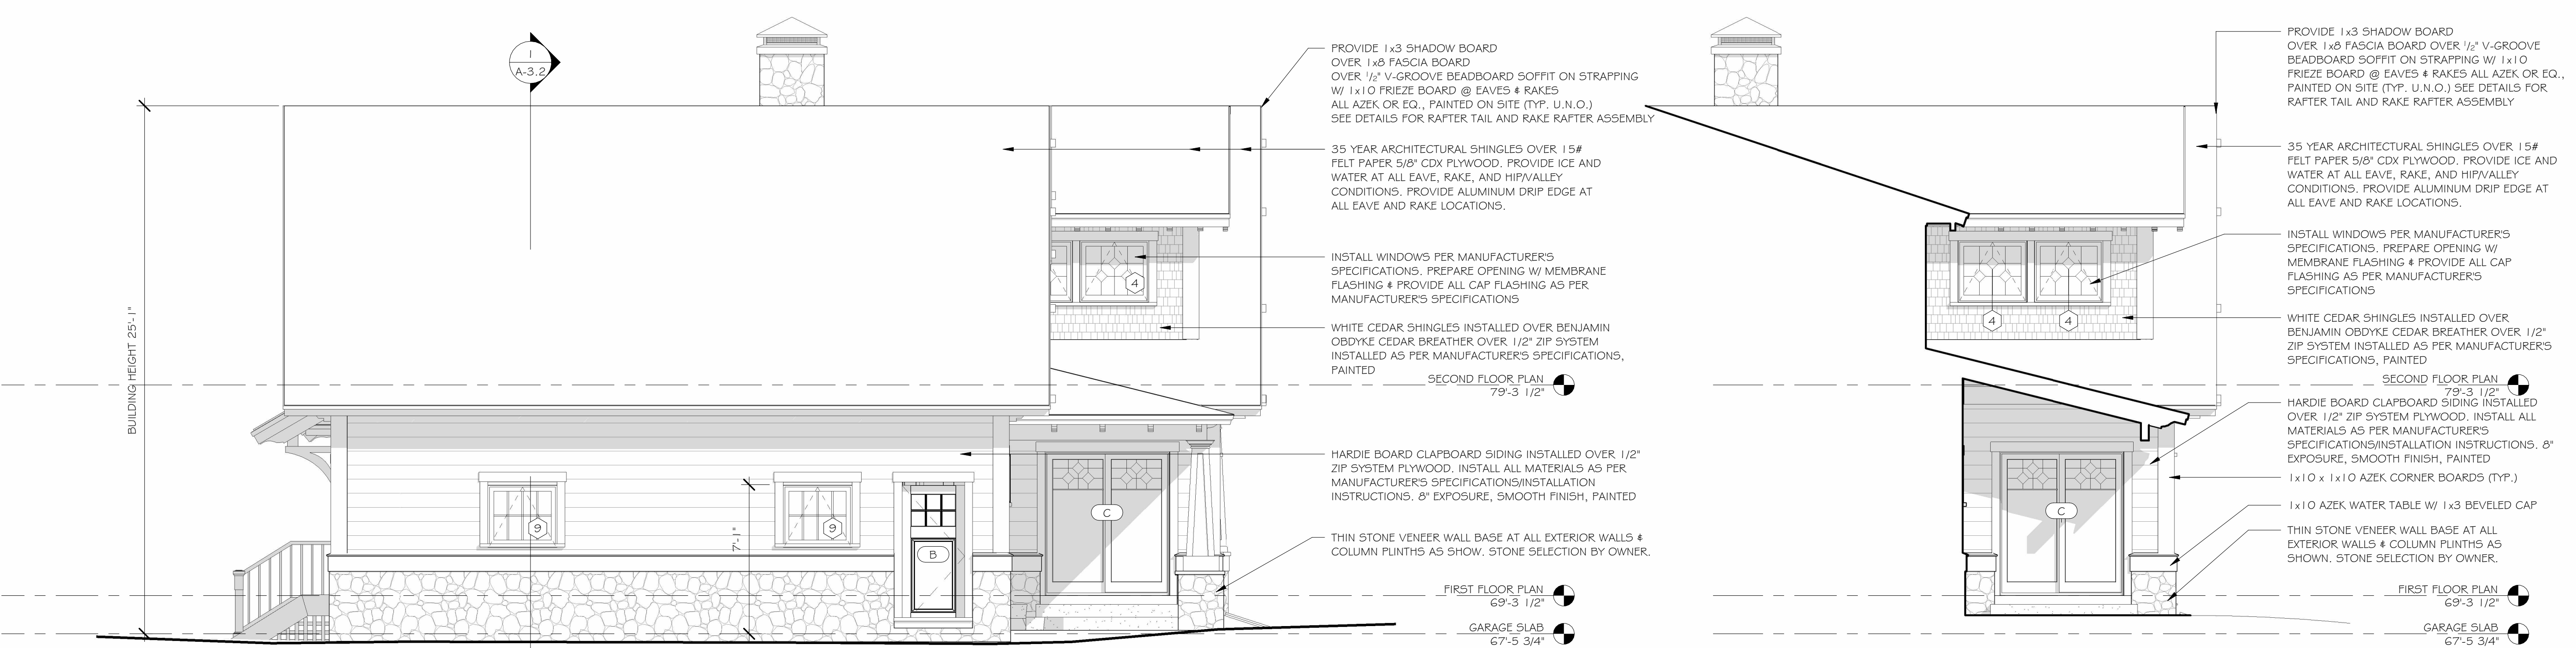

① REAR ELEVATION
1/4" = 1'-0"


③ PARTIAL REAR ELEVATION
1/4" = 1'-0"

Revisions/Project Status	
Issue	Date & Issue Description
△	



Revisions/Project Status		
Issue	Date	Issue Description
1		

Cullen Residence
3 Spingler Ave.
3 Spingler Ave, South Hamilton, MA

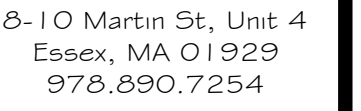

description
BUILDING SECTION

ate: 03.05.2026


ot Date: 3/5/2026 9:31:13 AM


[illegible]

Cullen Residence
3 Spingler Ave.
3 Spingler Ave, South Hamilton, MA

BUILDING SECTION


A-3.1

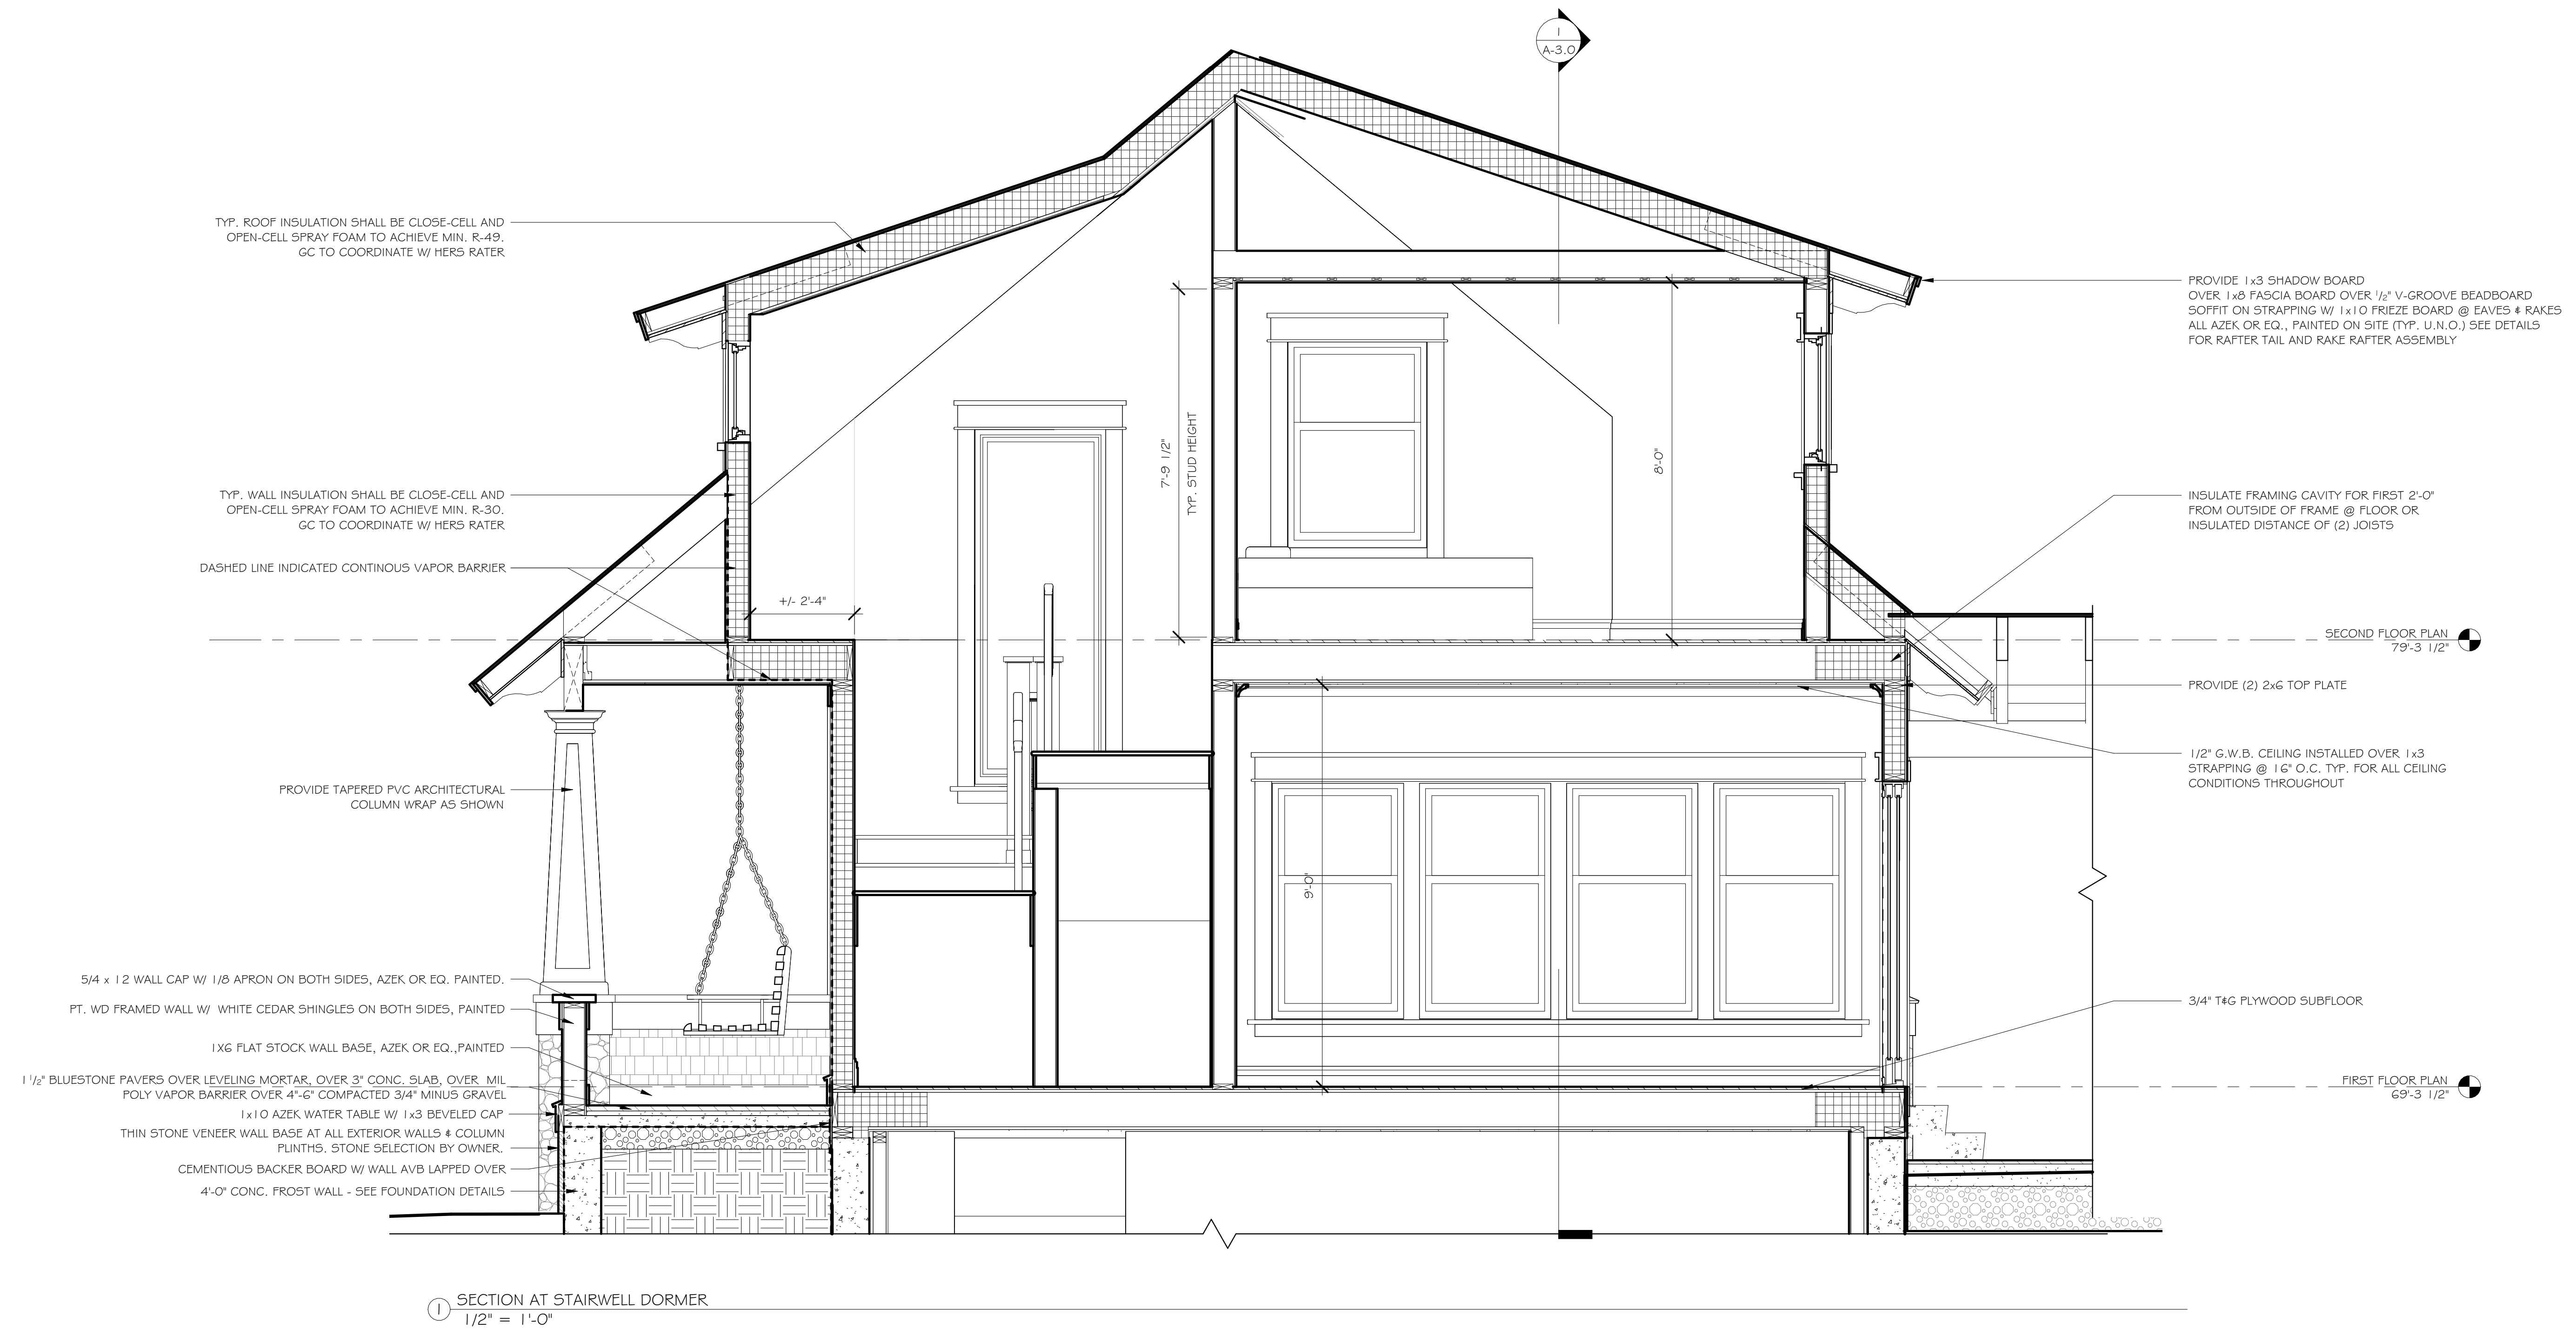

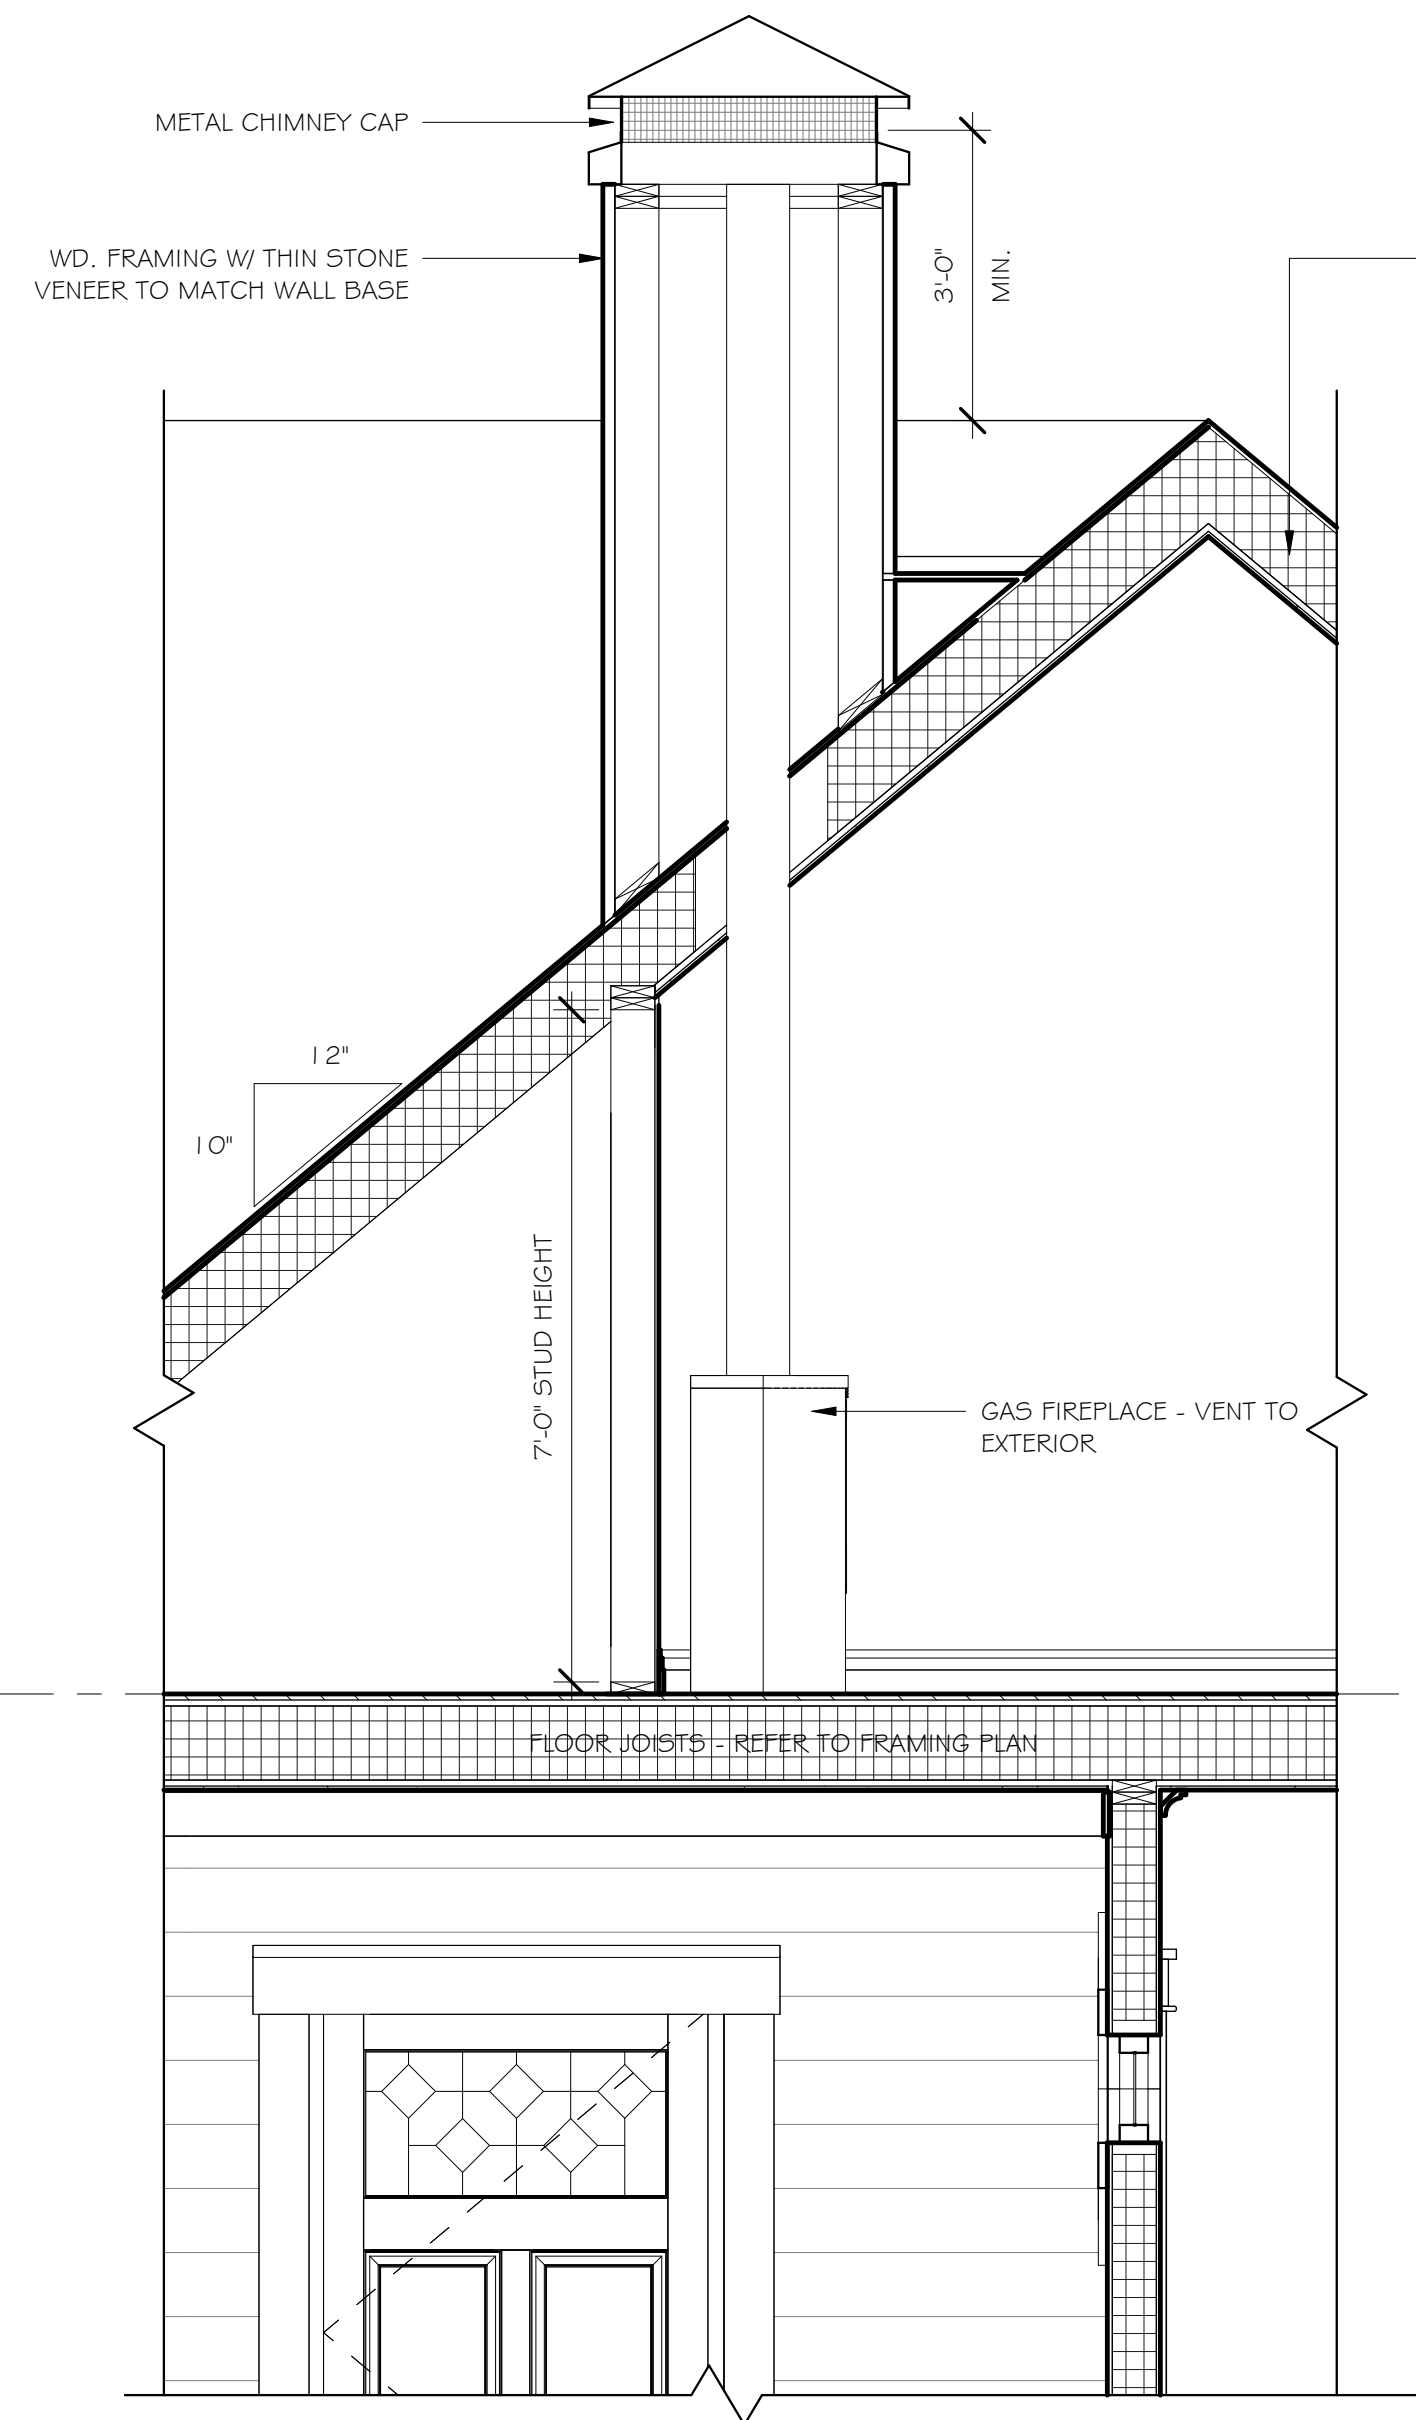


② PARTIAL SECTION AT CHIMNEY
1/2" = 1'-0"


TYP. ROOF INSULATION SHALL BE CLOSE-CELL AND
OPEN-CELL SPRAY FOAM TO ACHIEVE MIN. R-49.
GC TO COORDINATE W/ HERS RATER.

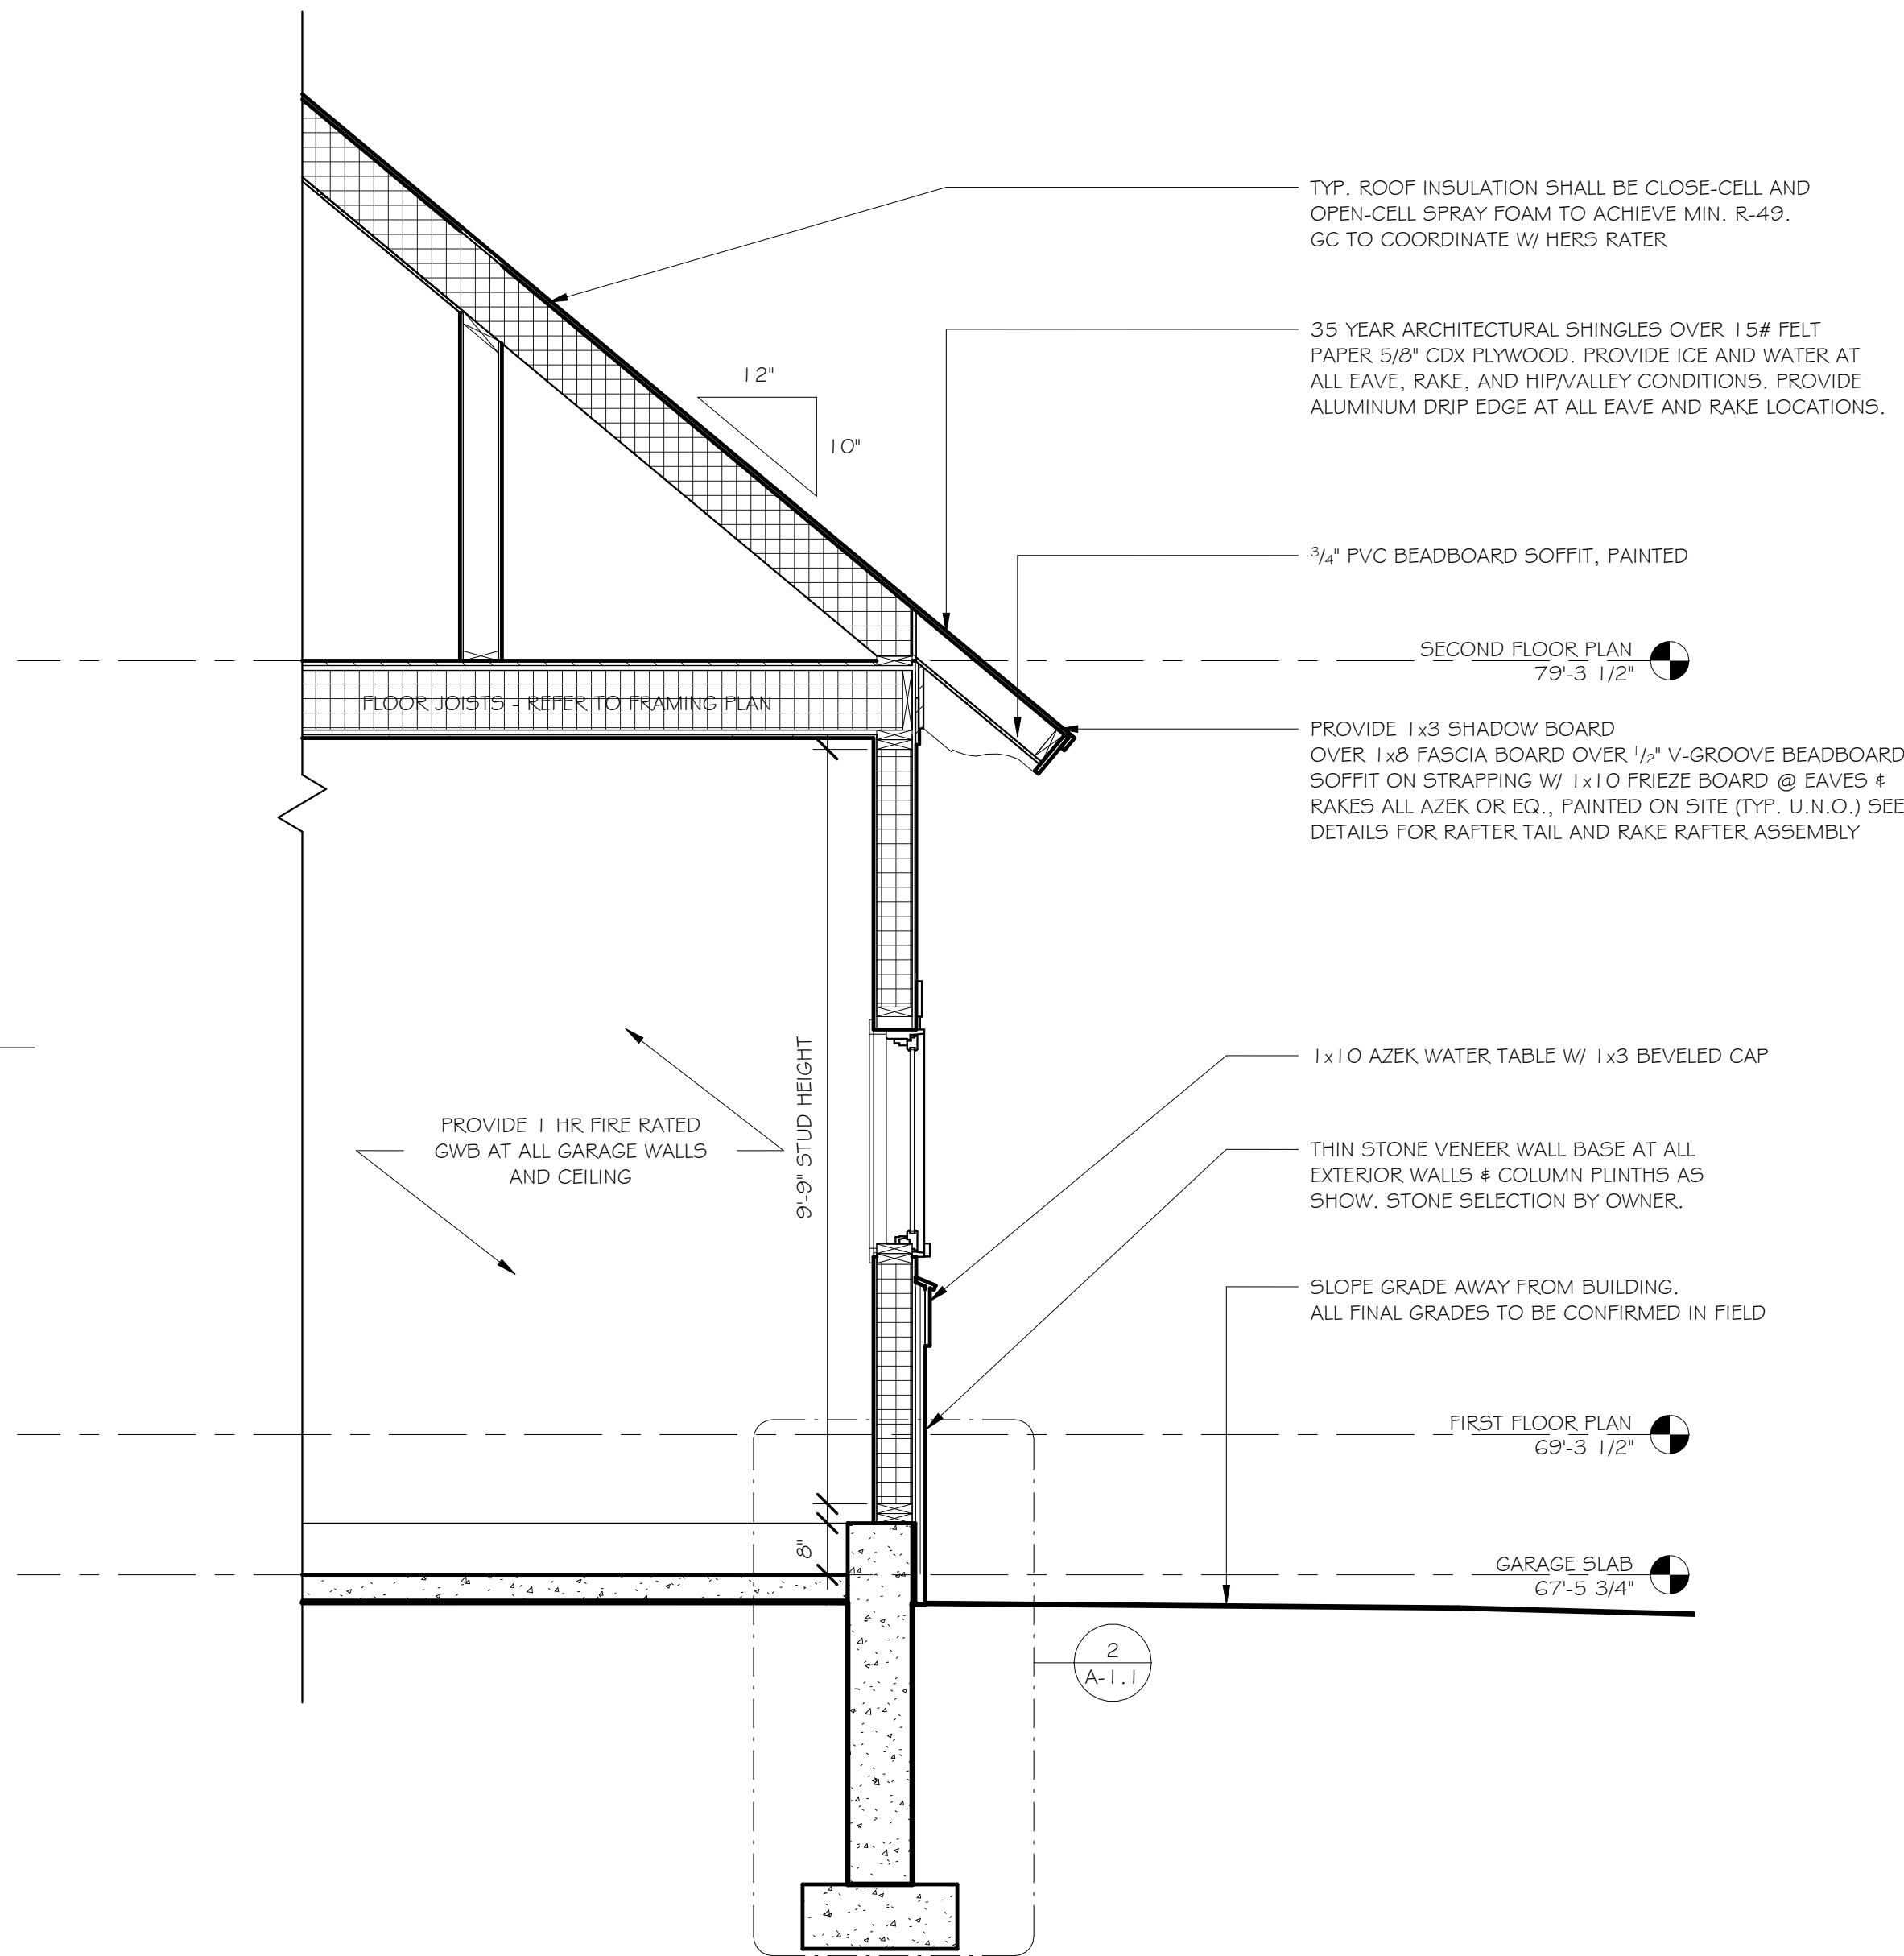

① PARTIAL SECTION @ GARAGE
1/2" = 1'-0"

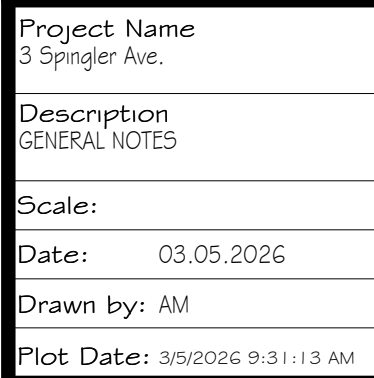





Allen Residence
3 Spingler Ave.
3 Spingler Ave, South Hamilton, MA

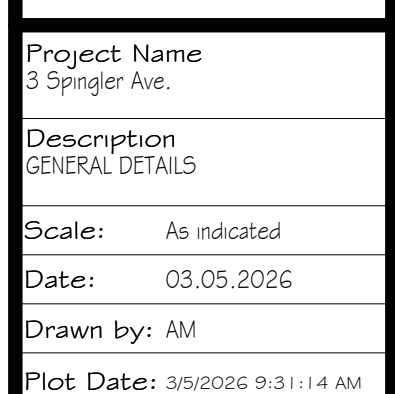[illegible]

© Red Barn Architecture


GENERAL DETAILS

⑧ DETAIL - EAVE W/ RAFTER TAIL
1" = 1'-0"




7 EXT. WINDOW TRIM DETAIL
1" = 1'-0"


NOTE: ART GLASS BY ANDERSEN, USE STANDARD SIZES AND MATERIALS WHERE POSSIBLE

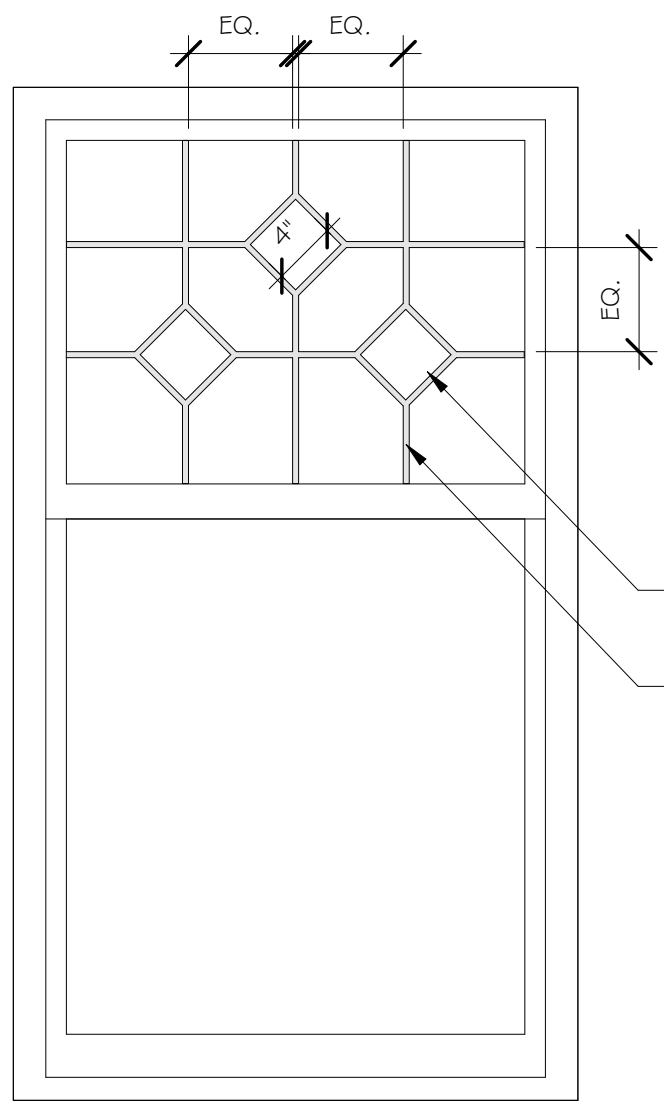


1

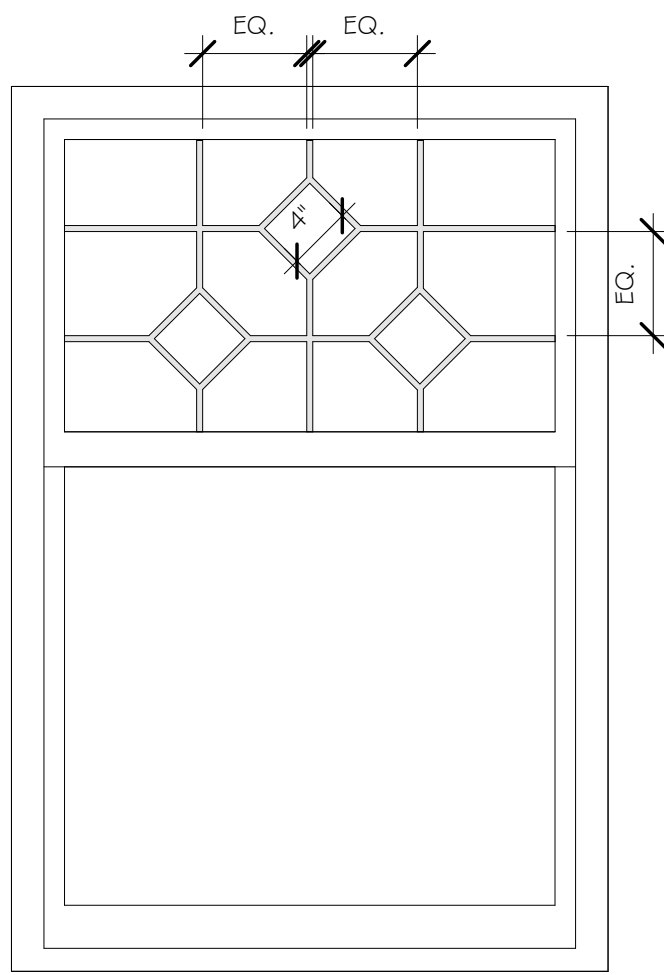


2

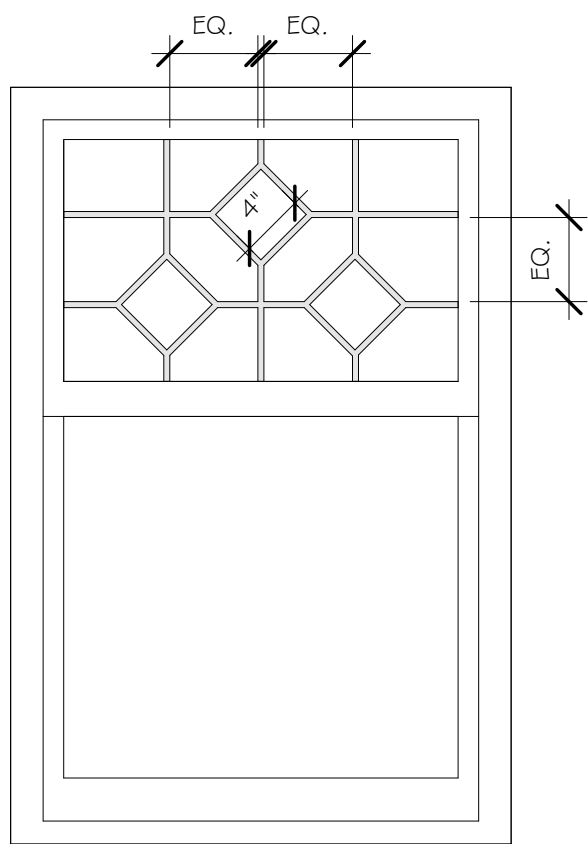


3

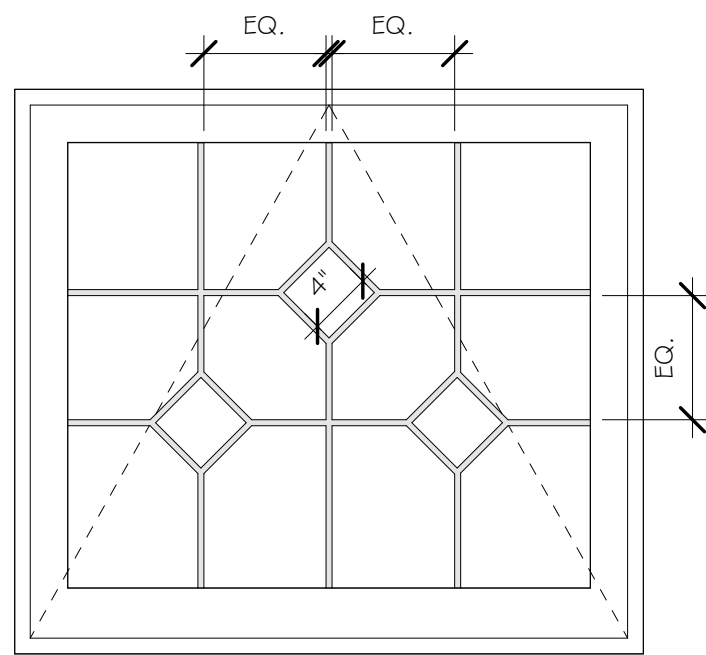

4

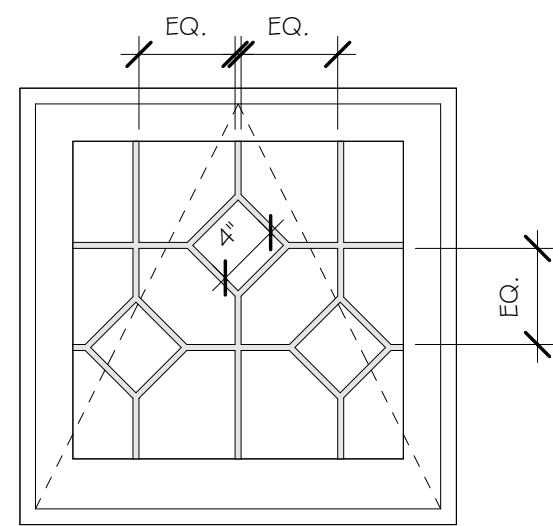

5 10

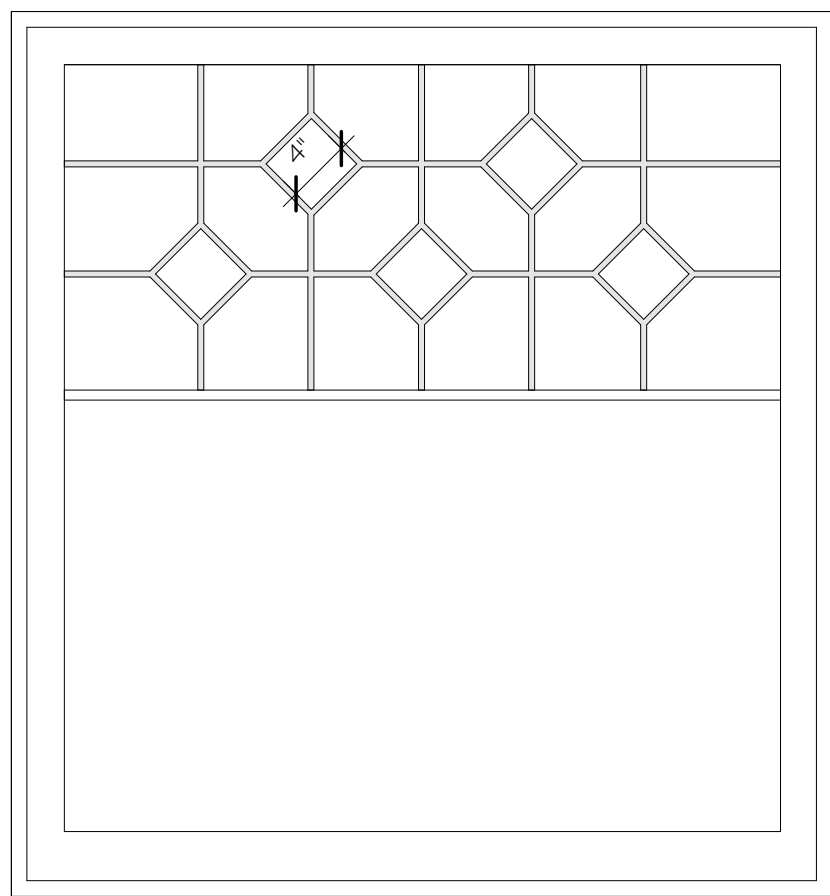


6

ACCENT GLASS
COLOR TBD.
LEAD CAMMING
SHOWN AT 3/8"

○ WINDOW ELEVATIONS
1" = 1'-0"

Revisions/Project Status		
Issue	Date & Issue Description	

Cullen Residence
3 Spingler Ave.
3 Spingler Ave, South Hamilton, MA

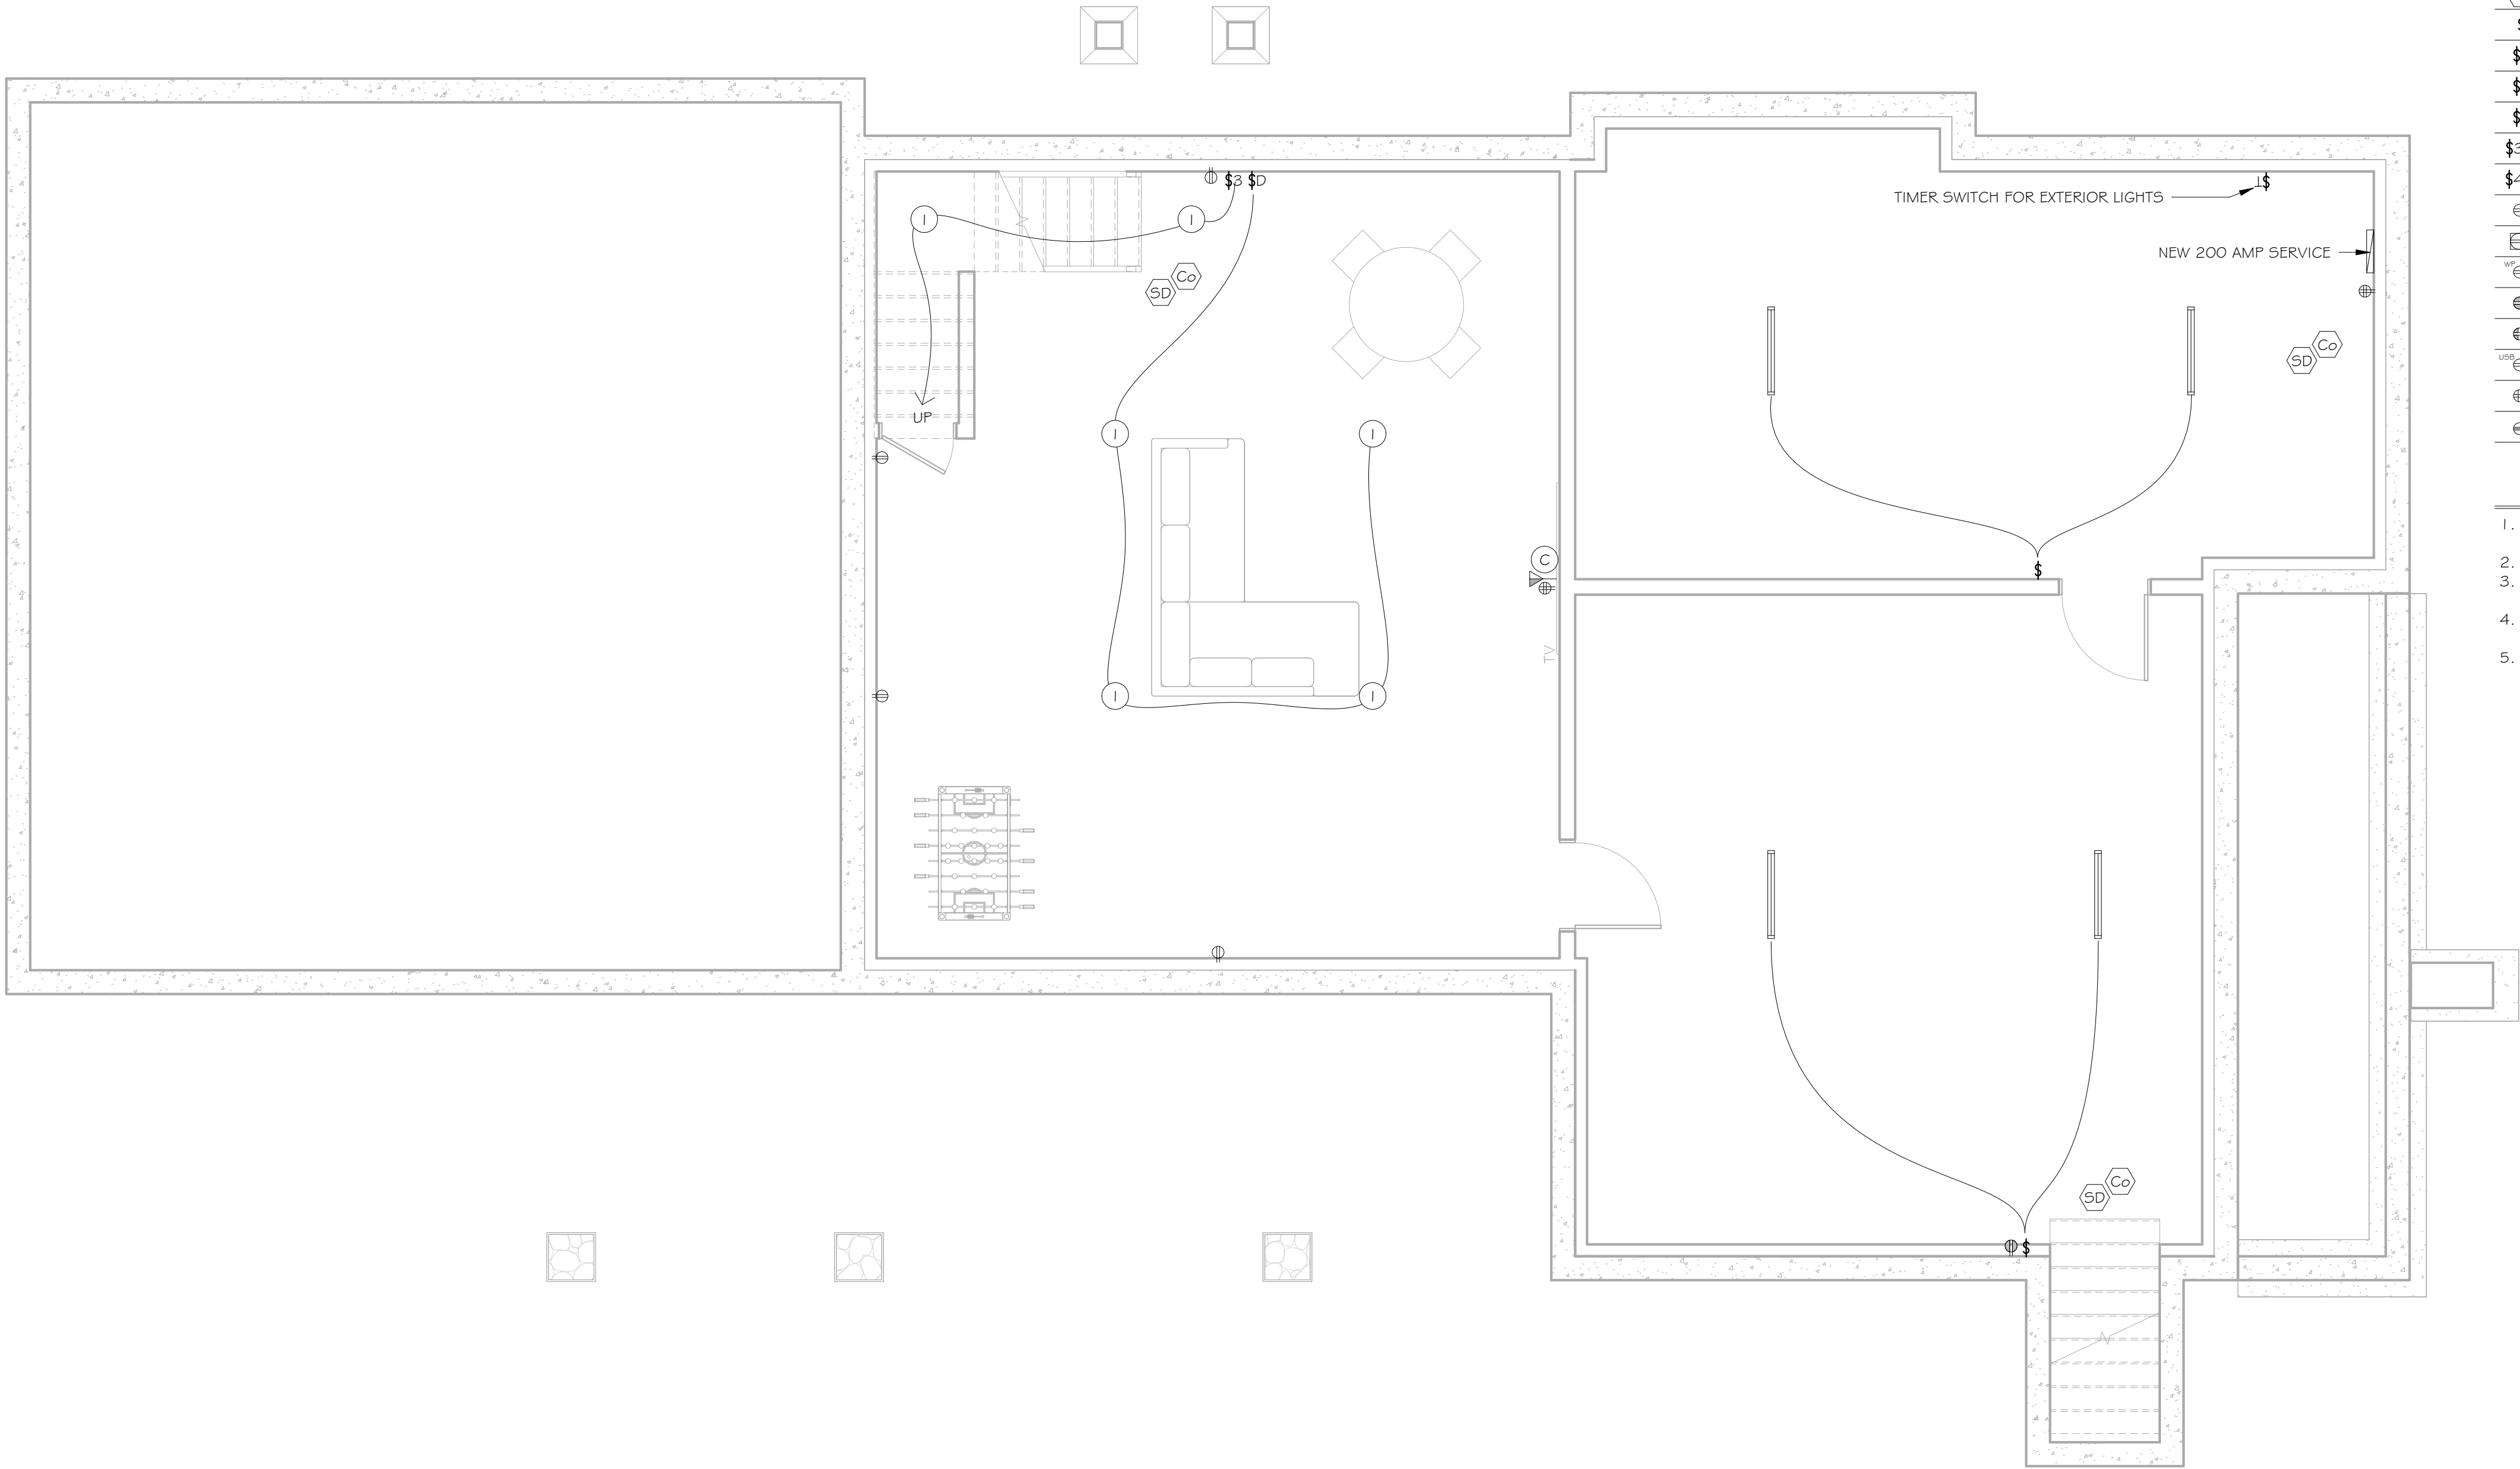


ELECTRICAL EQUIPMENT		
DES.	DEVICE	COMMENTS
E	DENOTES EXISTING TO REMAIN	
R	DENOTES EXISTING TO BE RELOCATED	
⓪	PENDANT LIGHT	
①	RECESSED DOWNLIGHT	
②	WALL SCONCE	75 WATT PAR 30
③	SHOWER LIGHT	
④	CLOSET LIGHT W/ MOTION SENSOR	50 WATT
⑤	EXTERIOR LIGHT	
⑥	UNDER CABINET LIGHT	
⑦	PIN HOLE/REC. LIGHT	
Ⓒ	CABLE TV	
Ⓜ	JUNCTION BOX	
—	LED UTILITY LIGHT	
—	LED STRING LIGHTS	EXTERIOR
Ⓜ	BATHROOM FAN	
—	HDMI CONNECTOR	
Ⓜ	HEAT DETECTOR	
SD	SMOKE DETECTOR	
Co	CARBON MONOXIDE DETECTOR	
\$	LIGHT SWITCH	
\$D	DIMMER LIGHT SWITCH	
\$3	3WAY SWITCH	
\$T	TIMER SWITCH	
\$3D	3WAY DIMMER	
\$4D	4WAY DIMMER	
Ⓜ	DUPLEX OUTLET	
Ⓜ	DUPLEX OUTLET FLOOR BOX	
Ⓜ	WATERPROOF OUTLET	WATERPROOF
Ⓜ	GFI OUTLET	
Ⓜ	GFI QUADPLEX OUTLET	
Ⓜ	OUTLET WITH USB PORT	
Ⓜ	QUADPLEX OUTLET	
Ⓜ	OUTLET/220	

GENERAL NOTES

1. CONTRACTOR SHALL WALK OWNER THROUGH ELEC. PLAN PRIOR TO ROUGH
2. VERIFY ALL COLORS W/ OWNER
3. ALL CEILING JUNCTION BOXES ARE TO BE BLOCKED TO ALLOW FOR CEILING FAN
4. PROVIDE ALL COORDINATION AND ELEC. FOR COMPLETE HVAC SYSTEM
5. ALL DEVICE MANUFACTURERS BY SUBMITTAL UNLESS OTHERWISE NOTED IN ELEC. SCHEDULE

Revisions/Project Status	
Issue	Date & Issue Description
△	

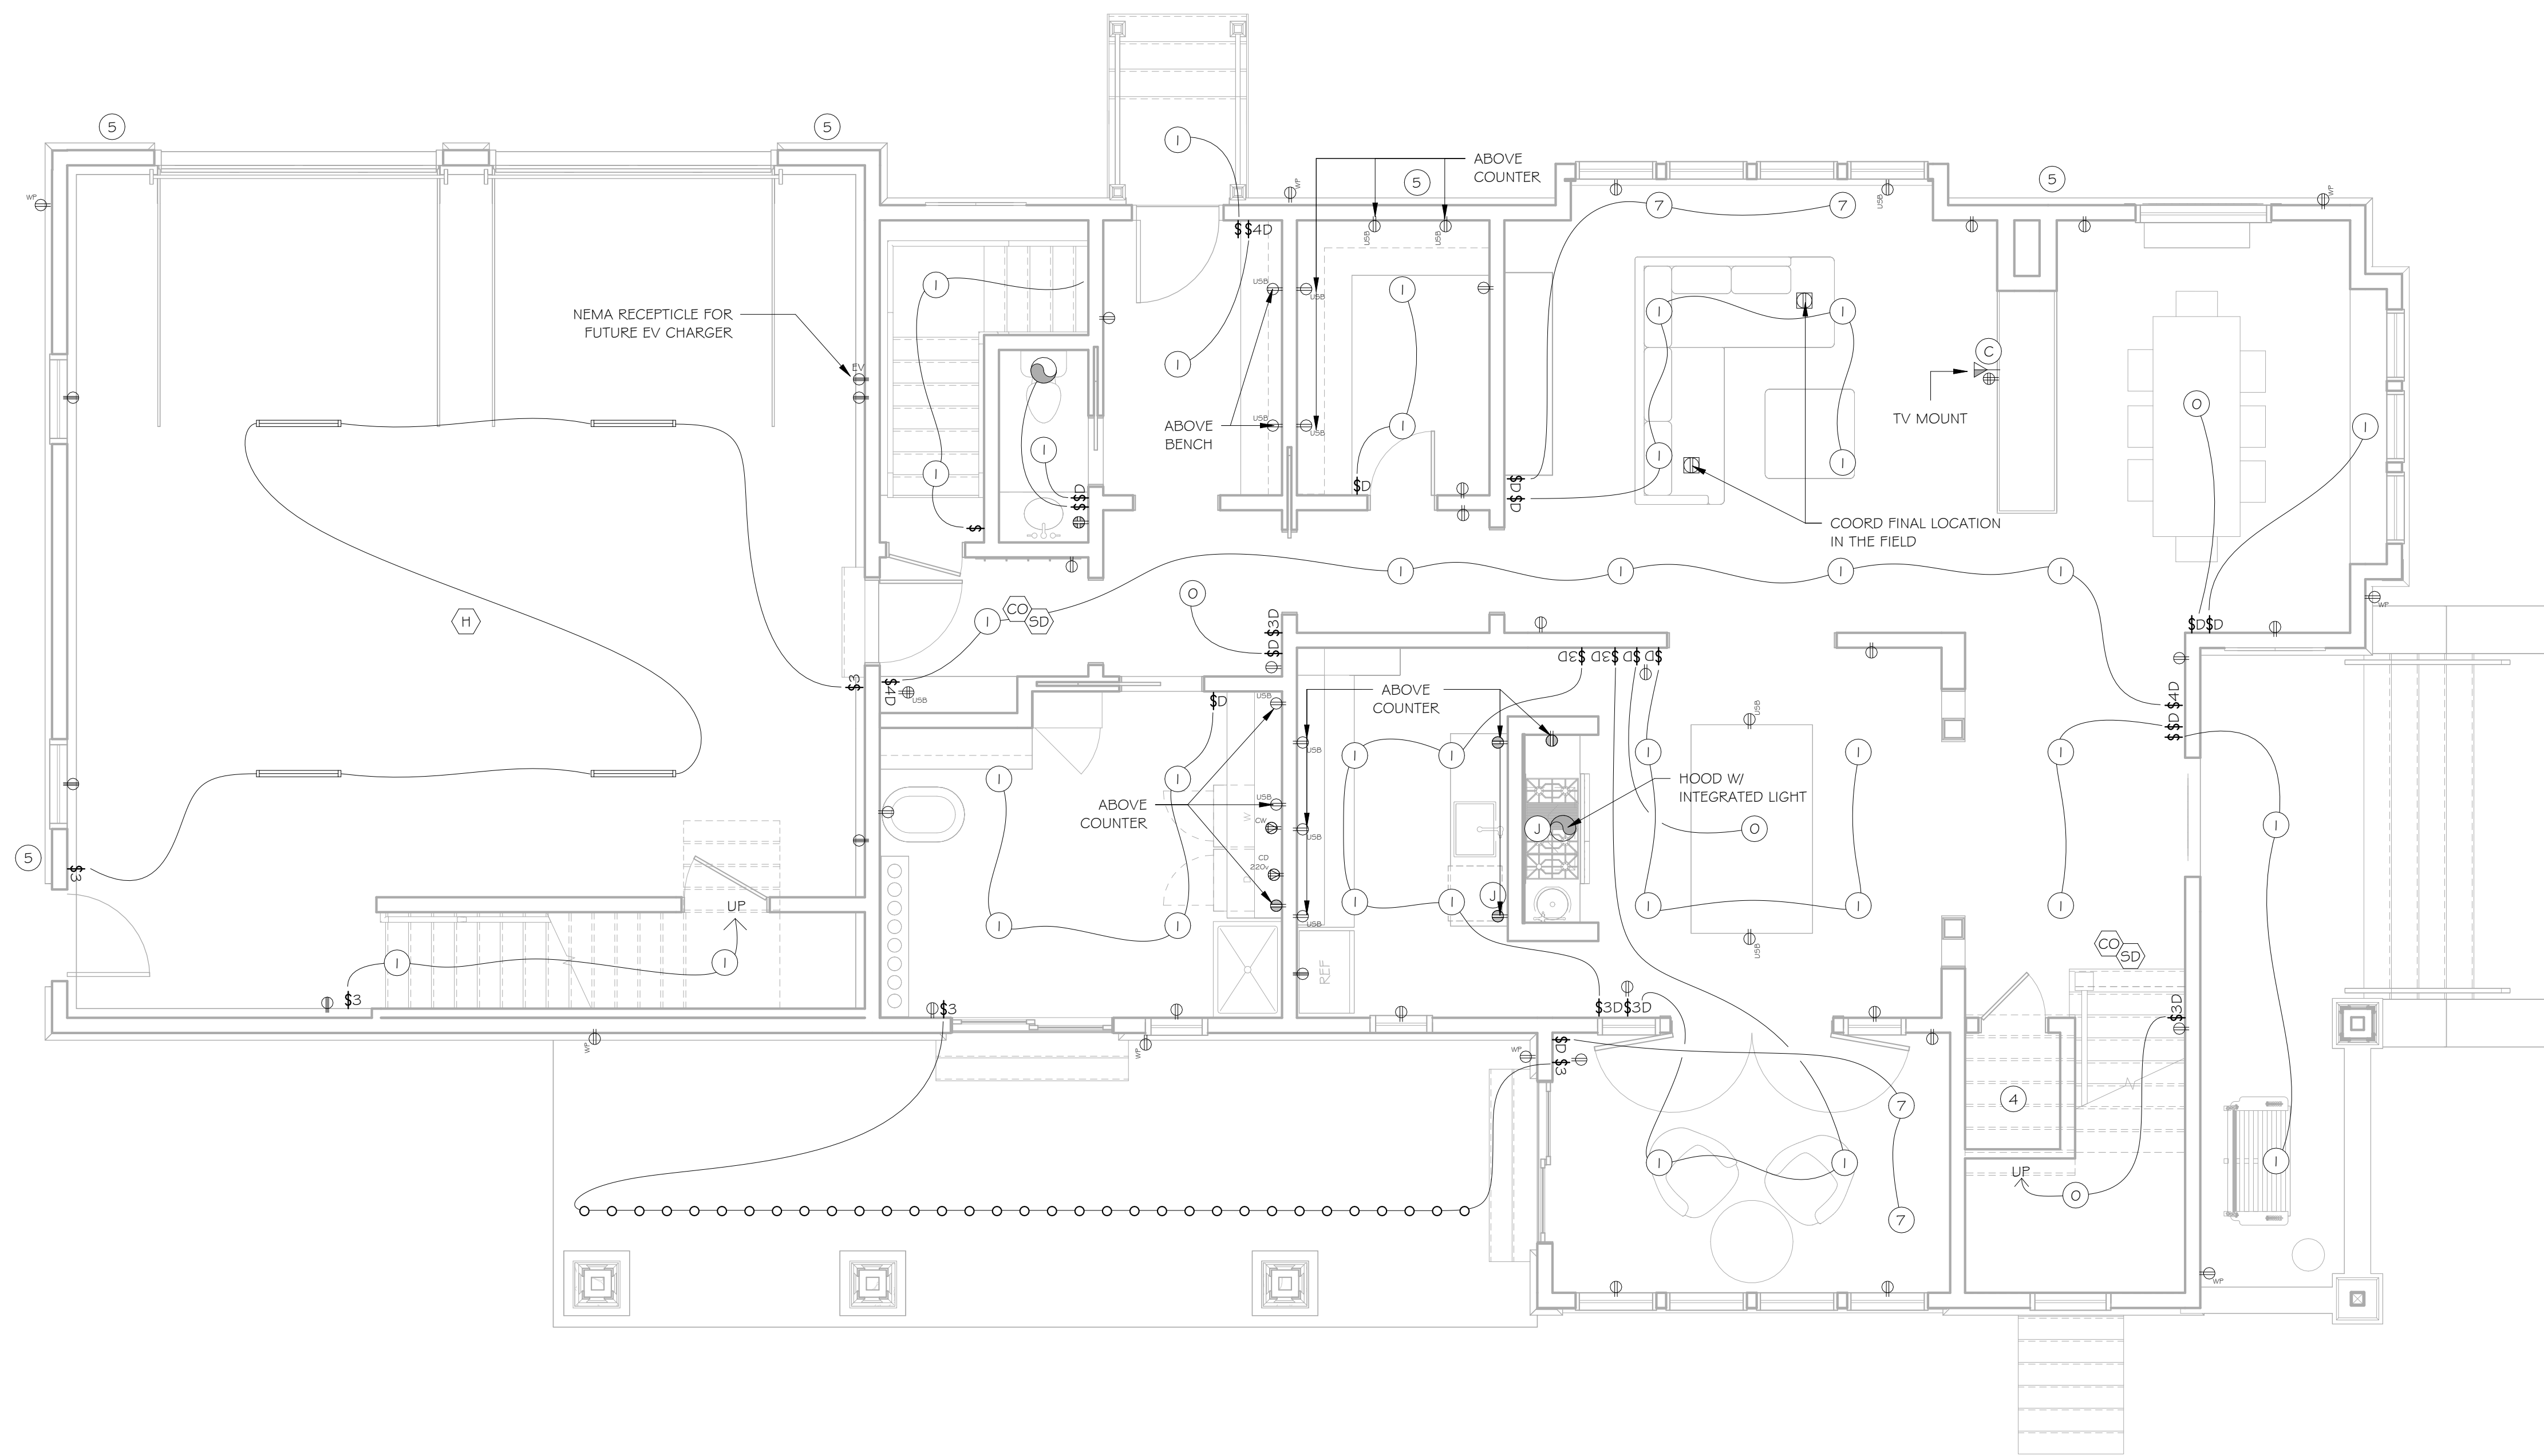


ELECTRICAL EQUIPMENT		
DES.	DEVICE	COMMENTS
E	DENOTES EXISTING TO REMAIN	
R	DENOTES EXISTING TO BE RELOCATED	
0	PENDANT LIGHT	
1	RECESSED DOWNLIGHT	
2	WALL SCONCE	75 WATT PAR 30
3	SHOWER LIGHT	
4	CLOSET LIGHT W/ MOTION SENSOR	50 WATT
5	EXTERIOR LIGHT	
6	UNDER CABINET LIGHT	
7	PIN HOLE/REC. LIGHT	
C	CABLE TV	
J	JUNCTION BOX	
	LED UTILITY LIGHT	
	LED STRING LIGHTS	EXTERIOR
	BATHROOM FAN	
	HDMI CONNECTOR	
H	HEAT DETECTOR	
SD	SMOKE DETECTOR	
Co	CARBON MONOXIDE DETECTOR	
\$	LIGHT SWITCH	
\$D	DIMMER LIGHT SWITCH	
\$3	3WAY SWITCH	
\$T	TIMER SWITCH	
\$3D	3WAY DIMMER	
\$4D	4WAY DIMMER	
	DUPLEX OUTLET	
	DUPLEX OUTLET FLOOR BOX	
W	WATERPROOF OUTLET	WATERPROOF
	GFI OUTLET	
	GFI QUADPLEX OUTLET	
U	OUTLET WITH USB PORT	
	QUADPLEX OUTLET	
	OUTLET/220	

GENERAL NOTES

1. CONTRACTOR SHALL WALK OWNER THROUGH ELEC. PLAN PRIOR TO ROUGH
2. VERIFY ALL COLORS W/ OWNER
3. ALL CEILING JUNCTION BOXES ARE TO BE BLOCKED TO ALLOW FOR CEILING FAN
4. PROVIDE ALL COORDINATION AND ELEC. FOR COMPLETE HVAC SYSTEM
5. ALL DEVICE MANUFACTURERS BY SUBMITTAL UNLESS OTHERWISE NOTED IN ELEC. SCHEDULE

1 FIRST FLOOR ELECTRICAL PLAN
1/4" = 1'-0"

Revisions/Project Status		
Issue	Date	Issue Description

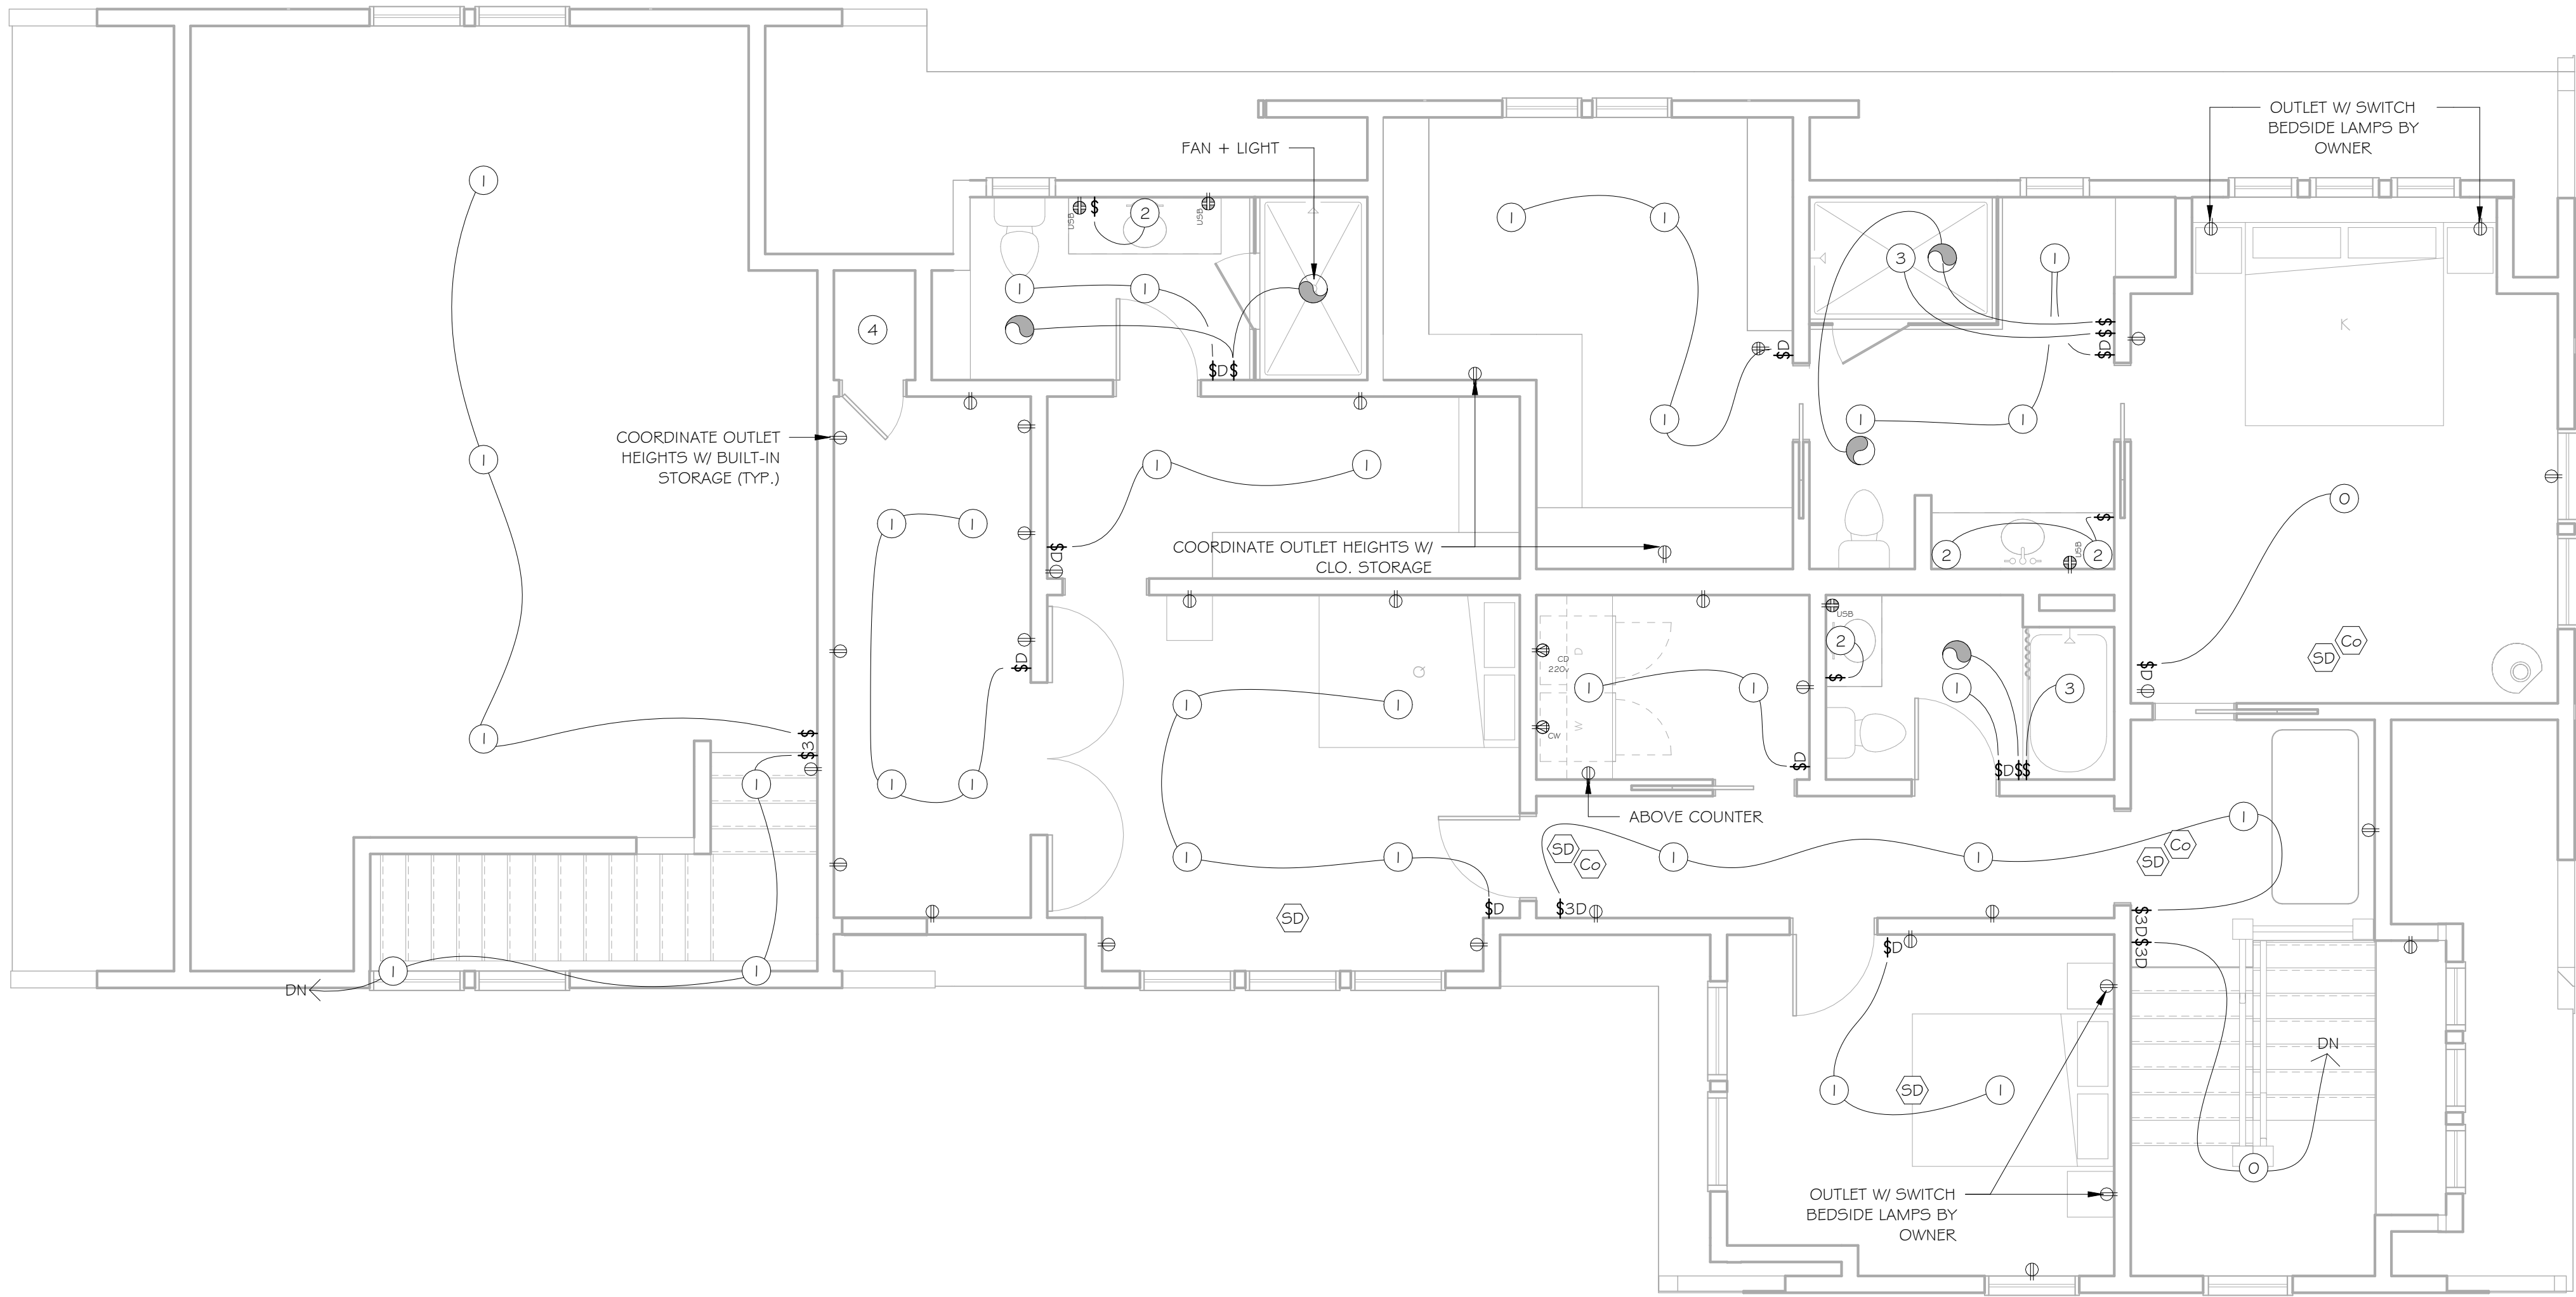

ELECTRICAL EQUIPMENT		
DES.	DEVICE	COMMENTS
E	DENOTES EXISTING TO REMAIN	
R	DENOTES EXISTING TO BE RELOCATED	
O	PENDANT LIGHT	
1	RECESSED DOWNLIGHT	
2	WALL SCONCE	75 WATT PAR 30
3	SHOWER LIGHT	
4	CLOSET LIGHT W/ MOTION SENSOR	50 WATT
5	EXTERIOR LIGHT	
6	UNDER CABINET LIGHT	
7	PIN HOLE/REC. LIGHT	
C	CABLE TV	
J	JUNCTION BOX	
	LED UTILITY LIGHT	
	LED STRING LIGHTS	EXTERIOR
	BATHROOM FAN	
	HDMI CONNECTOR	
H	HEAT DETECTOR	
SD	SMOKE DETECTOR	
Co	CARBON MONOXIDE DETECTOR	
\$	LIGHT SWITCH	
\$D	DIMMER LIGHT SWITCH	
\$3	3WAY SWITCH	
\$T	TIMER SWITCH	
\$3D	3WAY DIMMER	
\$4D	4WAY DIMMER	
	DUPLEX OUTLET	
	DUPLEX OUTLET FLOOR BOX	
W	WATERPROOF OUTLET	WATERPROOF
	GFI OUTLET	
	GFI QUADPLEX OUTLET	
U	OUTLET WITH USB PORT	
	QUADPLEX OUTLET	
	OUTLET/220	

GENERAL NOTES

1. CONTRACTOR SHALL WALK OWNER THROUGH ELEC. PLAN PRIOR TO ROUGH
2. VERIFY ALL COLORS W/ OWNER
3. ALL CEILING JUNCTION BOXES ARE TO BE BLOCKED TO ALLOW FOR CEILING FAN
4. PROVIDE ALL COORDINATION AND ELEC. FOR COMPLETE HVAC SYSTEM
5. ALL DEVICE MANUFACTURERS BY SUBMITTAL UNLESS OTHERWISE NOTED IN ELEC. SCHEDULE



RED BARN
ARCHITECTURE

8-10 Martin St, Unit 4
Essex, MA 01929
978.890.7254

Project Name
3 Spingler Ave.

Description
SECOND FLOOR ELECTRICAL PLAN

Scale: As indicated

Date: 03.05.2026

Drawn by: AM

Plot Date: 3/5/2026 9:31:16 AM

Revisions/Project Status	
Issue	Date & Issue Description

Cullen Residence
3 Spingler Ave.
3 Spingler Ave., South Hamilton, MA

© Red Barn Architecture

SECOND FLOOR ELECTRICAL
PLAN

E-1.2

STRUCTURAL GENERAL NOTES

- G1.

WORK SHALL CONFORM TO THE REQUIREMENTS OF 780 CMR THE MASSACHUSETTS STATE BUILDING CODE.
- G2.

CONTRACTOR IS TO EXAMINE ARCHITECTURAL, MECHANICAL, PLUMBING AND ELECTRICAL DRAWINGS FOR VERIFICATION OF LOCATION AND DIMENSIONS OF OTHER PROJECT REQUIREMENTS NOT SHOWN ON THE FRAMING PLANS.
- G3.

CONTRACTOR SHALL VERIFY ALL DIMENSIONS ON THE JOB.
- G4.

ALL DETAILS SHALL BE CONSIDERED TYPICAL AND APPLICABLE TO ALL SIMILAR CONDITIONS UNLESS OTHERWISE NOTED OR INDICATED.
- G5.

CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR MAINTAINING THE SAFETY AND STABILITY OF THE STRUCTURE AND ALL ADJACENT STRUCTURES DURING ALL PHASES OF THE WORK AND SHALL CORRECT ANY DEFECTS OR DAMAGE WHICH RESULTS FROM THEIR ACTIONS.
- G6.

THE CONTRACTOR SHALL MAKE THE SITE AVAILABLE FOR INSPECTIONS OF STEEL, WOOD, CONCRETE, AND MASONRY ELEMENTS TO MEET THE REQUIREMENTS OF THE MASSACHUSETTS STATE BUILDING CODE. THE CONTRACTOR SHALL NOT PROCEED WITH ANY WORK WHICH OTHERWISE CONCEALS ITEMS SCHEDULED FOR INSPECTION UNTIL INSPECTION HAS BEEN COMPLETED.

TEMPORARY SHORING AND BRACING

- B1.

CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ALL MEANS AND METHODS OF CONSTRUCTION EMPLOYED ON THIS PROJECT, AND FOR ALL TEMPORARY BRACING, SUPPORT, AND PROTECTION OF THE STRUCTURE DURING ERECTION AND PRIOR TO MAKING FINAL CONNECTIONS. PROVIDE AND INSTALL SHORING DESIGNED TO SUPPORT THE TEMPORARY STRUCTURAL LOADS OF THE SUPPORTED ITEMS. SUBMIT SHORING PRODUCTS, CONFIGURATION, PROCEDURE TO THE ARCHITECT FOR THEIR REVIEW.
- B2.

SHORING SHALL BE OF ANY MATERIAL WHICH IS SUITABLE FOR THE APPLICATION. TIMBER SHORING SHALL BE FULLY DRIED AND ALL END GRAIN SHALL BE SEALED TO PREVENT ABSORPTION OF WATER AND ASSOCIATED SWELLING. SHORING SHALL BE MADE STABLE, STIFF, AND SNUG FITTING SO AS NOT TO DEFLECT UNDER LOAD. PRE LOAD SUPPORTED ELEMENTS FOR SNUG FIT ONLY. SHORING SHALL DEFLECT NO MORE THAN THE GIVEN SPAN LENGTH DIVIDED BY 600.
- B3.

BEARING SURFACES OF SHORING SHALL BE REVIEWED WITH ARCHITECT IN FIELD AND SHALL PROVIDE FOR PROPER TRANSFER OF LOADS TO SUPPORTING AND SUPPORTED ELEMENTS.

STRUCTURAL WOOD

- W1.

TIMBER CONSTRUCTION IS TO CONFORM TO PART II "DESIGN SPECIFICATIONS" AS PUBLISHED IN THE "TIMBER CONSTRUCTION MANUAL" (AITC) AND TO "NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION", LATEST EDITIONS. (NDS)
- W2.

NEW TIMBER FOR STRUCTURAL USE IS TO BE KILN DRIED AND HAVE A MOISTURE CONTENT OF NOT MORE THAN 15 PERCENT.
- W3.

STRUCTURAL TIMBER IS TO BE IDENTIFIED BY THE GRADE MARK OF, OR CERTIFICATE OF INSPECTION ISSUED BY, A GRADING OR INSPECTION BUREAU OR AGENCY RECOGNIZED AS BEING COMPETENT.
- W4.

STRUCTURAL TIMBER IS TO BE VISUALLY STRESS-GRADED LUMBER IN ACCORDANCE WITH THE PROVISIONS OF ASTM DESIGNATION D245-74, "METHODS FOR ESTABLISHING STRUCTURAL GRADES AND RELATED ALLOWABLE PROPERTIES FOR VISUALLY GRADED LUMBER."
- W5.

TIMBER IS TO BE HANDLED AND COVERED TO PREVENT DAMAGE AND MOISTURE ABSORPTION FROM SNOW OR RAIN.
- W6.

ALL STRUCTURAL WOOD IS TO HAVE THE FOLLOWING MINIMUM DESIGN STRENGTHS AND IS TO HAVE MATERIAL CERTIFICATES AND GRADE STAMPS ATTESTING THEREOF (UNITS IN PSI UNLESS OTHERWISE NOTED):

LOCATION OF USE	FB	FT	FV	FC (PERP.)	FC (PARAL.)	E (KSI)
CONVENTIONAL WOOD JOISTS/RAFTERS	875	450	135	425	1150	1400
WOOD POSTS (NO. 1) (SOLID TIMBERS)	850	450	135	425	1150	1400
BEARING WALL STUDS	675	325	135	425	725	1200
LAMINATED VENEER LUMBER	2600	1550	285	750	2510	2000

W7. WOOD JOISTS & RAFTERS:

1.

SPLICES ARE TO OCCUR ONLY OVER BEARING POINTS.
2.

JOISTS SHALL BE TOE NAILED TO WOOD SUPPORT WITH TWO 10D NAILS.
3.

MINIMUM BEARING FOR JOISTS = 1-3/4 INCH AT ENDS, AND 3-1/2 INCHES WHERE JOISTS ARE CONTINUOUS.
4.

USE METAL JOIST HANGERS AT ALL FLUSH FRAME CONSTRUCTION.
5.

JOISTS ARE TO BE DOUBLED UNDER PARALLEL PARTITIONS.
6.

BRIDGING WILL BE SOLID USING 2" x JOIST DEPTH INSTALLED IN OFFSET FASHION. MAXIMUM SPACING = 8 FEET.
7.

NO JOIST IS TO BE NOTCHED OR DRILLED WITH HOLES WITHOUT PROPER REINFORCEMENT
8.

JOIST SUPPORT SOLELY BY NAILING IS NOT ALLOWED BY CODE.

W9. EXPOSED ENGINEERED LUMBER:

1.

EXPOSED ENGINEERED LUMBER SHALL BE TREATED TRUS-JOIST PARALLEL PLUS PSL, USED FOR EXTERIOR POSTS.

W10. BEARING WALLS:

1.

SILLS ARE TO BE PRESSURE TREATED AND KILN DRIED TO 15% MOISTURE AFTER TREATMENT SOLID 2-2 x 6 OR 2-2 x 8 MINIMUM AND ARE TO BE ANCHORED WITH 5/8" DIAMETER ANCHOR BOLTS BY NOT MORE THAN 4'-0" O.C. AND AT EACH CORNER. SPLICES IN SILL PLATES ARE TO BE STAGGERED.
2.

INTERIOR AND EXTERIOR BEARING WALLS WILL BE 2 x 6 AT 16" O.C. MINIMUM.
3.

STUDS ARE TO BE NAILED TO THE SOLE PLATE WITH THREE 10D OR FOUR 8D TOE NAILS.
4.

WHERE STRUCTURAL SHEATHING OVERLAPS SOLE PLATE NAIL SHEATHING TO SOLE PLATE AT 6 INCHES MAXIMUM CENTER.
5.

USE 2x BRIDGING AT MID-HEIGHT OF REGULAR HEIGHT WALLS, AND AT 4'-0" ON WALLS THAT ARE TALLER THAN 8'-0".

W11. BEARING WALL OPENINGS:

1.

BEARING WALL OPENINGS ARE TO BE FRAMED TO PROVIDE A RIGID ENCLOSURE. JAMB STUD IS TO EXTEND IN ONE PIECE FROM HEADER TO SOLE PLATE. PROVIDE SPECIFIED NUMBER OF JACK STUDS SHOWN IN PLAN.
2.

A MINIMUM OF TRIPLE STUDS ARE TO BE USED AT ALL WALL OPENINGS.

W12. NAILING:

1.

DOUBLE FRAMED OPENINGS, NAIL INNER STUD TO OUTER STUD WITH 16D NAILS, 24" O.C. TOE NAIL INNER STUD TO WALL PLATE WITH TWO 8D NAILS OR END NAIL WITH 16D NAILS. NAIL OUTER STUD TO HEADER WITH FOUR 16D NAILS AND TO TOP PLATE WITH TWO 8D TOE NAILS.
2.

ALL STUDS TO BE CONTINUOUS FROM FLOOR TO FLOOR OR ROOF TO FLOOR. - PARTICULARLY ON THE GABLE END WALLS WITH CATHEDRAL CEILINGS.

W13. PLATES (BEARING OR NON-BEARING):

1.

SOLE PLATES ARE TO BE NAILED TO SUBFLOOR AND JOISTS WITH 16D NAILS AT EACH JOIST.
2.

TOP PLATES FOR BEARING PARTITIONS ARE TO BE TWO 2 x 6S, A CONTINUOUS HEADER, OR AS INDICATED ON SECTIONS. PLATE MEMBERS OF PRINCIPAL PARTITIONS ARE TO BE LAPPED OR ANCHORED TO EXTERIOR WALL FRAMING. SPLICES ARE TO OCCUR OVER STUDS. NAIL PLATES TO STUDS WITH TWO 16D NAILS AT 24" O.C.
3.

TOP PLATES FOR NON-BEARING INTERIOR PARTITIONS MAY BE SINGLE. NAIL PLATE TO STUD WITH TWO 16D NAILS. WHEN TOP PLATE IS PARALLEL TO CEILING OR FLOOR FRAMING, INSTALL 2 x 6 CROSS BLOCKING NOT MORE THAN 4'-0" O.C.
4.

WHEN TOP PLATES ARE CUT FOR PIPING OR DUCT WORK, REINFORCE WITH STEEL STRAPS.
5.

SILL PLATES AT FOUNDATION WALLS TO BE BOLTED IN ACCORDANCE WITH DETAIL DRAWINGS.

W14. BEAMS AND GIRDERS:

1.

GIRDERS SHALL NOT REST LESS THAN 4" ON SUPPORTS.
2.

WHERE BEAMS AND GIRDERS OF NOMINAL 2" MEMBERS ARE SHOWN NAIL WITH TWO ROWS OF 16D NAILS SPACED NOT MORE THAN 24" O.C., LOCATE END JOISTS IN MEMBERS OVER SUPPORTS.
3.

ALL BEAMS MUST SPLICED ONLY OVER SUPPORTS UNLESS SPECIFICALLY INSTRUCTED OTHERWISE BY THE ARCHITECT.
4.

ALL BUILT-UP WOOD BEAMS WIDER THAN 6" AND NAILERS ATTACHED TO STEEL BEAMS ARE TO BE BOLTED WITH 5/8" DIAMETER THROUGH-BOLTS AT 2'-0" O.C. STAGGERED SPACING, UNLESS OTHERWISE NOTED.

W15. PLYWOOD FLOOR

1.

THE FLOOR IS TO BE 3/4" THICK ADVANTECH T4G

W16. PLYWOOD ROOF:

1.

PLYWOOD WILL BE 5/8" THICK MINIMUM INSTALLED WITH GRAIN OF OUTER PLIES AT RIGHT ANGLES TO RAFTERS AND BE STAGGERED SO THAT END RAFTERS IN ADJACENT PANELS OCCUR OVER DIFFERENT RAFTERS. PROVIDE AT LEAST 1/16" JOINT SPACE AT PANEL EDGES.
2.

PLYWOOD IS TO BE NAILED WITH 8D COMMON OR 6D THREADED NAILS. NAILS ARE TO BE 6 INCHES O.C. AT ALL EDGES AND 12" O.C. AT INTERIOR LINES OF SUPPORT.

W17. PLYWOOD NAILED TO BEARING PARTITIONS:

1.

PLYWOOD IS TO BE 1/2 INCH THICK MINIMUM.
2.

NAIL SHEATHING TO STUDS, PLATES, AND BLOCKING WITH 6D NAILS SPACED 4" O.C. ALONG ALL EDGES OF PLYWOOD SHEETS AND 12" ON CENTER ALONG INTERMEDIATE MEMBERS.
3.

NAILING SHOULD COMPLY WITH THE RECOMMENDATIONS OF THE AMERICAN PLYWOOD ASSOCIATION.

W18. CONNECTIONS:

1.

ALL WOOD POST BASES ON WOOD TO BE SIMPSON TYPE BC.
2.

ALL WOOD BEAMS ON WOOD COLUMNS TO HAVE SIMPSON TYPE PC OR EPC CONNECTIONS.
3.

ALL FLUSH FRAMED CONVENTIONAL WOOD JOIST CONNECTIONS TO BE SIMPSON TYPE U OR EQUAL. PROVIDE FIELD SLOPED ADJUSTABLE FLUSH FRAMED CONNECTORS AT RAFTERS CONNECTION TO RIDGE BEAM, TYPE LSU. SEE SIMPSON CATALOG. PROVIDE HOLD DOWN CLIPS @ RAFTER BEARING POINTS THAT HAVE NO HANGER.
4.

COMPLY WITH MANUFACTURER SPECIFICATIONS INSTALLATIONS FOR ALL OF THE ABOVE.
5.

ALL WOOD POST BASES ON CONCRETE TO BE SIMPSON TYPE ABU OR EQUAL.
6.

ANCHOR BOLTS AND BOLTS FOR STRUCTURAL TIMBER ARE TO BE ASTM A307. STANDARD CUT WASHERS ARE TO BE PROVIDED BETWEEN THE WOOD AND BOLT NUT, UNLESS STEEL PLATES OR PLATE WASHERS ARE USED, AS INDICATED ON STRUCTURAL DRAWINGS. BOLT HOLES IN STRUCTURAL TIMBER ARE TO BE 1/16 INCH LARGER THAN THE NOMINAL BOLT DIAMETER INDICATED.
7.

ALL EXTERIOR CONNECTION HARDWARE, INCLUDING NAILS, BOLTS, AND FABRICATED CONNECTORS IS TO BE STAINLESS STEEL OR COATED FOR CORROSION PROTECTION COMPATIBLE W/ LUMBER PRESERVATIVE.

W19. ENGINEERED WOOD

1.

PROVIDE LOAD RATED PRE-MANUFACTURED WOOD CONNECTORS FOR POSTS TO BEAM AND ALL FLUSH-FRAMED MEMBERS. PROVIDE FASTENERS IN ACCORDANCE WITH MANUFACTURER SCHEDULE FOR EACH TYPE.
2.

WHERE NO MANUFACTURED WOOD CONNECTOR EXISTS, FABRICATE FROM 1/4 INCH WELDED STEEL PLATE TO CONFORM TO THE MOST SIMILAR SIMPSON CONNECTOR.
3.

END BEARING OF LVL BEAMS SHALL BE 2-3/4 INCHES MINIMUM AND ACROSS THE FULL WIDTH OF THE BEAM.
4.

MINIMUM BEARING LENGTHS ARE GOVERNED BY Fc PERPENDICULAR OF THE WALL PLATE = 425 PSI, OR BY 750 PSI BEARING STRENGTH OF THE VENEER LUMBER WHEN PLACED ON STEEL SUPPORTING CONNECTOR.
5.

ALL LVL BEAMS REQUIRE LATERAL SUPPORT OR BLOCKING AT BEARING POINTS.
6.

BUILT UP LVL BEAMS SHALL BE NAILED OR BOLTED TOGETHER IN ACCORDANCE WITH THE DETAILS ON SHEET 5-1.G, BUT NOT LESS THAN 3 ROWS OF 16d NAILS AT 12 INCHES O.C. THROUGH ALL PLIES.
7.

ADHESIVES SHALL BE PROVIDED AT ALL PLYWOOD FLOOR TO WOOD JOIST AND BEAM FASTENINGS. ADHESIVES SHALL CONFORM TO TRUSS JOIST MANUFACTURER'S STANDARDS AND MEET THE REQUIREMENTS OF ASTM D2559.5 B
8.

TEMPORARY AND PERMANENT BRACING SHALL CONFORM TO TRUSS JOIST/MVEYERHAUSER REQUIREMENTS FOR ENGINEERED FLOOR JOISTS.
9.

CONNECTION SHALL BE DESIGNED FOR MAXIMUM CAPACITY OF THE CONNECTED MEMBERS FOR THE SPANS INDICATED.
10.

TRIFORCE JOISTS SHALL BE SIZES SHOWN ON THE PLANS, OF LENGTH TO FIT AS REQUIRED AND SHALL BE HANDLED, STORED AND INSTALLED IN ACCORDANCE W/ ALL REQUIREMENTS AND RECOMMENDATIONS

DESIGN LOADS

DL1. FLOOR LIVE LOADS:

1ST, 2ND & 3RD FLOOR RESIDENTIAL AREA:	40 PSF
EXTERIOR DECKS:	40 PSF

DL2. ROOF SNOW LOAD:

GROUND SNOW:	50 PSF
ROOF SNOW:	30 PSF & DRIFTS

DL3. WIND LOADS:

WIND SPEED 126

SEISMIC LOADS:

WIND LOAD EXCEEDS SEISMIC

STRUCTURAL STEEL

- S1.

ALL STRUCTURAL STEEL SHALL BE ASTM A572 GRADE EXCEPT HSS MEMBERS SHALL BE ASTM A500 GRADE B. PLATES AND ANGLES FOR CONNECTIONS MAY BE GRADE A36.
- S2.

ALL WELDS SHALL BE E70XX IN ACCORDANCE WITH AWS 1.1 DETAILS AND REQUIREMENTS AND PLACED BY AWS (MIN.) QUALIFIED WELDERS
- S3.

ALL BOLTS SHALL BE ASTM A325 HEAVY STRUCTURAL BOLTS
- S4.

SHOP DRAWINGS SHALL BE PREPARED FOR ALL STEEL MEMBERS & COORDINATED WITH FIELD DIMENSIONS AND INSTALLER METHODS. SHOP DRAWINGS SHALL BE SUBMITTED FOR REVIEW PRIOR TO FABRICATION WITH (3) WEEK REVIEW TIME ALLOWED
- S5.

STRUCTURAL STEEL MEMBERS SHALL BE SHOP FABRICATED TO THE EXTENT POSSIBLE & COATED WITH PRIMER



8-10 Martin St., Unit 4
Essex, MA 01929
978.890.7254

Project Name
3 Spingler Ave.

Description
GENERAL STRUCTURAL NOTES

Scale: 1/4" = 1'-0"

Date: 03.05.2026

Drawn by: AM

Plot Date: 3/5/2026 9:31:16 AM

Revisions/Project Status	Date & Issue Description	Issue							
△									

Cullen Residence
3 Spingler Ave.
3 Spingler Ave, South Hamilton, MA

Revisions/Project Status		
Date & Issue Description		Issue
		△

TYP. FLOOR FRAMING NOTES


- NEW 4" AND 5" SLABS ON GRADE IS TO BE REINFORCED WITH 6 x 6 W2.O/W2.O WELDED WIRE FABRIC.
 - FOOTINGS ARE TO BE BEAR 4'-0" MIN. BELOW FINISH GRADE ON 2 TSF BEARING CAPACITY SOILS. SOIL BEARING CONDITIONS AND CAPACITY ARE TO BE VERIFIED DURING CONSTRUCTION.
 - PROVIDE PERFORATED PVC PERIMETER DRAIN IN CRUSHED STONE SURROUND WITH FILTER FABRIC PROTECTION IF APPLICABLE.
 - FOUNDATION WALLS MUST BE POURED MONOLITHICALLY. COLD JOINTS IN UNREINFORCED CONCRETE WALL ARE NOT ACCEPTABLE, AND SHALL BE REMOVED IF THEY OCCUR.
 - DO NOT BACKFILL FOUNDATION WALLS UNTIL FIRST FLOOR IS IN PLACE AND COMPLETE, NO MATTER WHAT YOUR PAST EXPERIENCE HAS BEEN.
 - PROVIDE 6" FREE DRAINING COMPACTED GRAVEL UNDER ALL NEW SLABS ON GRADE AND PROVIDE 6 MIL POLYETHYLENE VAPOR BARRIER.
 - COAT ALL STEEL BELOW GRADE WITH TWO HEAVY APPLICATIONS OF COAL-TAR EPOXY.
 - ALL EXTERIOR DECK FRAMING IS TO BE NO. 2 PRESSURE TREATED SOUTHERN YELLOW PINE.
 - ALL CONNECTION HARDWARE ASSOCIATED WITH THE DECK FRAMING INCLUDING HANGERS, BOLTS, AND NAILS IS TO BE HOT DIPPED GALVANIZED OR STAINLESS STEEL. IF STAINLESS STEEL, VERIFY STEEL COMPATIBILITY WITH PRESERVATIVE TREATED WOOD.
 - SEE DRAWINGS SO FOR GENERAL NOTES, AND SKS DRAWINGS FOR SECTIONS AND DETAILS.
- ALL NEW FLOOR DECKING IS 3/4 INCH APA SPAN-RATED PLYWOOD GLUED AND NAILED.
 - LVL - INDICATES LAMINATED VENEER LUMBER
 - PSL - INDICATES PARALLEL STRANDED LUMBER
 - NEW OUTSIDE WALLS ARE 2x6 AT 16" ON CENTER STUD BEARING WALLS BLOCKED AT MIDHEIGHT
 - ALL FLUSH-FRAMED CONNECTIONS ARE TO HAVE STEEL HANGERS, AND ALL POST TO BEAM CONNECTIONS SHALL HAVE STEEL POST CAPS. SUBMIT COMPLETE SCHEDULE OF ALL HANGERS, SELECTED FOR END REACTIONS INDICATED (EXAMPLE: 2.0k = 2000#) IN PLAN, FOR REVIEW AND APPROVAL. IMPROVISED CONNECTIONS ARE NOT PERMITTED, AND REMEDIAL DESIGN WORK TO CORRECT UNAPPROVED DEFICIENT CONNECTIONS SHALL BE PAID FOR BY THE CONTRACTOR.


FLOOR DESIGN LOADS:

LIVE LOAD 40 PSF TYPICAL FLOOR FRAMING
40 PSF BALCONY/DECK

GRAPHICS LEGEND

- ☒ - INDICATES POST UP
☒ - INDICATES POST DOWN. FOR POSTS UP & DN, CONTINUE POST SIZE FROM LEVEL ABOVE UNLESS OTHERWISE NOTED
☒ - INDICATES 2x6 @ 16" O.C. INTERIOR STUD BEARING WALL, TYP. U.O.N.
⊗ - DRAIN LINE

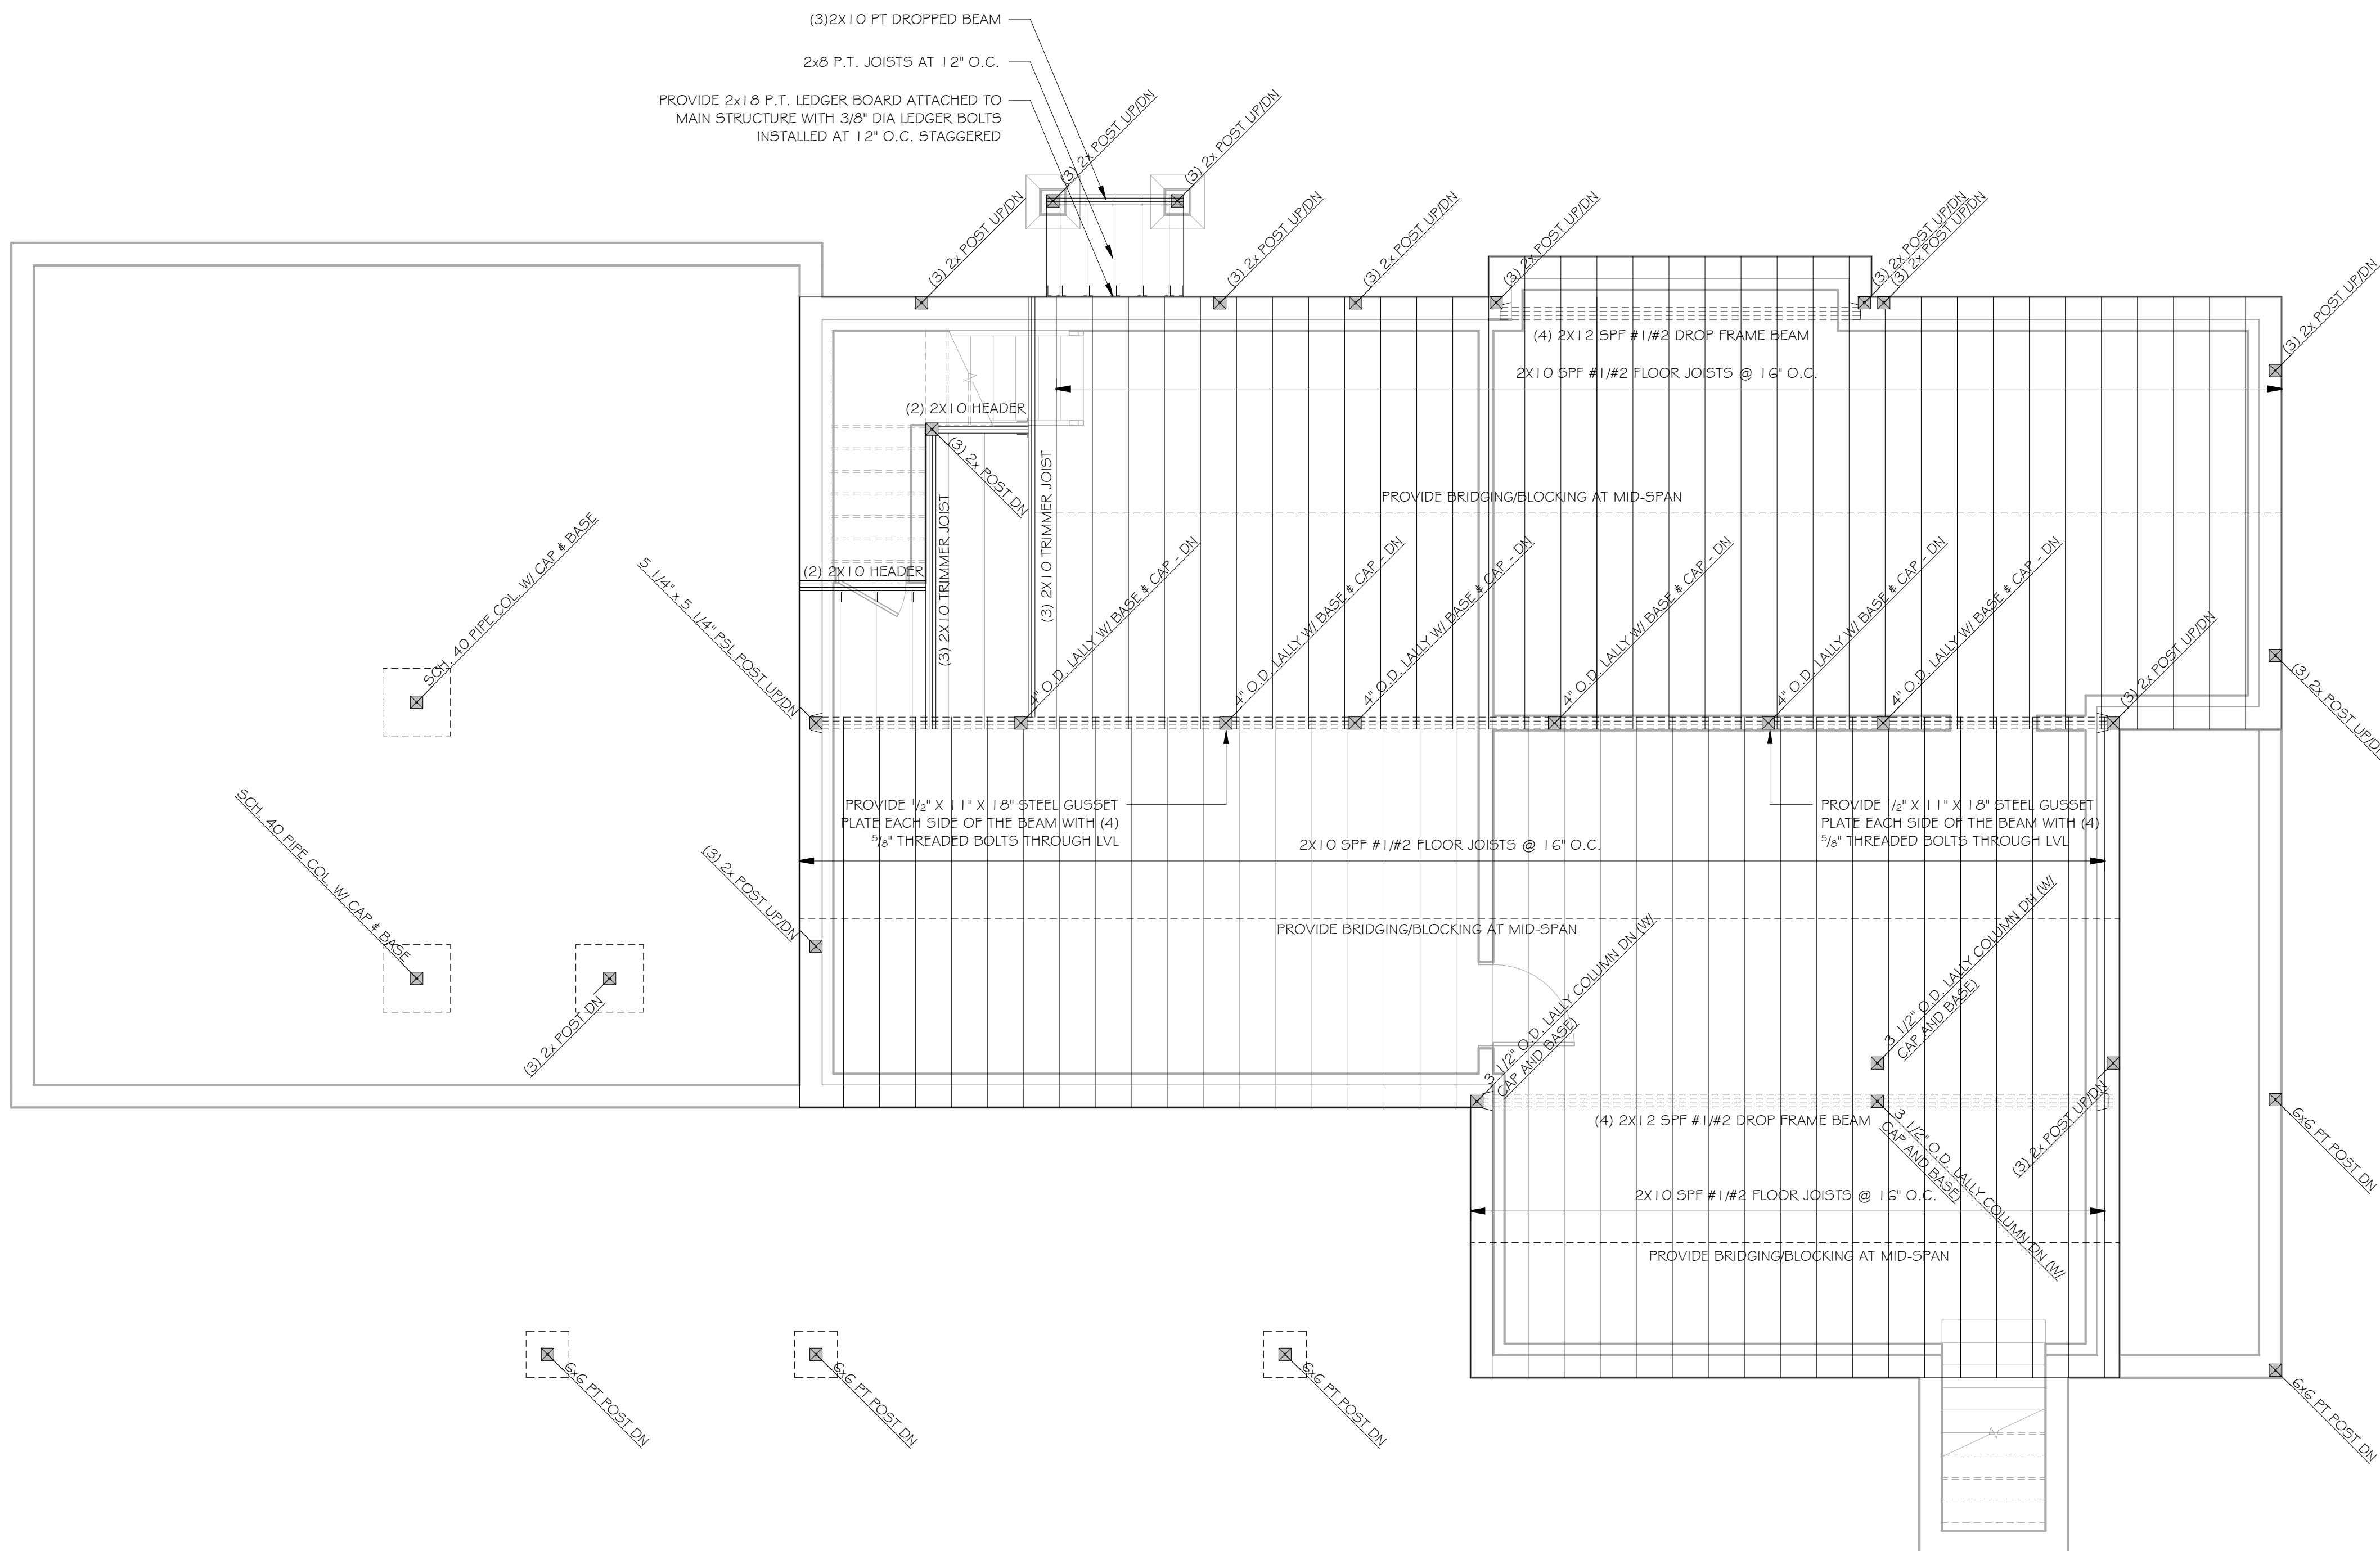

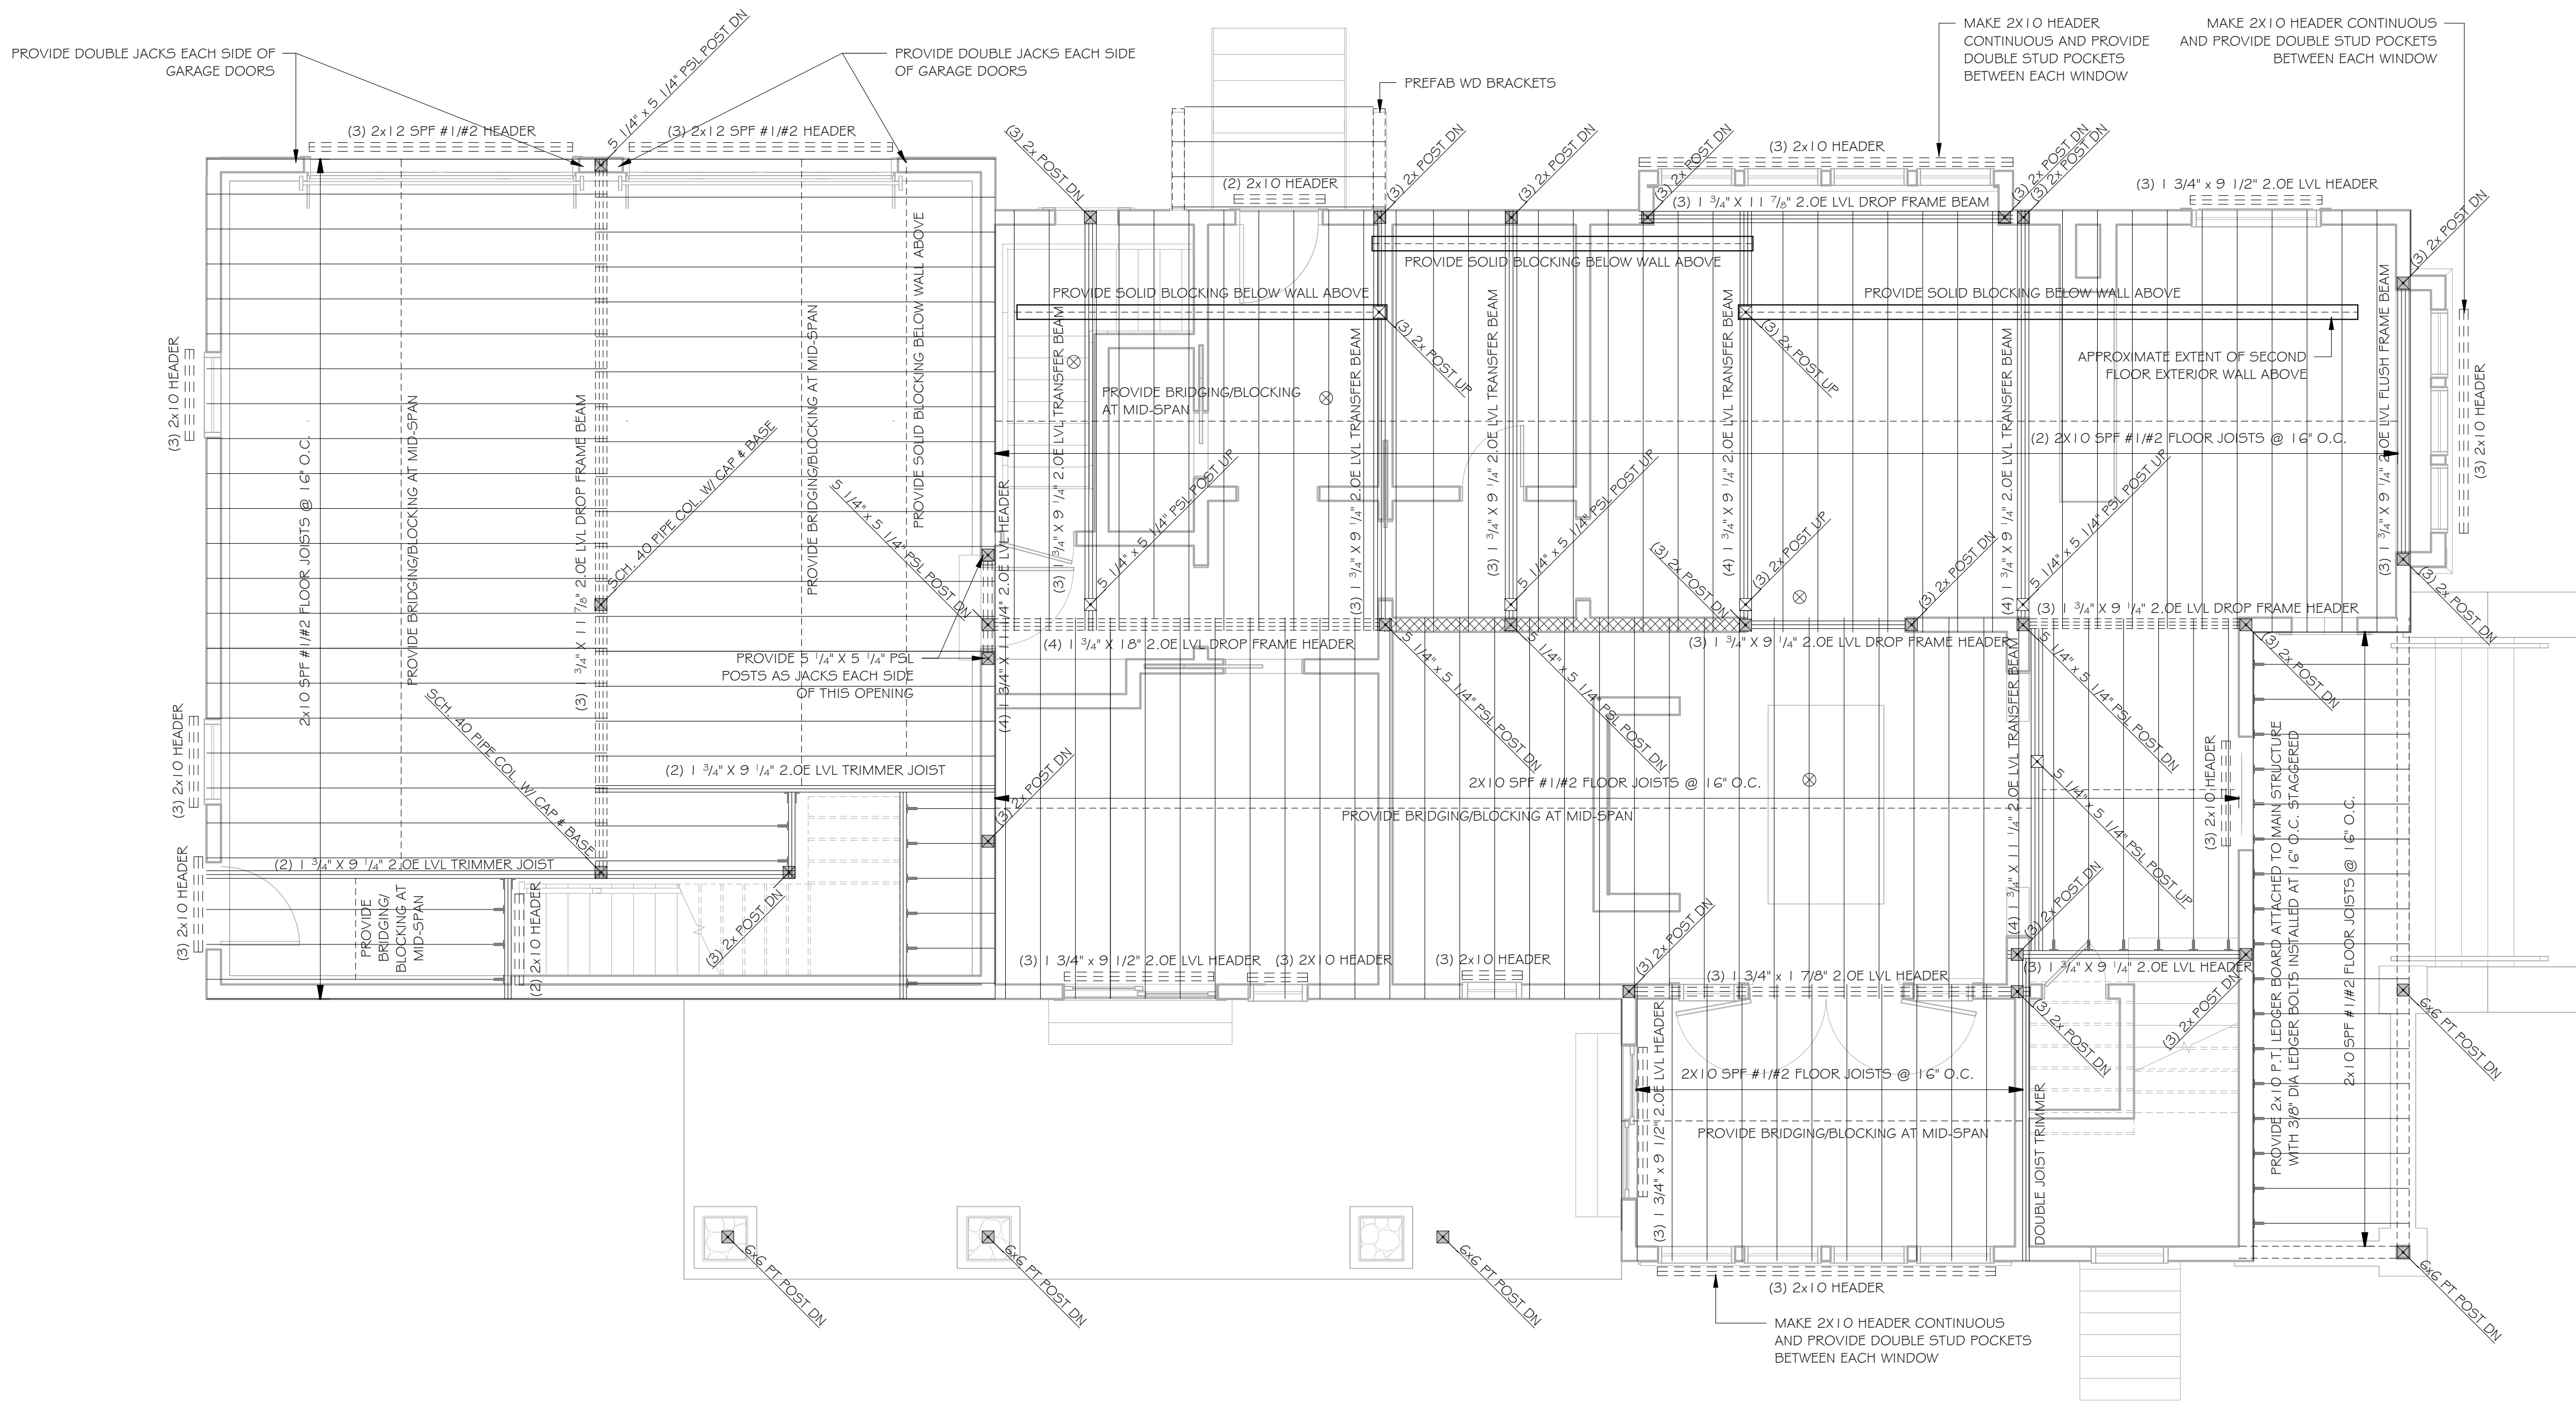

TYP. FLOOR FRAMING NOTES

1. NEW 4" AND 5" SLABS ON GRADE IS TO BE REINFORCED WITH 6 x 6 W2.0W2.0 WELDED WIRE FABRIC.
2. FOOTINGS ARE TO BE BEAR 4'-0" MIN. BELOW FINISH GRADE ON 2 TSF BEARING CAPACITY SOILS. SOIL BEARING CONDITIONS AND CAPACITY ARE TO BE VERIFIED DURING CONSTRUCTION.
3. PROVIDE PERFORATED PVC PERIMETER DRAIN IN CRUSHED STONE SURROUND WITH FILTER FABRIC PROTECTION IF APPLICABLE.
4. FOUNDATION WALLS MUST BE POURED MONOLITHICALLY. COLD JOINTS IN UNREINFORCED CONCRETE WALL ARE NOT ACCEPTABLE, AND SHALL BE REMOVED IF THEY OCCUR.
5. DO NOT BACKFILL FOUNDATION WALLS UNTIL FIRST FLOOR IS IN PLACE AND COMPLETE, NO MATTER WHAT YOUR PAST EXPERIENCE HAS BEEN.
6. PROVIDE 6" FREE DRAINING COMPACTED GRAVEL UNDER ALL NEW SLABS ON GRADE AND PROVIDE 6 MIL POLYETHYLENE VAPOR BARRIER.
7. COAT ALL STEEL BELOW GRADE WITH TWO HEAVY APPLICATIONS OF COAL-TAR EPOXY.
8. ALL EXTERIOR DECK FRAMING IS TO BE No. 2 PRESSURE TREATED SOUTHERN YELLOW PINE.
9. ALL CONNECTION HARDWARE ASSOCIATED WITH THE DECK FRAMING INCLUDING HANGERS, BOLTS, AND NAILS IS TO BE HOT DIPPED GALVANIZED OR STAINLESS STEEL. IF STAINLESS STEEL, VERIFY STEEL COMPATIBILITY WITH PRESERVATIVE TREATED WOOD.
10. SEE DRAWINGS 50 FOR GENERAL NOTES, AND SKS DRAWINGS FOR SECTIONS AND DETAILS.
11. ALL NEW FLOOR DECKING IS 3/4 INCH APA SPAN-RATED PLYWOOD GLUED AND NAILED.
12. LVL - INDICATES LAMINATED VENEER LUMBER
13. PSL - INDICATES PARALLEL STRANDED LUMBER
14. NEW OUTSIDE WALLS ARE 2x6 AT 16" ON CENTER STUD BEARING WALLS BLOCKED AT MIDHEIGHT
15. ALL FLUSH-FRAMED CONNECTIONS ARE TO HAVE STEEL HANGERS, AND ALL POST TO BEAM CONNECTIONS SHALL HAVE STEEL POST CAPS. SUBMIT COMPLETE SCHEDULE OF ALL HANGERS, SELECTED FOR END REACTIONS INDICATED (EXAMPLE: 2.0k = 2000#) IN PLAN, FOR REVIEW AND APPROVAL. IMPROVISED CONNECTIONS ARE NOT PERMITTED, AND REMEDIAL DESIGN WORK TO CORRECT UNAPPROVED DEFICIENT CONNECTIONS SHALL BE PAID FOR BY THE CONTRACTOR.

FLOOR DESIGN LOADS:

LIVE LOAD 40 PSF TYPICAL FLOOR FRAMING
40 PSF BALCONY/DECK

GRAPHICS LEGEND

- ⊠ - INDICATES POST UP
- ⊞ - INDICATES POST DOWN. FOR POSTS UP & DN, CONTINUE POST SIZE FROM LEVEL ABOVE UNLESS OTHERWISE NOTED
- ⊞ - INDICATES 2x6 @ 16" O.C. INTERIOR STUD BEARING WALL, TYP. U.O.N.
- ⊞ - DRAIN LINE

Revisions/Project Status		
Issue	Date	Issue Description
△		

Cullen Residence


3 Spingler Ave.

3 Spingler Ave, South Hamilton, MA

GENERAL ROOFING NOTES

1. PROVIDE ICE & WATER @ ALL EAVE & RAKE LOCATIONS AS WELL AS ALL VALLEY & ROOF CHEEK WALL CONNECTIONS.
2. PROVIDE ALUMINUM DRIP EDGE @ ALL EAVE & RAKE LOCATIONS
3. PROVIDE ALUMINUM STEP FLASHING @ ALL ROOF TO CHEEK WALL CONNECTIONS.
4. AT LOW PITCH ROOFS (LESS THAN 4" RISE/ 12" RUN) PROVIDE MECHANICALLY FASTENED & FULLY ADHERED EPDM ROOFING INSTALLED PER MNFRS SPECIFICATIONS
5. SEE ELEVATIONS FOR GUTTER/DOWNSPOUT LOCATIONS AND DETAILS.
6. ALUMINUM DRIP EDGE @ ROOF EDGE SHALL NOT OBSTRUCT CROWN. PROVIDE BLOCKING AS NECESSARY.
7. ROOF SUBSTRATE SHALL BE 5/8" ZIP SYSTEM UNLESS OTHERWISE NOTED.

NOTE:
ALL RAFTERS SHALL BE 2X10 SPF #1/#2 AT 16" O.C. UNLESS NOTED OTHERWISE

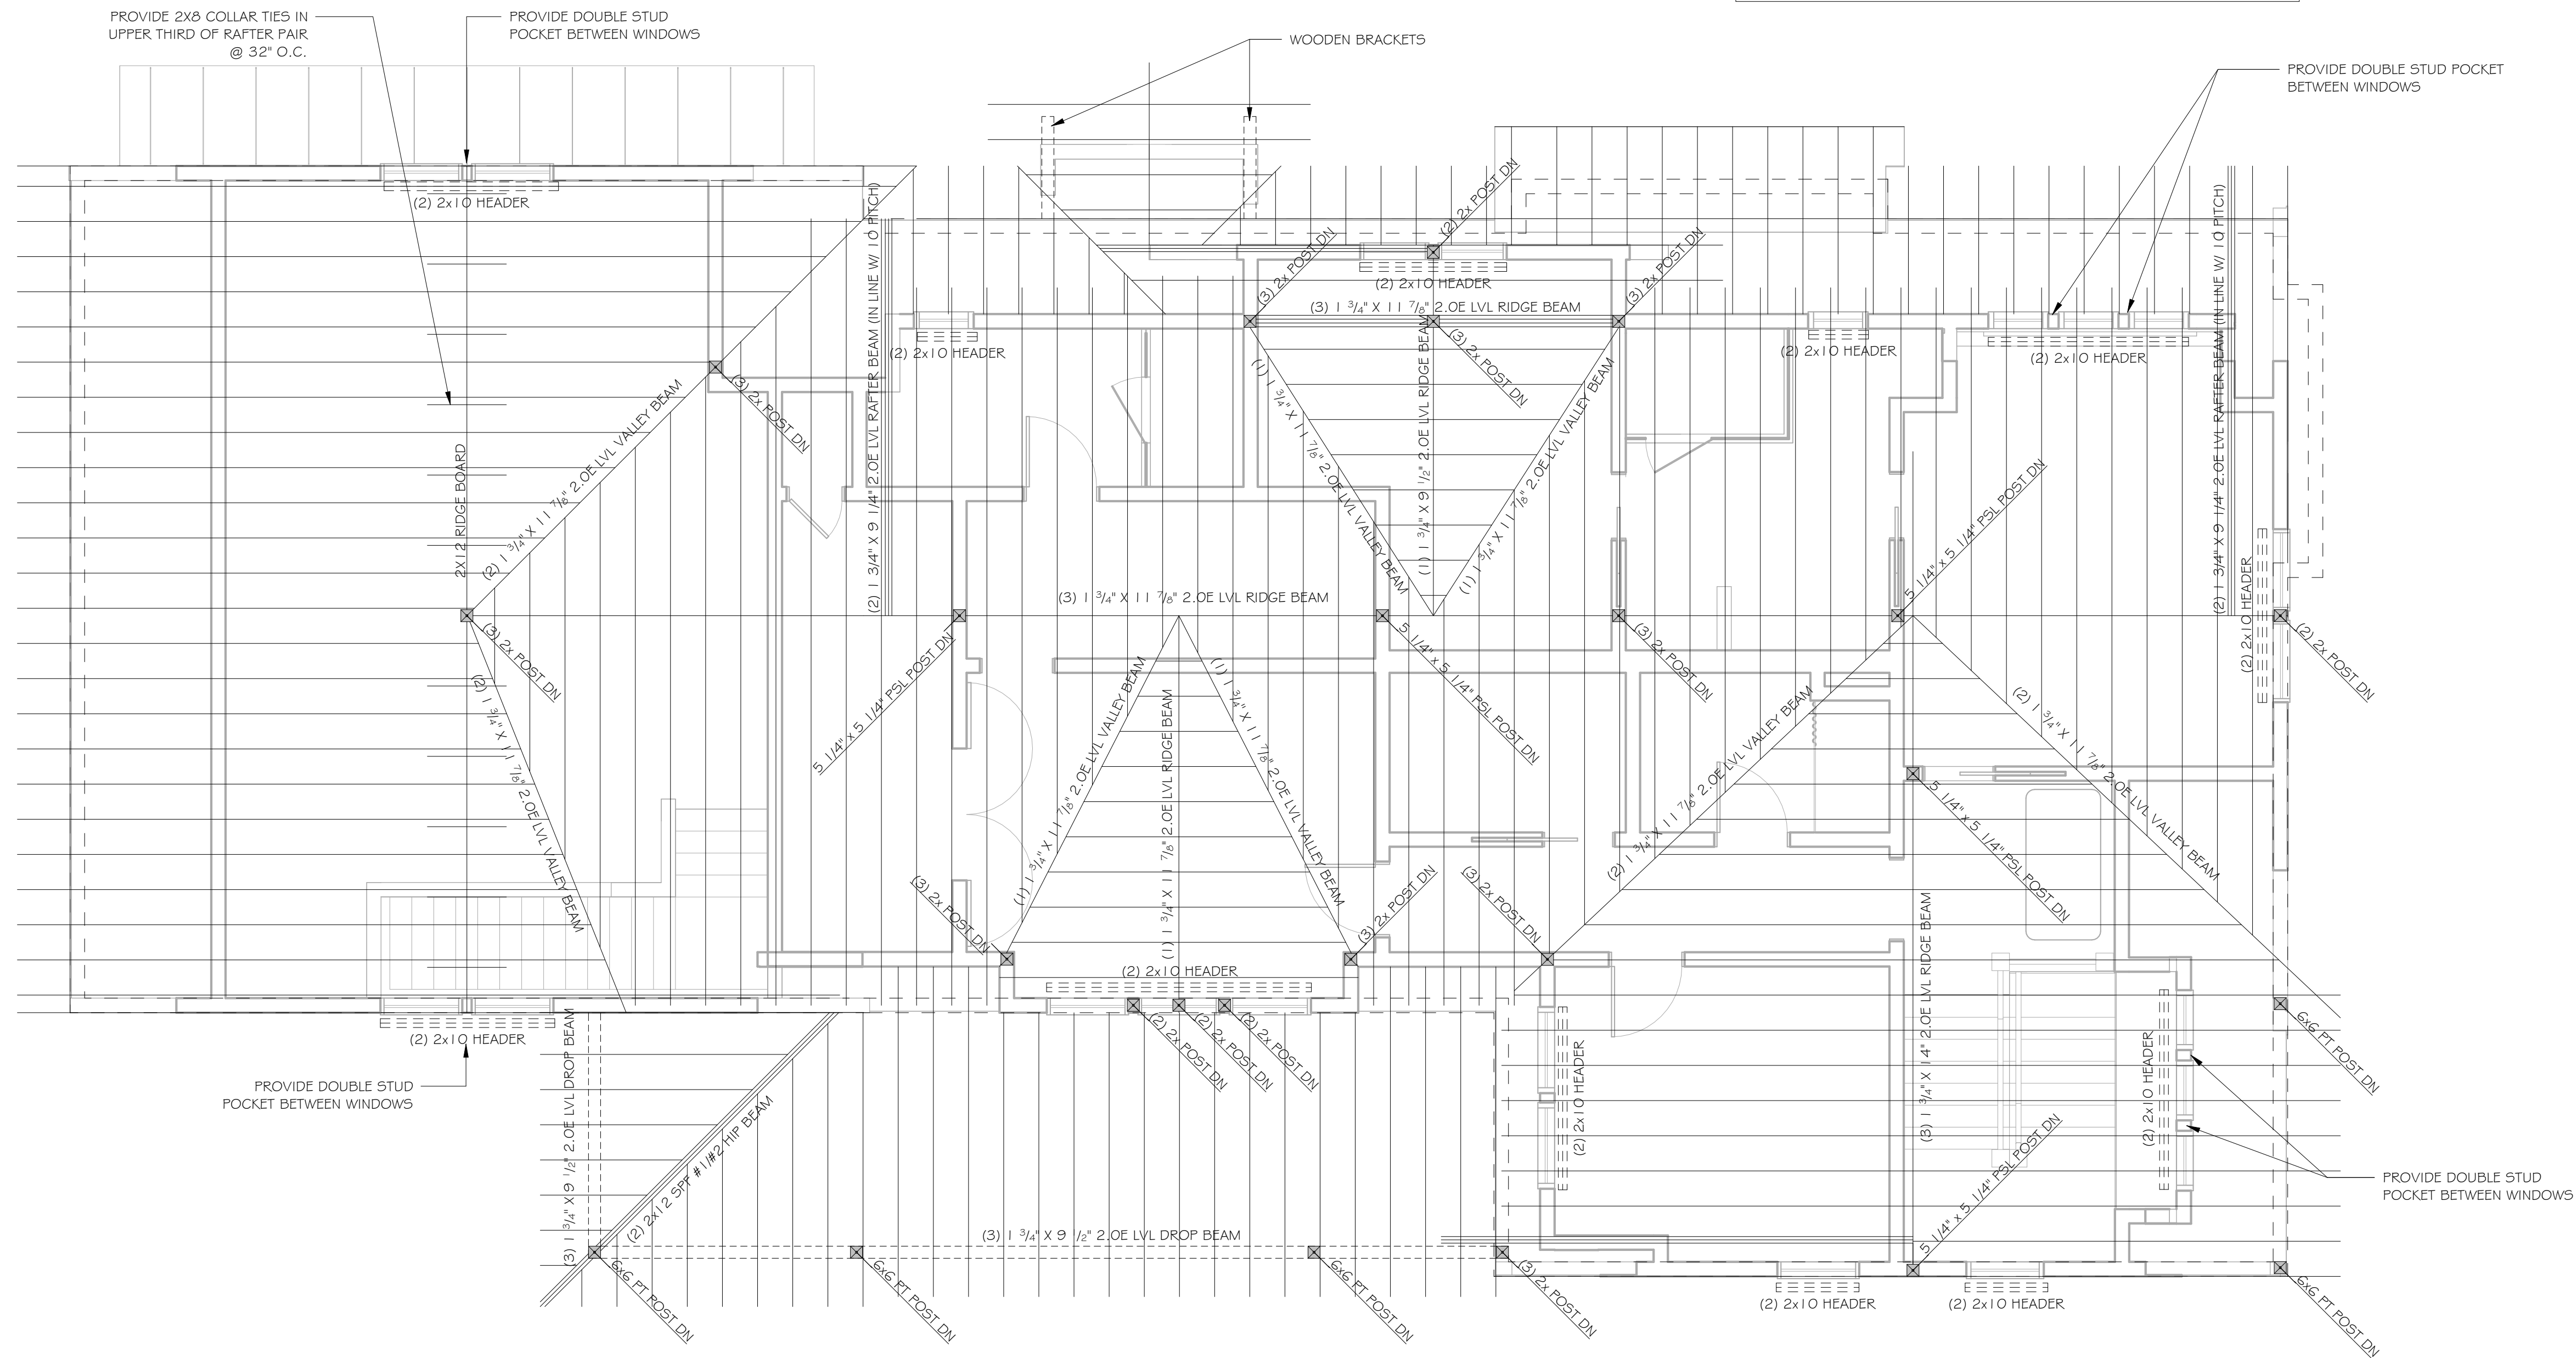




DETAILS ABOVE ARE TYP. @ ALL OPENING UNLESS OTHERWISE NOTED ON FRAMING PLANS

PROVIDE DOUBLE JACK STUDS FOR SUPPORT @ BEARING WALL HEADERS UNLESS OTHERWISE NOTED ON FRAMING PLANS


① STANDARD EXT. & LOAD BEARING WALL HEADERS
1" = 1'-0"

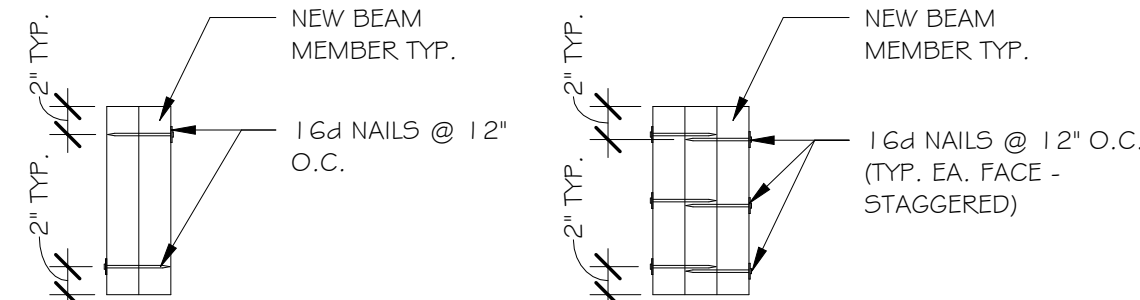

TWO MEMBER BEAM


THREE MEMBER BEAM (FOUR MEMBER BEAMS SIMILAR UNLESS SPEC. AS BOLTED ON PLANS)

② TYP. NAILING DETAILS FOR BUILT-UP BEAMS
1" = 1'-0"

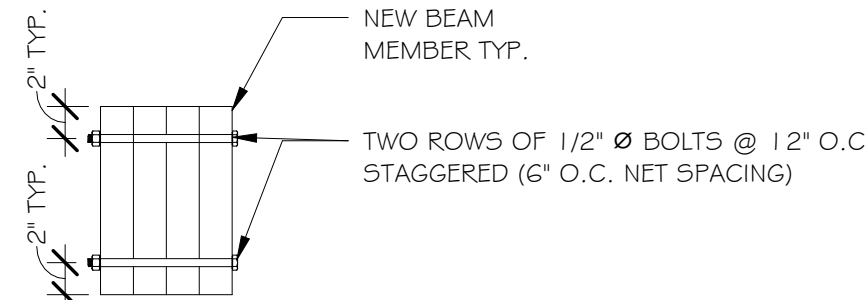


BOLTED FOUR MEMBER BEAMS (SPEC. AS "BOLTED" ON FRAMING PLANS)


③ TYP. FOUNDATION SECTION - GABLE WALLS
1" = 1'-0"

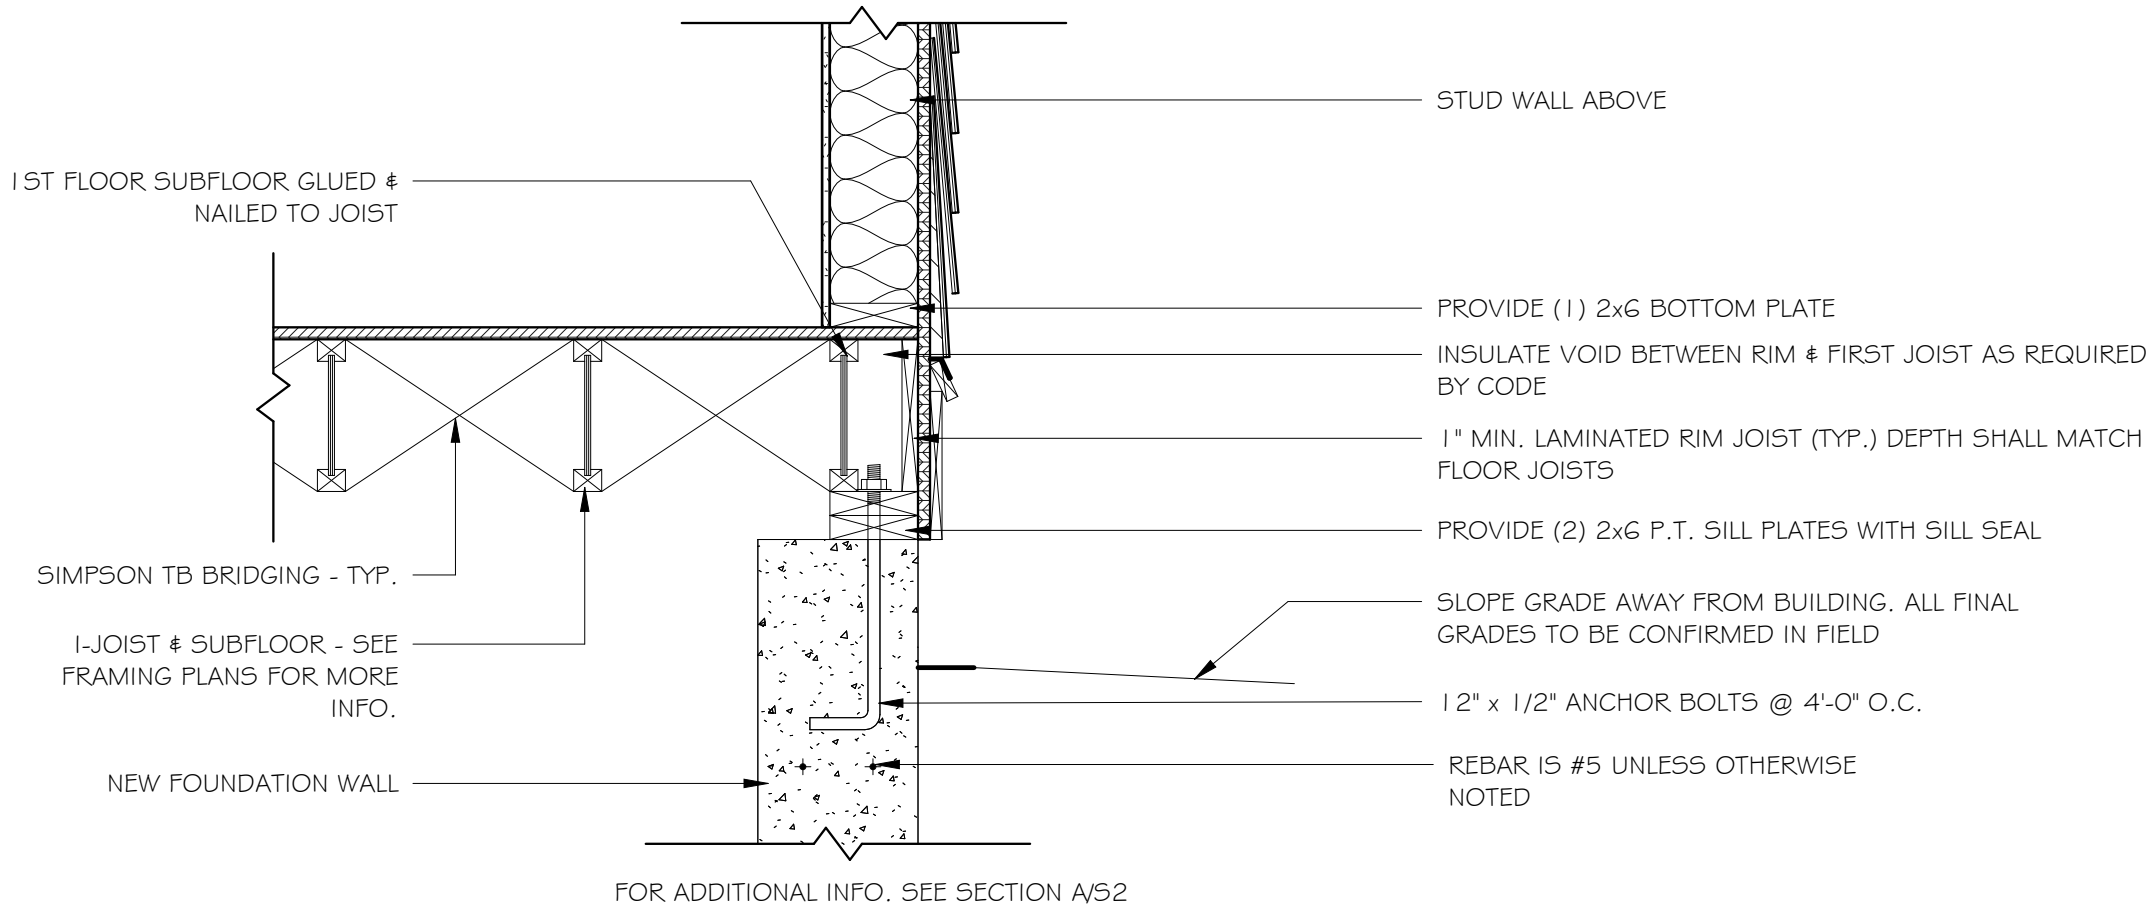


⑤ TYP. FOUNDATION SECTION - GABLE WALLS
1" = 1'-0"

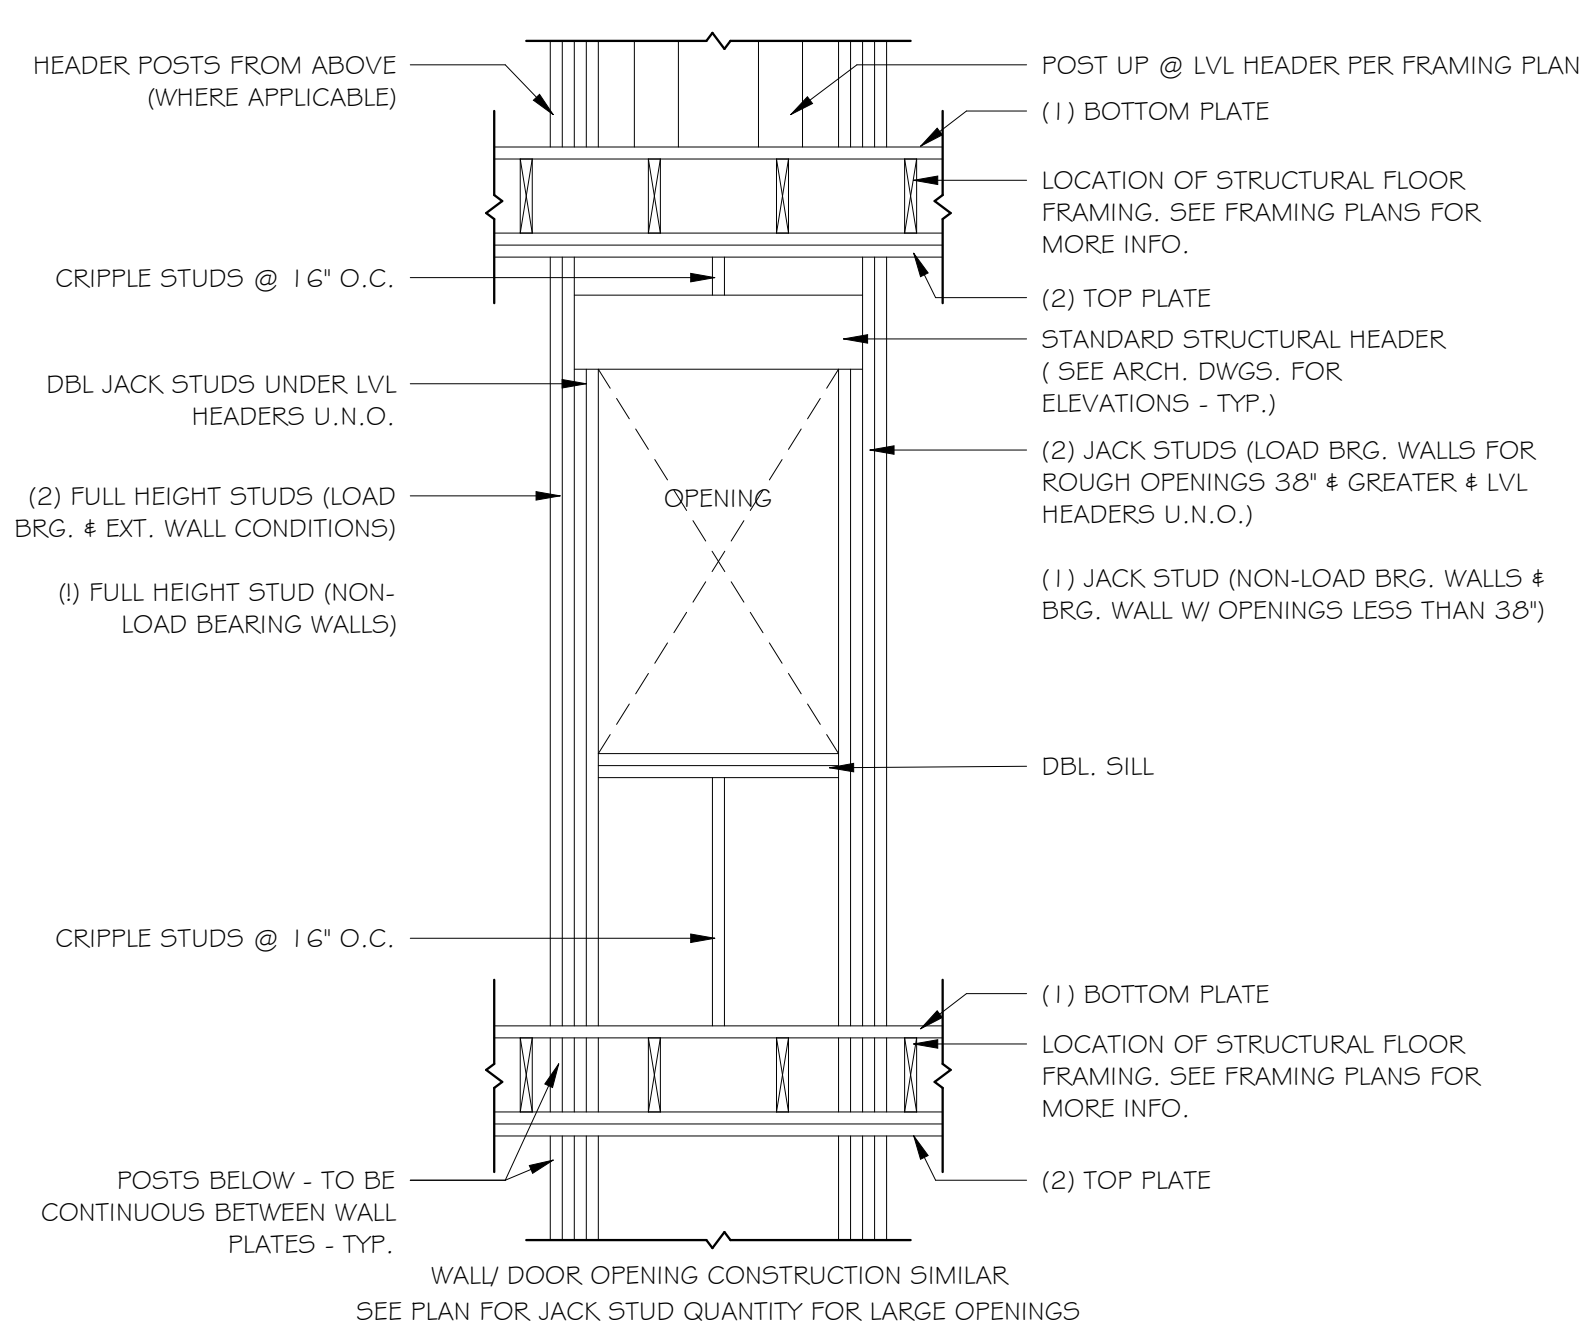

③ ELEVATION - STRUCTURAL WINDOW FRAMING
1/2" = 1'-0"

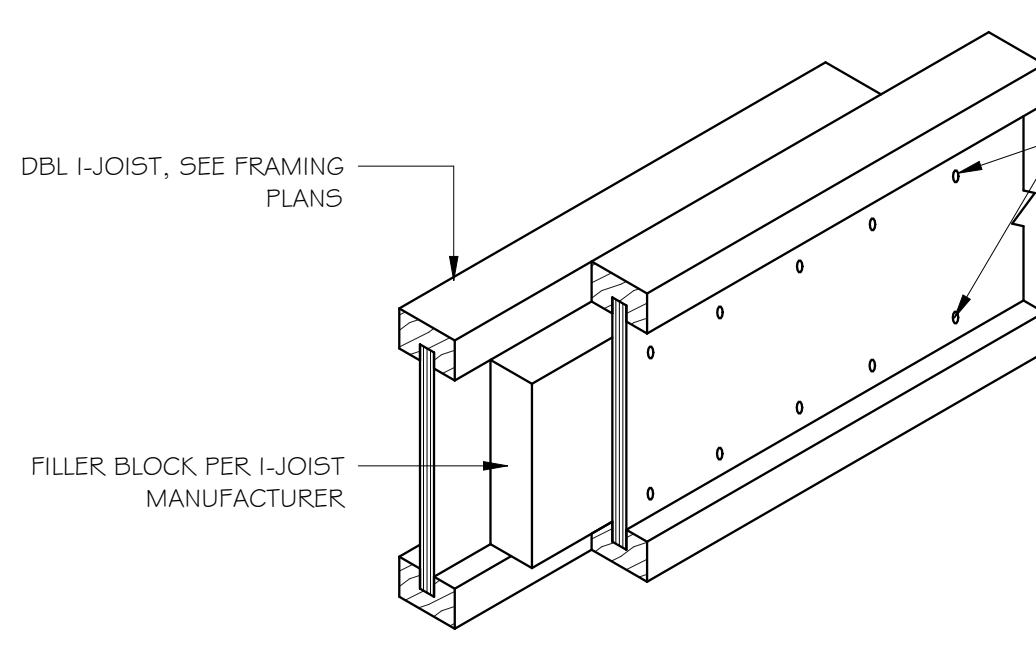

⑥ DBL I-JOIST NAILING DETAIL
1/2" = 1'-0"

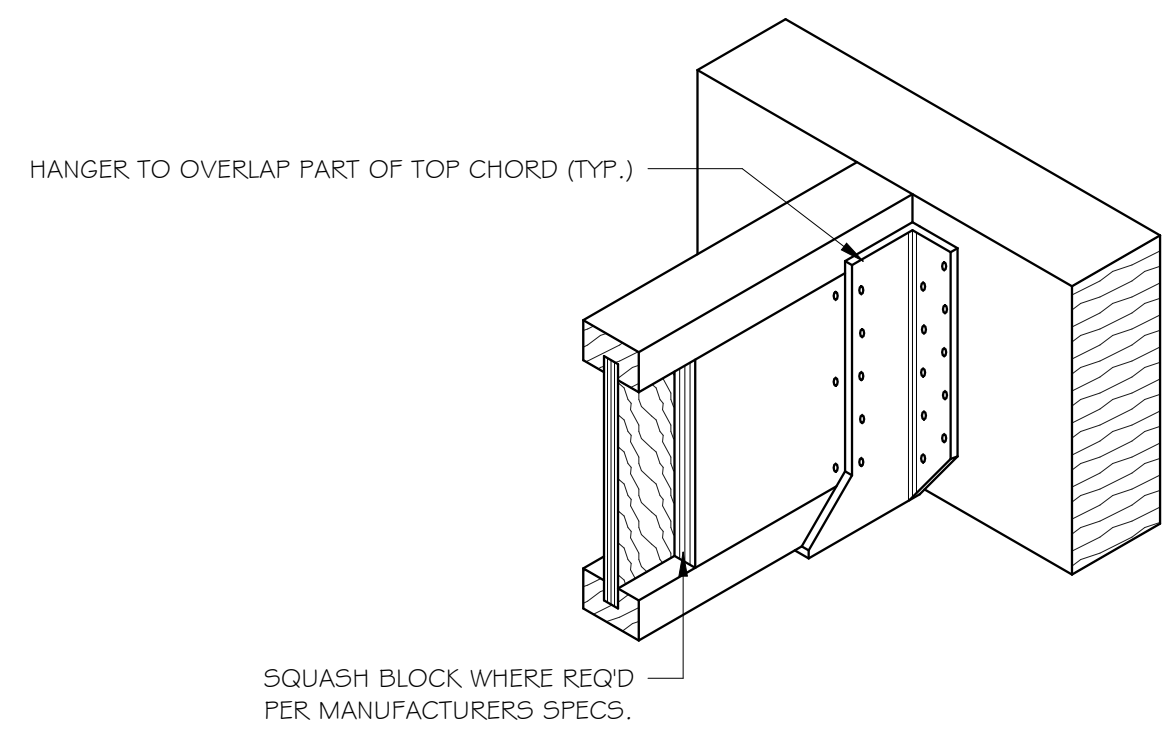

⑦ TYP. FLUSH FRAMED I-JOIST
1/2" = 1'-0"


TJI NAILING REQUIREMENTS

TJI® JOISTS AT BEARINGS: ONE 8D (2 1/2") BOX NAIL EACH SIDE. DRIVE NAILS AT AN ANGLE AT LEAST 1 1/2" FROM END.


BLOCKING PANELS, RIM JOIST OR RIM BOARD TO BEARING PLATE:
TJI® BLOCKING PANELS OR RIM JOIST: 1 OD (3") BOX NAILS AT 6" O.C.
TRUS JOIST RIM BOARD: TOENAIL WITH 1 OD (3") BOX NAILS AT 6" O.C. OR 1 6D (3 1/2") BOX NAILS AT 12" O.C.
SHEAR TRANSFER: CONNECTIONS EQUIVALENT TO DECKING NAIL SCHEDULE.

RIM BOARD, RIM JOIST OR CLOSURE TO TJI® JOIST:
1 3/4" WIDTH OR LESS: ONE 1 OD (3") BOX NAIL INTO EACH.
2 1/16" THRU 2 1/2" WIDTHS: ONE 1 6D (3 1/2") BOX NAIL INTO EACH FLANGE.
3 1/2" WIDTH: ONE 1 OD (3") BOX NAILS, ONE EACH SIDE OF TJI® JOIST FLANGE.


2x4 MINIMUM SQUASH BLOCKS: ONE 1 OD (3") BOX NAIL INTO EACH FLANGE.

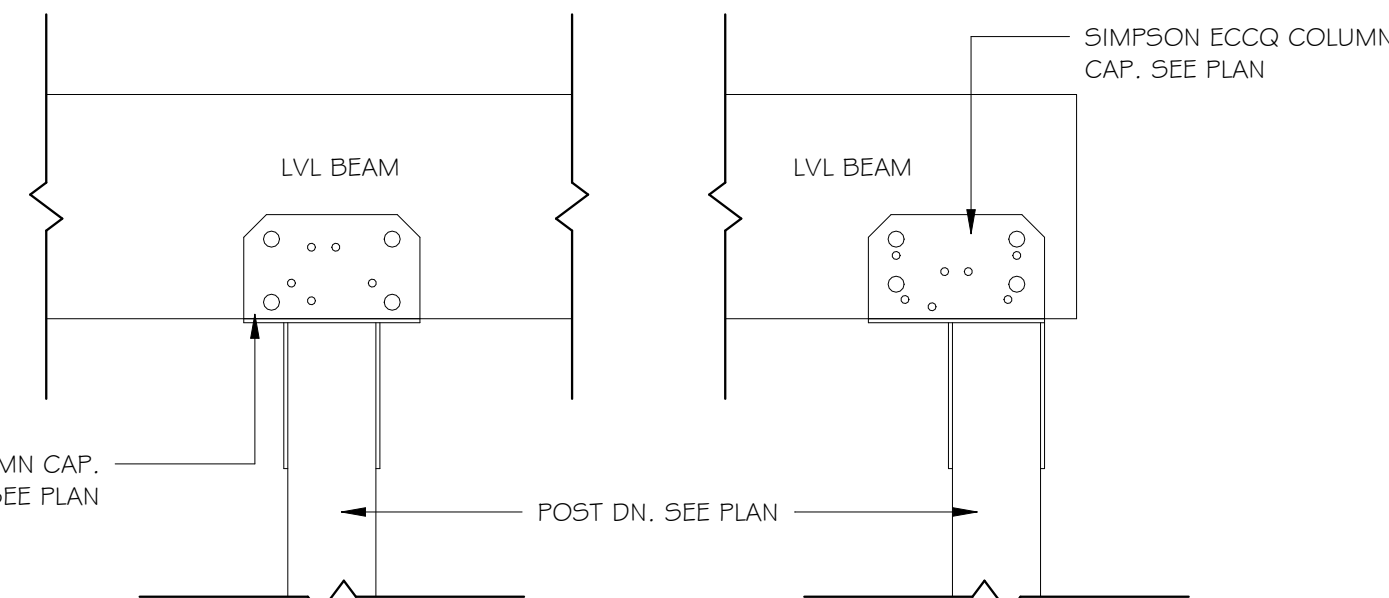

④ TYP. BEAM TO POST CONNECTION
1" = 1'-0"

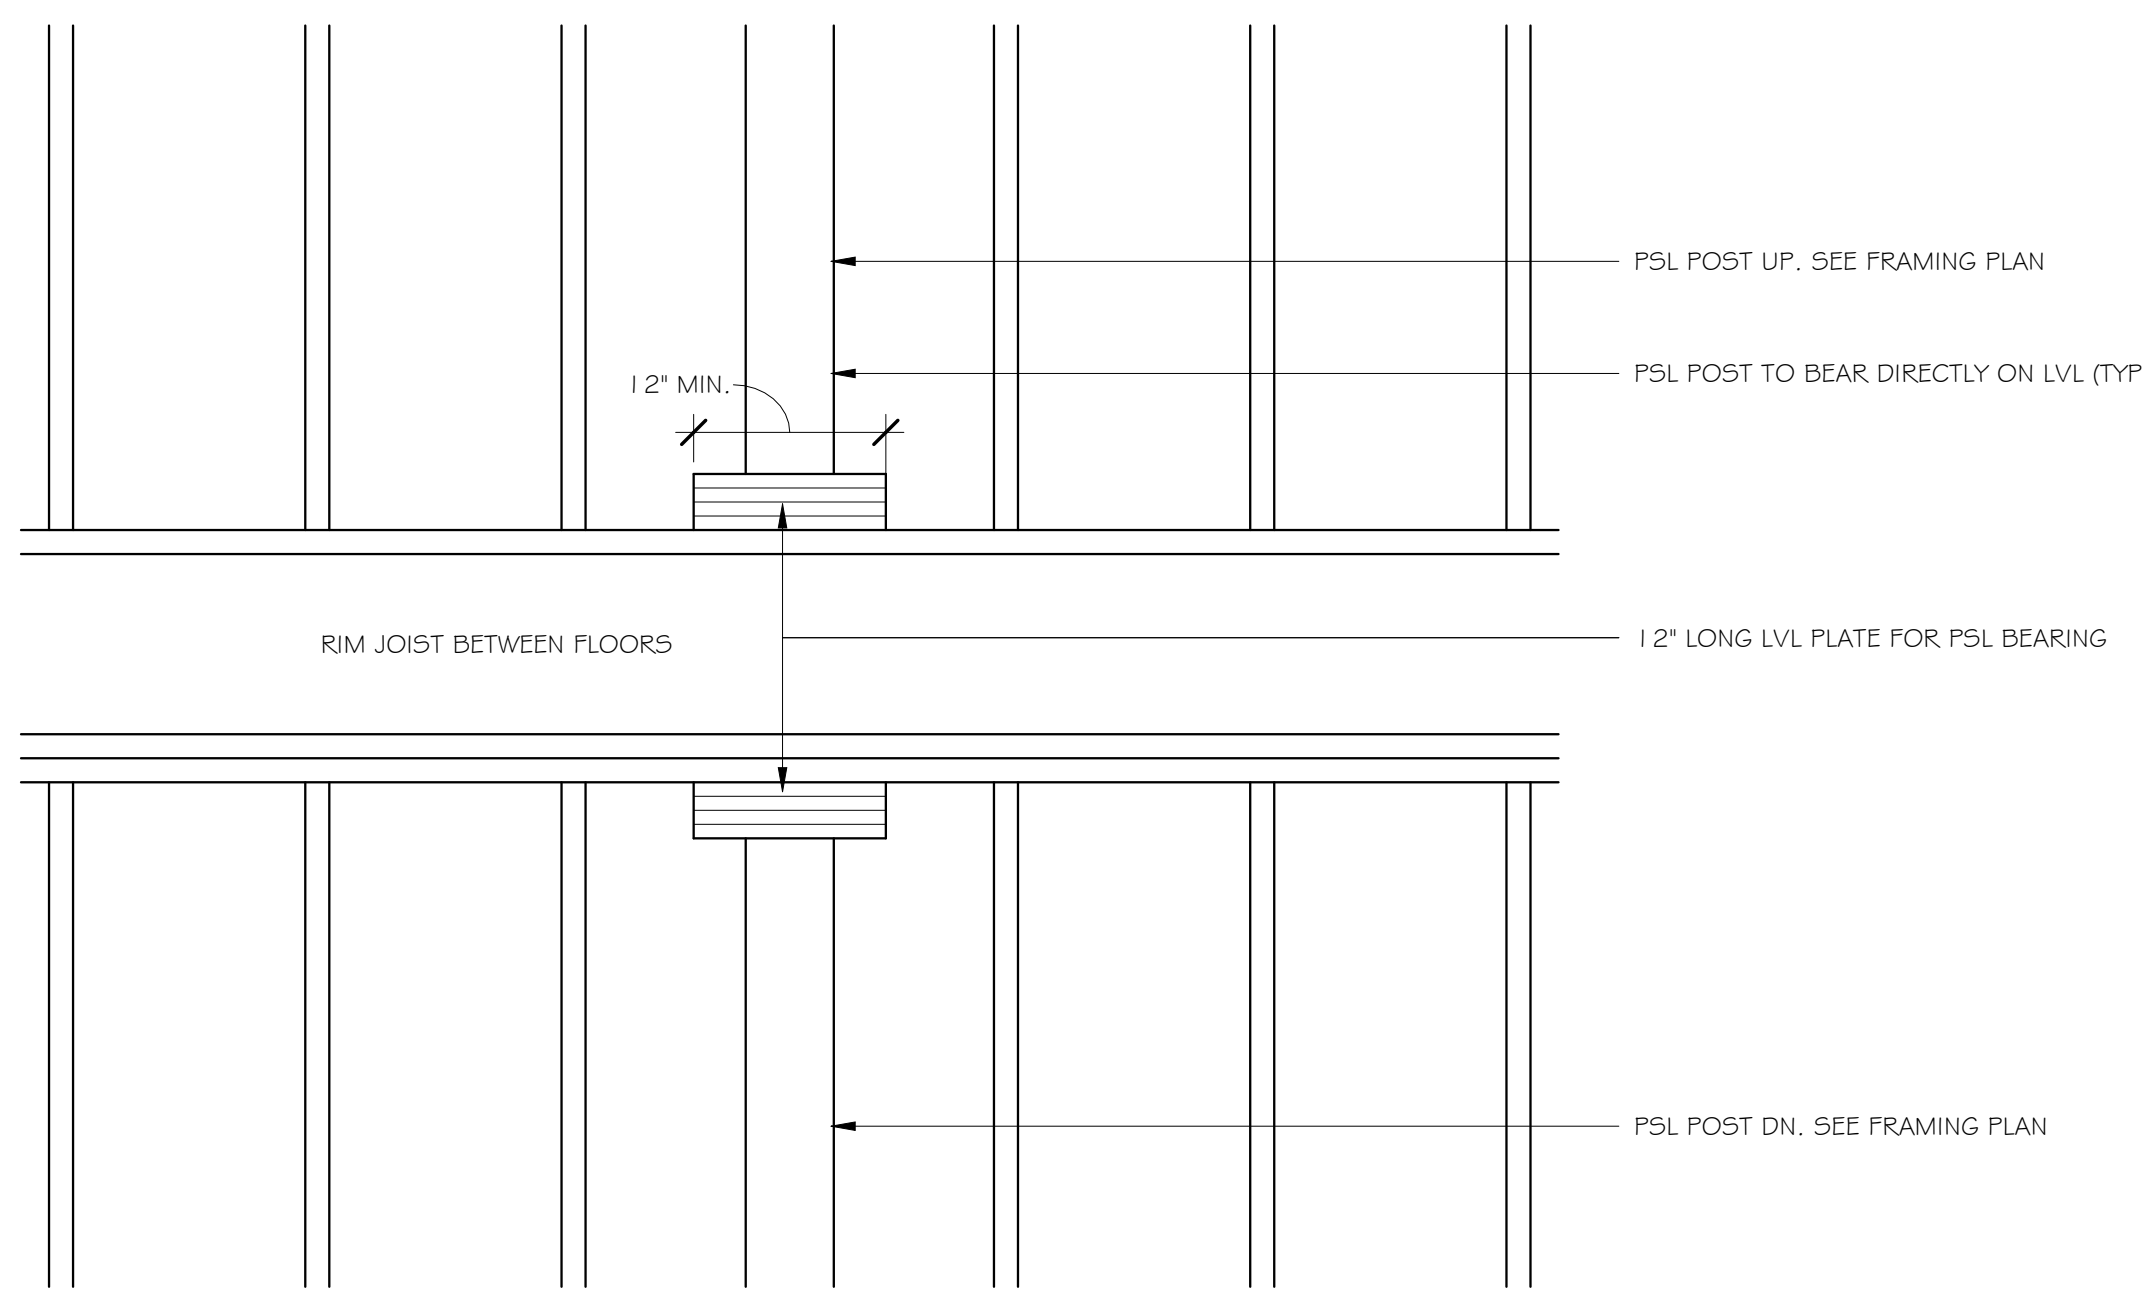


⑧ TYP. PSL POST UP & DN DETAIL
1" = 1'-0"

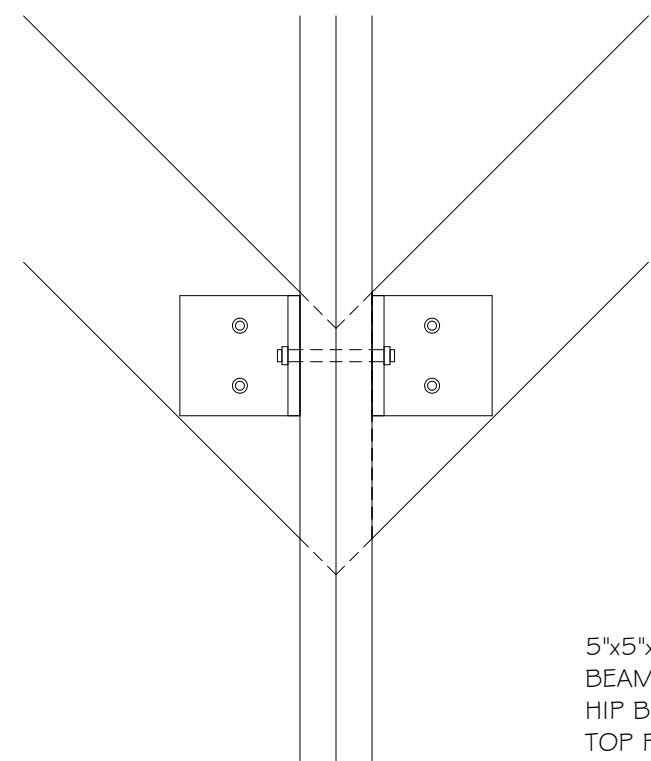


5"x5"x1/2" STEEL ANGLE EACH SIDE OF HIP BEAM W/ 1/2" THROUGH BOLT THROUGH HIP BEAM AND (2) 3/8" LAG BOLT TO THE TOP PLATE

⑤ CATHEDRAL CEILING REINFORCEMENT DETAIL
1/2" = 1'-0"

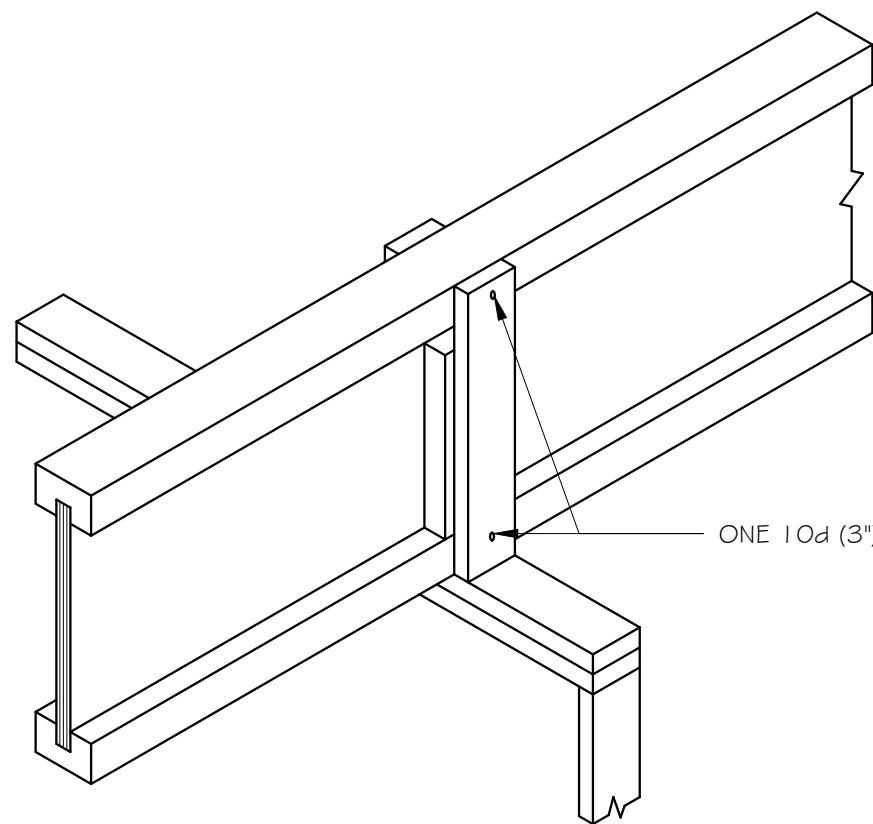

ONE 10d (3") BOX NAIL INTO EA. FLANGE

① TYP. FRAMING DETAIL @ CONTINUOUS JOIST
1/2" = 1'-0"

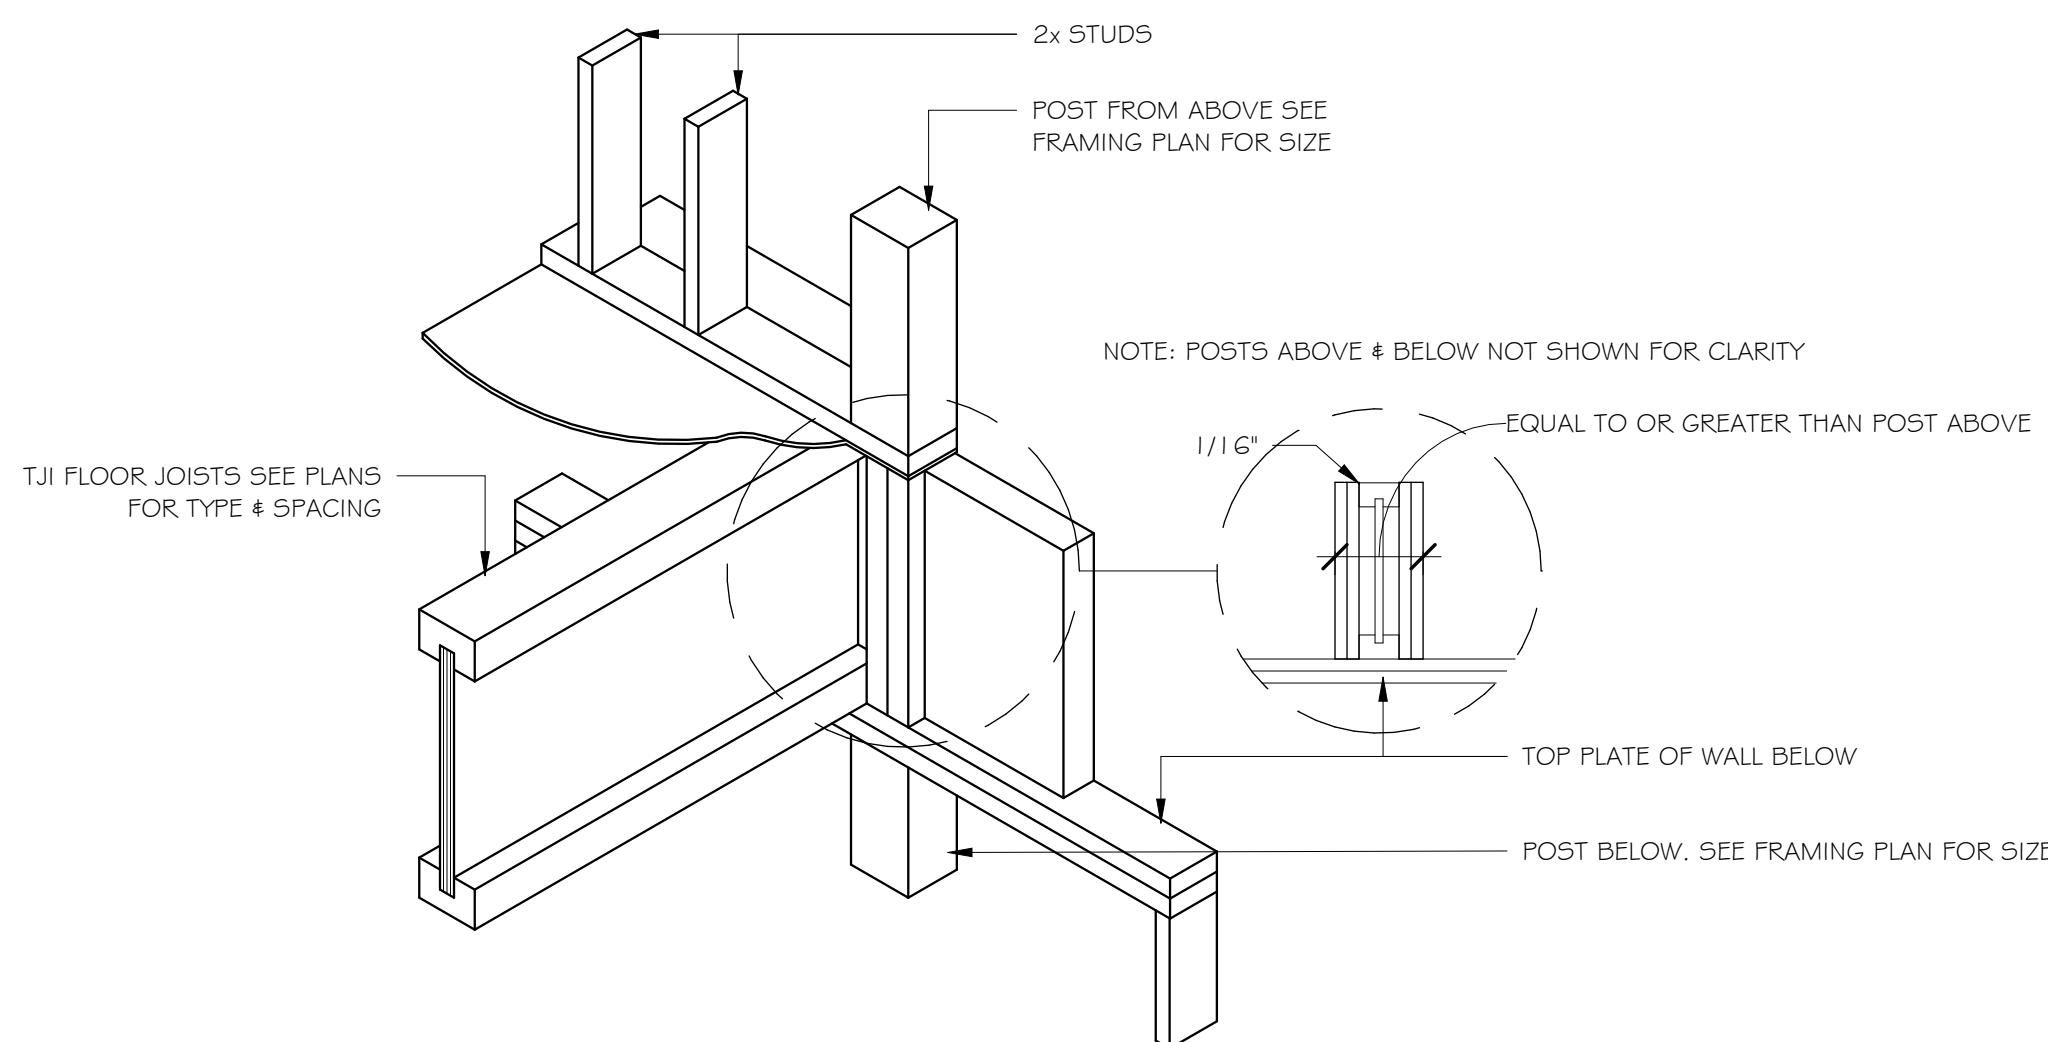


NOTE: POSTS ABOVE & BELOW NOT SHOWN FOR CLARITY

1/16" EQUAL TO OR GREATER THAN POST ABOVE

TOP PLATE OF WALL BELOW

POST BELOW, SEE FRAMING PLAN FOR SIZE

③ TYP. FRAMING DETAIL @ TIMBER POST
1/2" = 1'-0"

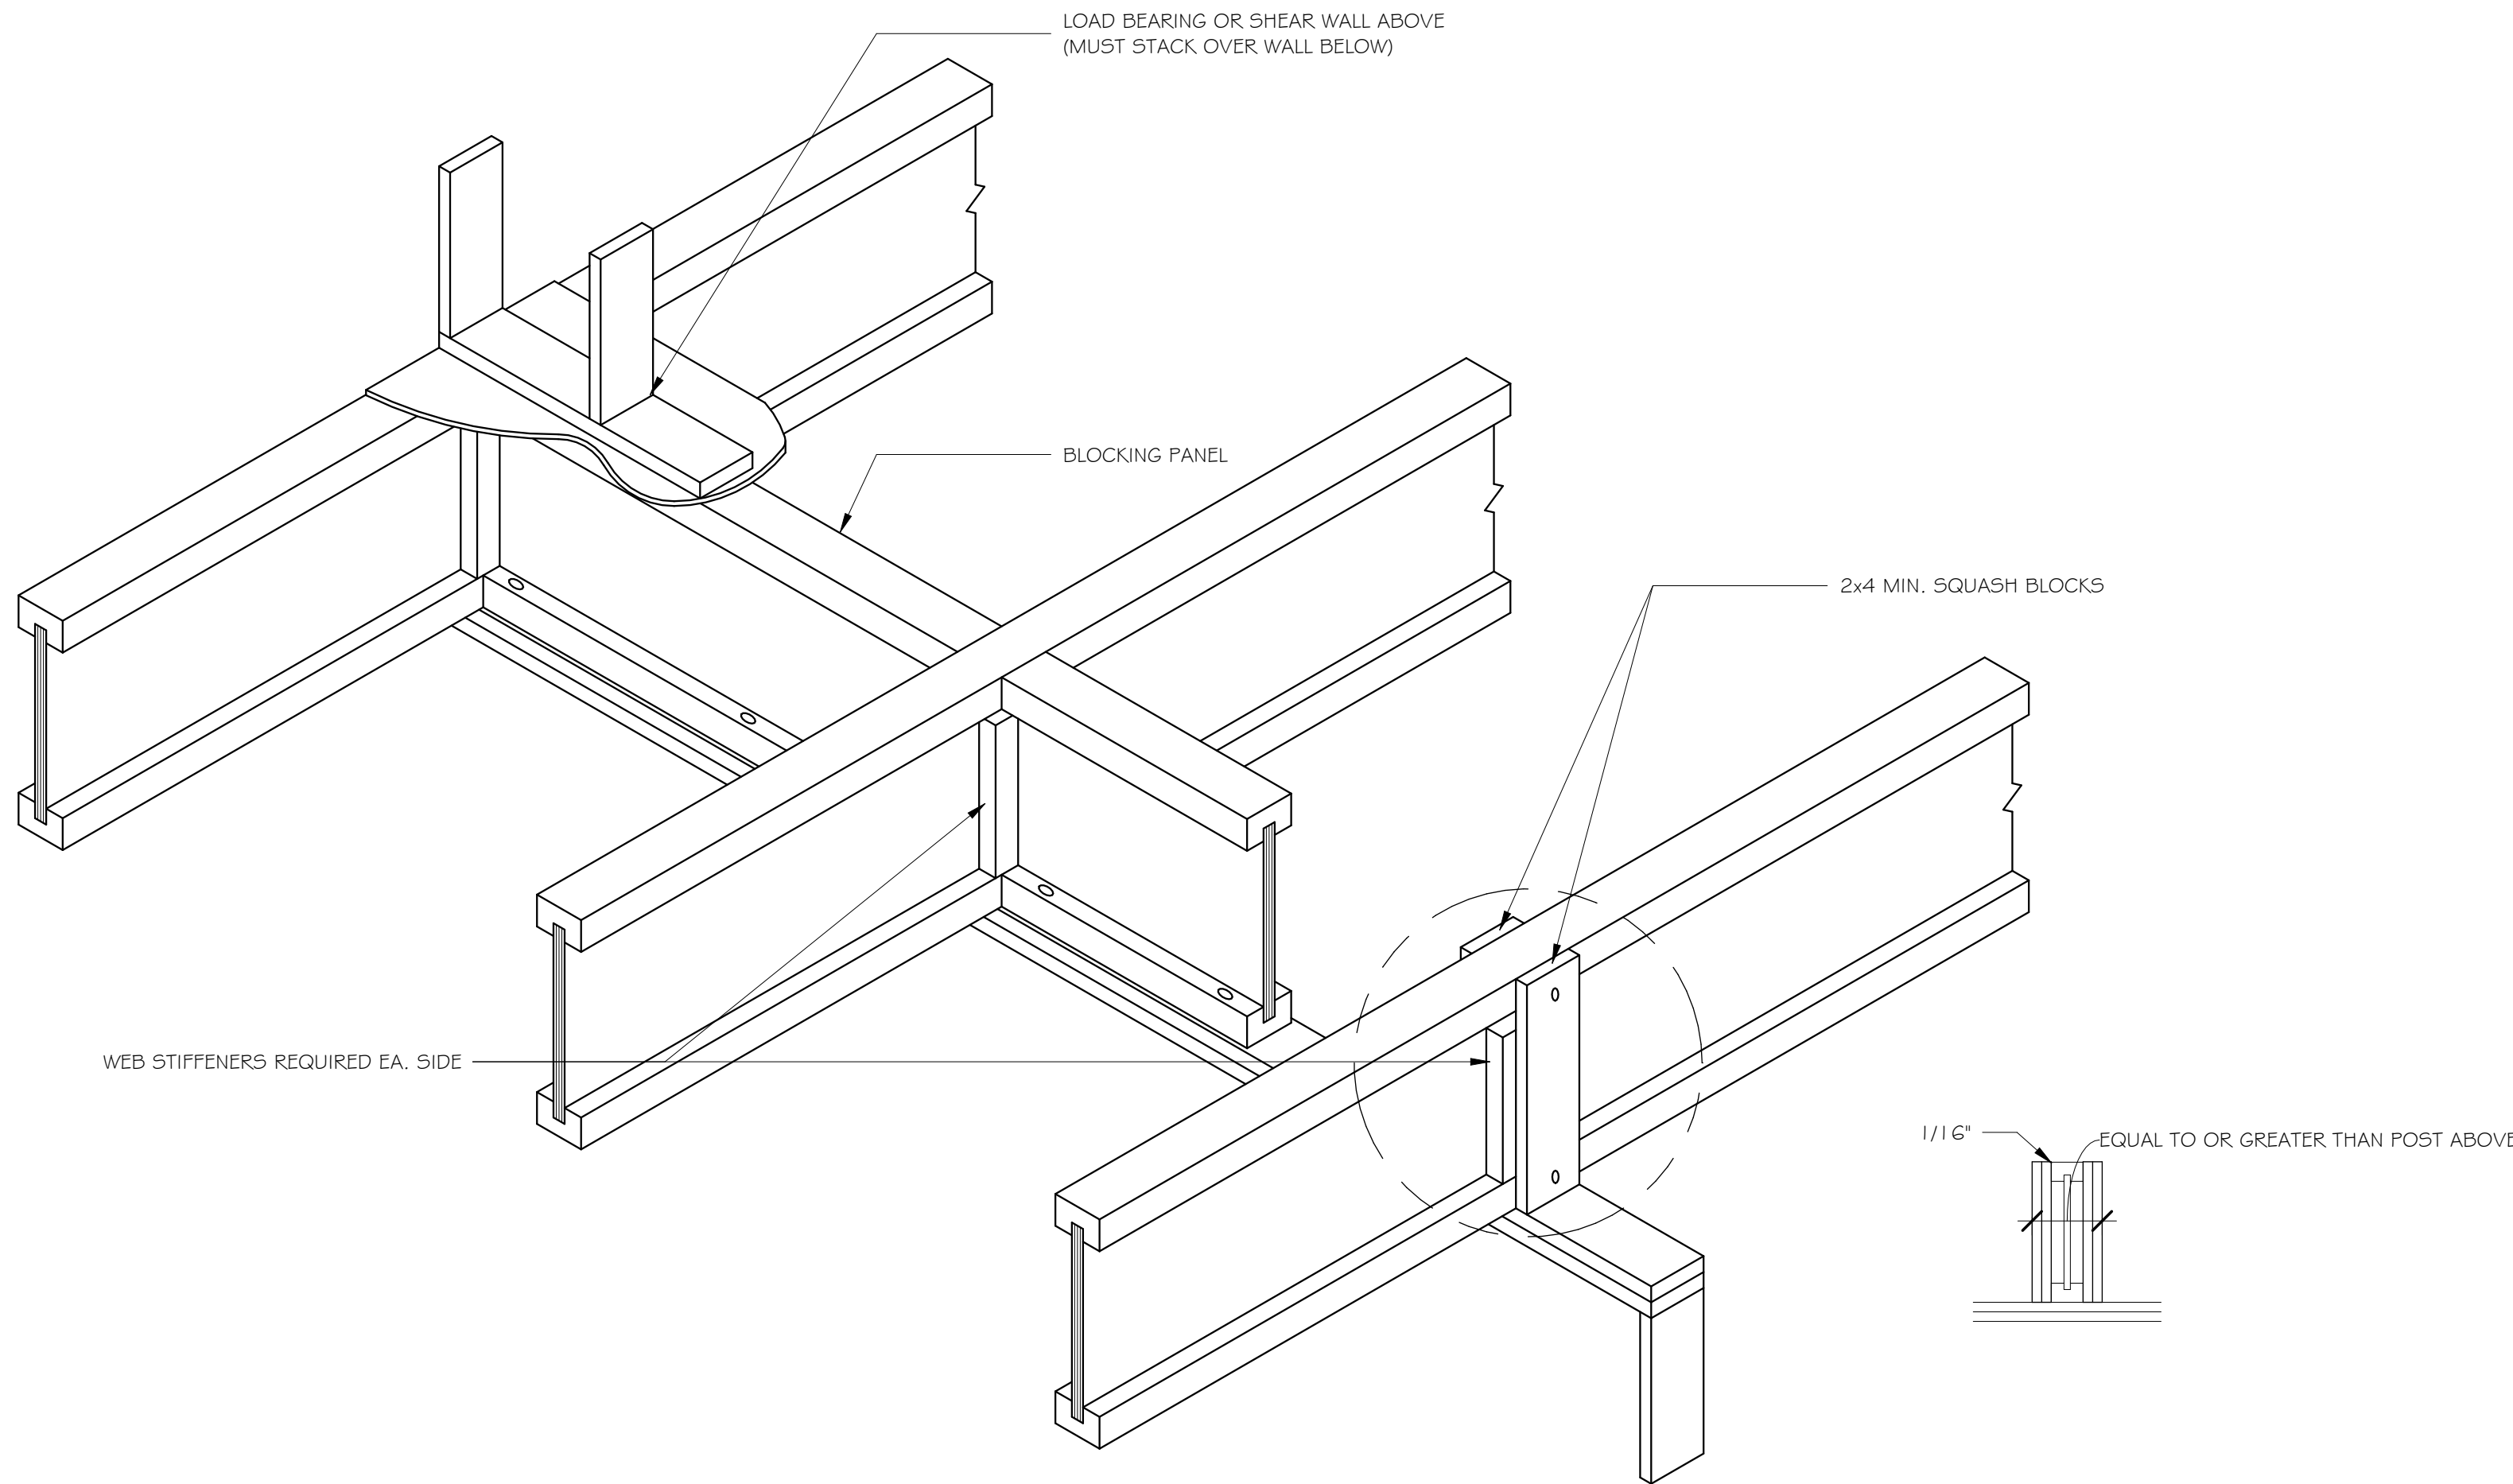

LOAD BEARING OR SHEAR WALL ABOVE (MUST STACK OVER WALL BELOW)


BLOCKING PANEL

2x4 MIN. SQUASH BLOCKS

WEB STIFFENERS REQUIRED EA. SIDE

1/16" EQUAL TO OR GREATER THAN POST ABOVE

② FRAMING DETAIL @ LOAD BEARING WALL
1/2" = 1'-0"

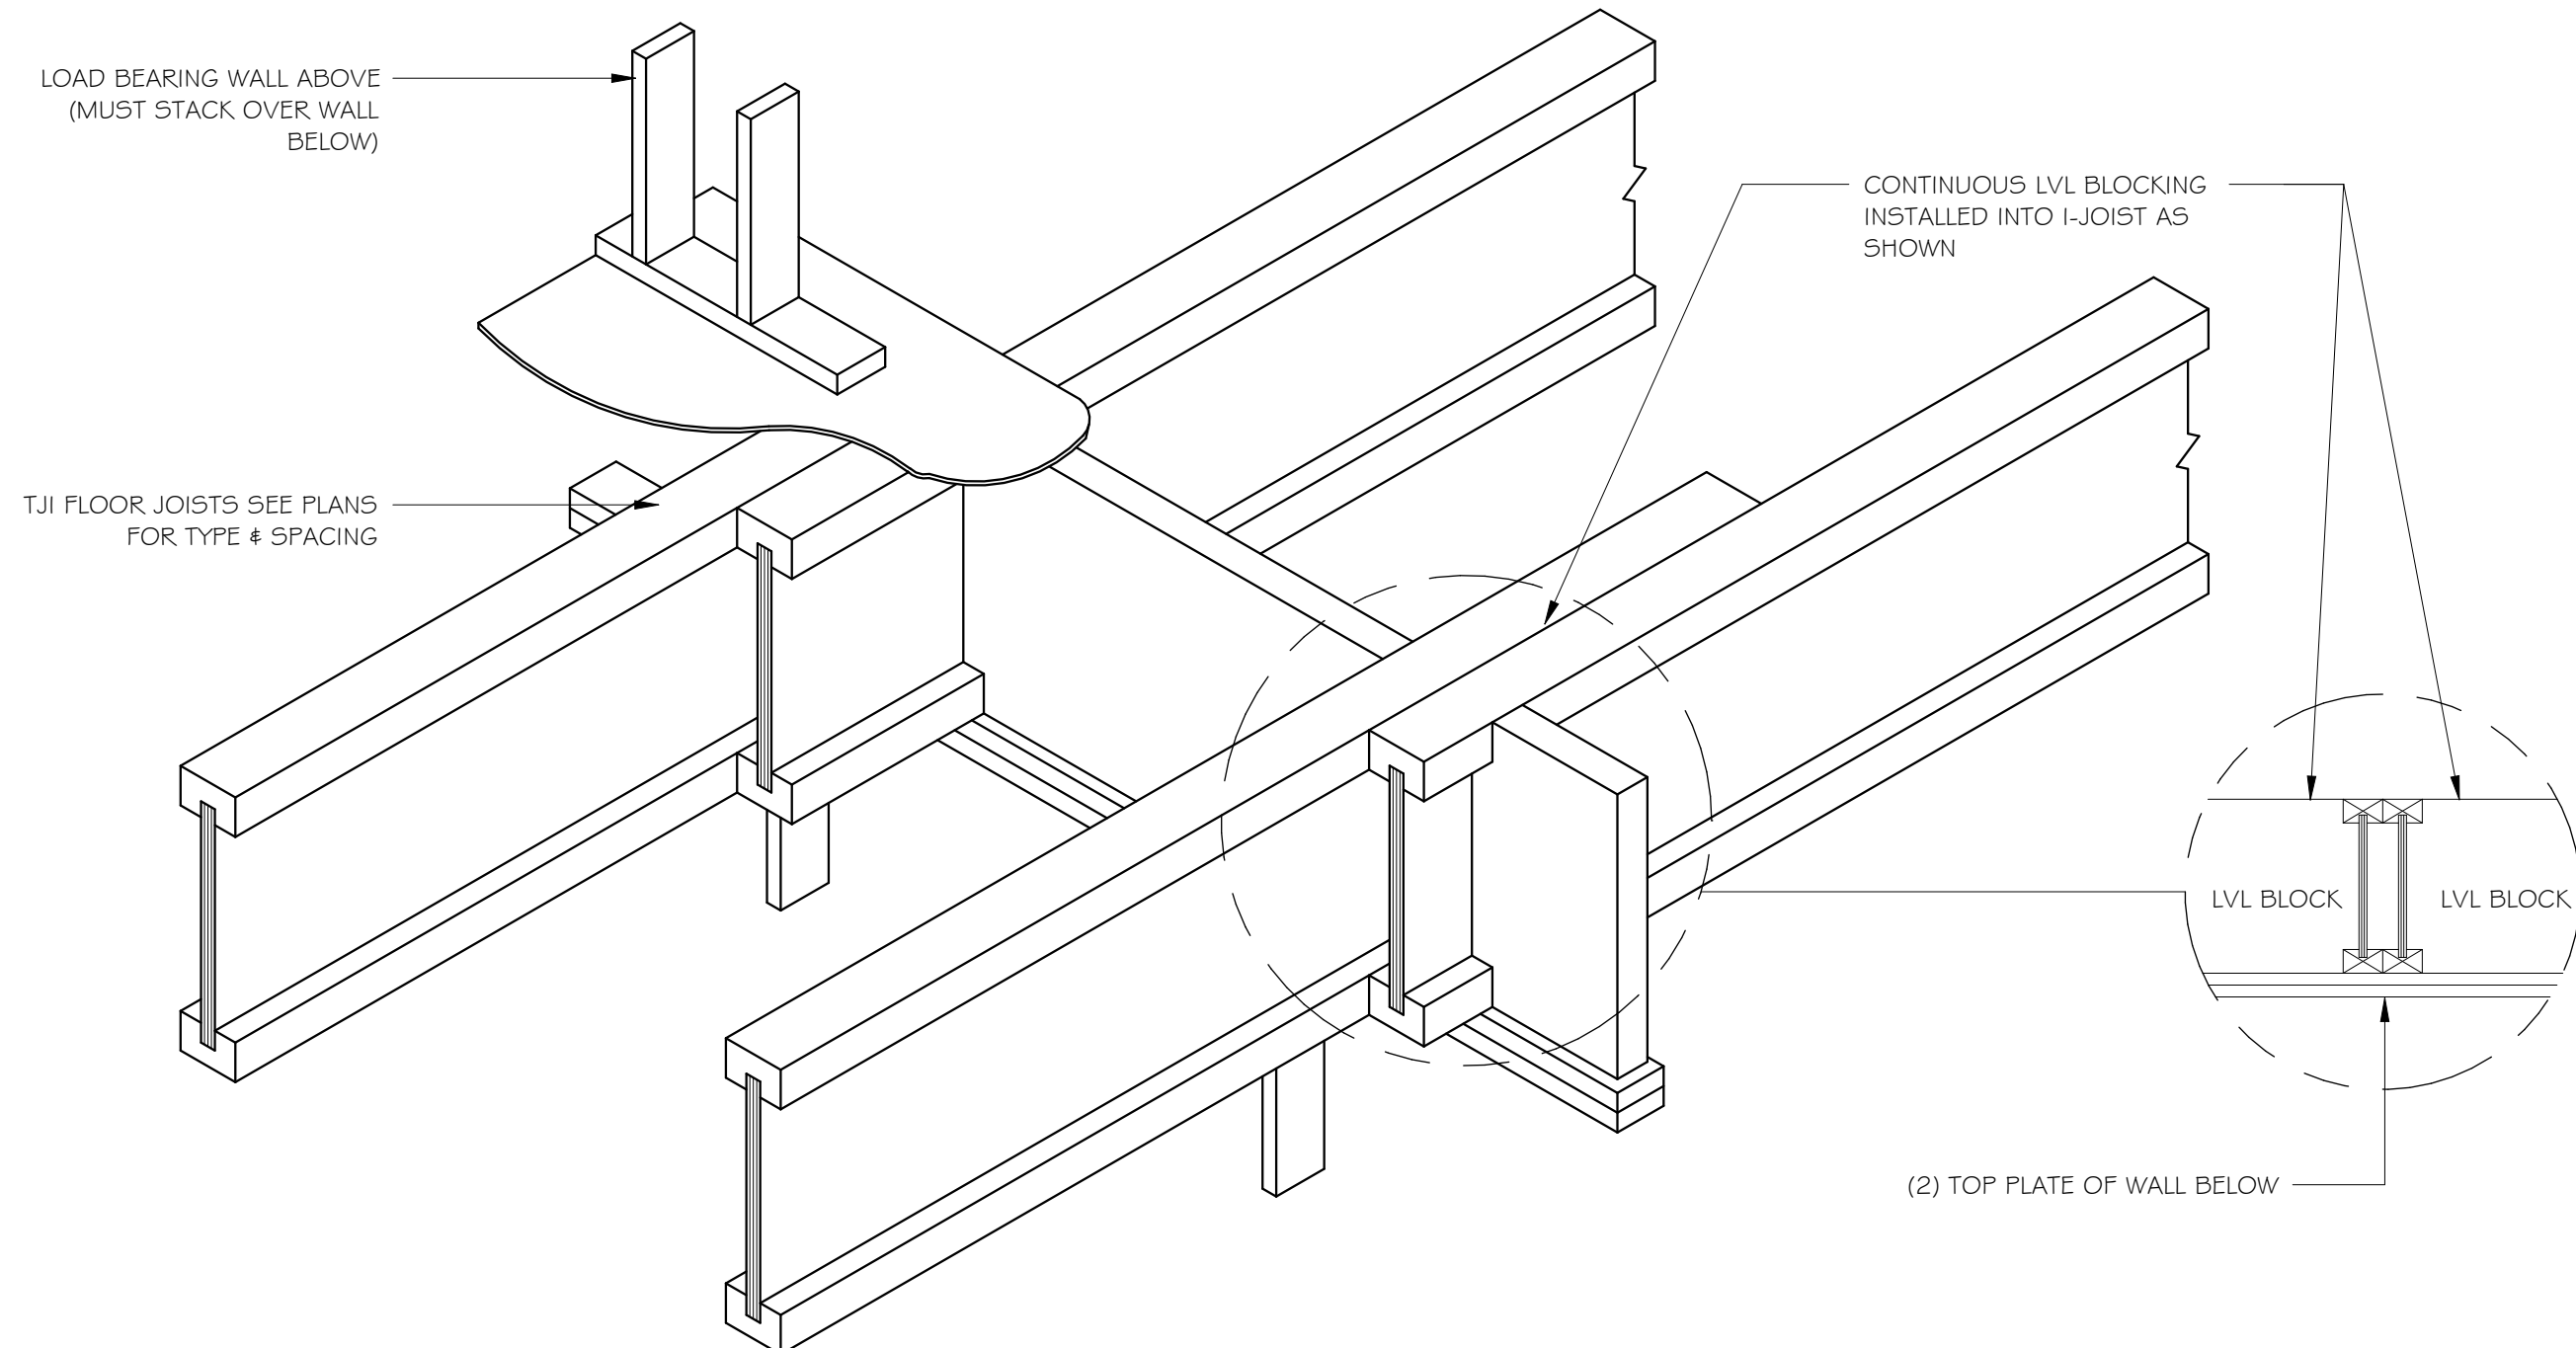

LOAD BEARING WALL ABOVE (MUST STACK OVER WALL BELOW)

TJI FLOOR JOISTS SEE PLANS FOR TYPE & SPACING

CONTINUOUS LVL BLOCKING INSTALLED INTO JOIST AS SHOWN

LVL BLOCK LVL BLOCK

(2) TOP PLATE OF WALL BELOW

④ FRAMING DETAIL @ LOAD BEARING WALLS W/ LAPPED JOISTS
1/2" = 1'-0"

Revisions/Project Status	
Date & Issue Description	Issue