

1. FOR GENERAL NOTES SEE DWGS S-001 TO S-002.
2. BASE PLATE BP1, BP10 AND ANCHOR BOLTS DETAILS, SEE DWG S-501.
3. FOOTING F10 AND FOUNDATION WALL FW DETAILS AND REINFORCING SEE DWG. S-407.
4. TOP OF WEEPING TILE SHALL BE LOCATED MIN. 1.2m BELOW FINISHED GRADE. PROVIDE SLOPE AS NECESSARY.
5. WRAP WEEPING TILES WITH PEA GRAVEL AND GEOTEXTILE SOCK FILTER.
6. FOR MANHOLES (MH), CATCH BASINS (CB) & UTILITY CHAMBER (UC) EXACT LOCATIONS AND DETAILS SEE CIVIL DWG. C20-00-01.
7. SEE TYPICAL DETAILS FOR NEW SUB-BASE MATERIAL BELOW SLAB-ON-GRADE FOR THE ENTIRE FOOT PRINT OF THE BLDG.
8. PLACE & COMPACT SUB-BASE MATERIAL TO THE ELEVATION REQUIRED BEFORE DRILLING THE CAISSONS. DRILL CAISSONS TO THE DEPTH INDICATED IN THE TABLE BELOW ASSUMING A MIN. EMBEDMENT OF 1.0m INTO THE VERY DENSE SANDY SILT OR HARD SILTY CLAY SOIL AS RECOMMENDED IN GEOTECHNICAL REPORT.
9. AFTER COMPLETION OF CAISSONS & INSTALLATION OF STEEL COLUMNS, CAST CONCRETE FOR REINFORCED GRADE BEAMS/FOUNDATION WALLS.
10. CONTINUE TO COMPACT SPECIFIED FILL MATERIAL TO THE ELEVATION BELOW SLAB-ON-GRADE.

CAISSONS SCHEDULE			
MARK	SIZE DIA. (mm)	MIN. DEPTH (mm)	REMARKS
F1	1200ø	5500	FOR DET. SEE DWG S-401
F2	750ø	5500	

STEEL COLUMNS SCHEDULE		
MARK	SIZE	REMARKS
C1	W460x128	FOR DETAILS SEE DWG S-501
C2	W460x128	
C2A	W460x128	
C3	HSS 324x13	

GRADE BEAMS SCHEDULE		
MARK	SIZE WxH (mm)	REMARKS
GB1	300x1200	FOR DETAILS SEE DWG. S-402 & S-403

 — CATCH BASIN
 CB


 — MANHOLE
 MH

 — UTILITY CHAMBER
 UC

SCALES



100 York Blvd., Suite, 300
Richmond Hill, ON., L4B 1J8
Ph. (289) 695-4600
Fax. (289) 695-4601

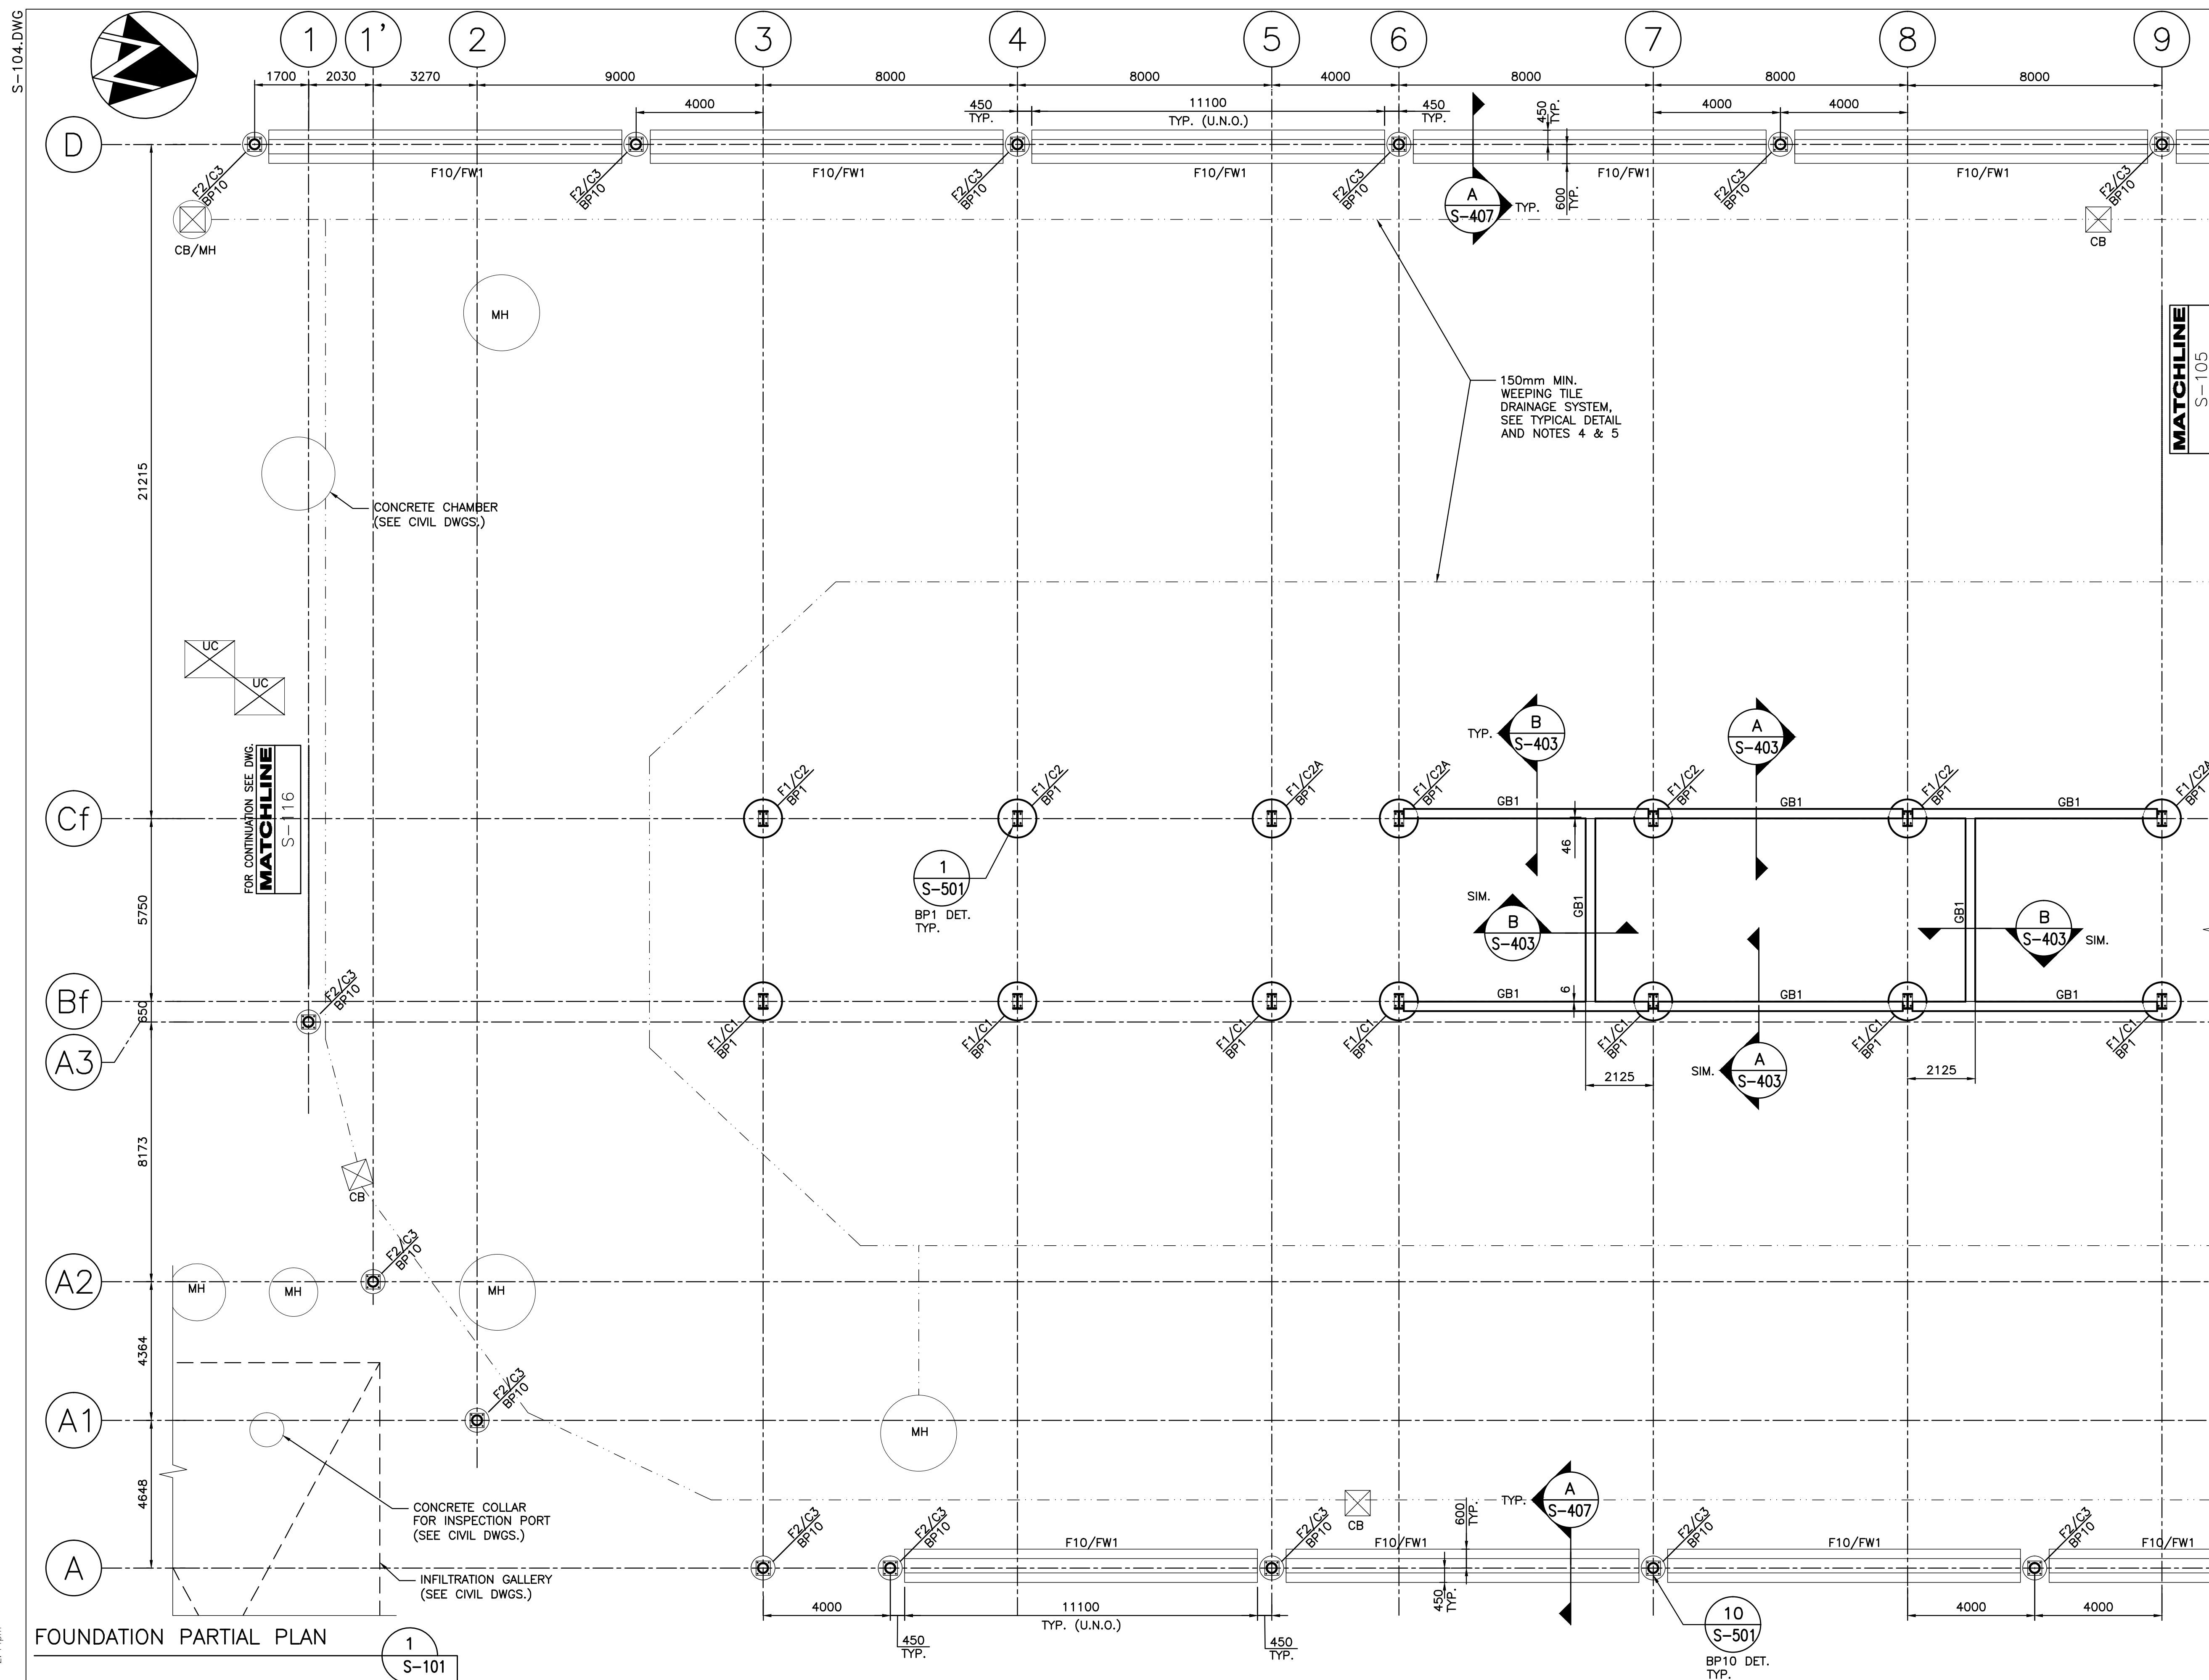


FOUNDATION PARTIAL PLAN

No.	DATE	REVISIONS	BY
A	12/29/2017	ISSUED FOR TENDER	OP
B	03/05/2018	ISSUED FOR BUILDING PERMIT	OP



Transportation Services

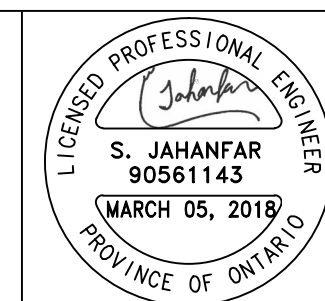

DESIGN OP
DRAWN RV
CHECKED SJ

FOUNDATION
PARTIAL PLAN (1/3)

DWG. NO. S-104
CONT. NO. PT-17-061-RT
SHEET NO. 155