ERECTION NORTH

ROOF DECK DIAPHRAGM

1) GENERAL NOTES FOR DECK

A) THE DECK IS REQUIRED TO ACT AS A LATERAL FORCE DISTRIBUTING DIAPHRAGM.

B) ☐ WELDED DECK

- THE DECK MUST BE WELDED TO THE STRUCTURAL FRAMING SYSTEM WITH E60XX ELECTRODES.
- ALL SPOT WELDS 3/4"Ø TO BE DONE BY CANADIAN WELDING BUREAU QUALIFIED WELDER.
- APPLY A SUITABLE PRIMER, ON EACH BURNED TOPSIDE AREAS.

☐ SCREWED DECK

- THE STEEL DECK SHALL BE SCREWED TO STRUCTURAL SUPPORT WITH SCREWS TYPE TEK 5 #12-24x1 1/2".


☐ NAILED

- THE STEEL DECK SHALL BE NAILED TO STRUCTURAL SUPPORT WITH NAILS TYPE HILTI : X-HSN 24 : 1/8" (3 mm) ≤ t ≤ 3/8" (10 mm)
 : X-ENP19 L15 : t ≥ 1/4" (6 mm)


THE ERECTOR IS RESPONSIBLE FOR THE FASTENING OF THE DECK TO THE STEEL STRUCTURE AND THE SELECTION OF THE FASTENER, THE TOOL, THE CARTRIDGE AS WELL AS THE POWER REGULATION OF THE TOOL IN ACCORDANCE WITH THE PRODUCT SPECIFICATIONS.

C) THE MINIMUM EDGE DISTANCE MEASURED FROM CENTERLINE OF THE FASTENER TO THE END OR BOUNDARY OF THE DECK SHALL NOT BE LESS THAN 1".

D) ERECTION SHALL BE IN ACCORDANCE WITH CSSBI 10M-2013 PUBLICATIONS, AND ALL OTHER APPLICABLE STANDARDS.

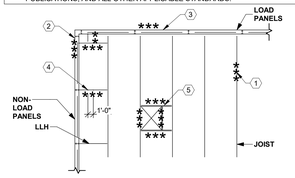

1) 2) FASTENER PATTERN AT SUPPORT



☐ 36/4
☐ 36/7
☐ 36/9
☐ 36/11

3) SIDE LAP FASTENING

SIDE LAP SHALL BE SCREW:

☐ SCREW TEK 2 #10 - 16 x 1/2"

☐ @ 6" c/c
☐ @ 12" c/c
☐ @ 24" c/c

☐ HILTI S-SLC 01 M HWH (22 ga., 20 ga. & 18 ga.)

☐ @ 6" c/c
☐ @ 12" c/c
☐ @ 24" c/c

☐ HILTI S-SLC 02 M HWH (16 ga.)

☐ @ 6" c/c
☐ @ 12" c/c
☐ @ 24" c/c

4) PERIMETER FASTENING

(2) A) ATTACH DECK TO PERIMETER MEMBER AT EACH RIB.

(3) B) ATTACH DECK TO PERIMETER MEMBER @ 6" c/c.

(4) C) ATTACH DECK TO LLH AND C8" @12" c/c.

(5) D) ATTACH DECK TO ROOF OPENING FRAMES @ 6" c/c.

5) SHEAR CONNECTORS FASTENING


A) PROVIDE ATTACHMENT BETWEEN DECK AND EACH SHEAR CONNECTOR WITH:

☐ SPOT WELD 3/4"ø @ 6"c/c TYP. U/N
☐ SCREW TEK 5 #12-24x1" @ 6"c/c TYP. U/N
☐ HILTI NAIL X-HSN 24 @ 6"c/c TYP. U/N

NOTES STEEL DECK ROOF_EN_IMP (CAN)

1" = 1'-0"

GROSS UPLIFT DIAGRAM (UNFACTORED):

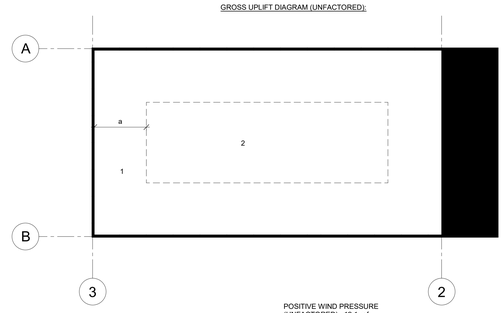

POSITIVE WIND PRESSURE (UNFACTORED): 12.1 psf

ZONE 1 : 22.1 psf
ZONE 2 : 27.5 psf
a : 7'-0"

CONTRACTOR/ERECTOR NOTE:

IT IS PROHIBITED TO MODIFY, COPY, REPRODUCE OR OTHERWISE DISTRIBUTE THIS DRAWING OR ANY REPRESENTATION OF THIS DRAWING, OR ANY MEDIA, INCLUDING ELECTRONIC, WITHOUT THE PRIOR WRITTEN APPROVAL OF CANAM GROUP INC.

ROOF

TOP OF PILASTER	:	99'-0"
TOP OF SLAB	:	100'-0"
TOP OF FOUNDATION	:	100'-0"
CLEAR HEIGHT	:	25'-0"
TOP OF STEEL (LOW)	:	129'-4"
TOP OF STEEL (HIGH)	:	132'-2"

LOADS


D.L.	:	18.0 psf
Coll.	:	5.0 psf
Ss	:	33.42 psf
Sr	:	2.09 psf
Cb x Cw	:	0.8
Roof L.L.	:	0 psf
I_S	:	1.0
Roof snow load	:	28.8 psf
I_W	:	1.0
Wind q= 1/50	:	10.86 psf

Seismic (Site class: D (Assumed))

I_E	:	1.0
S_a (0.2)	:	0.247
S_a (0.5)	:	0.205
S_a (1.0)	:	0.104
S_a (2.0)	:	0.0418
S_a (5.0)	:	0.00882
S_a (10.0)	:	0.00253
PGA	:	0.152
PGV	:	0.114

LOADINGS:

- Roof dead load excluding collateral load : 18 psf
- Collateral load : 5 psf (includes lighting and/or mechanical and sprinklers of 4 inches in diameter and less)
- Roof snow load : psf
- Wind load q 1/50 : psf
- Roof live load : psf
- Ground snow load : S_s = psf
 : S_r = psf
- Risk Category : normal
- Snow load factors : Cb =0.8
 : Cw =1.0
- Code Applicable : National building Code of Canada
 Saskatchewan Building Code, latest adopted editions
 Code of Standard Practice CISC.
- Assumed soil site class: D
- NOTE :
 1. If, however, the seismic site class is determined to be E or F according to the geotechnical report, the preliminary structural concept (location and geometry of bracings, etc.) must be validated and coordinated by a Canam's engineer.

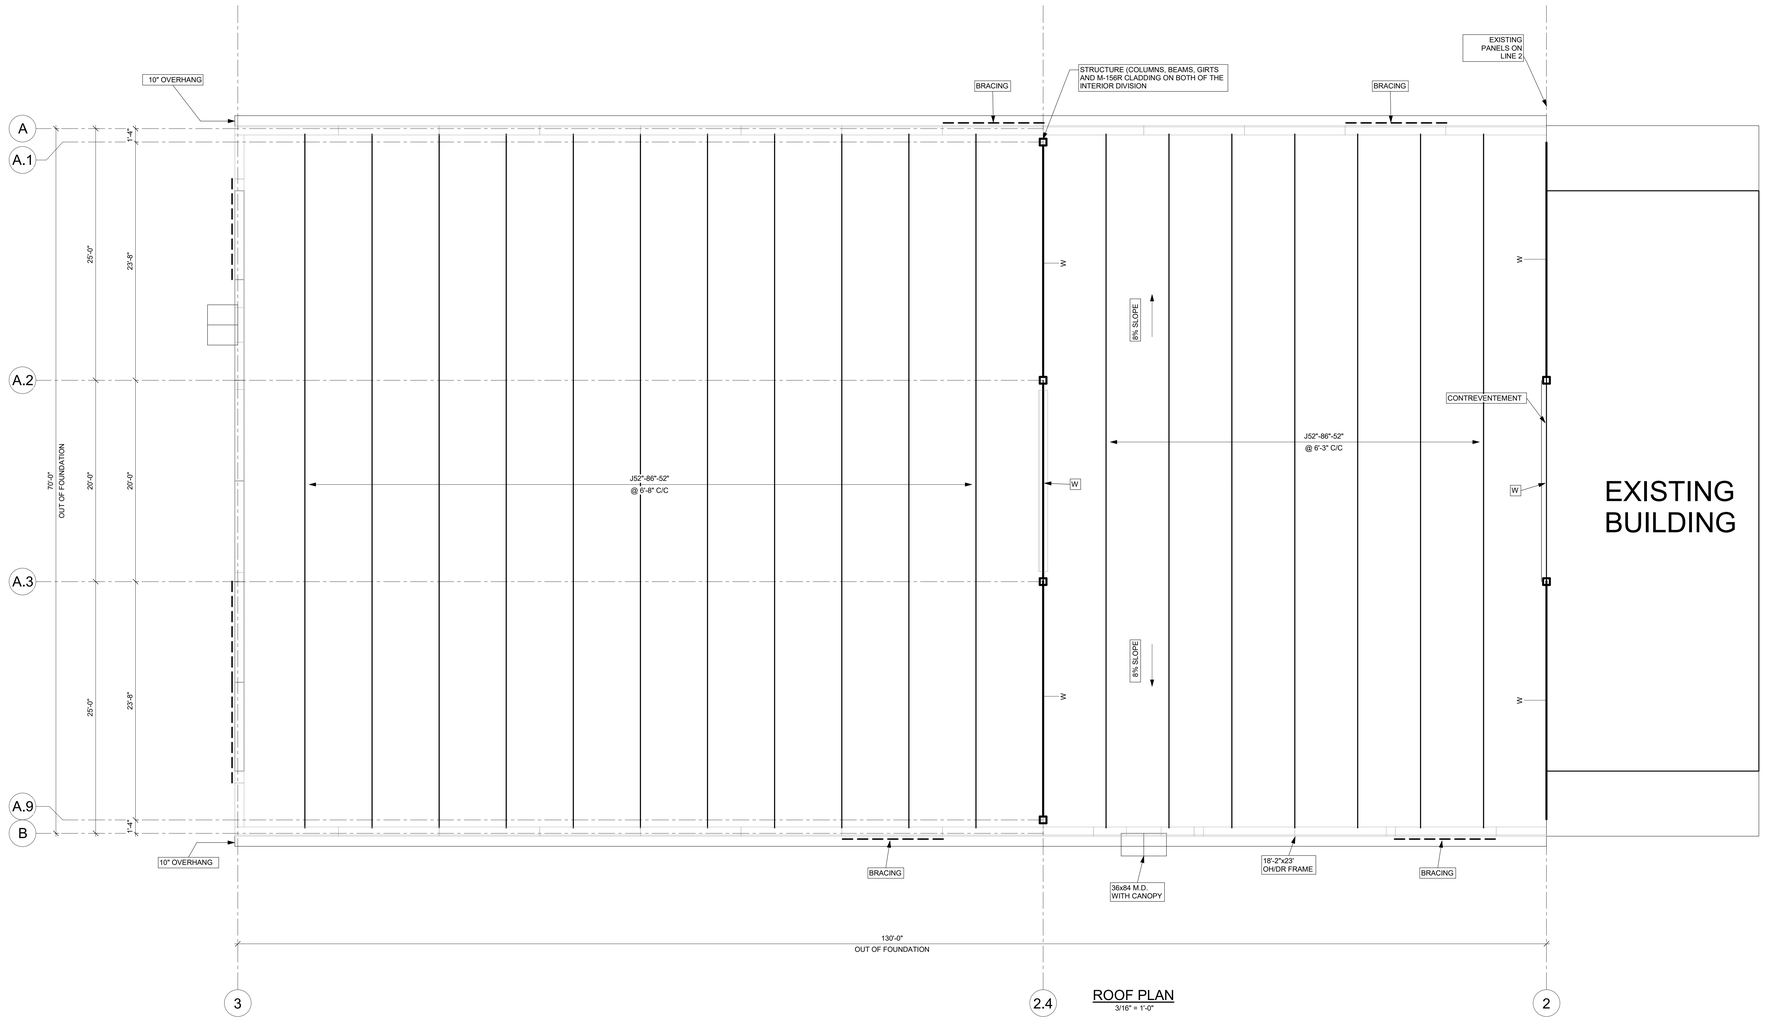

ROOF PLAN
3/16" = 1'-0"

PRELIMINARY

NOT TO BE USED FOR CONSTRUCTION

REVISION	DATE	DESCRIPTION	DESS.	VER.
1	06/04/2026	Revised bldg dimensions, door and OH/DR quantities	SL	

PROJECT MANAGER: -

DRAFTING: -

DRAWN	DESIGNED	PROJECT ENGINEER	SCALE:
INITIALE			Comme indiqué

CHECKED	CONSULTING ENGINEERS / ARCHITECTS	DATE (yyyy/mm/dd) :
		2026/04/20

CUSTOMER:

CANAM
11505, 1re Avenue, bureau 500, Saint-Georges Beauce
Quebec, Canada, G5Y 7X3
Phone : (418) 228-8031
Toll free : (877) 499-0049
www.canam.com

PROFESSIONAL SEAL:

PROJECT:

ESTEVAN, SASKATCHEWAN

DRAWING TITLE:

PRELIMINARY SKETCH - ROOF PLAN

CONTRACT NUMBER	DRAWING NUMBER	DIVISION	REVISION
P2026-079	EsMx401		1

Initials